

SPECIFICATION FOR APPROVAL

CUSTOMER :	通用款
PART NAME :	贴片BLE天线（5*2*2mm）
PART NO. :	
DZZ NO. :	D04-2063-R0A
REV. :	1.0

	MANUFACTURERR SIGNATURE	CUSTOMER SIGNATURE
APPROVED BY:		
DATE:		


CONTENTS

Item	Description	Page
1.	天线图片	3
2.	S参数	4
3.	patterns	5
4.	passive	6
5.	图纸.....	7
6.	包规.....	8


1. Mechanical instruction




2. Analyzer Measurement

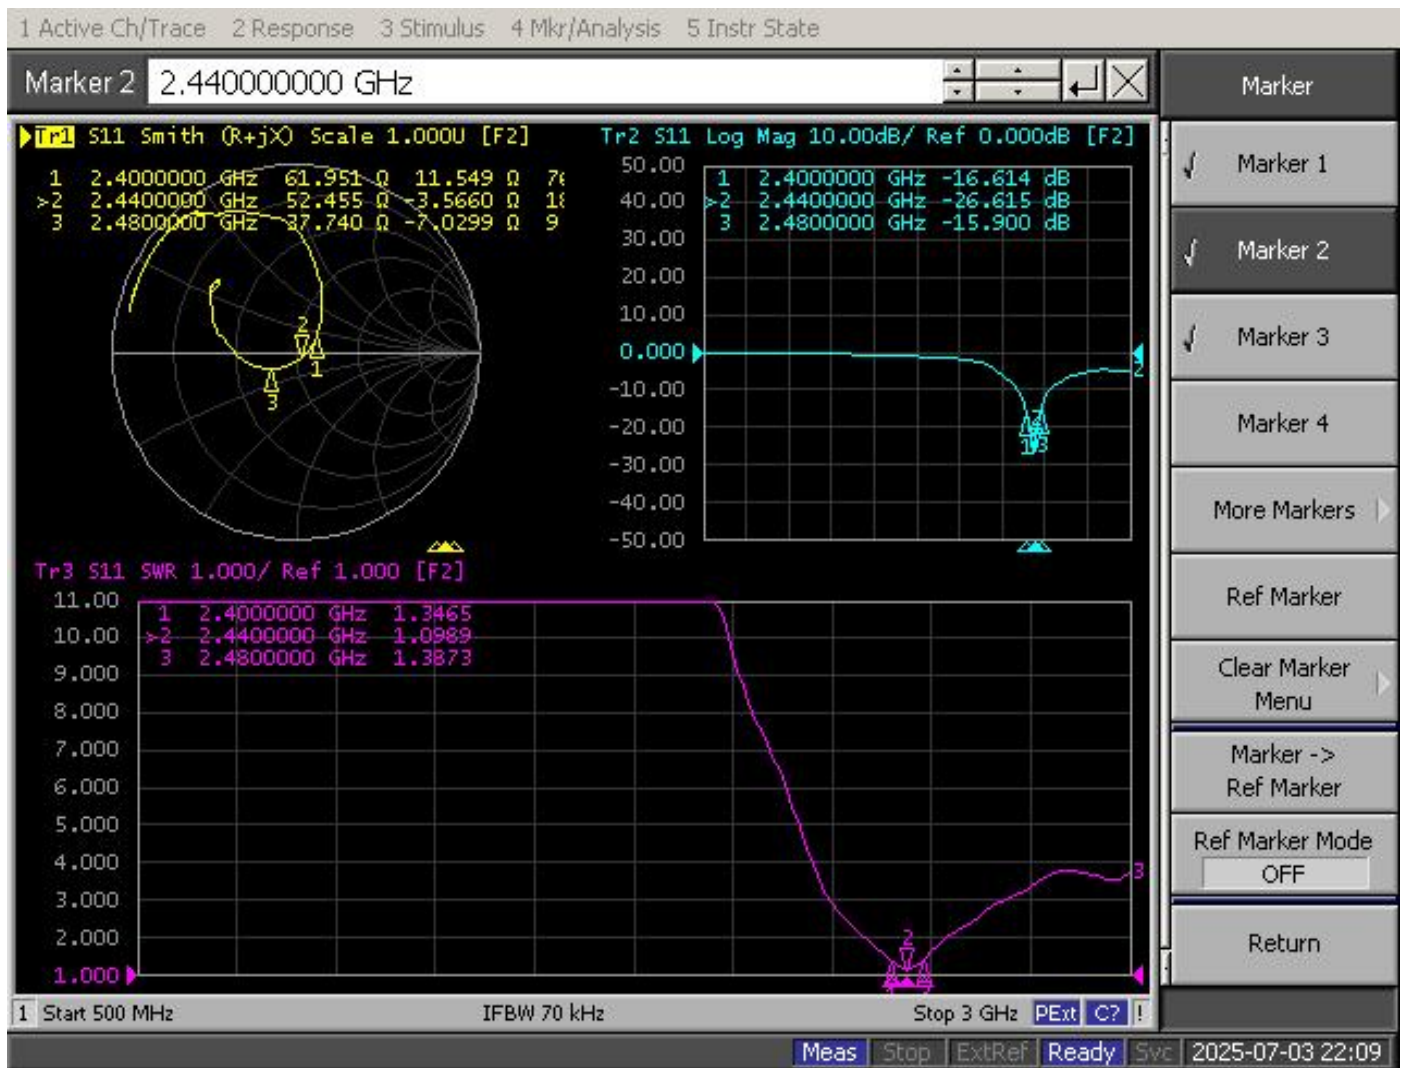


3. Patterns

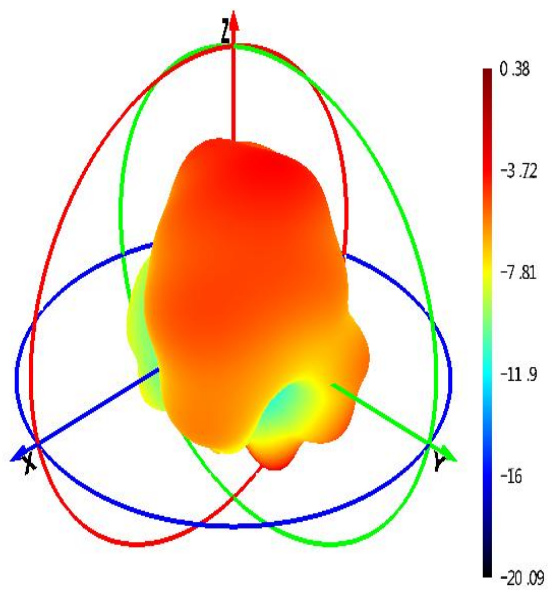


Phi=0 freq=2450MHz

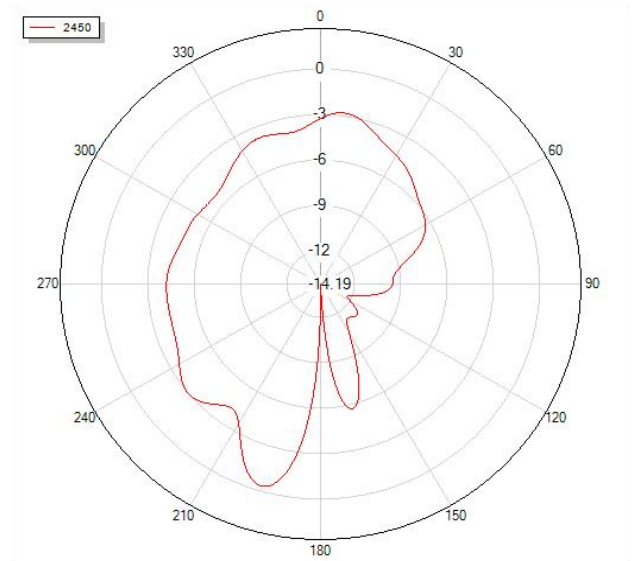

Phi=90 freq=2450MHz

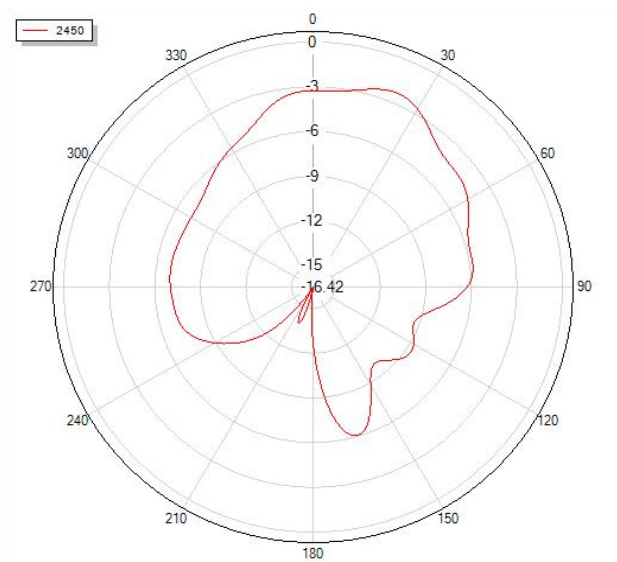

Theta=90 freq=2450MHz

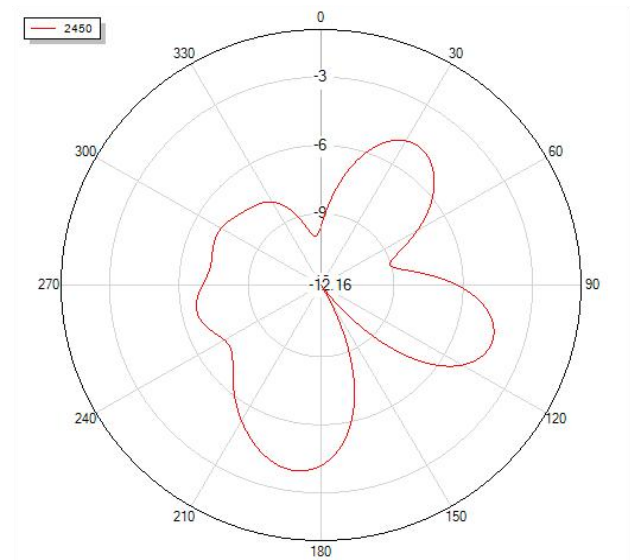

4 3D Peak Gain & Efficiency(2.4G)

Frequency 频率(MHz)	Gain 增益(dBi)	Efficiency 效率(dB)	Efficiency 效率(%)
2400.00	0.15	-5.88	25.82
2410.00	0.43	-5.74	26.68
2420.00	0.59	-5.70	26.90
2430.00	0.42	-5.77	26.47
2440.00	0.33	-5.89	25.76
2450.00	0.38	-5.88	25.82
2460.00	0.40	-5.91	25.63
2470.00	0.32	-6.03	24.96
2480.00	-0.09	-6.35	23.16
2490.00	-0.70	-6.90	20.41
2500.00	-0.41	-6.71	21.33

产品包装规范

日期: 2023. 3. 17




page: 1 of 1

成品名称 :贴片天线

版本: A

客户:

INSPECTION DRAWING

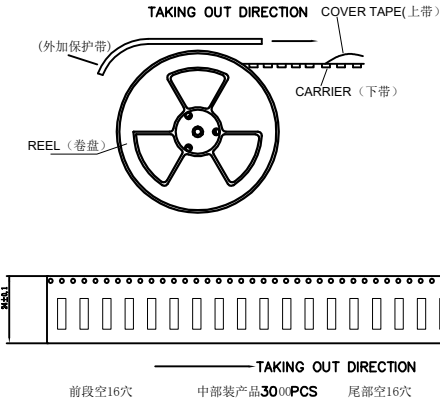

- Notes:
1. 每卷前空16PCS, 后空16PCS, 中间包装3000PCS产品, 尾部用美纹胶纸封住, 美纹胶长度为18~20cm.
 2. 外圈再卷一圈保护带, 保护带最后重叠50MM MIN. 同样用18~20cm长美纹胶将其封住.
 3. 每个卷盘上贴一张物料标签 (按要求填写).
 4. 每10卷盘装入1个外箱; 外箱角落用三角板填充. 用透明胶将外箱封口
 5. 将标签 (按要求打印好的) 贴在纸箱侧上方.
 6. 尾数箱用纸壳或其它填充物填满空间, 或将纸箱割小至刚好装下.
 7. 在搬运过程中要轻拿轻放.
 8. 在运输中不可堆放过多, 不可有重压现象.

注: 客户特殊要求请参照业务的出货资料, 以实际包装为准;

批准: _____

确认: 冯惠平

拟制: 田进