

# Test Report

**Applicant** : INTEGRATED TECHNICAL VISION LTD  
**Address** : 12 CHIGORINA STR., KYIV 01042, UKRAINE  
**Product Name** : U-Prox access control system  
**Brand Mark** : U-Prox  
**Model** : Universal reader U-Prox SE mini  
**FCC ID** : 2BLQF-482026137EOM  
**Report Number** : BLA-EMC-202411-A1702  
**Date of Receipt** : Nov. 8, 2024  
**Date of Test** : Feb. 13, 2025 to Feb. 26, 2025  
**Test Standard** : 47 CFR Part 15, Subpart C 15.247  
**Test Result** : Pass

Compiled by:




Review by:



Approved by:



Issued Date: Feb. 26, 2025

**BlueAsia of Technical Services(Shenzhen) Co., Ltd.**Address: Building C, No. 107, Shihuan Road, Shiyao Sub-District, Baoan District,  
Shenzhen, Guangdong Province, China

*The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.*

## Table of Contents

|          |                                                             |           |
|----------|-------------------------------------------------------------|-----------|
| <b>1</b> | <b>General information .....</b>                            | <b>5</b>  |
| 1.1      | General information .....                                   | 5         |
| 1.2      | General description of EUT .....                            | 5         |
| <b>2</b> | <b>Test summary .....</b>                                   | <b>6</b>  |
| <b>3</b> | <b>Test Configuration .....</b>                             | <b>7</b>  |
| 3.1      | Test mode .....                                             | 7         |
| 3.2      | Operation Frequency each of channel .....                   | 8         |
| 3.3      | Test channel.....                                           | 8         |
| 3.4      | Configuration diagram of EUT .....                          | 8         |
| 3.5      | Auxiliary equipment .....                                   | 8         |
| 3.6      | Test environment .....                                      | 8         |
| <b>4</b> | <b>Laboratory information .....</b>                         | <b>9</b>  |
| 4.1      | Laboratory and accreditations .....                         | 9         |
| 4.2      | Measurement uncertainty .....                               | 9         |
| <b>5</b> | <b>Test equipment .....</b>                                 | <b>10</b> |
| <b>6</b> | <b>Test result.....</b>                                     | <b>12</b> |
| 6.1      | Antenna requirement .....                                   | 12        |
| 6.2      | Conducted peak output Power .....                           | 13        |
| 6.3      | Minimum 6dB bandwidth .....                                 | 14        |
| 6.4      | Power spectrum density .....                                | 15        |
| 6.5      | Conducted Band Edges Measurement.....                       | 16        |
| 6.6      | Conducted spurious emissions.....                           | 17        |
| 6.7      | Radiated spurious emissions.....                            | 18        |
| 6.8      | Radiated emissions which fall in the restricted bands ..... | 29        |
| <b>7</b> | <b>Appendix A.....</b>                                      | <b>36</b> |
| 7.1      | Maximum Conducted Output Power.....                         | 36        |
| 7.2      | -6dB Bandwidth.....                                         | 39        |
| 7.3      | Occupied Channel Bandwidth .....                            | 42        |
| 7.4      | Maximum Power Spectral Density Level .....                  | 45        |
| 7.5      | Band Edge .....                                             | 48        |

|                                                    |                                     |           |
|----------------------------------------------------|-------------------------------------|-----------|
| 7.6                                                | Conducted RF Spurious Emission..... | 51        |
| <b>Appendix B: photographs of test setup .....</b> |                                     | <b>55</b> |
| <b>Appendix C: photographs of EUT .....</b>        |                                     | <b>56</b> |

BlueAsia

## Revise Record

| Version No. | Date          | Description |
|-------------|---------------|-------------|
| 01          | Feb. 26, 2025 | Original    |
|             |               |             |
|             |               |             |
|             |               |             |

## 1 General information

### 1.1 General information

|              |                                                   |
|--------------|---------------------------------------------------|
| Applicant    | INTEGRATED TECHNICAL VISION LTD                   |
| Address      | 12 CHIGORINA STR., KYIV 01042, UKRAINE            |
| Manufacturer | INTEGRATED TECHNICAL VISION LTD                   |
| Address      | 5, kurganny side street, Chernihiv 14013, Ukraine |
| Factory      | INTEGRATED TECHNICAL VISION LTD                   |
| Address      | 5, kurganny side street, Chernihiv 14013, ukraine |

### 1.2 General description of EUT

|                                     |                                 |
|-------------------------------------|---------------------------------|
| Product Name                        | U-Prox access control system    |
| Model No.                           | Universal reader U-Prox SE mini |
| Series model                        | N/A                             |
| Operation Frequency:                | 2402MHz-2480MHz                 |
| Modulation Type:                    | GFSK                            |
| Rate data:                          | 1Mbps                           |
| Channel Spacing:                    | 2MHz                            |
| Number of Channels:                 | 40                              |
| Antenna Type:                       | PCB antenna                     |
| Antenna Gain:                       | 4 dBi (Provided by customer)    |
| Power supply or adapter information | DC12V                           |
| Hardware Version                    | N/A                             |
| Software Version                    | N/A                             |

*Note: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.*

## 2 Test summary

| No. | Test item                                                   | FCC standard          | Test Method(Clause)                 | Result |
|-----|-------------------------------------------------------------|-----------------------|-------------------------------------|--------|
| 1   | Antenna Requirement                                         | §15.203               | N/A                                 | Pass   |
| 2   | Conducted Emissions<br>at AC Power Line<br>(150kHz-30MHz)   | §15.207               | ANSI C63.10-2013 Clause 6.2         | N/A    |
| 3   | Conducted Peak<br>Output Power                              | §15.247(b)(3)         | ANSI C63.10-2013 Cluase 7.8.5       | Pass   |
| 4   | Minimum 6dB<br>Bandwidth                                    | §15.247a(2)           | ANSI C63.10-2013 Cluase 11.8.1      | Pass   |
| 5   | Power Spectrum<br>Density                                   | §15.247(d)            | ANSI C63.10-2013 Cluase 11.10.2     | Pass   |
| 6   | Conducted Band Edges<br>Measurement                         | §15.247(d)            | ANSI C63.10-2013 Cluase 11.13       | Pass   |
| 7   | Conducted Spurious<br>Emissions                             | §15.247(d)            | ANSI C63.10-2013 Cluase 11.11       | Pass   |
| 8   | Radiated Spurious<br>Emissions                              | §15.209<br>§15.247(d) | ANSI C63.10-2013 Cluase 6.4,6.5,6.6 | Pass   |
| 9   | Radiated Emissions<br>which fall in the<br>restricted bands | §15.209<br>§15.247(d) | ANSI C63.10-2013 Cluase 11.12       | Pass   |

N/A: Not Applicable

## 3 Test Configuration

### 3.1 Test mode


| Test Mode <sup>Note 1</sup> | Description                                                      |
|-----------------------------|------------------------------------------------------------------|
| TX                          | Keep the EUT in continuously transmitting with modulation mode.  |
| RX                          | Keep the EUT in receiving mode                                   |
| TX Low channel              | Keep the EUT in continuously transmitting mode in low channel    |
| TX middle channel           | Keep the EUT in continuously transmitting mode in middle channel |
| TX high channel             | Keep the EUT in continuously transmitting mode in high channel   |

**Note 1:** The EUT was configured to measure its highest possible emission and/or immunity level. The test modes were adapted according to the operation manual for use; the EUT was operated in the engineering mode <sup>Note 2</sup> to fix the TX or Rx frequency that was for the purpose of the measurements.

**Note 2:** Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

| Power level setup in software |                                                      |                 |                   |
|-------------------------------|------------------------------------------------------|-----------------|-------------------|
| Test Software Name            | BTool - Bluetooth Low Energy PC Application-v1.40.15 |                 |                   |
| Mode                          | Channel                                              | Frequency (MHz) | Soft Set          |
| GFSK                          | CH00                                                 | 2402            | TX level: default |
|                               | CH20                                                 | 2442            |                   |
|                               | CH39                                                 | 2480            |                   |

### Run Software

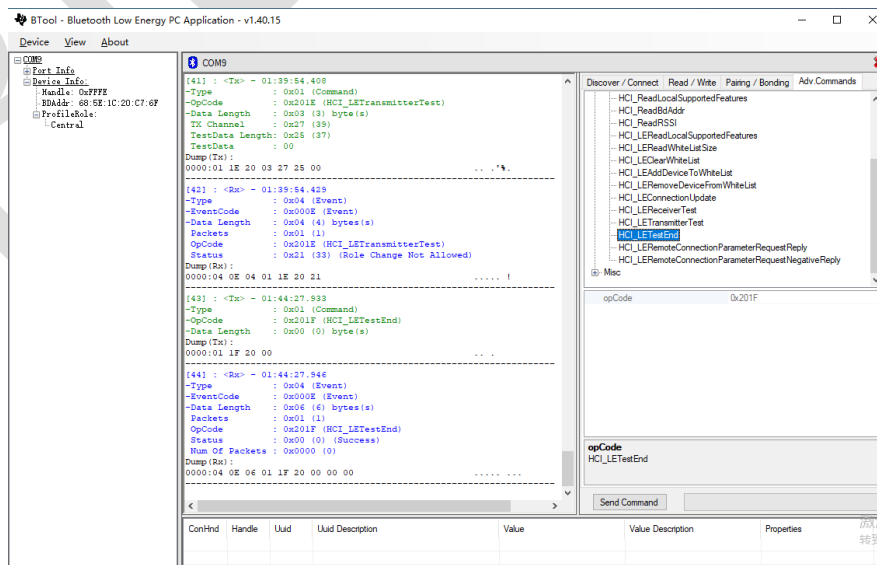


### 3.2 Operation Frequency each of channel

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|---------|-----------|
| 0       | 2402MHz   | 10      | 2422MHz   | 20      | 2442MHz   | 30      | 2462MHz   |
| 1       | 2404MHz   | 11      | 2424MHz   | 21      | 2444MHz   | 31      | 2464MHz   |
| ...     | ...       | ...     | ...       | ...     | ...       | ...     | ...       |
| 8       | 2418MHz   | 18      | 2438MHz   | 28      | 2458MHz   | 38      | 2478MHz   |
| 9       | 2420MHz   | 19      | 2440MHz   | 29      | 2460MHz   | 39      | 2480MHz   |

### 3.3 Test channel

| Channel             | Frequency |
|---------------------|-----------|
| The lowest channel  | 2402MHz   |
| The middle channel  | 2442MHz   |
| The Highest channel | 2480MHz   |

### 3.4 Configuration diagram of EUT



### 3.5 Auxiliary equipment

| Device Type          | Manufacturer | Model Name | Serial No. | Remark                             |
|----------------------|--------------|------------|------------|------------------------------------|
| PC                   | Lenovo       | E460C      | N/A        | From lab<br>(No.BLA-ZC-BS-2022005) |
| Rechargeable battery | OUTDO        | UTX7L-BS   | N/A        | From lab (No.BLA-ZC-PJ-2023005)    |

**Note:**  
 “-” mean no any auxiliary device during testing.

### 3.6 Test environment

| Environment | Temperature | Voltage |
|-------------|-------------|---------|
| Normal      | 25°C        | DC 12V  |

## 4 Laboratory information

### 4.1 Laboratory and accreditations

The test facility is recognized, certified, or accredited by the following organizations:

|                          |                                                                                                             |
|--------------------------|-------------------------------------------------------------------------------------------------------------|
| Company name:            | BlueAsia of Technical Services(Shenzhen) Co., Ltd.                                                          |
| Address:                 | Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China |
| CNAS accredited No.:     | L9788                                                                                                       |
| A2LA Cert. No.:          | 5071.01                                                                                                     |
| FCC Designation No.:     | CN1252                                                                                                      |
| ISED CAB identifier No.: | CN0028                                                                                                      |
| Telephone:               | +86-755-28682673                                                                                            |
| FAX:                     | +86-755-28682673                                                                                            |

### 4.2 Measurement uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

| Parameter                                      | Expanded Uncertainty            |
|------------------------------------------------|---------------------------------|
| Radiated Emission(9kHz-30MHz)                  | $\pm 4.34\text{dB}$             |
| Radiated Emission(30Mz-1000MHz)                | $\pm 4.24\text{dB}$             |
| Radiated Emission(1GHz-18GHz)                  | $\pm 4.68\text{dB}$             |
| AC Power Line Conducted Emission(150kHz-30MHz) | $\pm 3.45\text{dB}$             |
| Occupied Channel Bandwidth                     | $\pm 5\%$                       |
| RF output power, conducted                     | $\pm 1.5\text{ dB}$             |
| Power Spectral Density, conducted              | $\pm 3.0\text{ dB}$             |
| Unwanted Emissions, conducted                  | $\pm 3.0\text{ dB}$             |
| Temperature                                    | $\pm 3\text{ }^{\circ}\text{C}$ |
| Supply voltages                                | $\pm 3\%$                       |
| Time                                           | $\pm 5\%$                       |

## 5 Test equipment

### RF conducted

| Equipment       | Name                       | Model    | Manufacture     | S/N           | Cal. Date  | Due. Date  |
|-----------------|----------------------------|----------|-----------------|---------------|------------|------------|
| BLA-EMC-003-003 | Shield room                | 5*3*3    | SKET            | N/A           | 2023/11/16 | 2025/11/15 |
| BLA-EMC-016     | Signal Generator           | N5182A   | Agilent         | MY52420567    | 2024/06/28 | 2025/06/27 |
| BLA-EMC-038     | Spectrum                   | N9020A   | Agilent         | MY49100060    | 2024/08/08 | 2025/08/07 |
| BLA-EMC-042     | Power sensor               | RPR3006W | DARE            | 14I00889SN042 | 2024/08/08 | 2025/08/07 |
| BLA-EMC-044     | Radio communication tester | CMW500   | R&S             | 132429        | 2024/08/08 | 2025/08/07 |
| BLA-EMC-064     | Signal Generator           | N5182B   | KEYSIGHT        | MY58108892    | 2024/06/28 | 2025/06/27 |
| BLA-EMC-079     | Spectrum                   | N9020A   | Agilent         | MY54420161    | 2024/08/08 | 2025/08/07 |
| BLA-EMC-088     | Audio Analyzer             | ATS-1    | Audio Precision | ATS141094     | 2024/06/28 | 2025/06/27 |

### Radiated Spurious Emissions (Below 1GHz)

| Equipment      | Name              | Model            | Manufacture | S/N    | Cal. Date  | Due. Date  |
|----------------|-------------------|------------------|-------------|--------|------------|------------|
| BLA-EMC-002-01 | Anechoic chamber  | 9*6*6 chamber    | SKET        | N/A    | 2024/3/27  | 2027/3/26  |
| BLA-EMC-002-02 | Control room      | 966 control room | SKET        | N/A    | 2024/3/27  | 2027/3/26  |
| BLA-EMC-009    | EMI receiver      | ESR7             | R&S         | 101199 | 2024/08/08 | 2025/08/07 |
| BLA-EMC-043    | Loop antenna      | FMZB1519B        | Schwarzbeck | 00102  | 2024/06/29 | 2026/06/28 |
| BLA-EMC-065    | Broadband antenna | VULB9168         | Schwarzbeck | 01065P | 2024/06/29 | 2026/06/27 |
| BLA-XC-01      | Coaxial Cable     | N/A              | BlueAsia    | V01    | N/A        | N/A        |
| BLA-XC-02      | Coaxial Cable     | N/A              | BlueAsia    | V02    | N/A        | N/A        |

**Radiated Spurious Emissions (Above 1GHz)**

| Equipment      | Name              | Model                | Manufacture | S/N              | Cal. Date  | Due. Date  |
|----------------|-------------------|----------------------|-------------|------------------|------------|------------|
| BLA-EMC-001-01 | Anechoic chamber  | 9*6*6 chamber        | SKET        | N/A              | 2023/11/16 | 2026/11/15 |
| BLA-EMC-001-02 | Control Room      | 966 control room     | SKET        | N/A              | 2023/11/16 | 2025/11/15 |
| BLA-EMC-008    | Spectrum          | FSP40                | R&S         | 100817           | 2024/08/08 | 2025/08/07 |
| BLA-EMC-012    | Broadband antenna | VULB9168             | Schwarzbeck | 00836<br>P:00227 | 2022/10/12 | 2025/10/11 |
| BLA-EMC-013    | Horn Antenna      | BBHA9120D            | Schwarzbeck | 01892            | 2024/06/29 | 2026/06/28 |
| BLA-EMC-014    | Amplifier         | PA_000318G-45        | SKET        | PA201804<br>3003 | 2024/08/08 | 2025/08/07 |
| BLA-EMC-046    | Filter bank       | 2.4G/5G Filter bank  | SKET        | N/A              | 2024/06/28 | 2025/06/27 |
| BLA-EMC-061    | Receiver          | ESPI7                | R&S         | 101477           | 2024/06/28 | 2025/06/27 |
| BLA-EMC-066    | Amplifier         | LNPA_30M01<br>G-30   | SKET        | SK202106<br>0801 | 2024/06/28 | 2025/06/27 |
| BLA-EMC-086    | Amplifier         | LNPA_18G40<br>G-50dB | SKET        | SK202207<br>1301 | 2024/06/28 | 2025/06/27 |
| BLA-EMC-087    | Horn Antenna      | BBHA 9170            | Schwarzbeck | 1106             | 2024/06/29 | 2026/06/28 |
| BLA-XC-03      | Coaxial Cable     | N/A                  | BlueAsia    | V03              | N/A        | N/A        |
| BLA-XC-04      | Coaxial Cable     | N/A                  | BlueAsia    | V04              | N/A        | N/A        |

**Test Software Record:**

| Software No. | Software Name                  | Manufacture | Software version | Test site |
|--------------|--------------------------------|-------------|------------------|-----------|
| BLA-EMC-S001 | EZ-EMC                         | EZ          | EEMC-3A1+        | RE        |
| BLA-EMC-S002 | EZ-EMC                         | EZ          | EEMC-3A1+        | RE        |
| BLA-EMC-S010 | MTS 8310                       | MW          | 2.0.0.0          | RF        |
| BLA-EMC-S014 | Bluetooth and WiFi Test System | Tonscend    | 2.5.77.0418      | RF        |

## 6 Test result

### 6.1 Antenna requirement

|               |                                  |
|---------------|----------------------------------|
| Test Standard | 47 CFR Part 15, Subpart C 15.247 |
| Test Method   | N/A                              |

#### 6.1.1 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of a so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 4 dBi.


## 6.2 Conducted peak output Power

|                               |                                  |
|-------------------------------|----------------------------------|
| <b>Test Standard</b>          | 47 CFR Part 15, Subpart C 15.247 |
| <b>Test Method</b>            | ANSI C63.10 (2013) Section 7.8.5 |
| <b>Test Mode (Pre-Scan)</b>   | TX                               |
| <b>Test Mode (Final Test)</b> | TX                               |

### 6.2.1 Limit

| Frequency range(MHz) | Output power of the intentional radiator(watt)         |
|----------------------|--------------------------------------------------------|
| 902-928              | 1 for $\geq 50$ hopping channels                       |
|                      | 0.25 for $25 \leq \text{hopping channels} < 50$        |
|                      | 1 for digital modulation                               |
| 2400-2483.5          | 1 for $\geq 75$ non-overlapping hopping channels       |
|                      | 0.125 for all other frequency hopping systems          |
|                      | 1 for digital modulation                               |
| 5725-5850            | 1 for frequency hopping systems and digital modulation |

### 6.2.2 Test setup

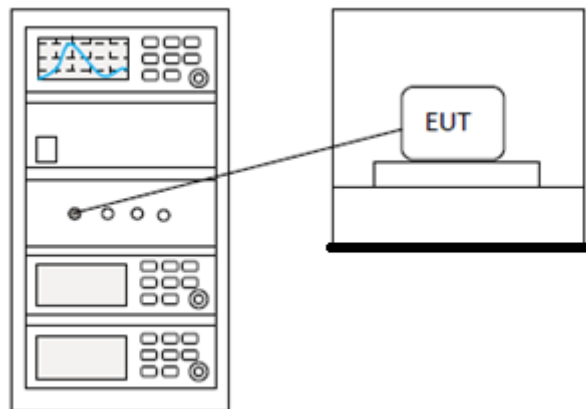

### 6.2.3 Test data

Pass: Please refer to appendix A for details


### 6.3 Minimum 6dB bandwidth

|                        |                                   |
|------------------------|-----------------------------------|
| Test Standard          | 47 CFR Part 15, Subpart C 15.247  |
| Test Method            | ANSI C63.10 (2013) Section 11.8.1 |
| Test Mode (Pre-Scan)   | TX                                |
| Test Mode (Final Test) | TX                                |

#### 6.3.1 Limit

≥500 kHz

#### 6.3.2 Test setup

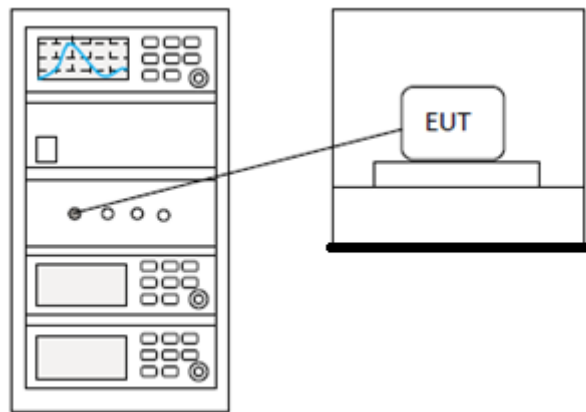

#### 6.3.3 Test data

Pass: Please refer to appendix A for details


## 6.4 Power spectrum density

|                        |                                    |
|------------------------|------------------------------------|
| Test Standard          | 47 CFR Part 15, Subpart C 15.247   |
| Test Method            | ANSI C63.10 (2013) Section 11.10.2 |
| Test Mode (Pre-Scan)   | TX                                 |
| Test Mode (Final Test) | TX                                 |

### 6.4.1 Limit

$\leq 8\text{dBm}$  in any 3 kHz band during any time interval of continuous transmission

### 6.4.2 Test setup

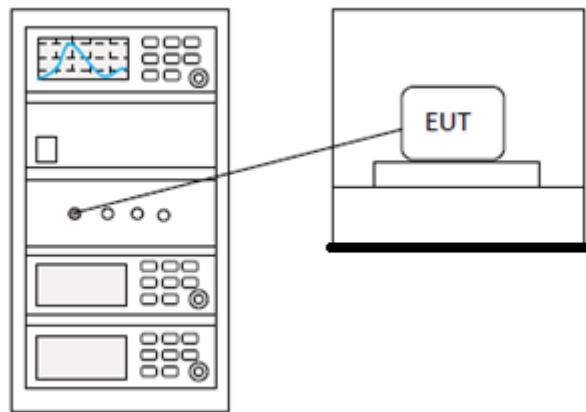

### 6.4.3 Test data

Pass: Please refer to appendix A for details

## 6.5 Conducted Band Edges Measurement

|                               |                                                      |
|-------------------------------|------------------------------------------------------|
| <b>Test Standard</b>          | 47 CFR Part 15, Subpart C 15.247                     |
| <b>Test Method</b>            | ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2 |
| <b>Test Mode (Pre-Scan)</b>   | TX                                                   |
| <b>Test Mode (Final Test)</b> | TX                                                   |

### 6.5.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 6.5.2 Test setup

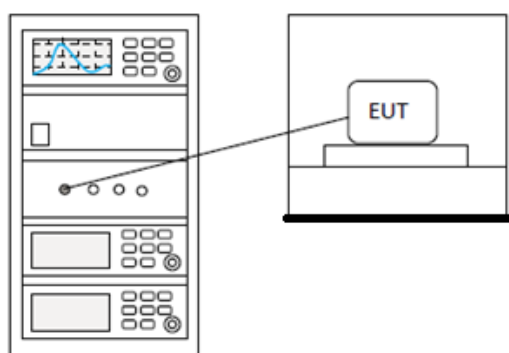

### 6.5.3 Test data

Pass: Please refer to appendix A for details

## 6.6 Conducted spurious emissions

|                               |                                                  |
|-------------------------------|--------------------------------------------------|
| <b>Test Standard</b>          | 47 CFR Part 15, Subpart C 15.247                 |
| <b>Test Method</b>            | ANSI C63.10 (2013) Section 7.8.6 & Section 11.11 |
| <b>Test Mode (Pre-Scan)</b>   | TX                                               |
| <b>Test Mode (Final Test)</b> | TX                                               |

### 6.6.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 6.6.2 Test setup

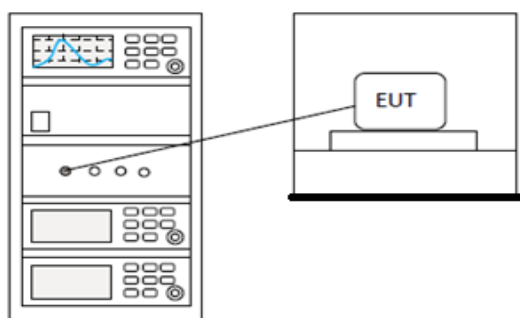

### 6.6.3 Test data

Pass: Please refer to appendix A for details

## 6.7 Radiated spurious emissions

|                               |                                        |
|-------------------------------|----------------------------------------|
| <b>Test Standard</b>          | 47 CFR Part 15, Subpart C 15.247       |
| <b>Test Method</b>            | ANSI C63.10 (2013) Section 6.4,6.5,6.6 |
| <b>Test Mode (Pre-Scan)</b>   | TX                                     |
| <b>Test Mode (Final Test)</b> | TX                                     |


### 6.7.1 Limit

| <b>Frequency(MHz)</b> | <b>Field strength(microvolts/meter)</b> | <b>Measurement distance(meters)</b> |
|-----------------------|-----------------------------------------|-------------------------------------|
| 0.009-0.490           | 2400/F(kHz)                             | 300                                 |
| 0.490-1.705           | 24000/F(kHz)                            | 30                                  |
| 1.705-30.0            | 30                                      | 30                                  |
| 30-88                 | 100                                     | 3                                   |
| 88-216                | 150                                     | 3                                   |
| 216-960               | 200                                     | 3                                   |
| Above 960             | 500                                     | 3                                   |


*Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.*

## 6.7.2 Test setup


Below 1GHz:

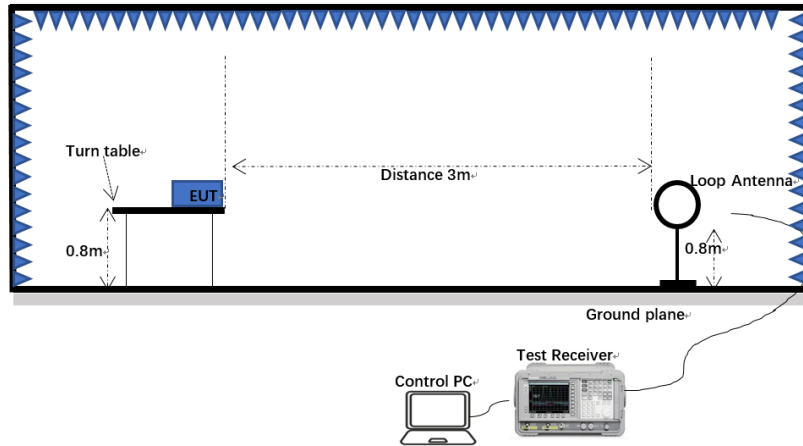

30MHz-1GHz:

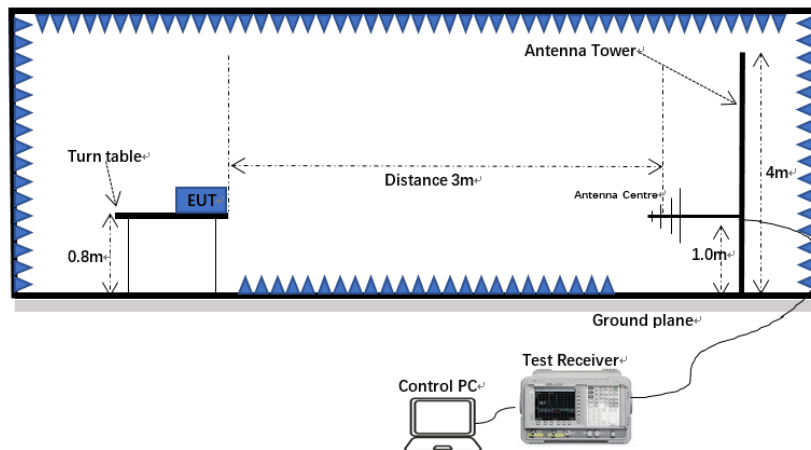

Above 1GHz:

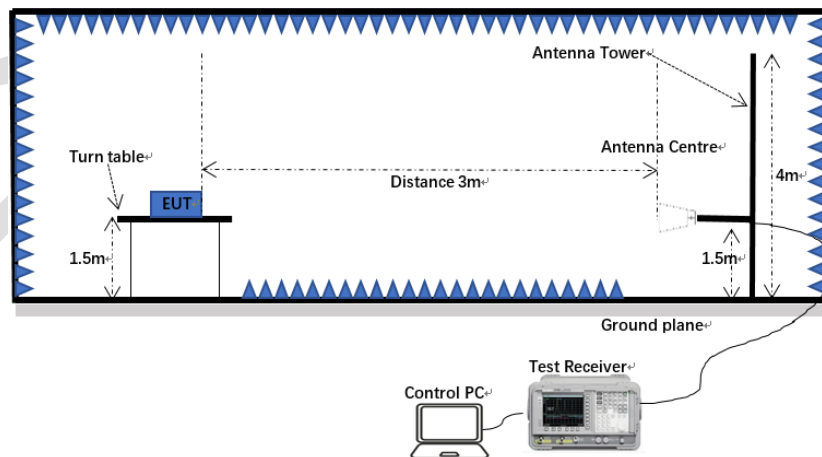

### 6.7.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

*Note 1: Scan from 9 kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.*

*Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.*


*Note 3: The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:*

$$\text{Level (dBuV)} = \text{Reading (dBuV)} + \text{Factor (dB/m)}$$

## 6.7.4 Test data

Below 1GHz


[Test mode: TX]; [Polarity: Horizontal]

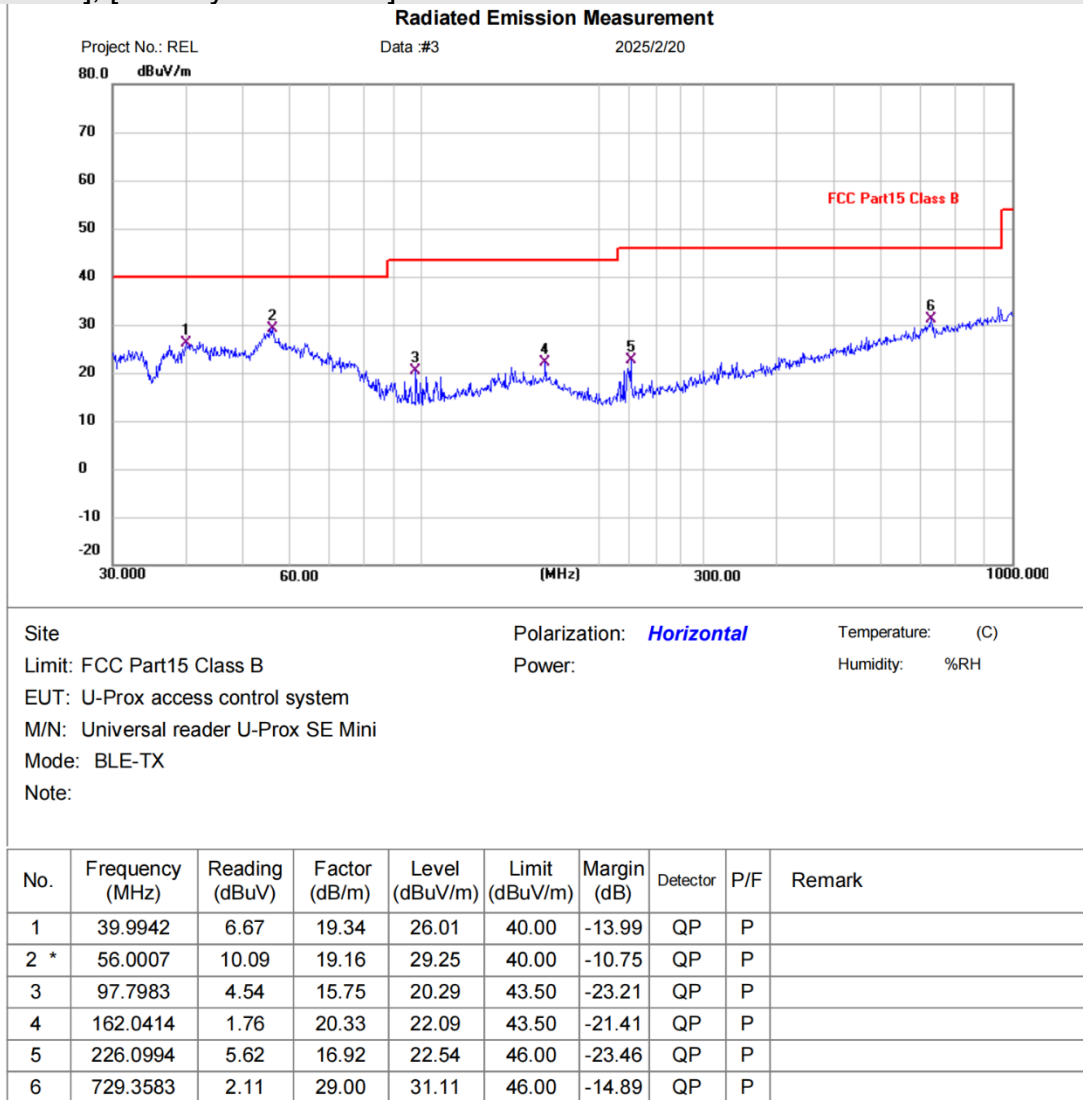

\*Maximum data      Over limit      Excess margin

**Test Result: Pass**

[Test mode: TX]; [Polarity: Vertical]

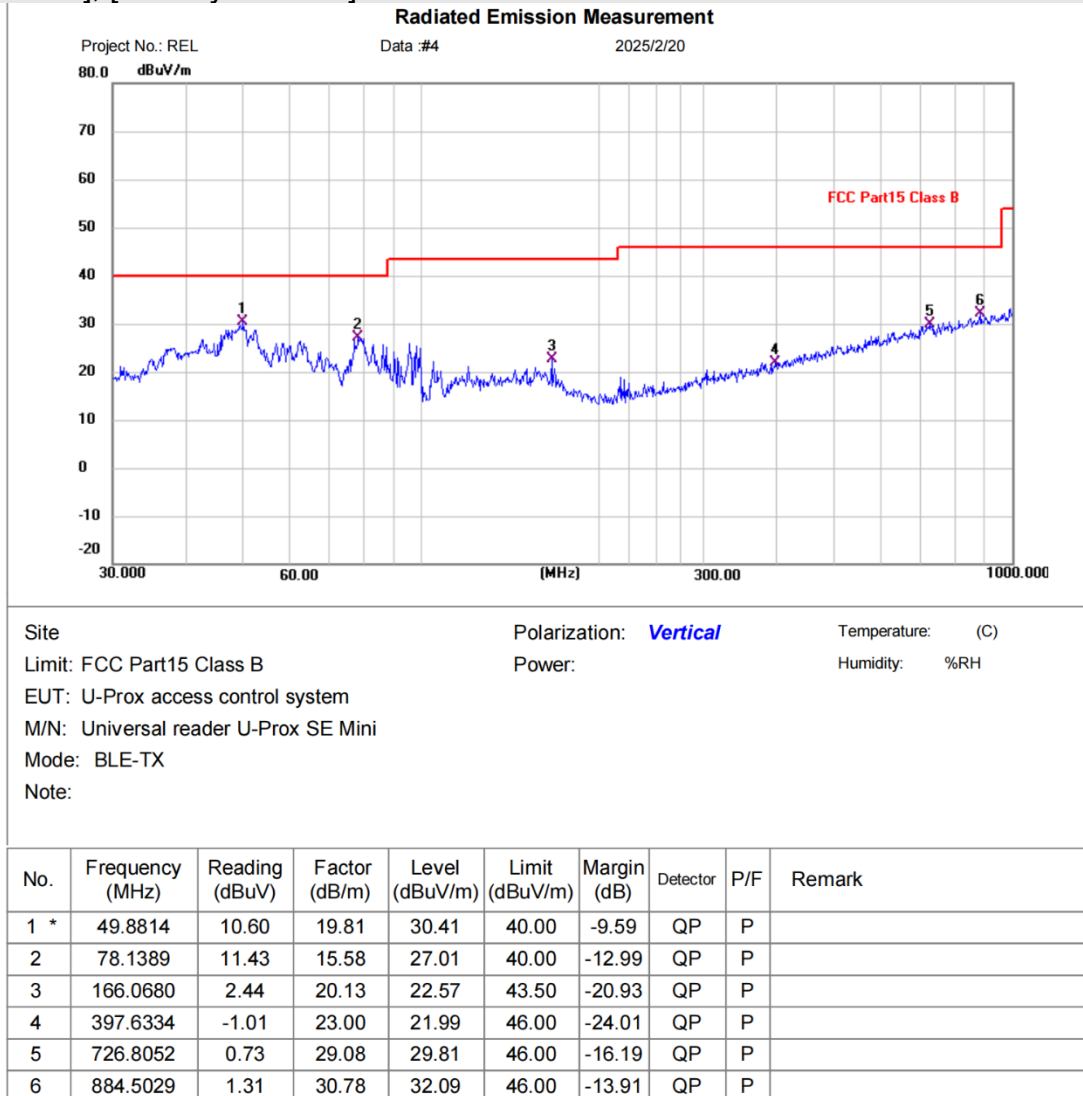


\*Maximum data      y-Over limit      Level margin

**Test Result: Pass**

Above 1GHz:

[Test mode: TX low channel]; [Polarity: Horizontal]

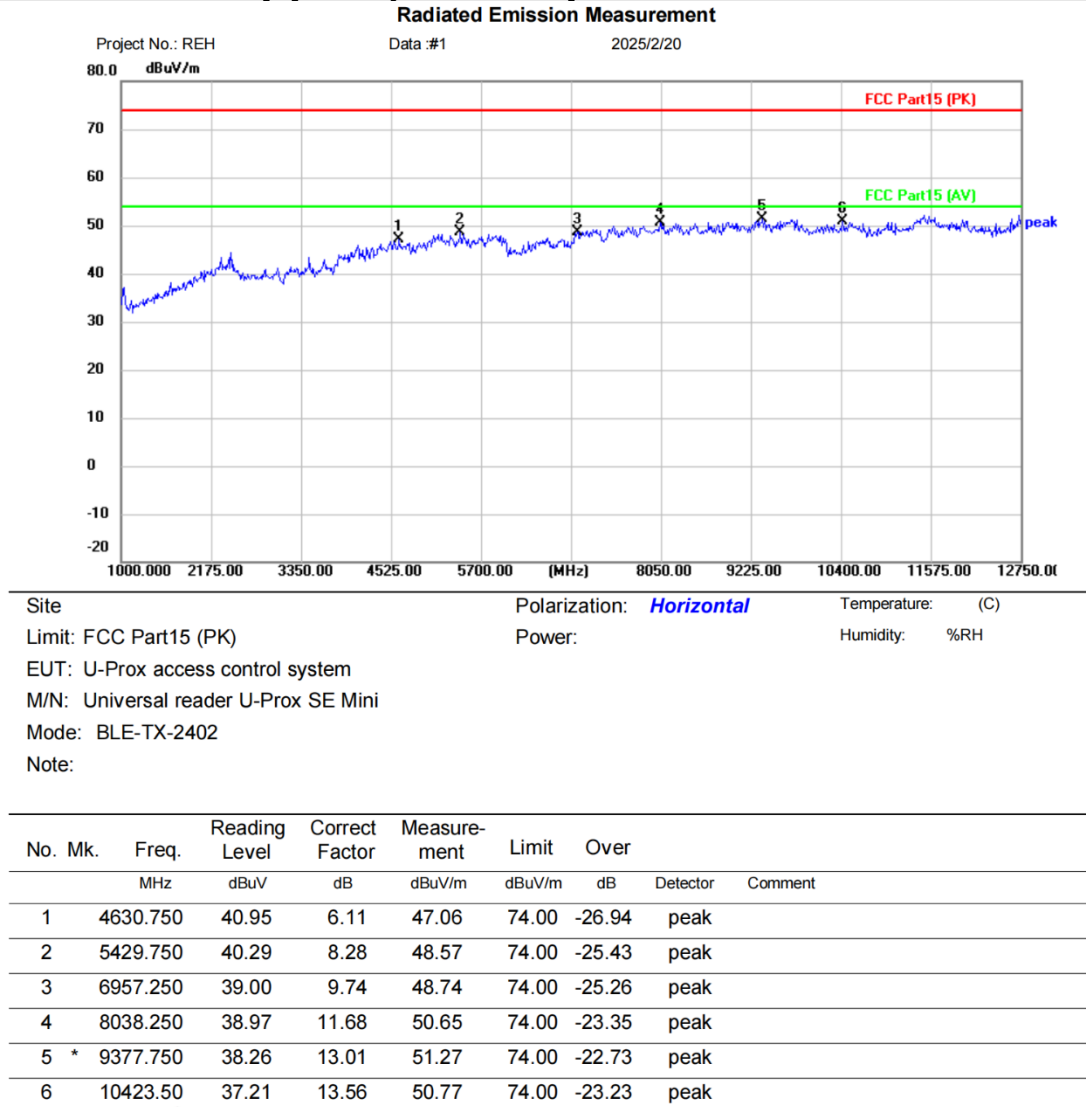

\*:Maximum data    x:Over limit    !:over margin

◁Reference Only


Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

[Test mode: TX low channel]; [Polarity: Vertical]

**Radiated Emission Measurement**

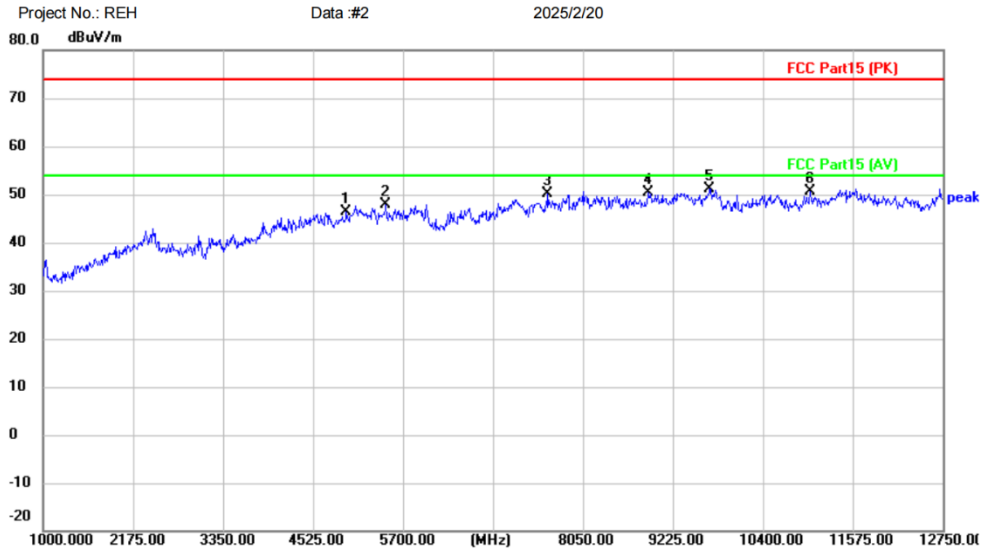


Site: Limit: FCC Part15 (PK) Polarization: **Vertical** Temperature: (C)  
 EUT: U-Prox access control system Power: Humidity: %RH  
 M/N: Universal reader U-Prox SE Mini  
 Mode: BLE-TX-2402  
 Note:

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1   |     | 4959.750     | 38.92                    | 7.41                    | 46.33                      | 74.00           | -27.67     | peak     |         |
| 2   |     | 5476.750     | 39.57                    | 8.38                    | 47.95                      | 74.00           | -26.05     | peak     |         |
| 3   |     | 7591.750     | 39.36                    | 10.66                   | 50.02                      | 74.00           | -23.98     | peak     |         |
| 4   |     | 8896.000     | 37.73                    | 12.62                   | 50.35                      | 74.00           | -23.65     | peak     |         |
| 5   | *   | 9706.750     | 37.66                    | 13.56                   | 51.22                      | 74.00           | -22.78     | peak     |         |
| 6   |     | 11011.00     | 37.59                    | 13.00                   | 50.59                      | 74.00           | -23.41     | peak     |         |

\*:Maximum data x:Over limit !:over margin (Reference Only)  
 Receiver: ESR\_1 Spectrum Analyzer: FSP40

**Test Result: Pass**

[Test mode: TX middle channel]; [Polarity: Horizontal]

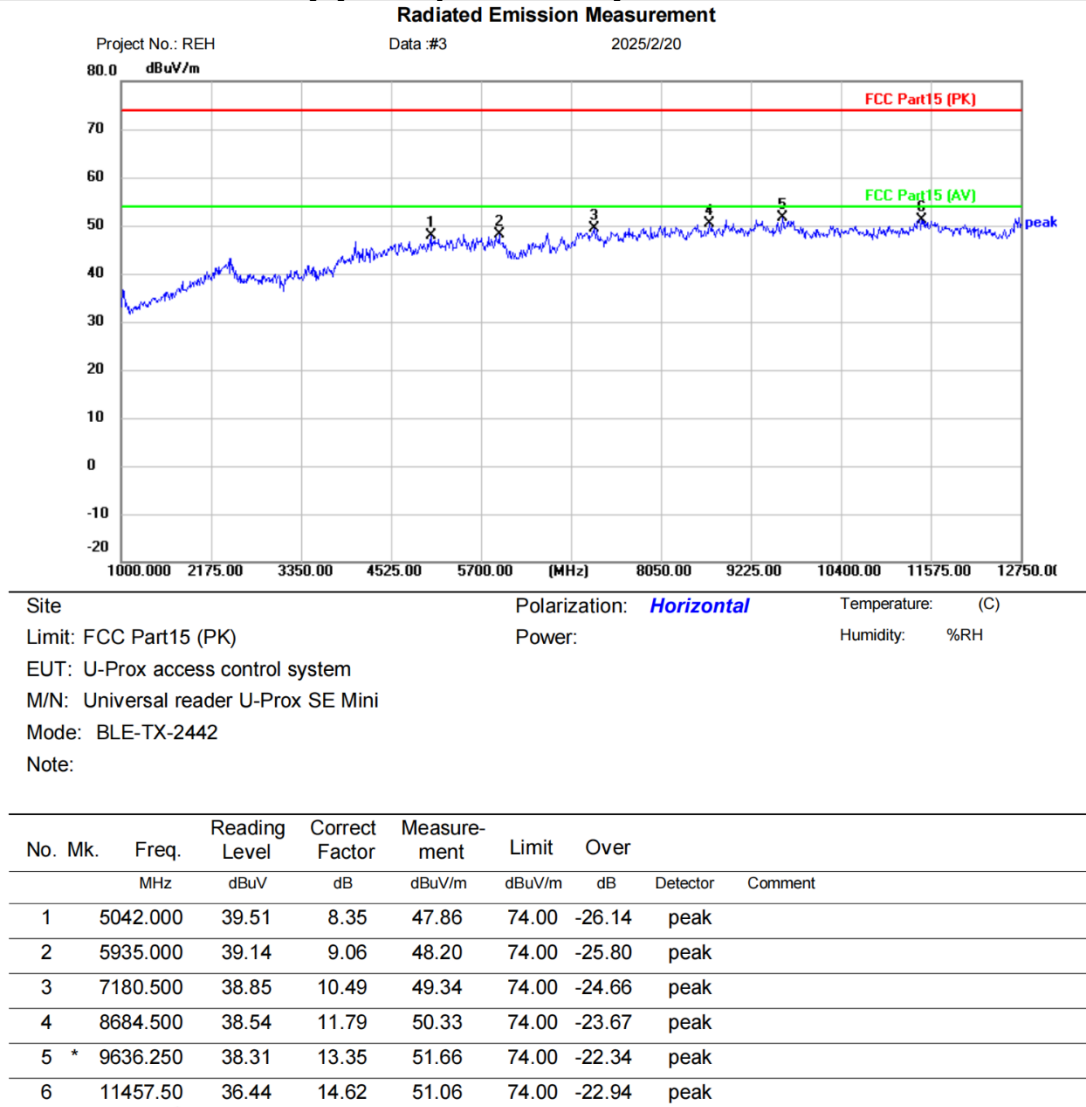

\*:Maximum data    x:Over limit    !:over margin


⟨Reference Only

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

[Test mode: TX middle channel]; [Polarity: Vertical]

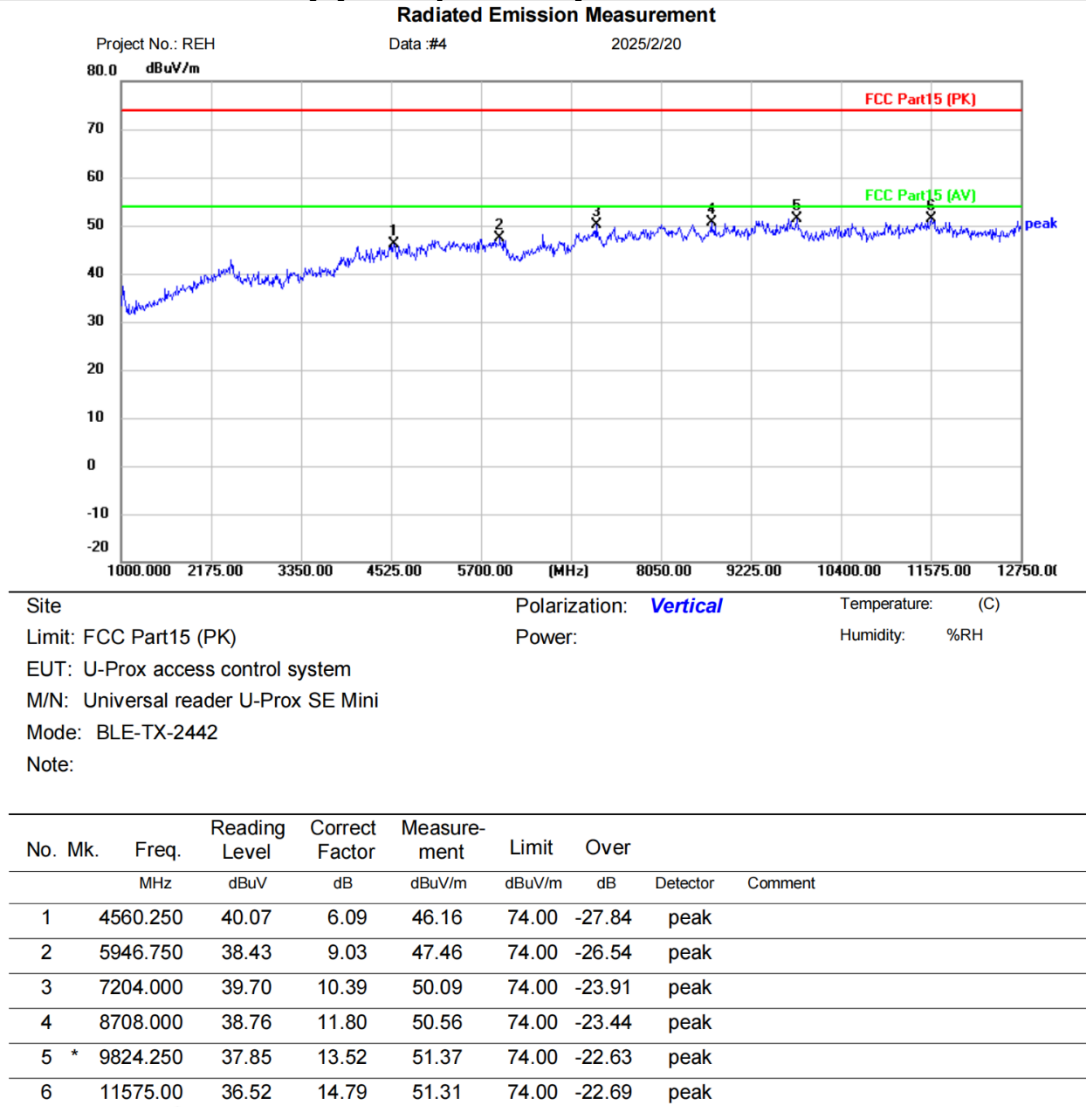

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

[Test mode: TX High channel]; [Polarity: Horizontal]

**Radiated Emission Measurement**



Site: Limit: FCC Part15 (PK) Polarization: **Horizontal** Temperature: (C)  
 EUT: U-Prox access control system Power: Humidity: %RH  
 M/N: Universal reader U-Prox SE Mini  
 Mode: BLE-TX-2480  
 Note:


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1   |     | 5018.500     | 38.18                    | 8.09                    | 46.27                      | 74.00           | -27.73     | peak     |         |
| 2   |     | 6769.250     | 39.17                    | 8.86                    | 48.03                      | 74.00           | -25.97     | peak     |         |
| 3   |     | 7251.000     | 39.96                    | 10.48                   | 50.44                      | 74.00           | -23.56     | peak     |         |
| 4   |     | 8249.750     | 39.10                    | 11.20                   | 50.30                      | 74.00           | -23.70     | peak     |         |
| 5   | *   | 9377.750     | 39.30                    | 13.01                   | 52.31                      | 74.00           | -21.69     | peak     |         |
| 6   |     | 10541.00     | 37.08                    | 13.69                   | 50.77                      | 74.00           | -23.23     | peak     |         |

\*:Maximum data x:Over limit !:over margin <Reference Only  
 Receiver: ESR\_1 Spectrum Analyzer: FSP40

**Test Result: Pass**

[Test mode: TX High channel]; [Polarity: Vertical]

**Radiated Emission Measurement**

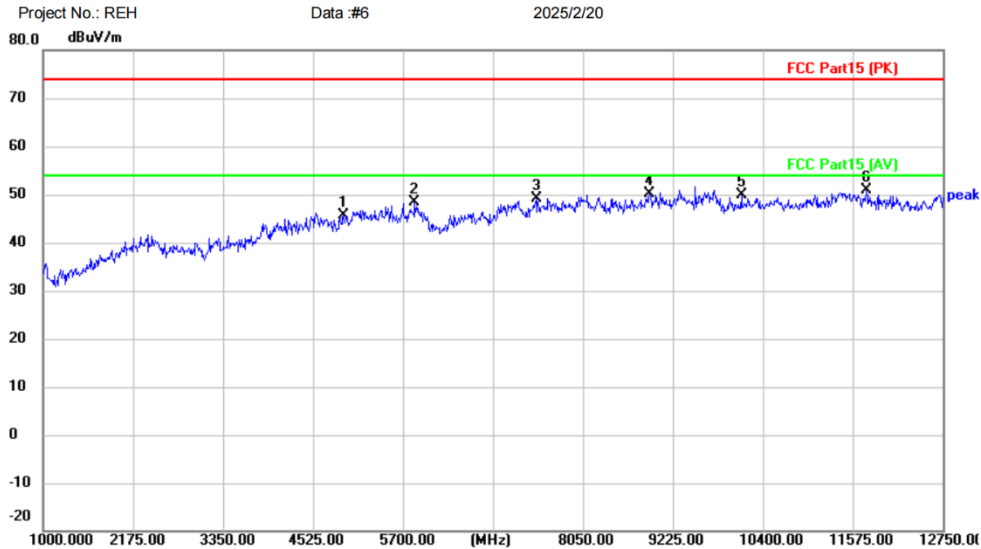

Site Limit: FCC Part15 (PK) Polarization: **Vertical** Temperature: (C)  
 EUT: U-Prox access control system Power: Humidity: %RH  
 M/N: Universal reader U-Prox SE Mini  
 Mode: BLE-TX-2480  
 Note:

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1   |     | 4924.500     | 38.84                    | 6.90                    | 45.74                      | 74.00           | -28.26     | peak     |         |
| 2   |     | 5852.750     | 39.40                    | 8.88                    | 48.28                      | 74.00           | -25.72     | peak     |         |
| 3   |     | 7439.000     | 38.23                    | 11.01                   | 49.24                      | 74.00           | -24.76     | peak     |         |
| 4   |     | 8919.500     | 37.71                    | 12.38                   | 50.09                      | 74.00           | -23.91     | peak     |         |
| 5   |     | 10118.00     | 36.72                    | 13.26                   | 49.98                      | 74.00           | -24.02     | peak     |         |
| 6   | *   | 11751.25     | 37.36                    | 13.47                   | 50.83                      | 74.00           | -23.17     | peak     |         |

\*:Maximum data x:Over limit !:over margin <Reference Only  
 Receiver: ESR\_1 Spectrum Analyzer: FSP40

**Test Result: Pass**

## 6.8 Radiated emissions which fall in the restricted bands

|                               |                                   |
|-------------------------------|-----------------------------------|
| <b>Test Standard</b>          | 47 CFR Part 15, Subpart C 15.247  |
| <b>Test Method</b>            | ANSI C63.10 (2013) Section 6.10.5 |
| <b>Test Mode (Pre-Scan)</b>   | TX                                |
| <b>Test Mode (Final Test)</b> | TX                                |


### 6.8.1 Limit

| <b>Frequency(MHz)</b> | <b>Field strength(microvolts/meter)</b> | <b>Measurement distance(meters)</b> |
|-----------------------|-----------------------------------------|-------------------------------------|
| 0.009-0.490           | 2400/F(kHz)                             | 300                                 |
| 0.490-1.705           | 24000/F(kHz)                            | 30                                  |
| 1.705-30.0            | 30                                      | 30                                  |
| 30-88                 | 100                                     | 3                                   |
| 88-216                | 150                                     | 3                                   |
| 216-960               | 200                                     | 3                                   |
| Above 960             | 500                                     | 3                                   |


*Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.*

## 6.8.2 Test setup


Below 1GHz:

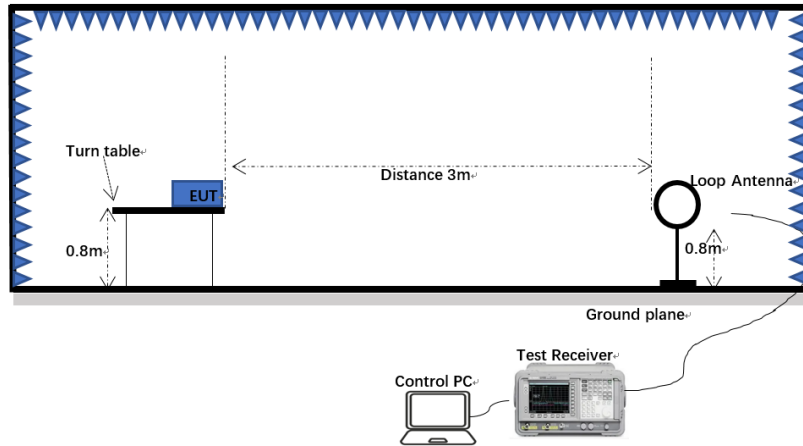

30MHz-1GHz:

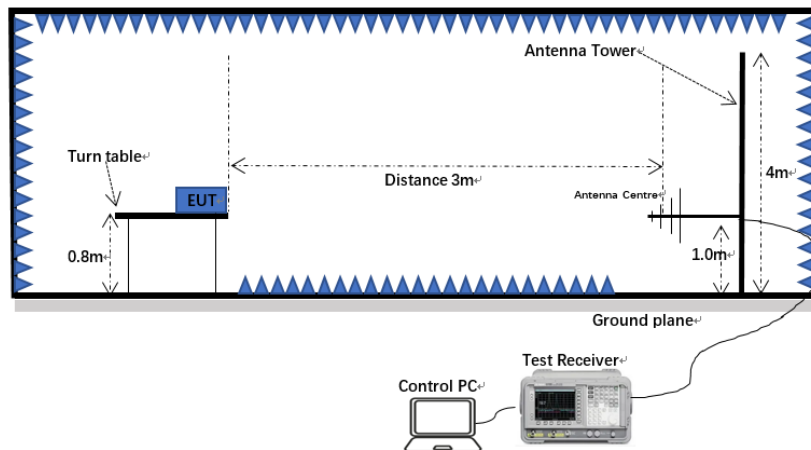

Above 1GHz:

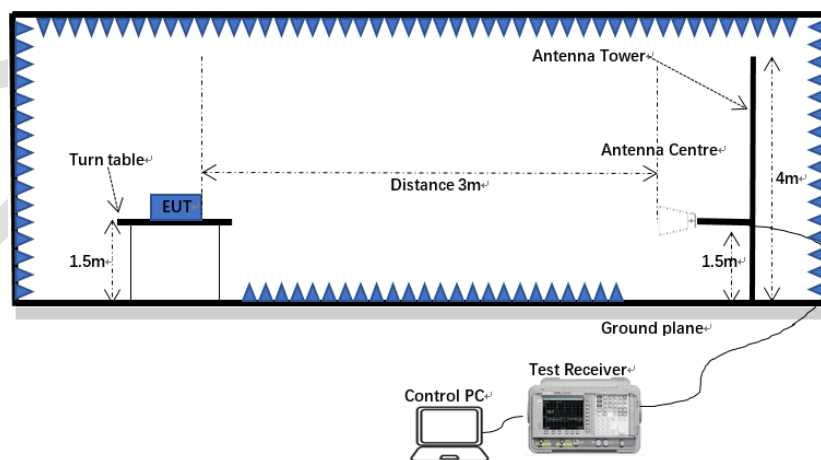

### 6.8.3 Procedure


- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1:  $Level (dBuV) = Reading (dBuV) + Factor (dB/m)$

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

## 6.8.4 Test data

[Test mode: TX low channel]; [Polarity: Horizontal]

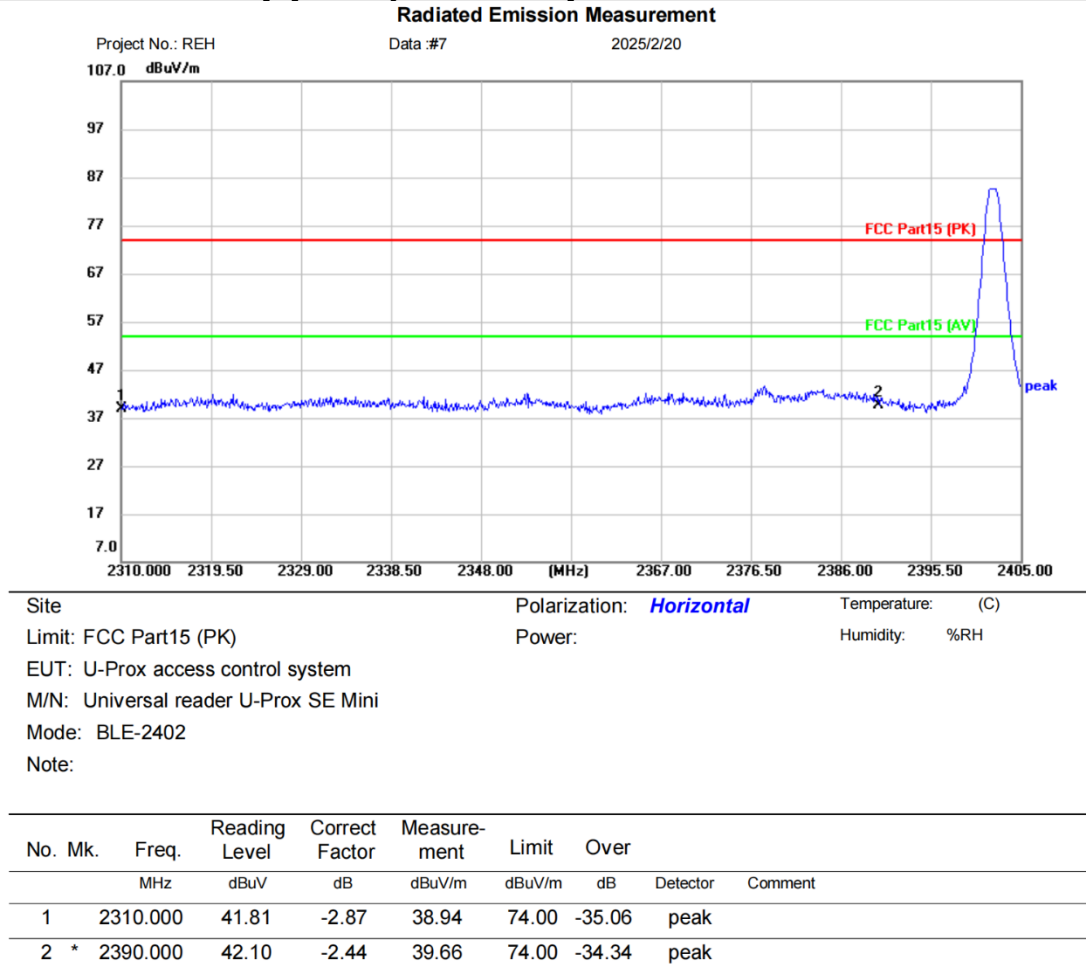

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only


Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

[Test mode:TX low channel]; [Polarity: Vertical]

**Radiated Emission Measurement**

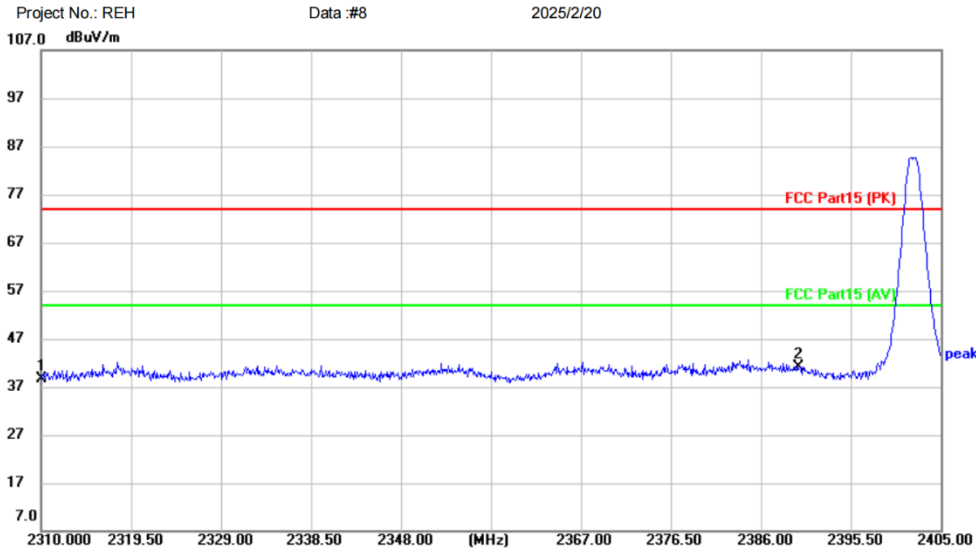

Site Limit: FCC Part15 (PK) Polarization: **Vertical** Temperature: (C)  
 EUT: U-Prox access control system Power: Humidity: %RH  
 M/N: Universal reader U-Prox SE Mini  
 Mode: BLE-2402  
 Note:

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1   |     | 2310.000     | 41.58                    | -2.87                   | 38.71                      | 74.00           | -35.29     | peak     |         |
| 2   | *   | 2390.000     | 43.63                    | -2.44                   | 41.19                      | 74.00           | -32.81     | peak     |         |

\*:Maximum data x:Over limit !:over margin

<Reference Only


Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

[Test mode: TX High channel]; [Polarity: Horizontal]

**Radiated Emission Measurement**

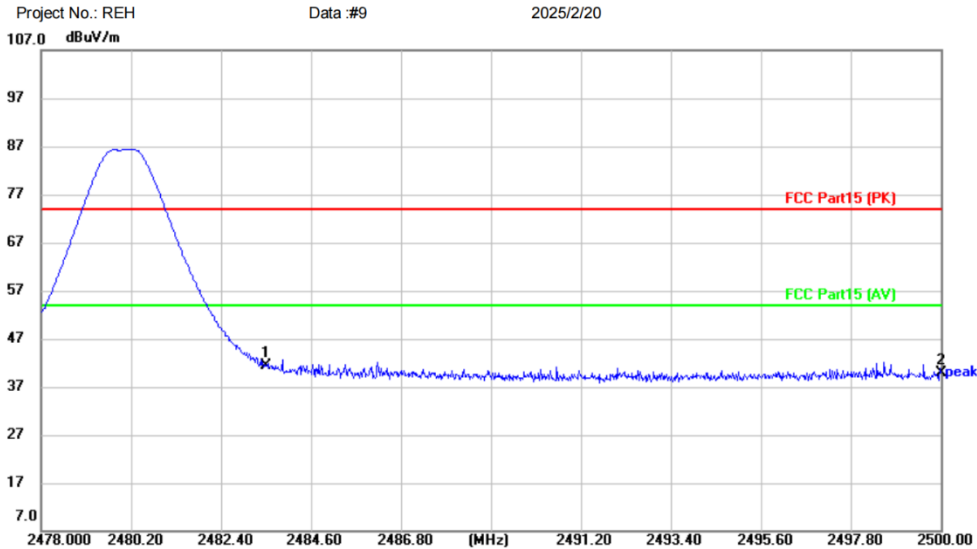

Site Limit: FCC Part15 (PK) Polarization: **Horizontal** Temperature: (C)  
 EUT: U-Prox access control system Power: Humidity: %RH  
 M/N: Universal reader U-Prox SE Mini  
 Mode: BLE-2480  
 Note:

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1   | *   | 2483.500     | 44.31                    | -2.91                   | 41.40                      | 74.00           | -32.60     | peak     |         |
| 2   |     | 2500.000     | 42.77                    | -3.00                   | 39.77                      | 74.00           | -34.23     | peak     |         |

\*:Maximum data x:Over limit !:over margin <Reference Only  
 Receiver: ESR\_1 Spectrum Analyzer: FSP40

**Test Result: Pass**

[Test mode:TX High channel]; [Polarity: Vertical]


**Radiated Emission Measurement**

Project No.: REH

Data :#10

2025/2/20

107.0 dBuV/m

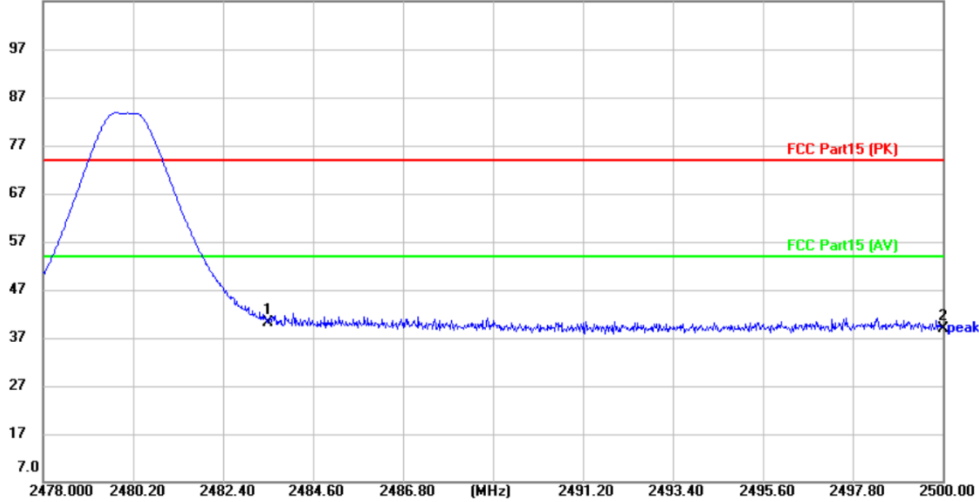

Site

Limit: FCC Part15 (PK)

EUT: U-Prox access control system

M/N: Universal reader U-Prox SE Mini

Mode: BLE-2480

Note:

Polarization: **Vertical**

Power:

Temperature: (C)

Humidity: %RH

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1   | *   | 2483.500     | 43.08                    | -2.91                   | 40.17                      | 74.00           | -33.83     | peak     |         |
| 2   |     | 2500.000     | 41.93                    | -3.00                   | 38.93                      | 74.00           | -35.07     | peak     |         |

\*:Maximum data x:Over limit !:over margin

<Reference Only

Receiver: ESR\_1

Spectrum Analyzer: FSP40


**Test Result: Pass**

## 7 Appendix A


### 7.1 Maximum Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-------------|---------|
| NVNT      | BLE  | 2402            | Ant1    | -8.009                | 30          | Pass    |
| NVNT      | BLE  | 2442            | Ant1    | -8.43                 | 30          | Pass    |
| NVNT      | BLE  | 2480            | Ant1    | -9.401                | 30          | Pass    |


### Power NVNT BLE 2402MHz Ant1

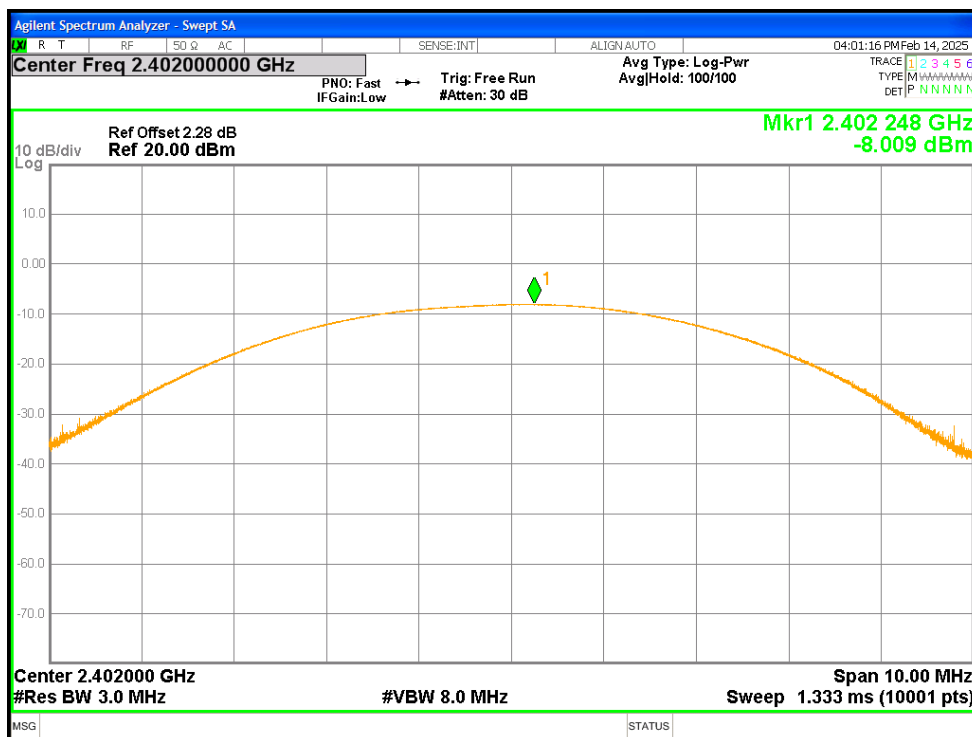

### Power NVNT BLE 2442MHz Ant1

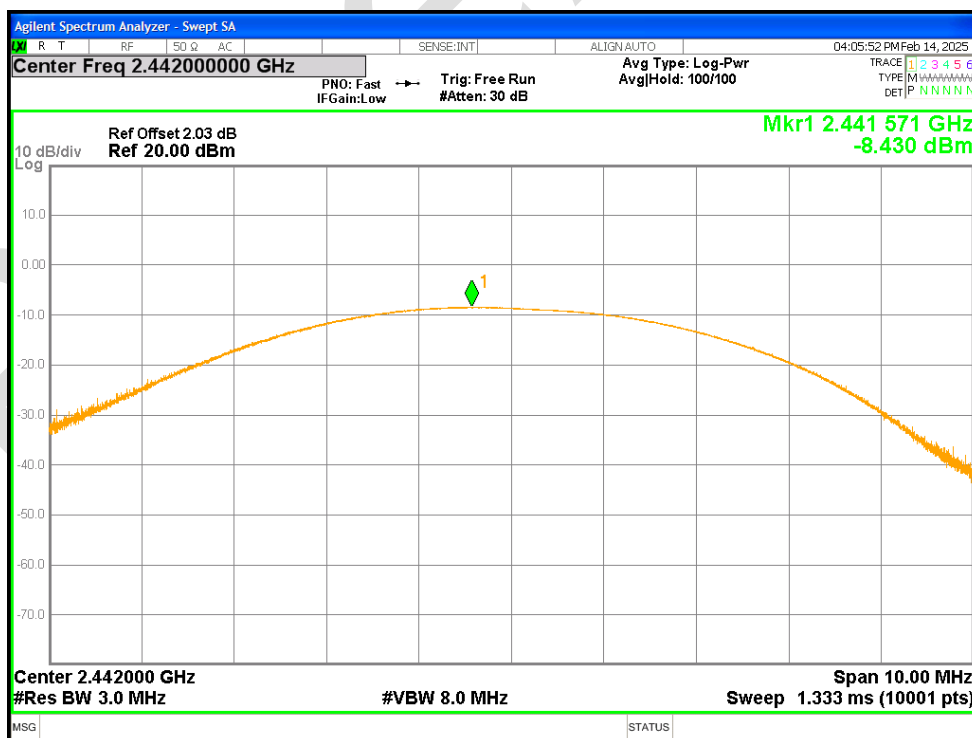


Power NVNT BLE 2480MHz Ant1

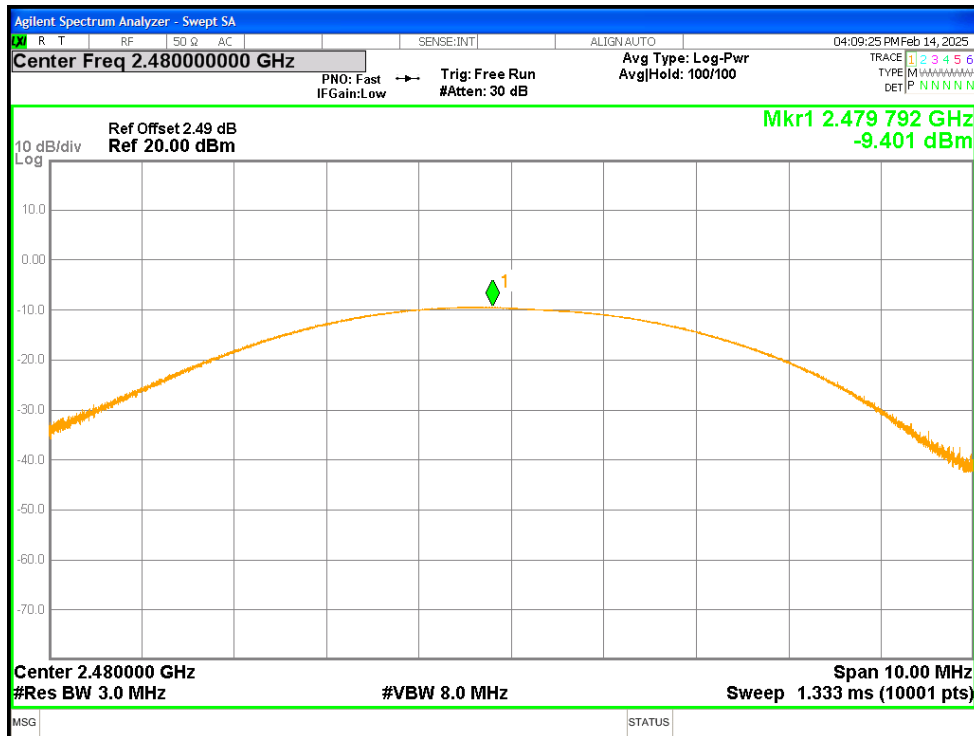


## 7.2 -6dB Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | BLE  | 2402            | Ant1    | 0.665                 | 0.5                         | Pass    |
| NVNT      | BLE  | 2442            | Ant1    | 0.651                 | 0.5                         | Pass    |
| NVNT      | BLE  | 2480            | Ant1    | 0.677                 | 0.5                         | Pass    |


-6dB Bandwidth NVNT BLE 2402MHz Ant1

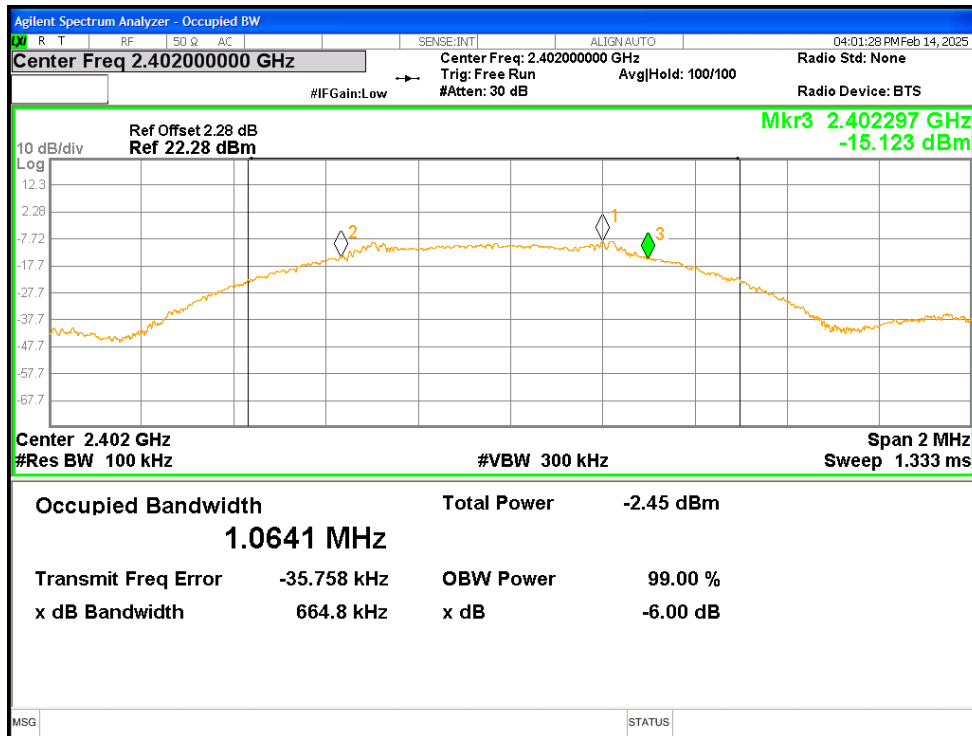

-6dB Bandwidth NVNT BLE 2442MHz Ant1

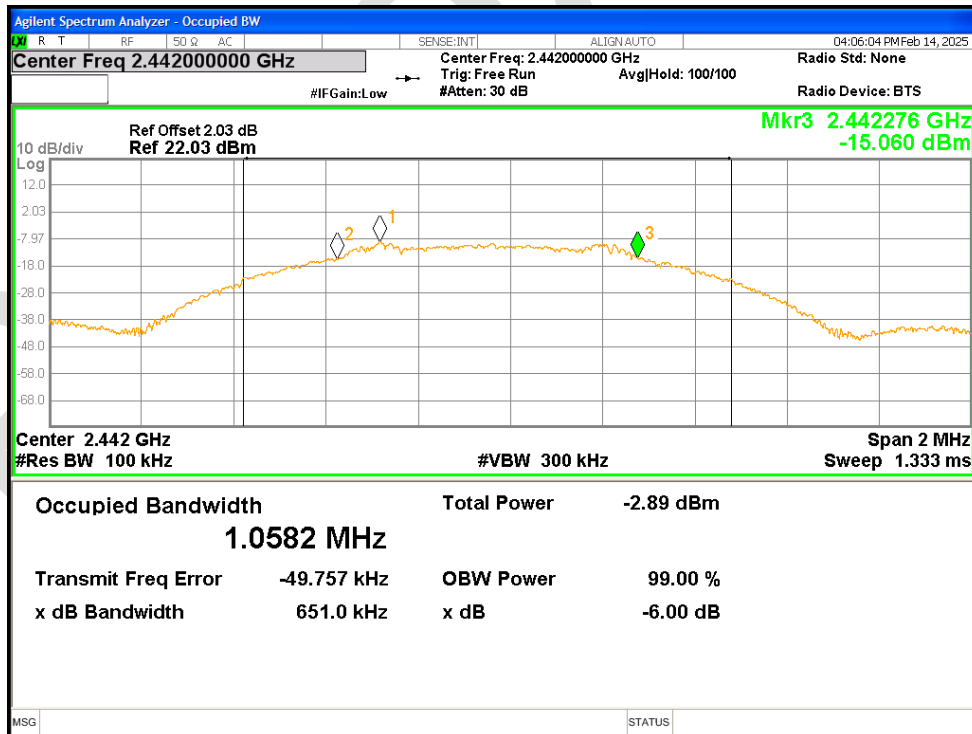


## -6dB Bandwidth NVNT BLE 2480MHz Ant1

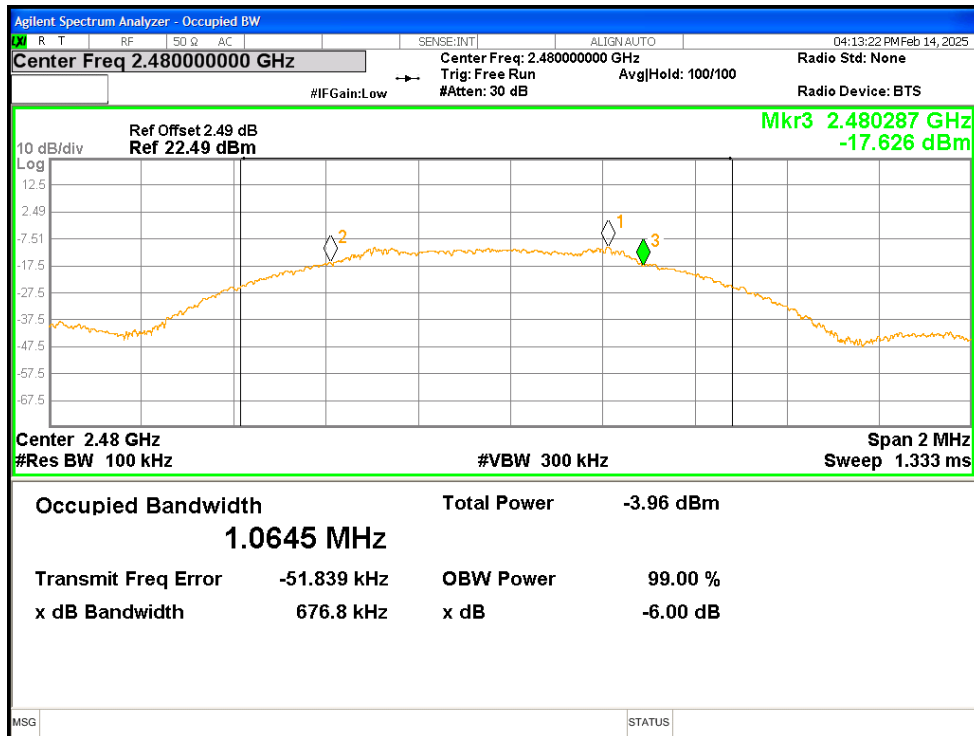


### 7.3 Occupied Channel Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|-----------|------|-----------------|---------|---------------|
| NVNT      | BLE  | 2402            | Ant1    | 1.0735        |
| NVNT      | BLE  | 2442            | Ant1    | 1.0508        |
| NVNT      | BLE  | 2480            | Ant1    | 1.0629        |


### OBW NVNT BLE 2402MHz Ant1

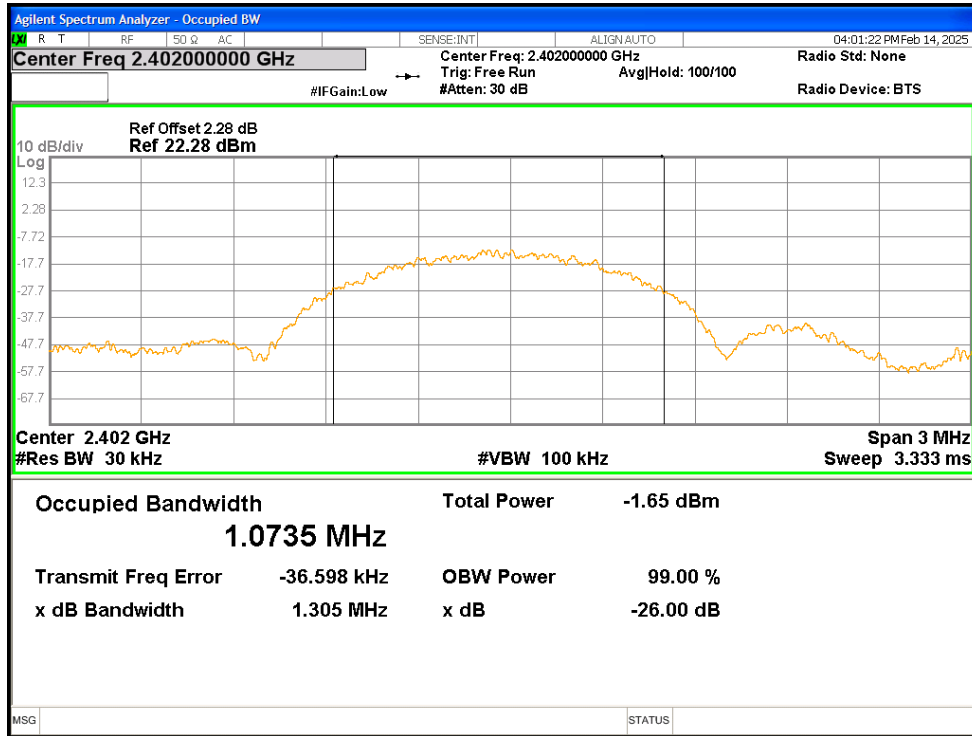

### OBW NVNT BLE 2442MHz Ant1

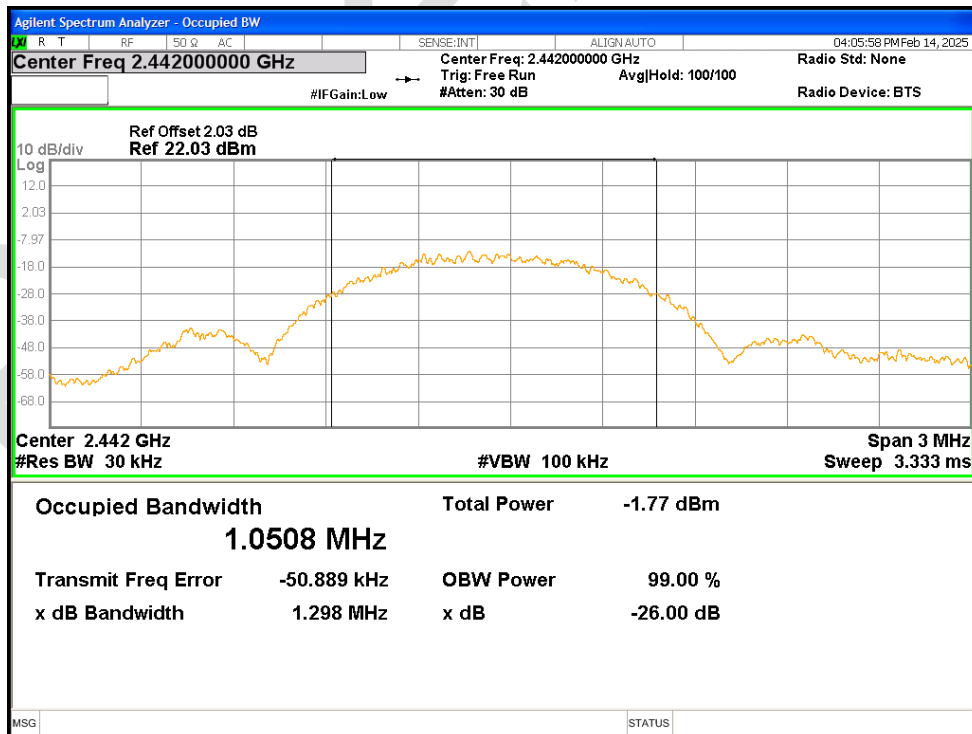


## OBW NVNT BLE 2480MHz Ant1

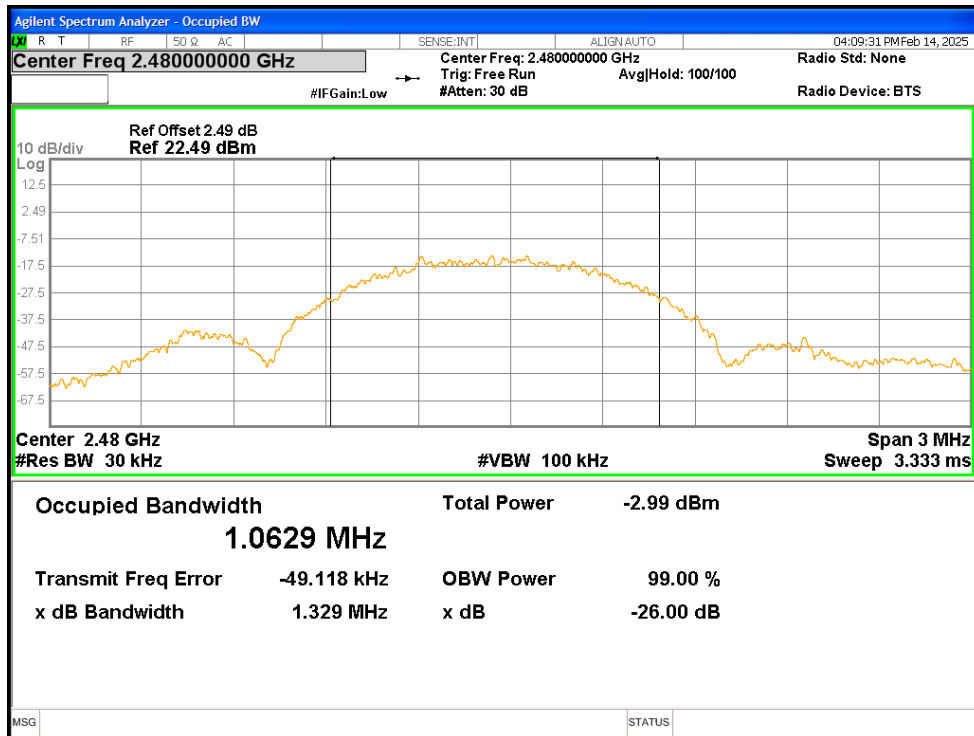


#### 7.4 Maximum Power Spectral Density Level

| Condition | Mode | Frequency (MHz) | Antenna | Max PSD (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|---------------|-------------|---------|
| NVNT      | BLE  | 2402            | Ant1    | -21.934       | 8           | Pass    |
| NVNT      | BLE  | 2442            | Ant1    | -21.22        | 8           | Pass    |
| NVNT      | BLE  | 2480            | Ant1    | -21.198       | 8           | Pass    |


### PSD NVNT BLE 2402MHz Ant1

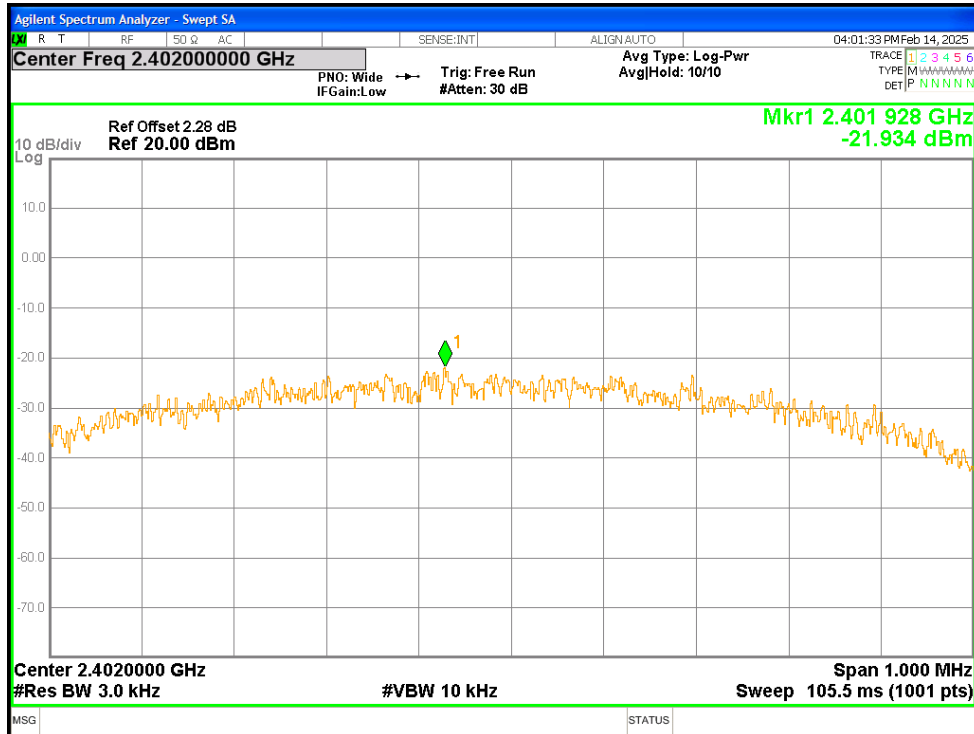

### PSD NVNT BLE 2442MHz Ant1

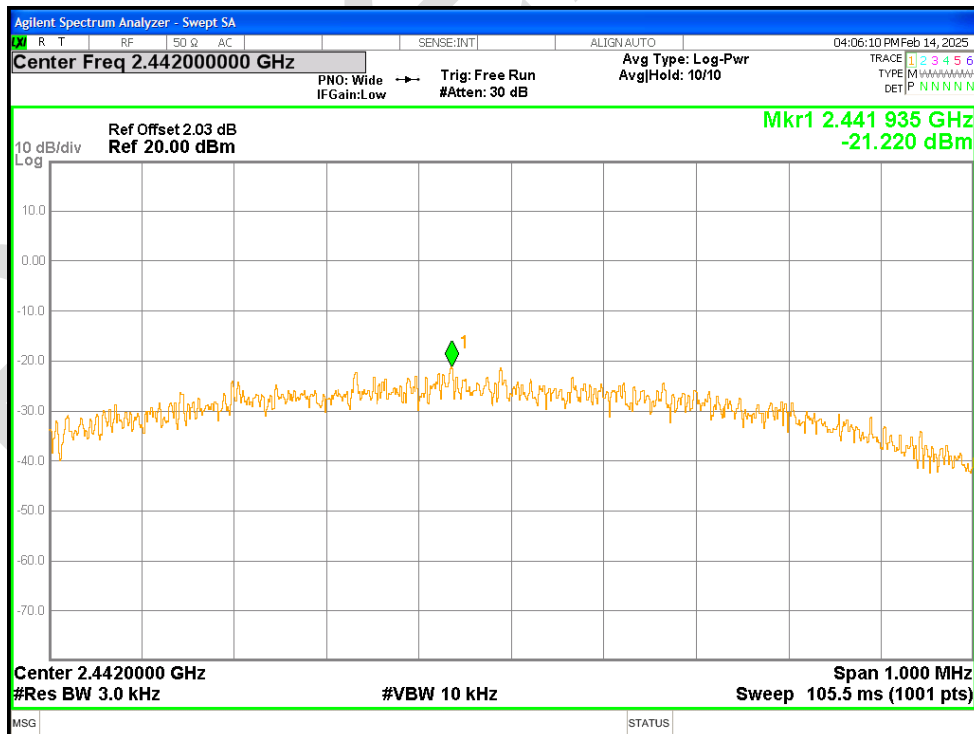


## PSD NVNT BLE 2480MHz Ant1

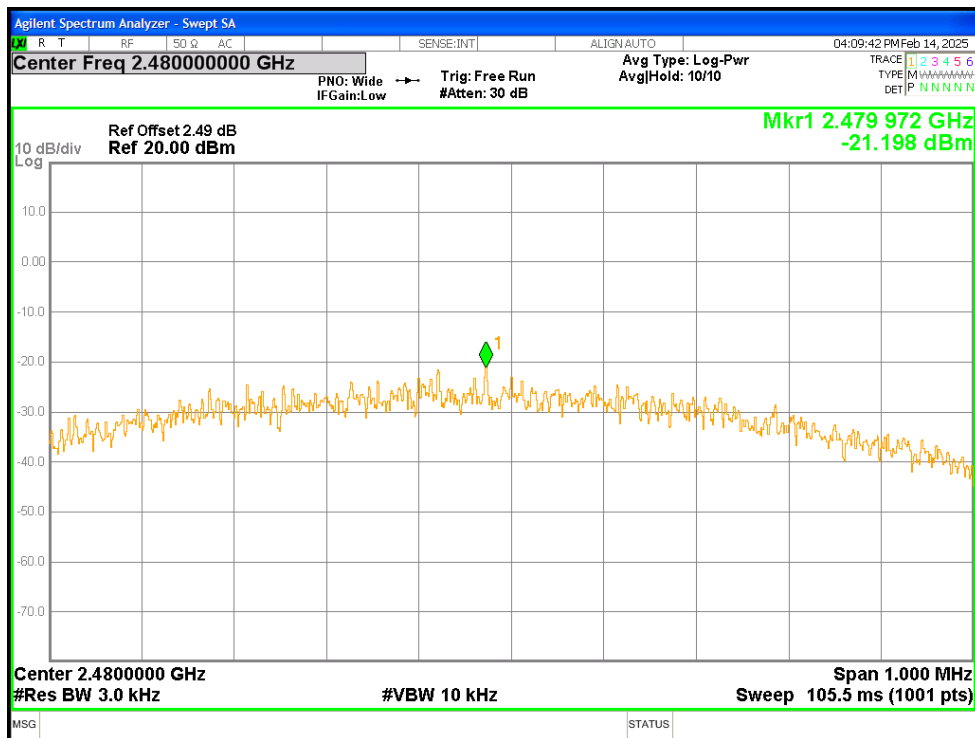


## 7.5 Band Edge

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | BLE  | 2402            | Ant1    | -46.47          | -20         | Pass    |
| NVNT      | BLE  | 2480            | Ant1    | -44.22          | -20         | Pass    |

### Band Edge NVNT BLE 2402MHz Ant1 Ref

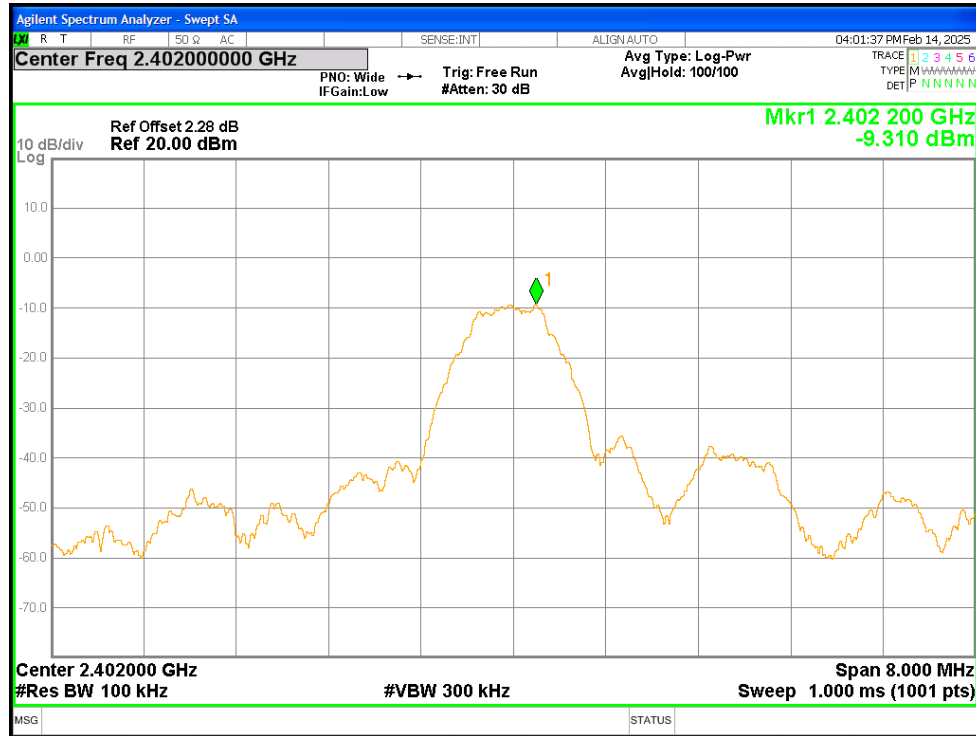


### Band Edge NVNT BLE 2402MHz Ant1 Emission

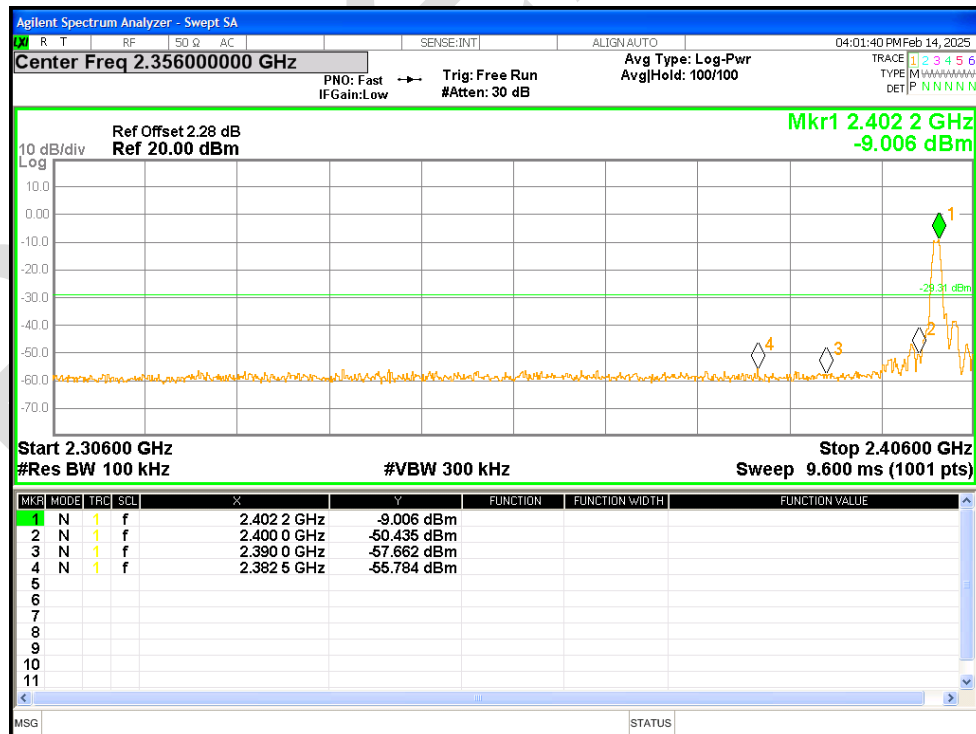

### Band Edge NVNT BLE 2480MHz Ant1 Ref




### Band Edge NVNT BLE 2480MHz Ant1 Emission

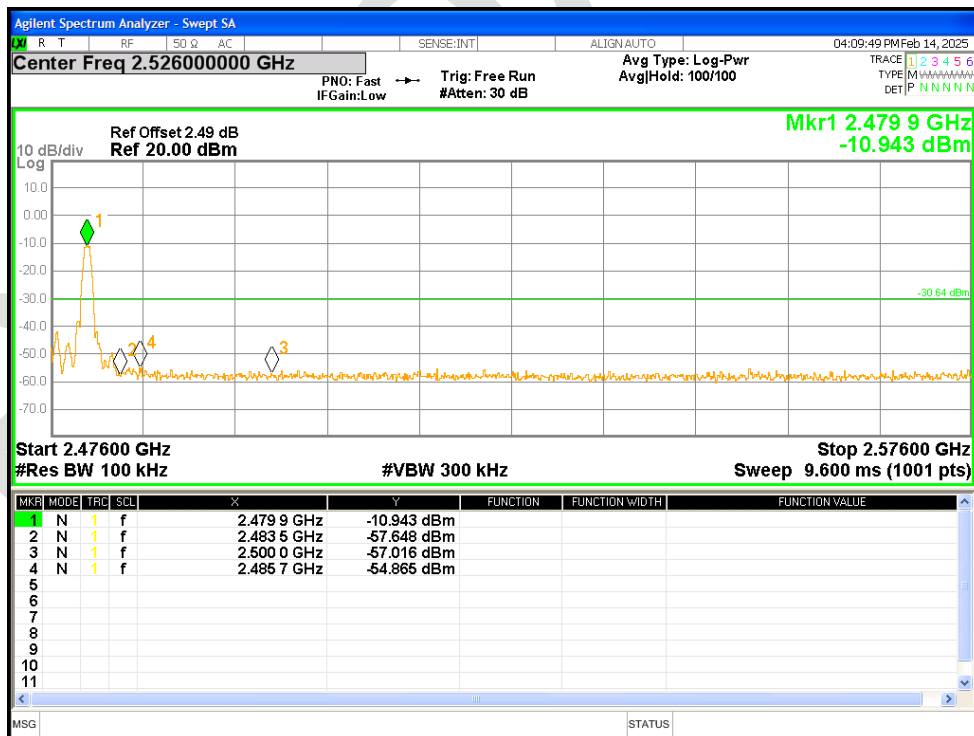


## 7.6 Conducted RF Spurious Emission

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | BLE  | 2402            | Ant1    | -35.47          | -20         | Pass    |
| NVNT      | BLE  | 2442            | Ant1    | -24.62          | -20         | Pass    |
| NVNT      | BLE  | 2480            | Ant1    | -34.5           | -20         | Pass    |


Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

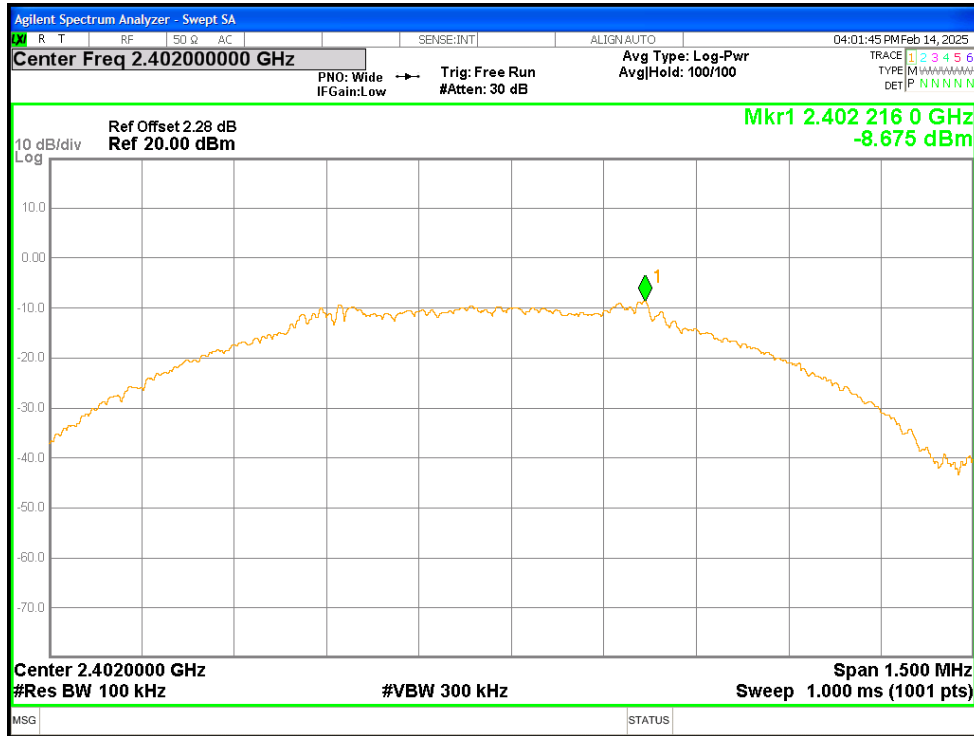


Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

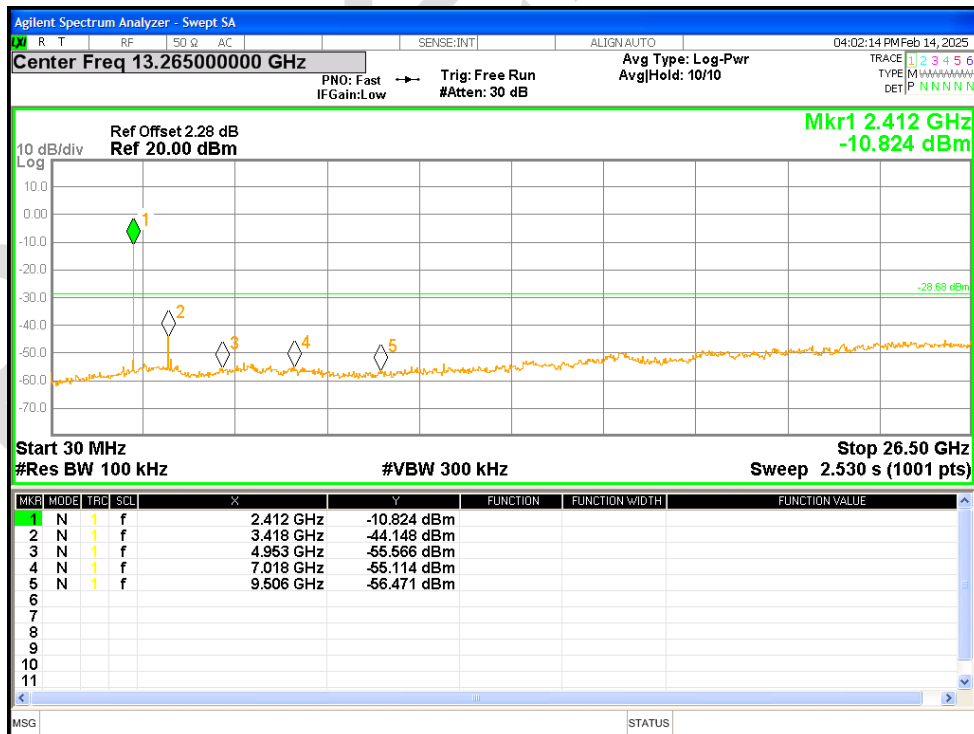


Tx. Spurious NVNT BLE 2442MHz Ant1 Ref

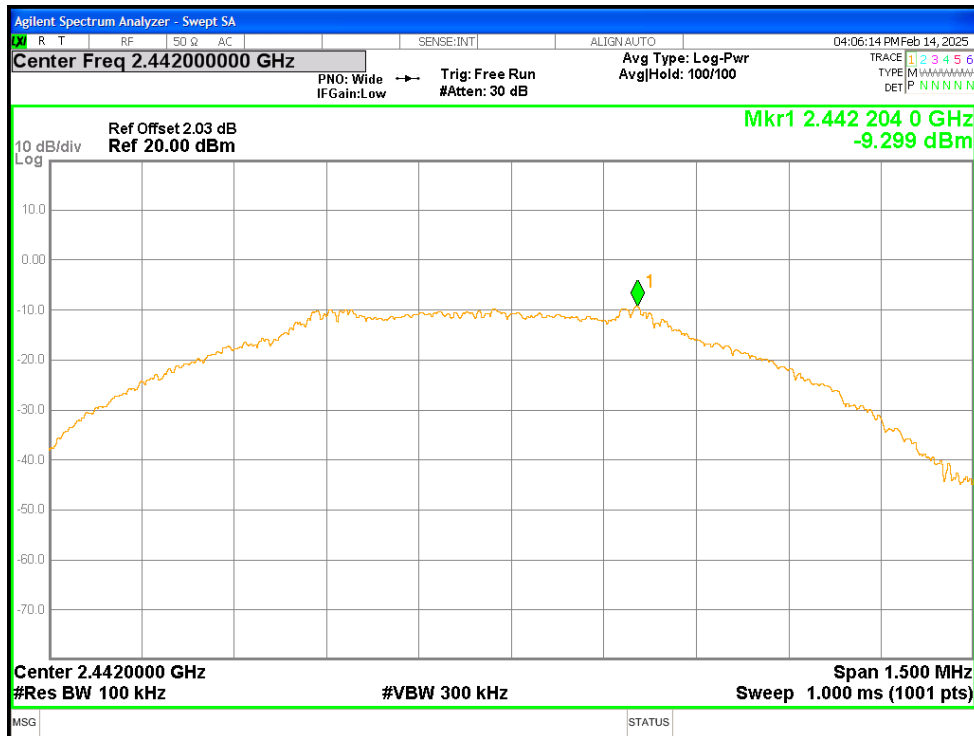


Tx. Spurious NVNT BLE 2442MHz Ant1 Emission

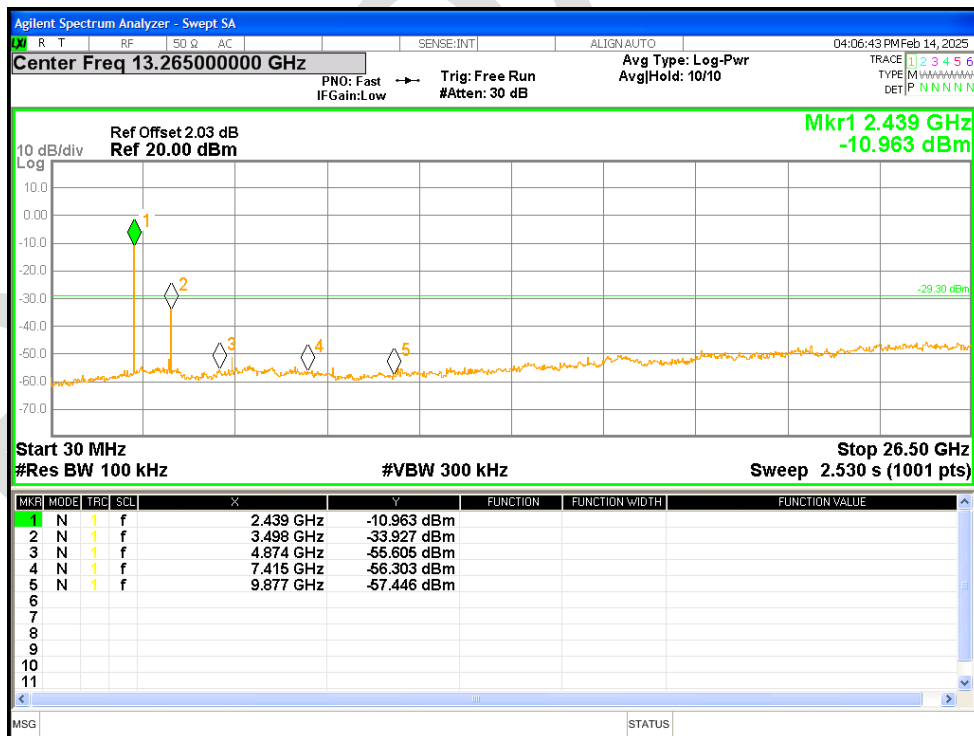

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

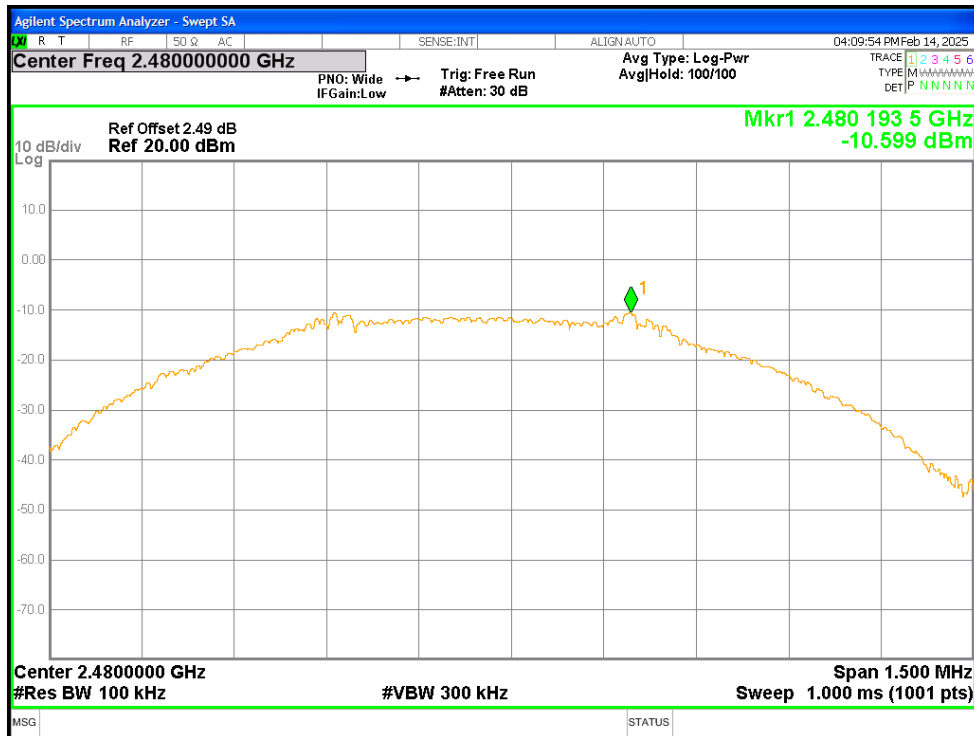


Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

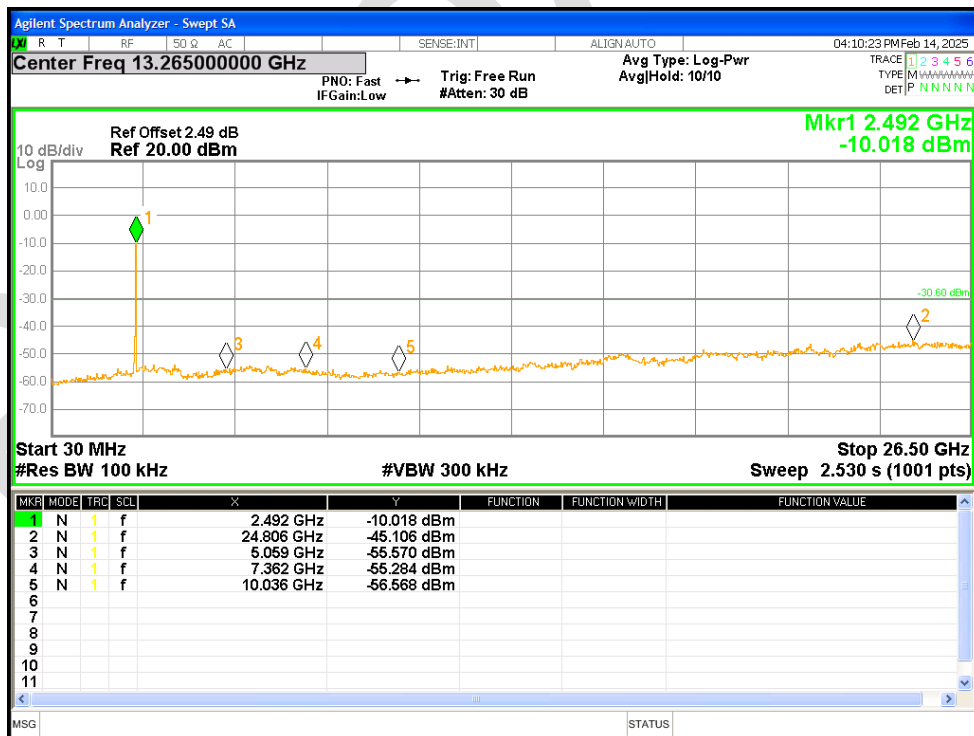

## Appendix B: photographs of test setup

Radiated Emissions (30MHz-1GHz)

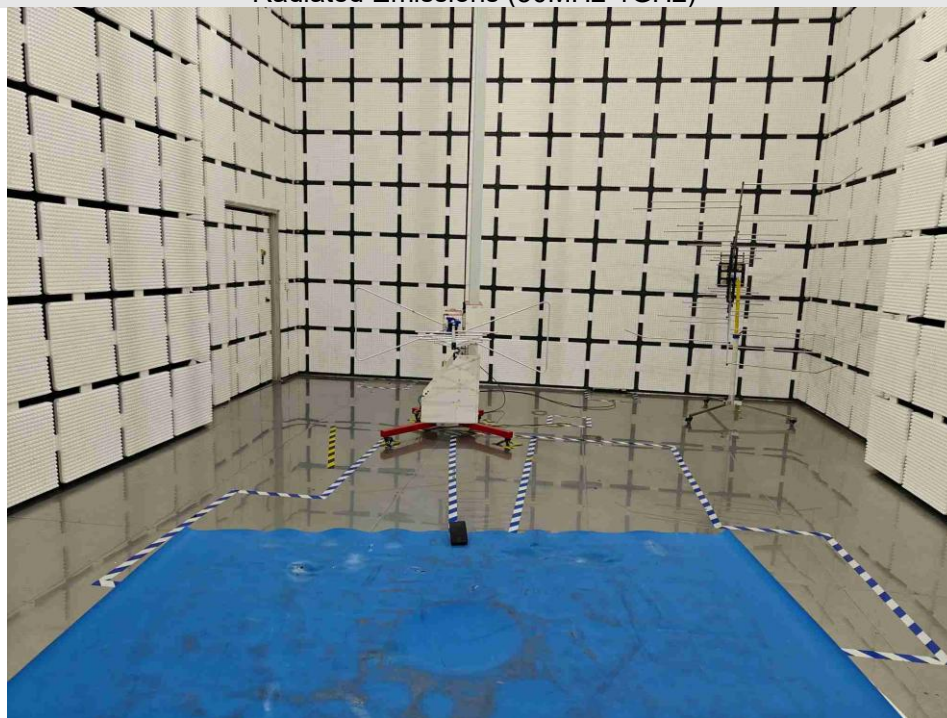

Radiated Emissions (above 1GHz)



## Appendix C: photographs of EUT

Reference to the test report no. BLA-EMC-202411-A1701

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, the result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.