

Test Report

Applicant : INTEGRATED TECHNICAL VISION LTD
Address : 12 CHIGORINA STR., KYIV 01042, UKRAINE
Product Name : U-Prox access control system
Brand Mark : U-Prox
Model : Universal reader U-Prox SE mini
FCC ID : 2BLQF-482026137EOM
Report Number : BLA-EMC-202411-A1704
Date of Receipt : Nov. 8, 2024
Date of Test : Feb. 13, 2025 to May 20, 2025
Test Standard : 47 CFR Part 15, Subpart C
Test Result : Pass

Compiled by:




Review by:



Approved by:



Issued Date: May 20, 2025

BlueAsia of Technical Services(Shenzhen) Co., Ltd.Address: Building C, No. 107, Shihuan Road, Shiyao Sub-District, Baoan District,
Shenzhen, Guangdong Province, China

The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.

Table of Contents

1	General information	4
1.1	General information	4
1.2	General description of EUT	4
2	Test summary	5
3	Test Configuration.....	6
3.1	Test mode	6
3.2	Auxiliary equipment	6
3.3	Test environment	6
4	Laboratory information	7
4.1	Laboratory and accreditations	7
4.2	Measurement uncertainty	7
5	Test equipment	8
6	Test result.....	10
6.1	Antenna requirement	10
6.2	20dB bandwidth	11
6.3	Radiated spurious emissions.....	14
7	Appendix A photographs of test setup	25
8	Appendix B: photographs of EUT.....	26

Revise Record

Version No.	Date	Description
01	May 20, 2025	Original

BlueAsia

1 General information

1.1 General information

Applicant	INTEGRATED TECHNICAL VISION LTD
Address	12 CHIGORINA STR., KYIV 01042, UKRAINE
Manufacturer	INTEGRATED TECHNICAL VISION LTD
Address	5, kurganny side street, Chernihiv 14013, Ukraine
Factory	INTEGRATED TECHNICAL VISION LTD
Address	5, kurganny side street, Chernihiv 14013, ukraine

1.2 General description of EUT

Product Name	U-Prox access control system
Model No.	Universal reader U-Prox SE mini
Series model	N/A
Operation Frequency	125KHz
Modulation type:	ASK, FSK
Antenna Type	Inductive loop coil Antenna
Antenna Gain:	4dBi(Provided by customer)
Power supply or adapter information	DC12V
Hardware Version	N/A
Software Version	N/A

Note: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2 Test summary

No.	Test item	FCC Part Section(s)	Test Method(Clause)	Result
1	Antenna Requirement	§15.203	N/A	Pass
2	20dB Bandwidth	§15.249	ANSI C63.10 (2013) Section 6.9	Pass
3	Radiated Spurious Emissions	§15.215	ANSI C63.10 (2013) Section 6.4,6.5,6.6	Pass

3 Test Configuration

3.1 Test mode

Test Mode	Description
TM1	Keep the EUT in TX mode

3.2 Auxiliary equipment

Device Type	Manufacturer	Model Name	Serial No.	Remark
Rechargeable battery	OUTDO	UTX7L-BS	N/A	From lab (No.BLA-ZC-PJ-2023005)
Note: “--” mean no any auxiliary device during testing.				

3.3 Test environment

Environment	Temperature	Voltage
Normal	25°C	DC 12V

4 Laboratory information

4.1 Laboratory and accreditations

The test facility is recognized, certified, or accredited by the following organizations:

Company name:	BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Address:	Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
CNAS accredited No.:	L9788
A2LA Cert. No.:	5071.01
FCC Designation No.:	CN1252
ISED CAB identifier No.:	CN0028
Telephone:	+86-755-28682673
FAX:	+86-755-28682673

4.2 Measurement uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Parameter	Expanded Uncertainty
Radiated Emission(9kHz-30MHz)	$\pm 4.34\text{dB}$
Radiated Emission(30Mz-1000MHz)	$\pm 4.24\text{dB}$
Radiated Emission(1GHz-18GHz)	$\pm 4.68\text{dB}$
AC Power Line Conducted Emission(150kHz-30MHz)	$\pm 3.45\text{dB}$
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 1.5\text{ dB}$
Power Spectral Density, conducted	$\pm 3.0\text{ dB}$
Unwanted Emissions, conducted	$\pm 3.0\text{ dB}$
Temperature	$\pm 3\text{ }^{\circ}\text{C}$
Supply voltages	$\pm 3\%$
Time	$\pm 5\%$

5 Test equipment

Radiated Spurious Emissions (Below 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-002-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-002-02	Control room	966 control room	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2024/08/08	2025/08/07
BLA-EMC-043	Loop antenna	FMZB1519B	Schwarzbeck	00102	2024/06/29	2026/06/28
BLA-EMC-065	Broadband antenna	VULB9168	Schwarzbeck	01065P	2024/06/29	2026/06/27
BLA-XC-01	Coaxial Cable	N/A	BlueAsia	V01	N/A	N/A
BLA-XC-02	Coaxial Cable	N/A	BlueAsia	V02	N/A	N/A

Radiated Spurious Emissions (Above 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-001-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-001-02	Control Room	966 control room	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-008	Spectrum	FSP40	R&S	100817	2024/08/08	2025/08/07
BLA-EMC-012	Broadband antenna	VULB9168	Schwarzbeck	00836 P:00227	2022/10/12	2025/10/11
BLA-EMC-013	Horn Antenna	BBHA9120D	Schwarzbeck	01892	2024/06/29	2026/06/28
BLA-EMC-014	Amplifier	PA_000318G-45	SKET	PA201804 3003	2024/08/08	2025/08/07
BLA-EMC-046	Filter bank	2.4G/5G Filter bank	SKET	N/A	2024/06/28	2025/06/27
BLA-EMC-061	Receiver	ESPI7	R&S	101477	2024/06/28	2025/06/27
BLA-EMC-066	Amplifier	LNPA_30M01 G-30	SKET	SK202106 0801	2024/06/28	2025/06/27
BLA-EMC-086	Amplifier	LNPA_18G40 G-50dB	SKET	SK202207 1301	2024/06/28	2025/06/27
BLA-EMC-087	Horn Antenna	BBHA 9170	Schwarzbeck	1106	2024/06/29	2026/06/28
BLA-XC-03	Coaxial Cable	N/A	BlueAsia	V03	N/A	N/A
BLA-XC-04	Coaxial Cable	N/A	BlueAsia	V04	N/A	N/A

Test software

Software No.	Software Name	Manufacture	Software version	Test site
BLA-EMC-S001	EZ-EMC	EZ	EEMC-3A1+	RE(Below 1GHz)
BLA-EMC-S002	EZ-EMC	EZ	EEMC-3A1+	RE(Above 1GHz)

6 Test result

6.1 Antenna requirement

Test Standard	47 CFR Part 15, Subpart C 15.203
Test Method	N/A

6.1.1 Requirement

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

6.1.2 Test Result

This product has an integral antenna, fulfill the requirement of this section.


6.2 20dB bandwidth

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.9
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.2.1 Limit

N/A


6.2.2 Test setup

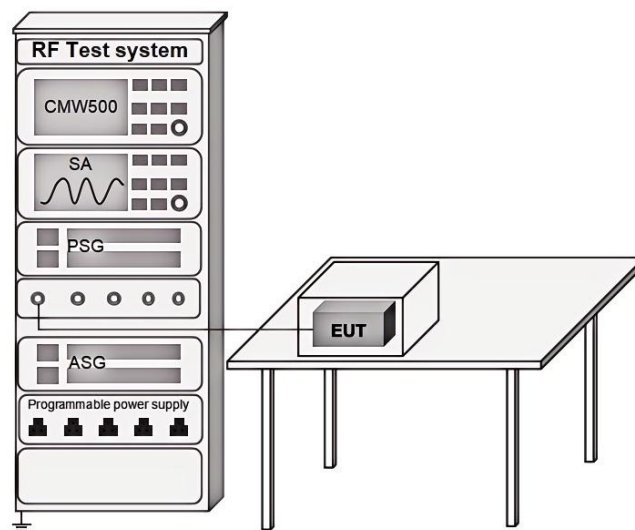

6.2.3 Test data


ASK:

Test Frequency MHz	20dB Bandwidth (MHz)	Result
0.125	0.002776	Pass

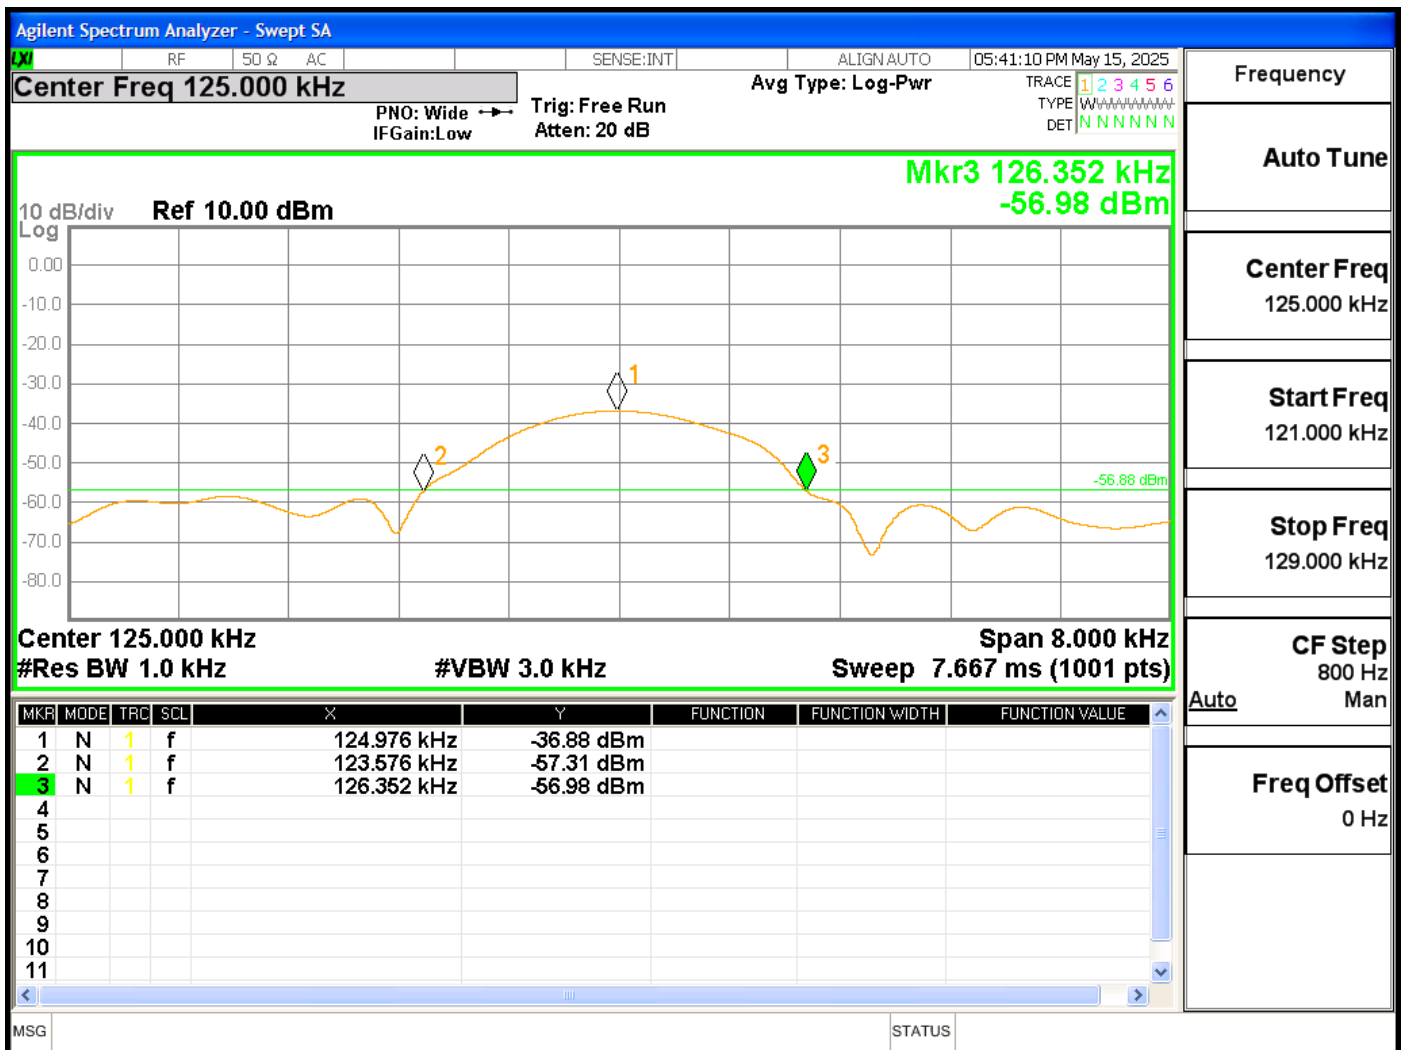

FSK:

Test Frequency MHz	20dB Bandwidth (MHz)	Result
0.125	0.003048	Pass

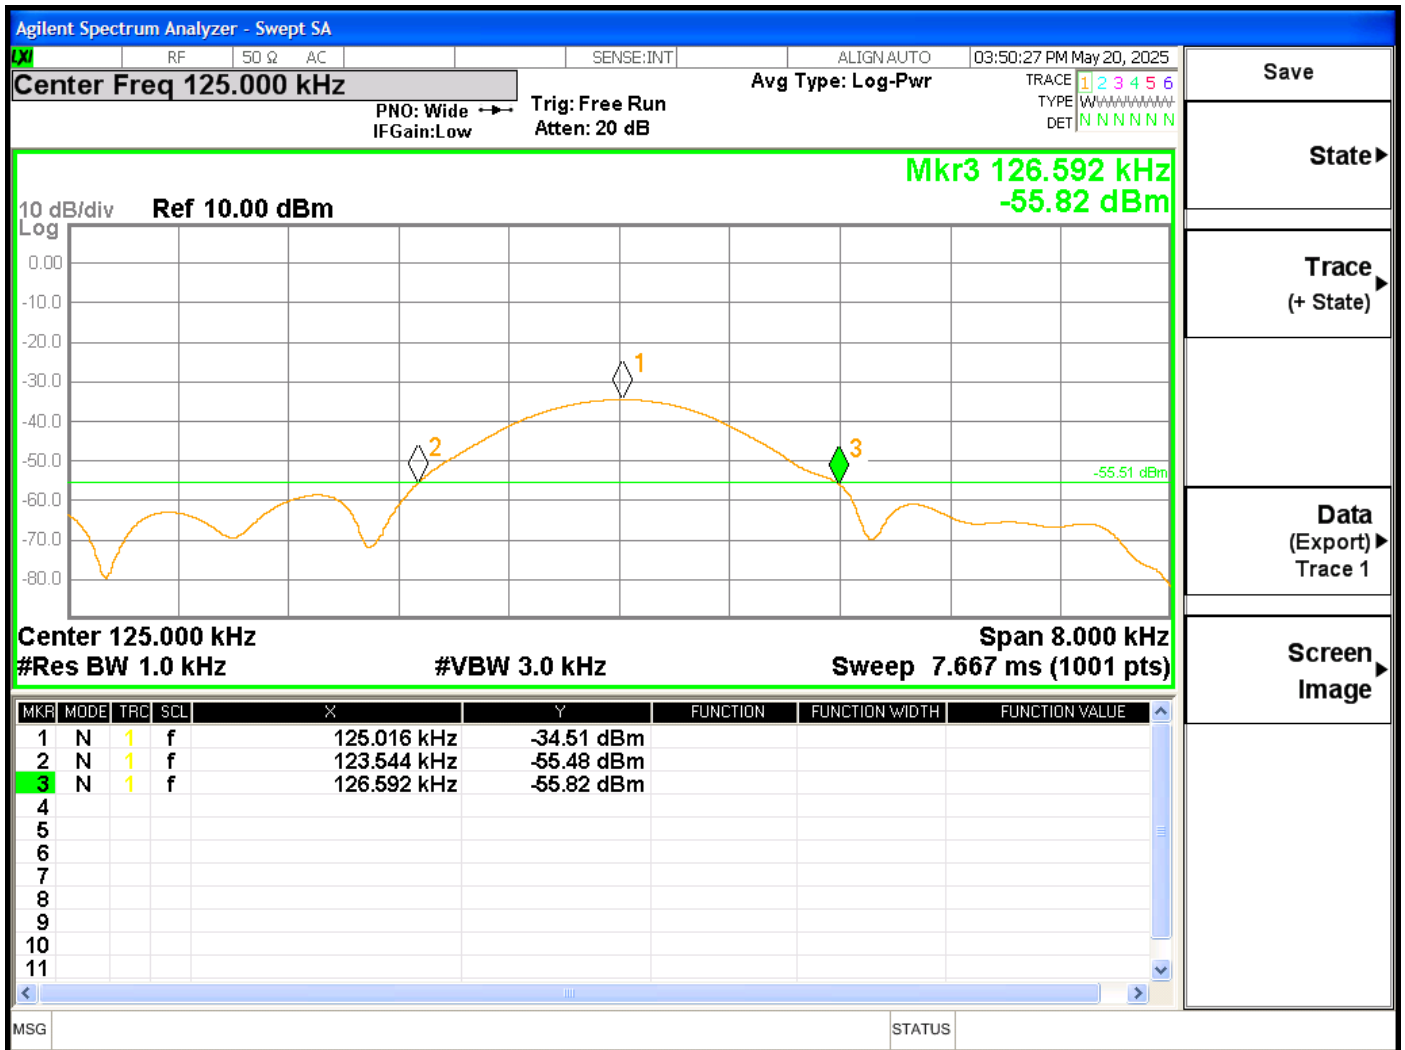

6.3 Radiated spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.215
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.3.1 Limit

Frequency(MHz)	Field strength (microvolts/meter)	Limit (dBuV/m)	Detector	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	-	300
0.490-1.705	24000/F(kHz)	-	-	30
1.705-30	30	-	-	30
30-88	100	40.0	QP	3
88-216	150	43.5	QP	3
216-960	200	46.0	QP	3
960-1000	500	54.0	QP	3
Above 1000	500	54.0	AV	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.3.2 Test setup


Below 1GHz:

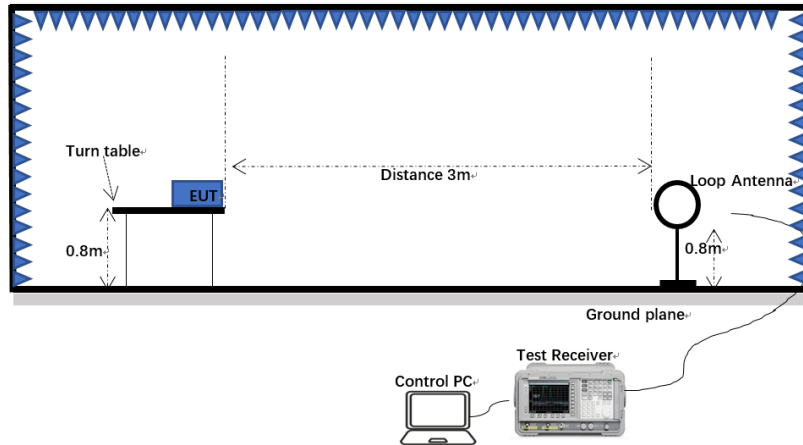

30MHz-1GHz:

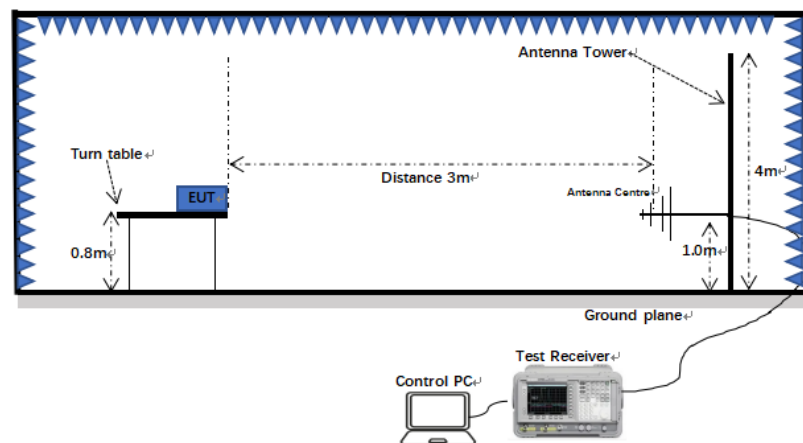

Above 1GHz:

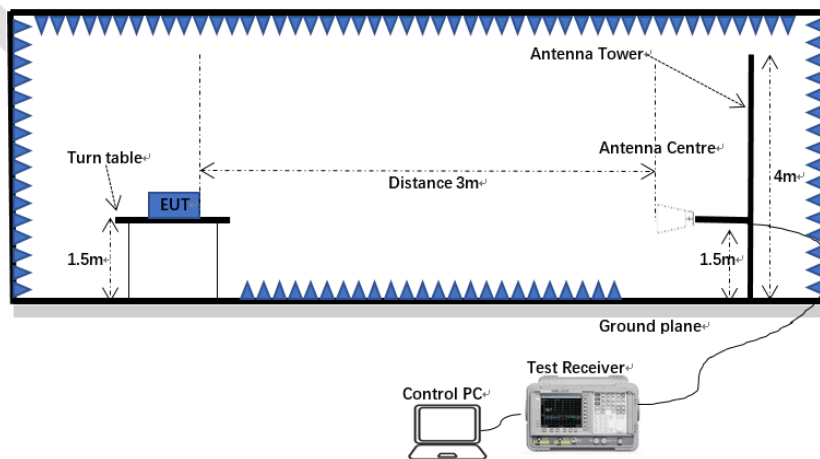

6.3.3 Procedure

For testing performed with the loop antenna, the center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.

Remark:

1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$

3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.


4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

6.3.4 Test data

ASK:


9kHz-30MHz:

[TestMode: wireless charging]; [Polarity: x]

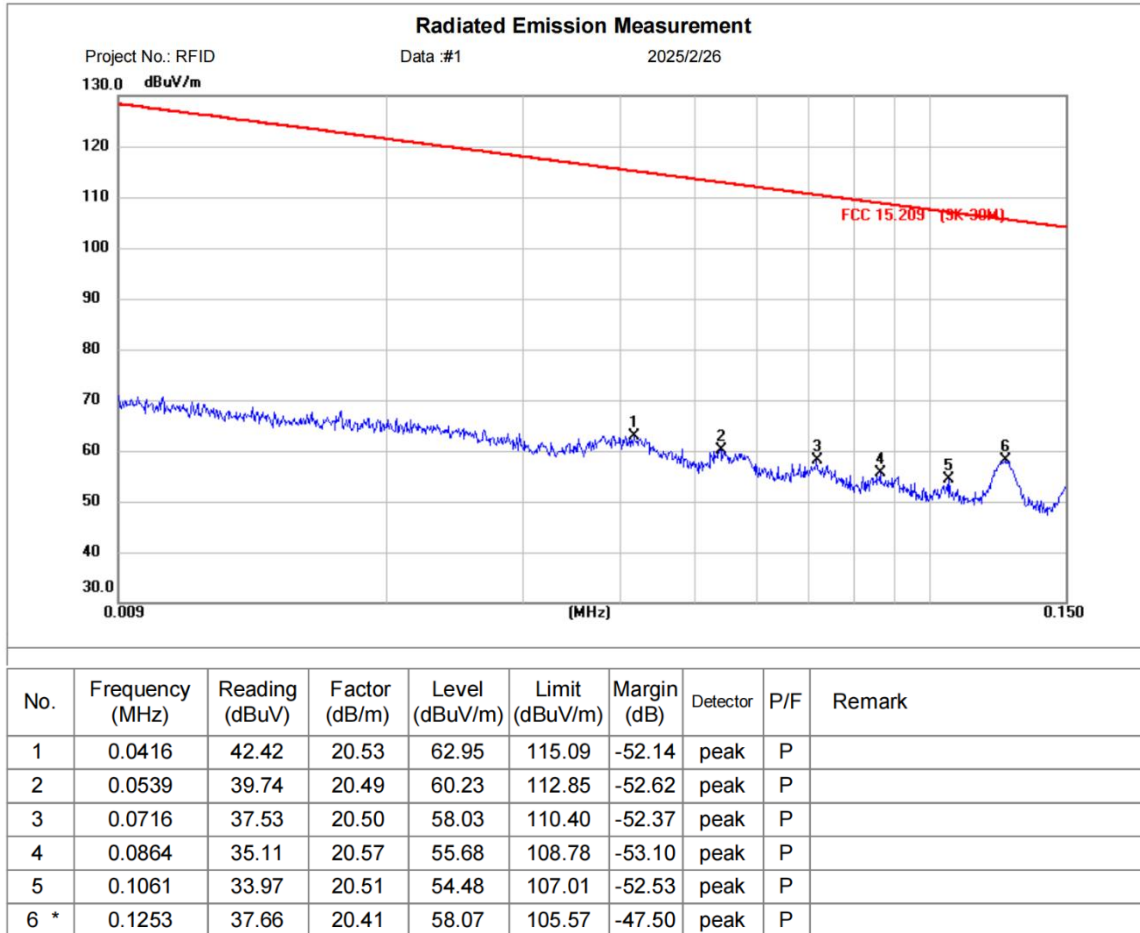

Test Result: Pass


[TestMode: wireless charging]; [Polarity: x]

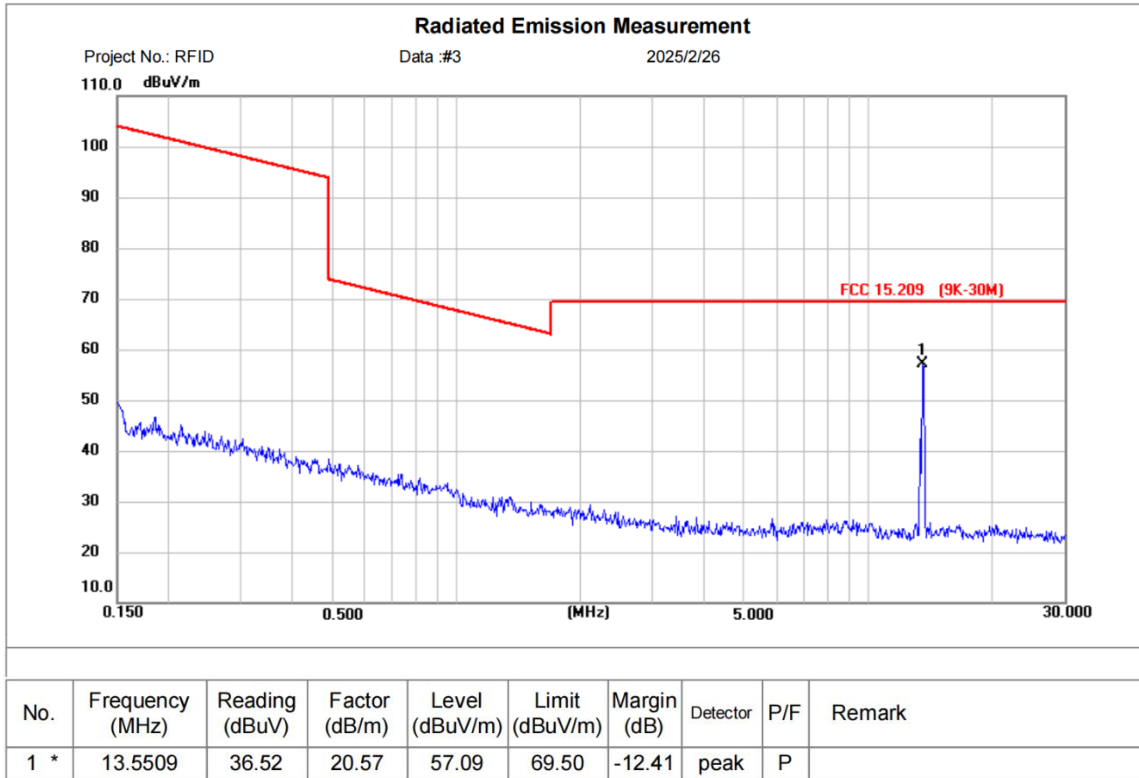

Test Result: Pass


30MHz-1GHz:

[TestMode: wireless charging]; [Polarity: Horizontal]

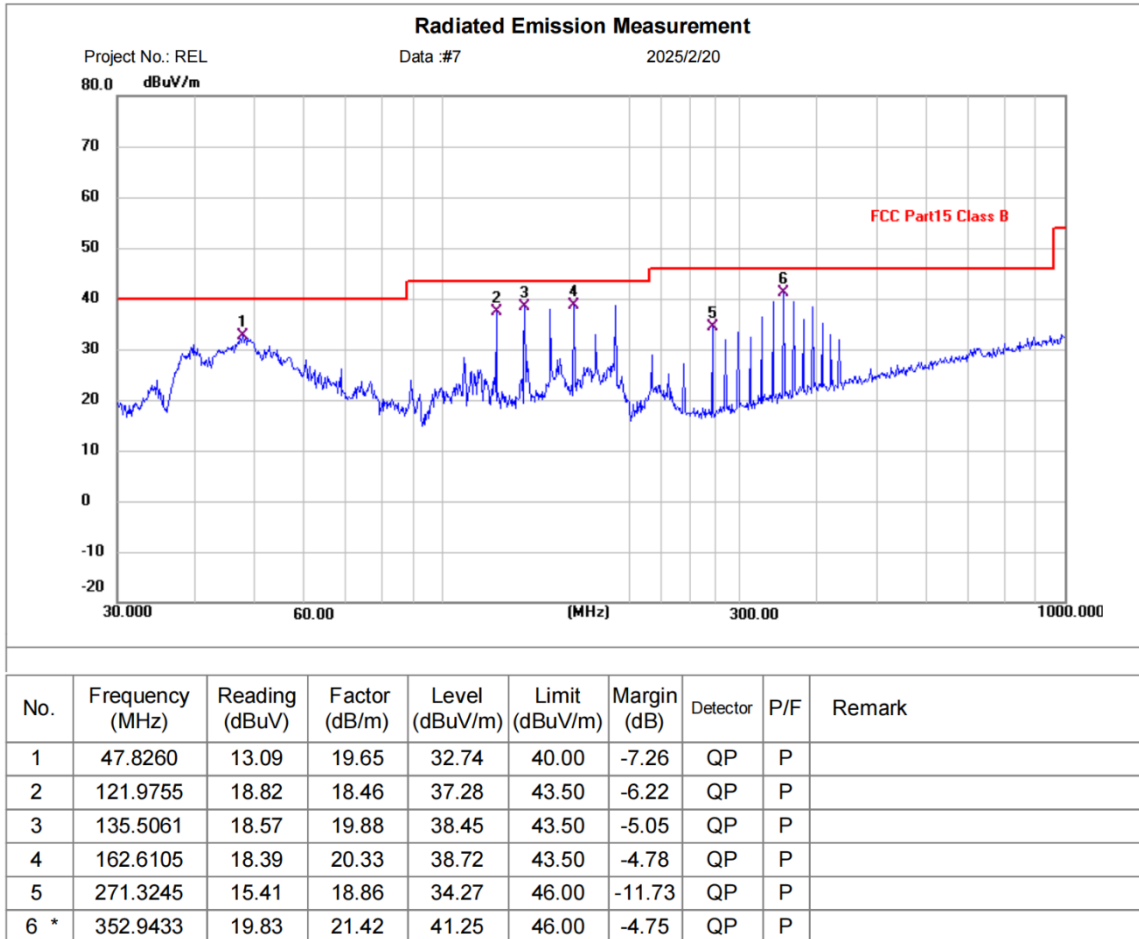

Test Result: Pass

[TestMode: wireless charging]; [Polarity: Vertical]

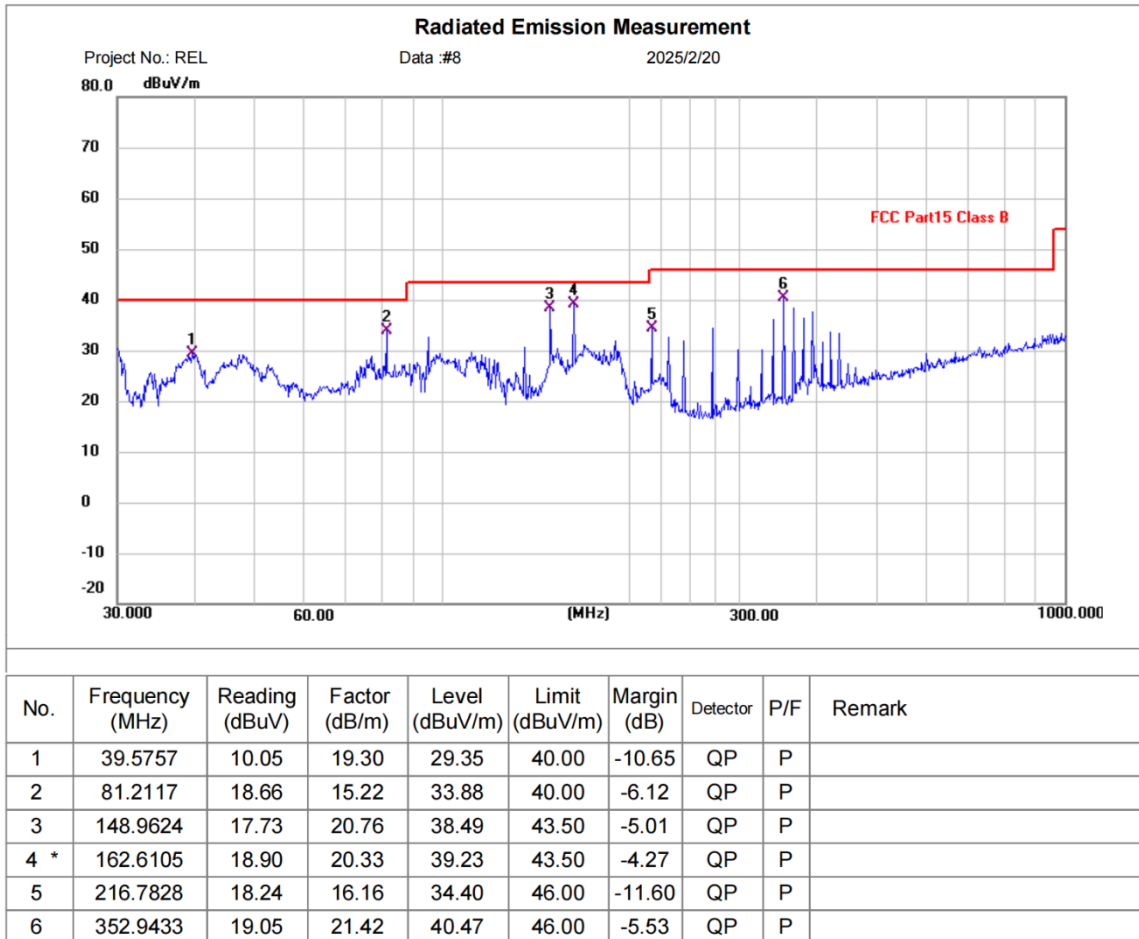


Test Result: Pass

FSK:


9kHz-30MHz:

[TestMode: wireless charging]; [Polarity: x]

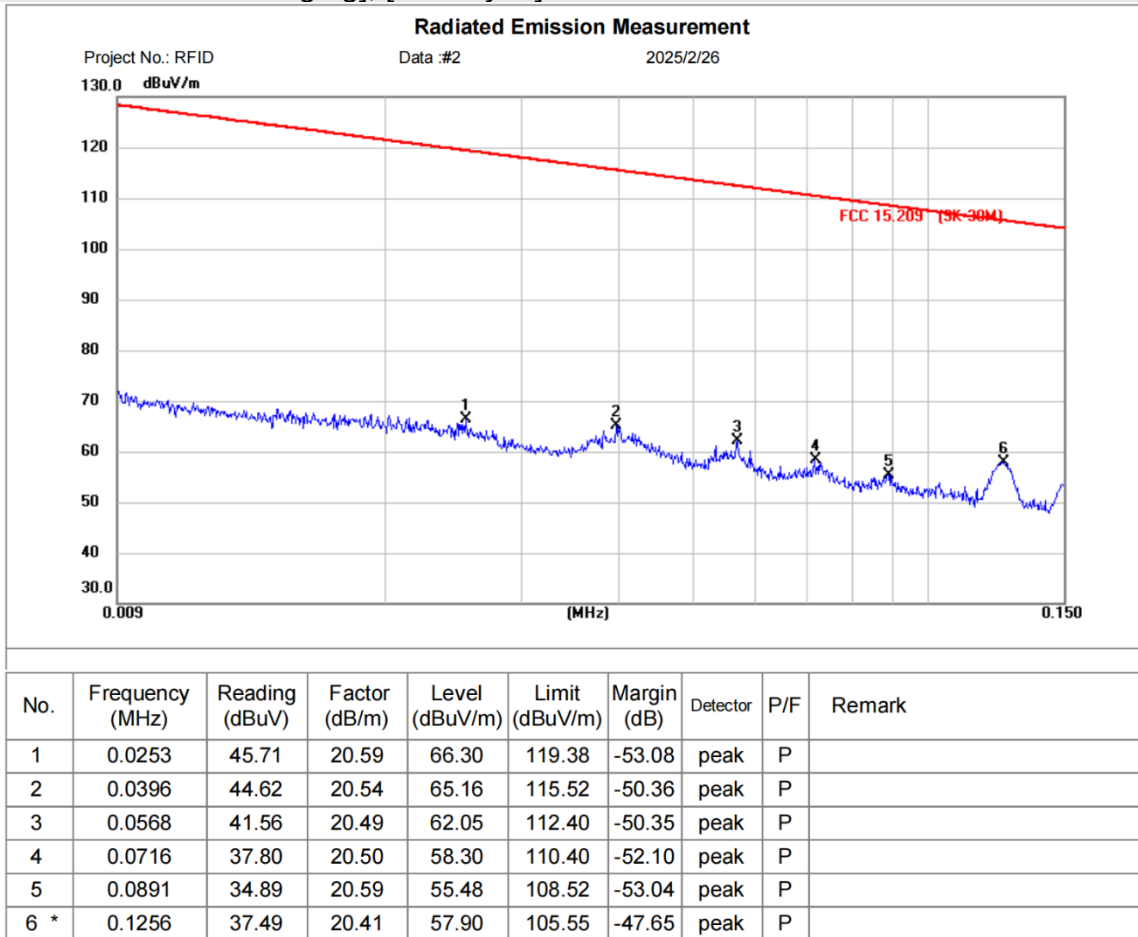

Test Result: Pass


[TestMode: wireless charging]; [Polarity: x]

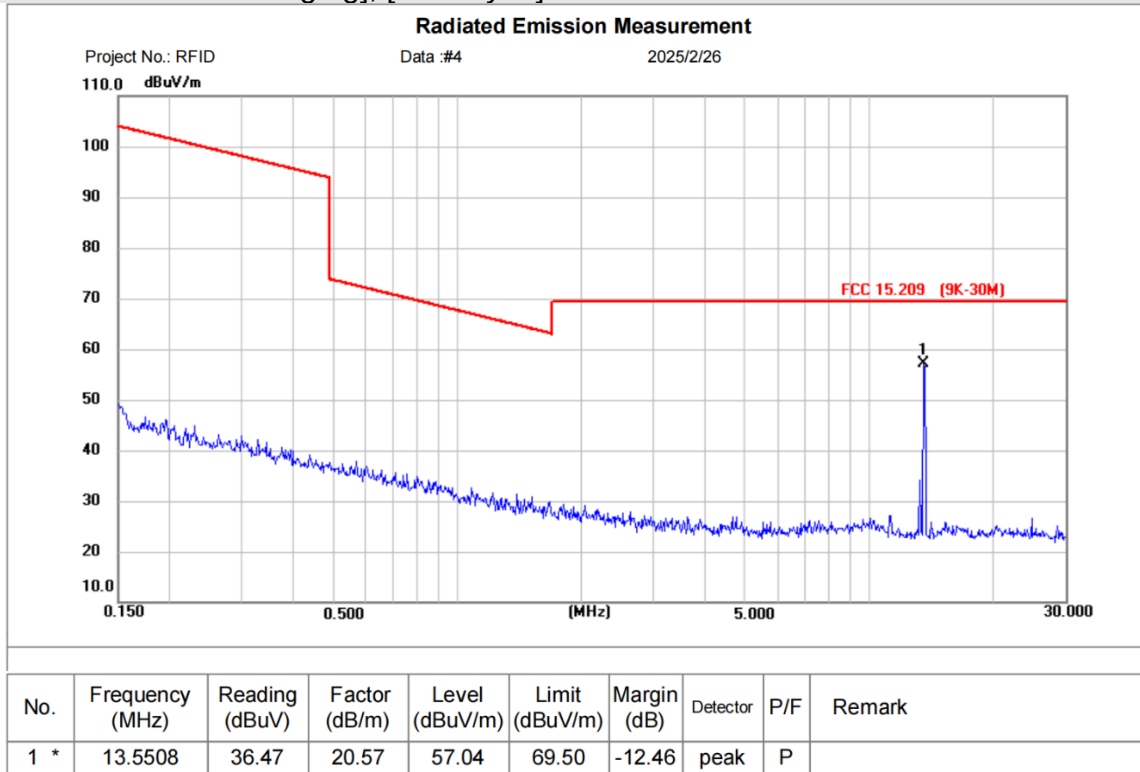

Test Result: Pass


30MHz-1GHz:

[TestMode: wireless charging]; [Polarity: Horizontal]

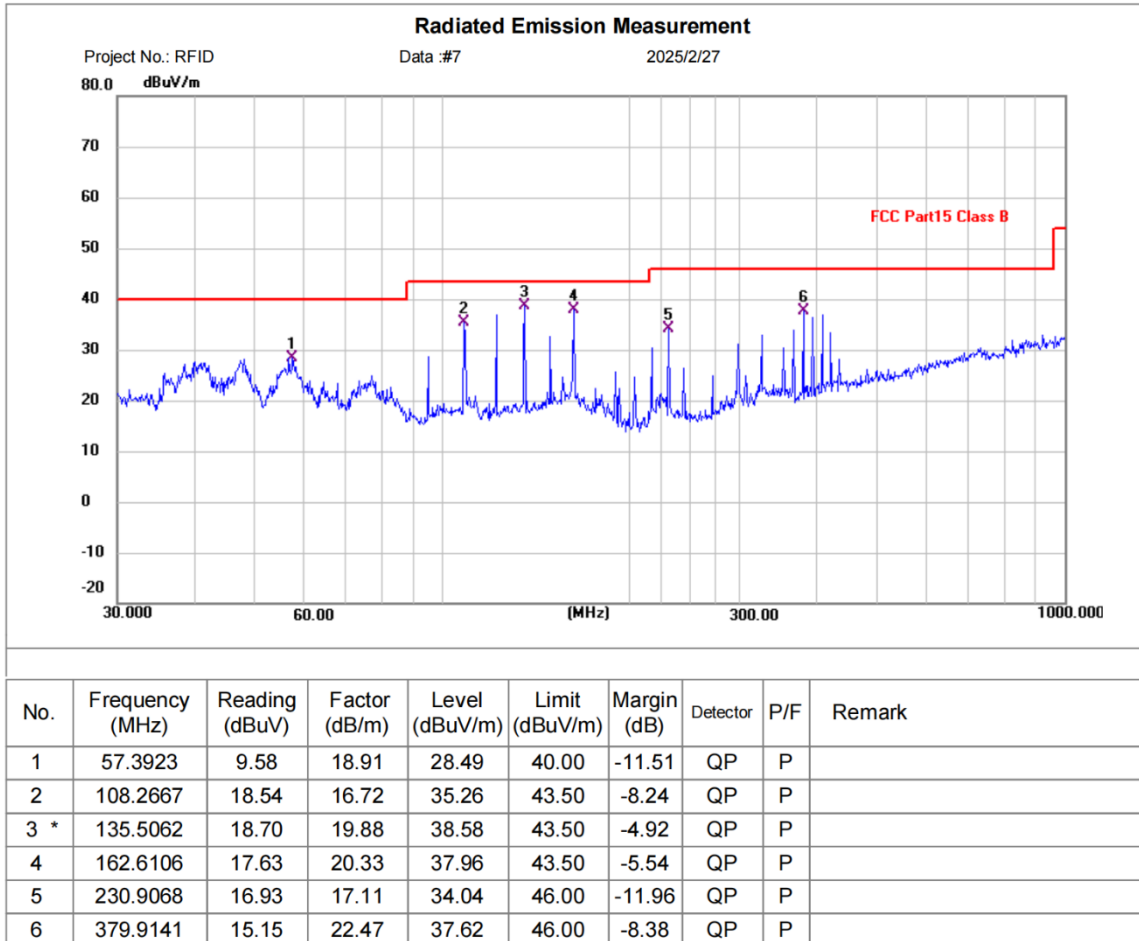

Test Result: Pass


[TestMode: wireless charging]; [Polarity: Vertical]

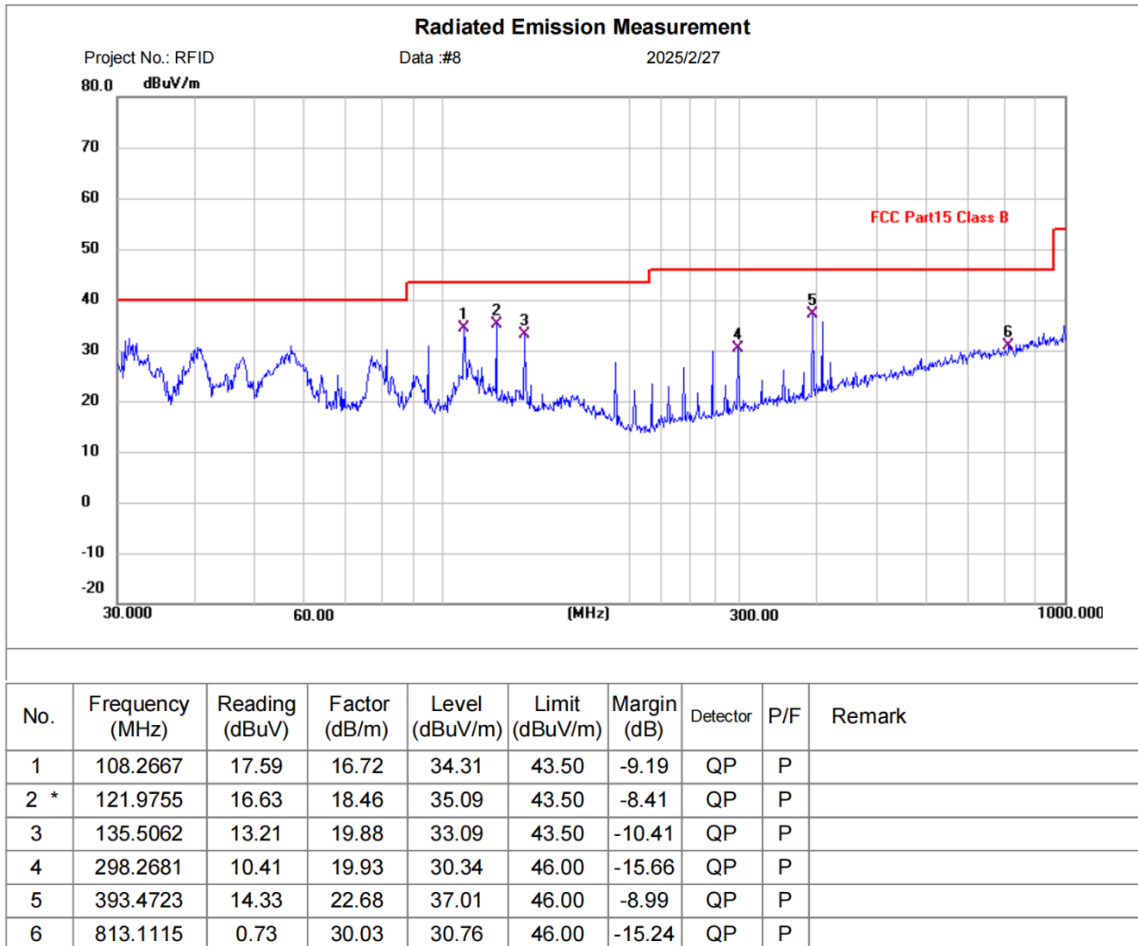


Test Result: Pass

7 Appendix A photographs of test setup

Radiated Emissions (9KHz-30MHz)

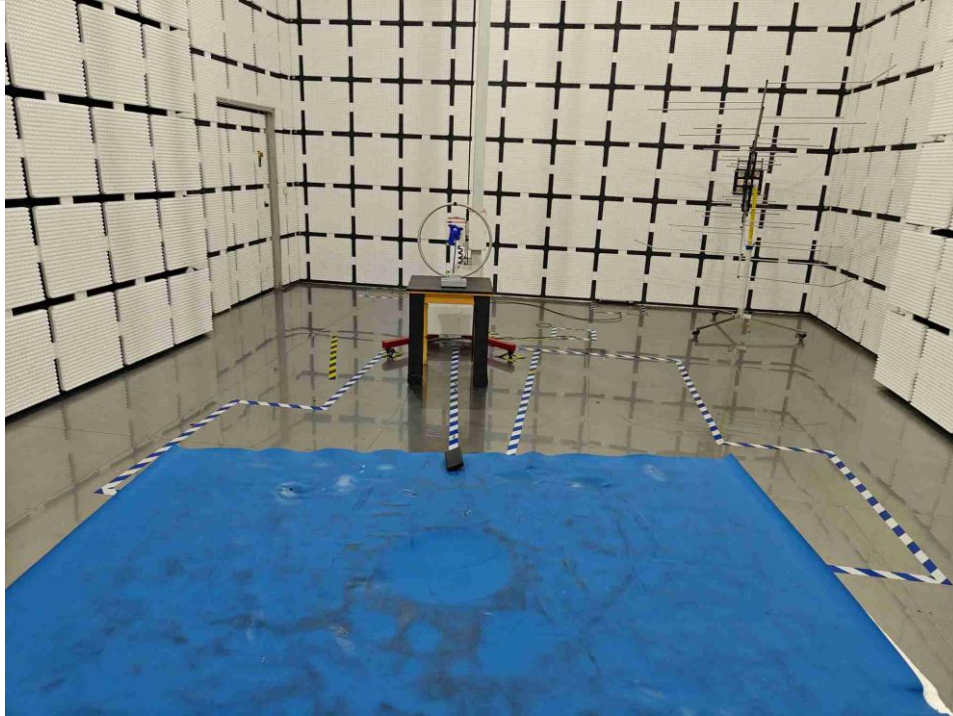

Radiated Emissions (30MHz-1GHz)

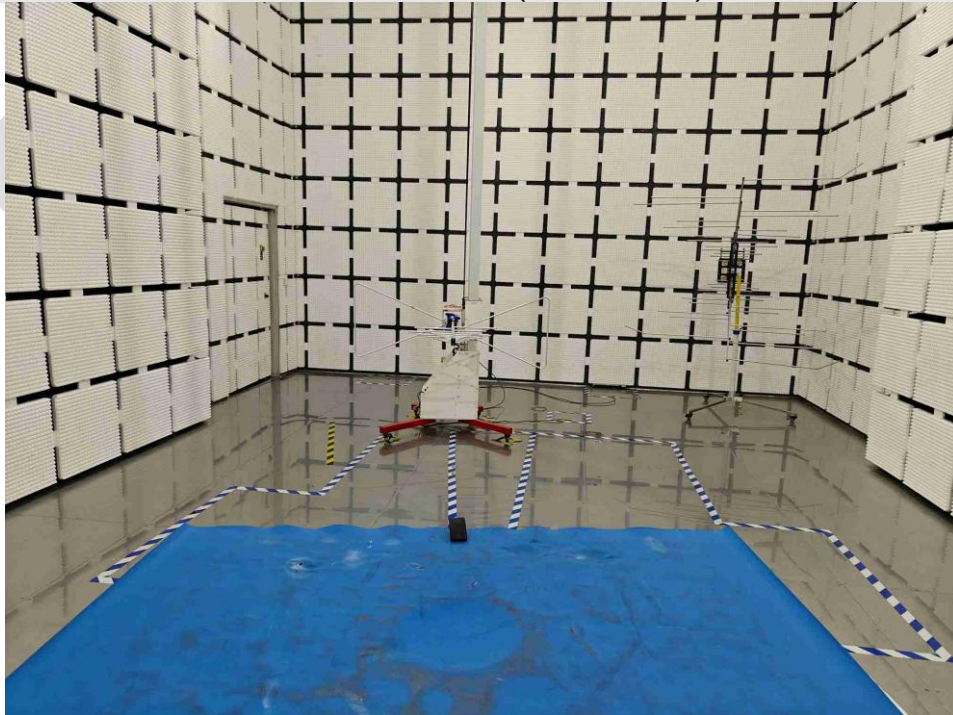

8 Appendix B: photographs of EUT

Reference to the test report no. BLA-EMC-202411-A1701

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, the result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia