

Appendix FCC Test Data
Case No. : <u>NCT24052732XE</u>
EUT: <u>Wireless Speaker</u>
M/N: <u>F02</u>
Standard: <u>FCC Part15 Subpart C, Section 15.247</u>
Test Power Supply: <u>DC 3.7V</u>
Ambient Condition: <u>25</u> °C, <u>45</u> %RH, <u>101.325</u> kPa
Test Date: <u>Dec. 30, 2024</u> Test Engineer: <u>Keven Wu</u>

Appendix A: DTS Bandwidth

Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.700	2401.636	2402.336	0.5	PASS
		2440	0.704	2439.640	2440.344	0.5	PASS
		2480	0.716	2479.628	2480.344	0.5	PASS


BLE_1M_Ant1_2402



BLE_1M_Ant1_2440



BLE_1M_Ant1_2480

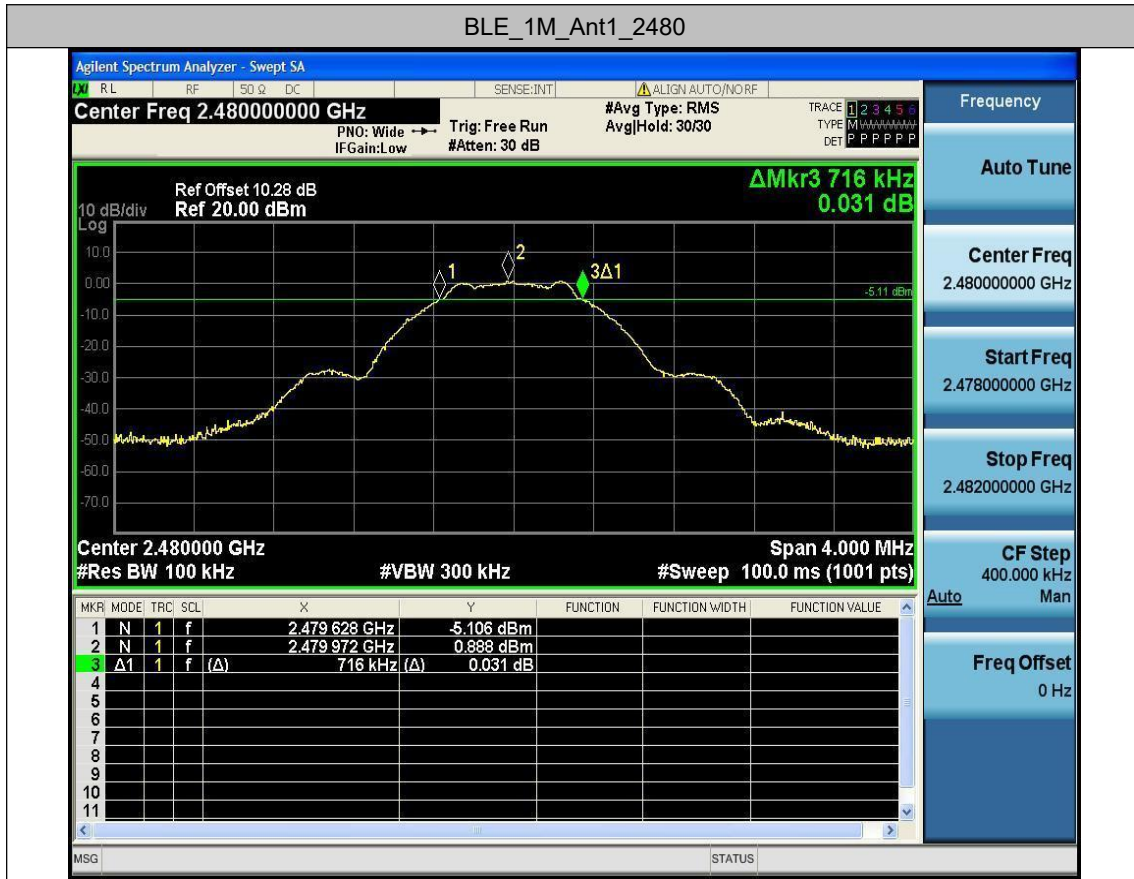

Appendix B: Maximum conducted output power

Test Result Peak

TestMode	Antenna	Channel	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	1.07	≤30	PASS
		2440	1.43	≤30	PASS
		2480	2.05	≤30	PASS

Appendix C: Maximum power spectral density

Test Result


TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-14.54	≤8.00	PASS
		2440	-14.18	≤8.00	PASS
		2480	-13.43	≤8.00	PASS

BLE_1M_Ant1_2402



BLE_1M_Ant1_2440



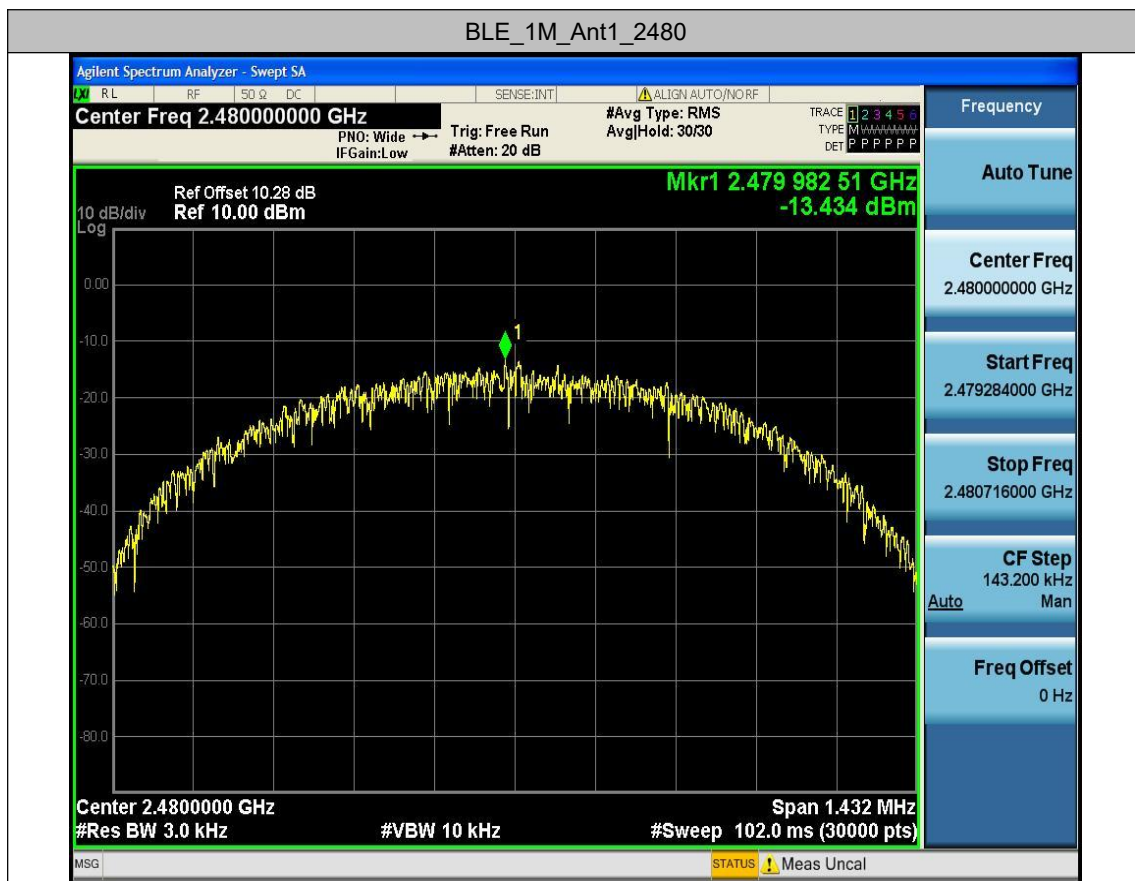


Appendix D: Band edge measurements


Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-0.05	-49.44	≤-20.05	PASS
		High	2480	0.96	-50.02	≤-19.04	PASS

BLE_1M_Ant1_Low_2402

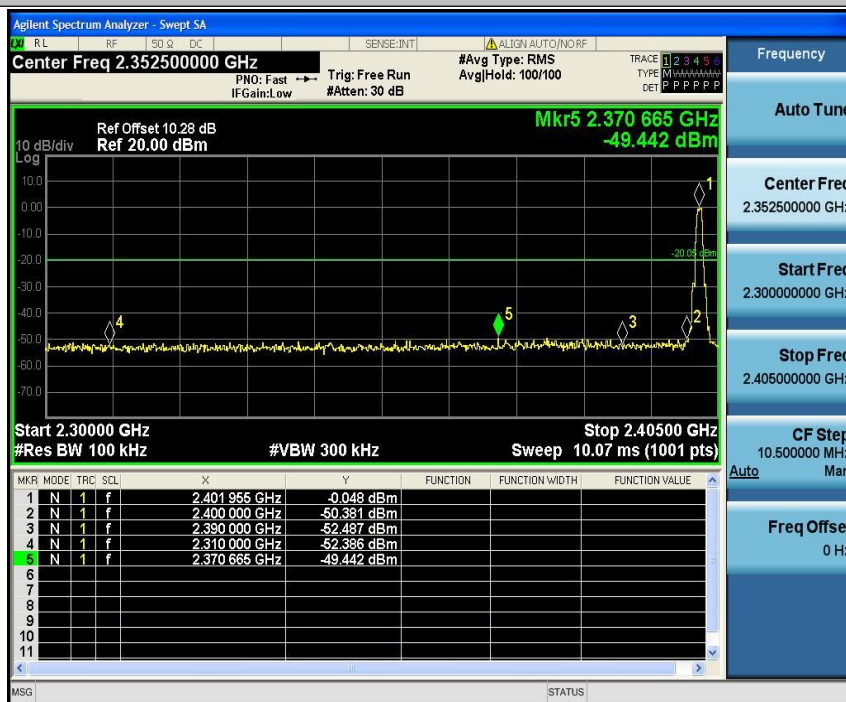

BLE_1M_Ant1_High_2480

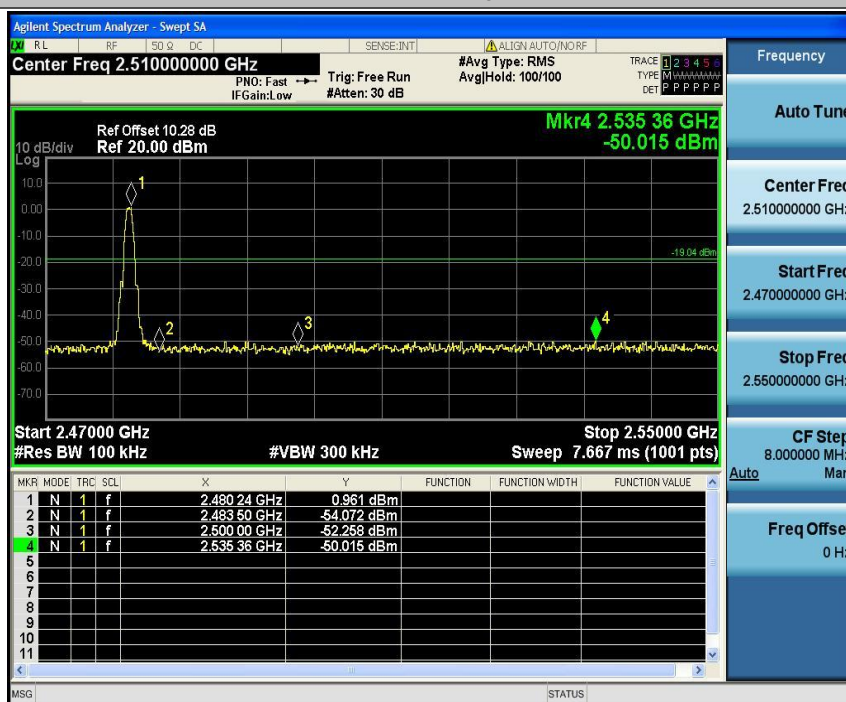

Appendix E: Conducted Spurious Emission


Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	-0.58	-0.58	---	PASS
			30~1000	-0.58	-59.42	≤-20.58	PASS
			1000~26500	-0.58	-41.45	≤-20.58	PASS
		2440	Reference	-1.36	-1.36	---	PASS
			30~1000	-1.36	-59.52	≤-21.36	PASS
			1000~26500	-1.36	-43.54	≤-21.36	PASS
		2480	Reference	0.02	0.02	---	PASS
			30~1000	0.02	-58.99	≤-19.98	PASS
			1000~26500	0.02	-43.44	≤-19.98	PASS


BLE_1M_Ant1_2402_0~Reference



BLE_1M_Ant1_2402_30~1000

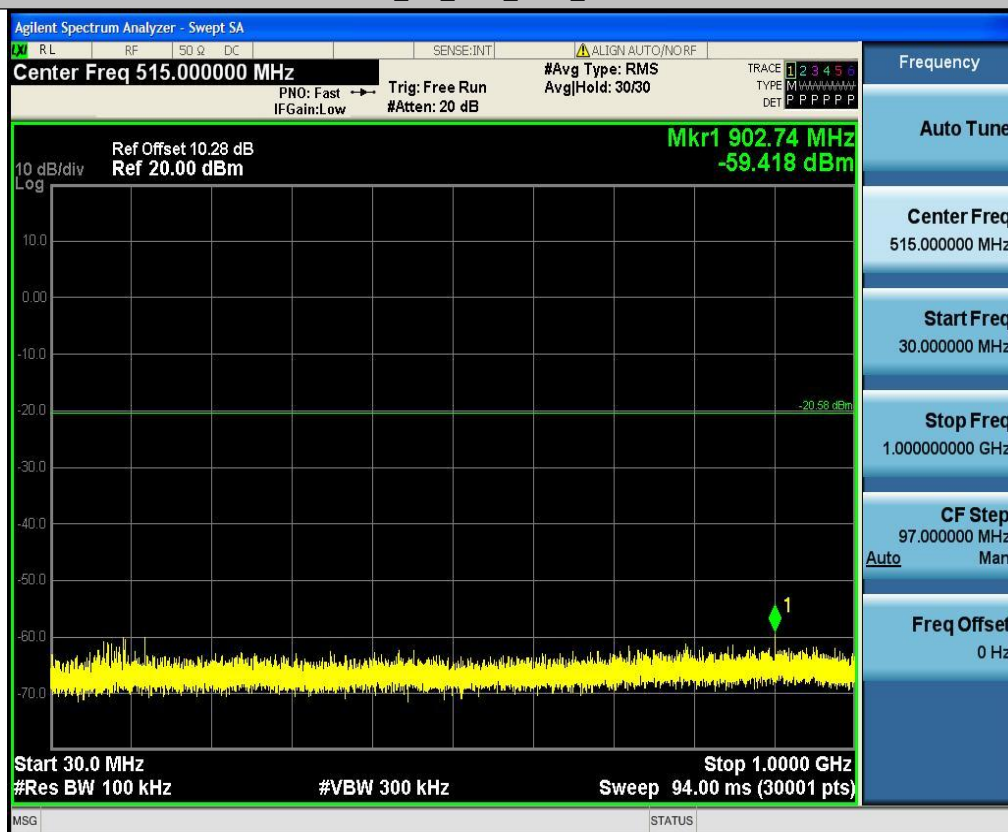


BLE_1M_Ant1_2402_1000~26500

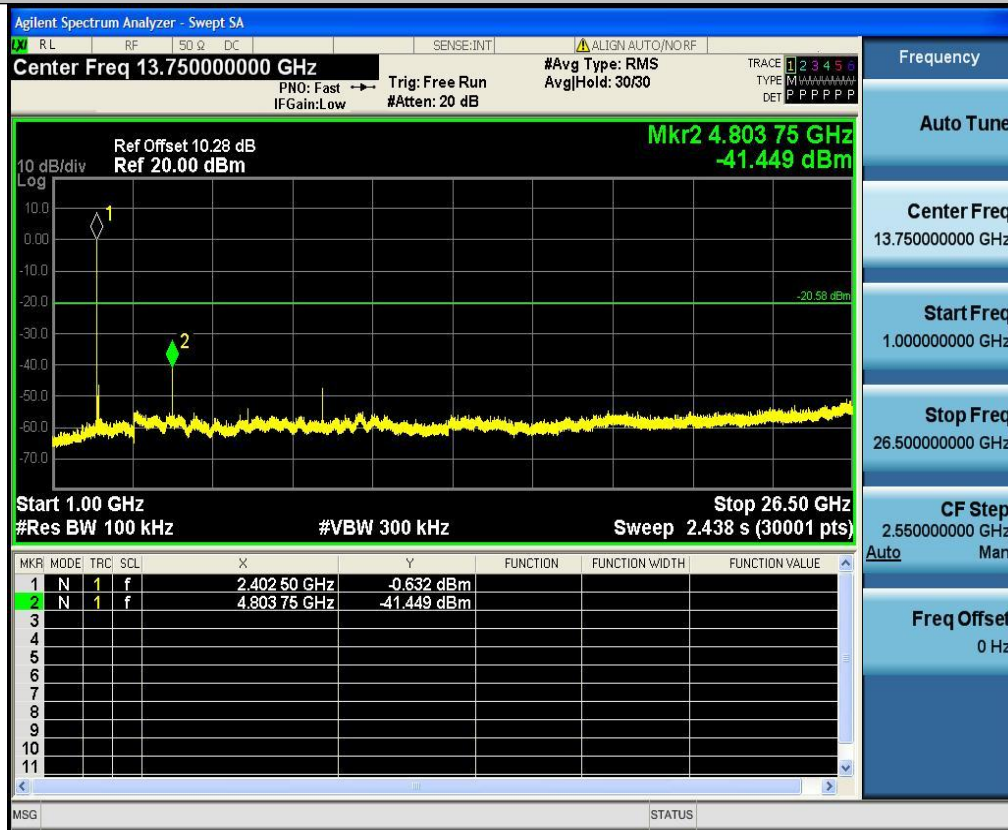


BLE_1M_Ant1_2440_0~Reference



BLE_1M_Ant1_2440_30~1000

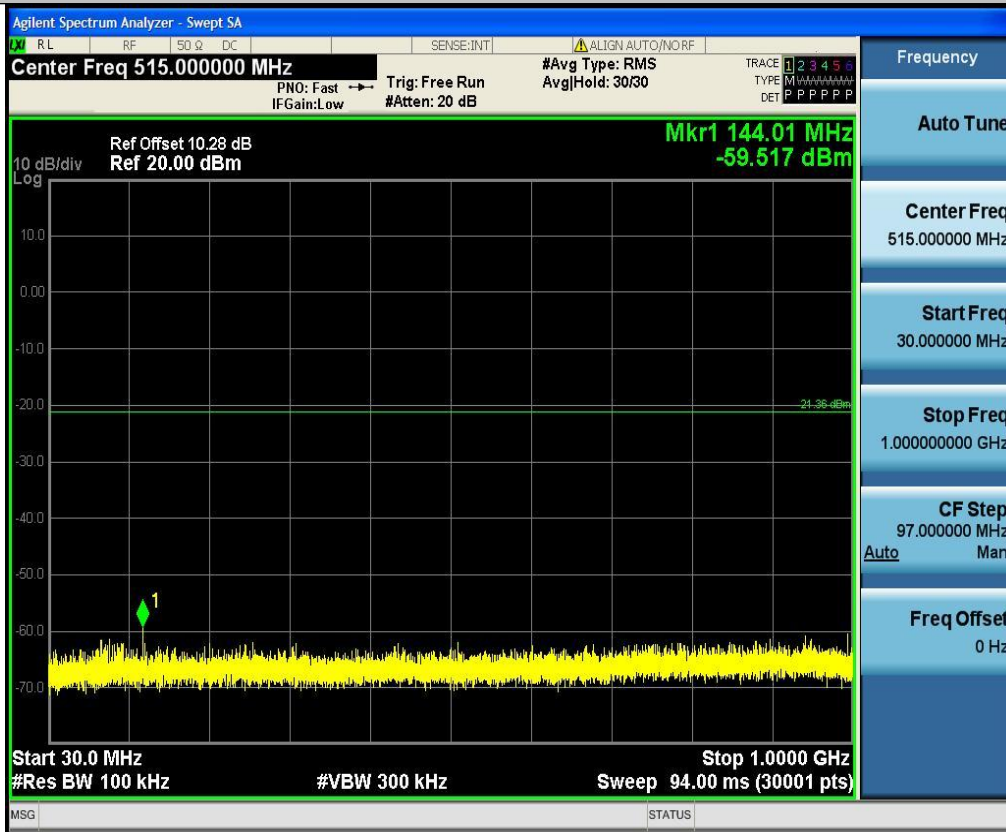


BLE_1M_Ant1_2440_1000~26500

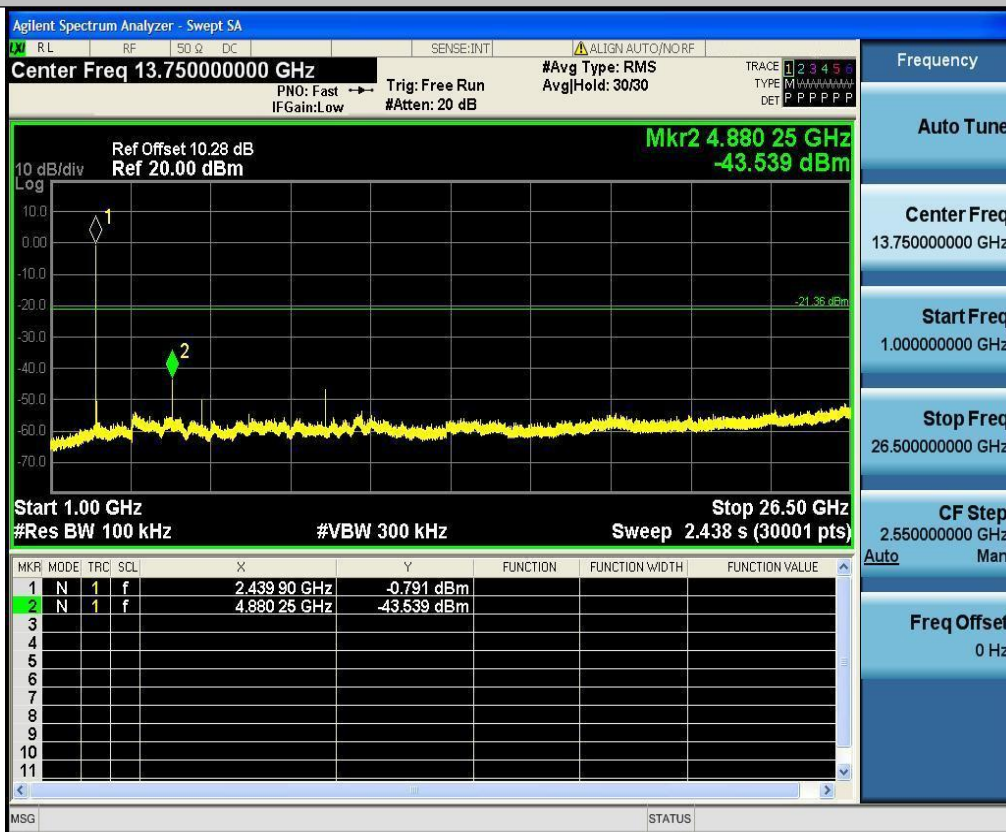


BLE_1M_Ant1_2480_0~Reference



BLE_1M_Ant1_2480_30~1000

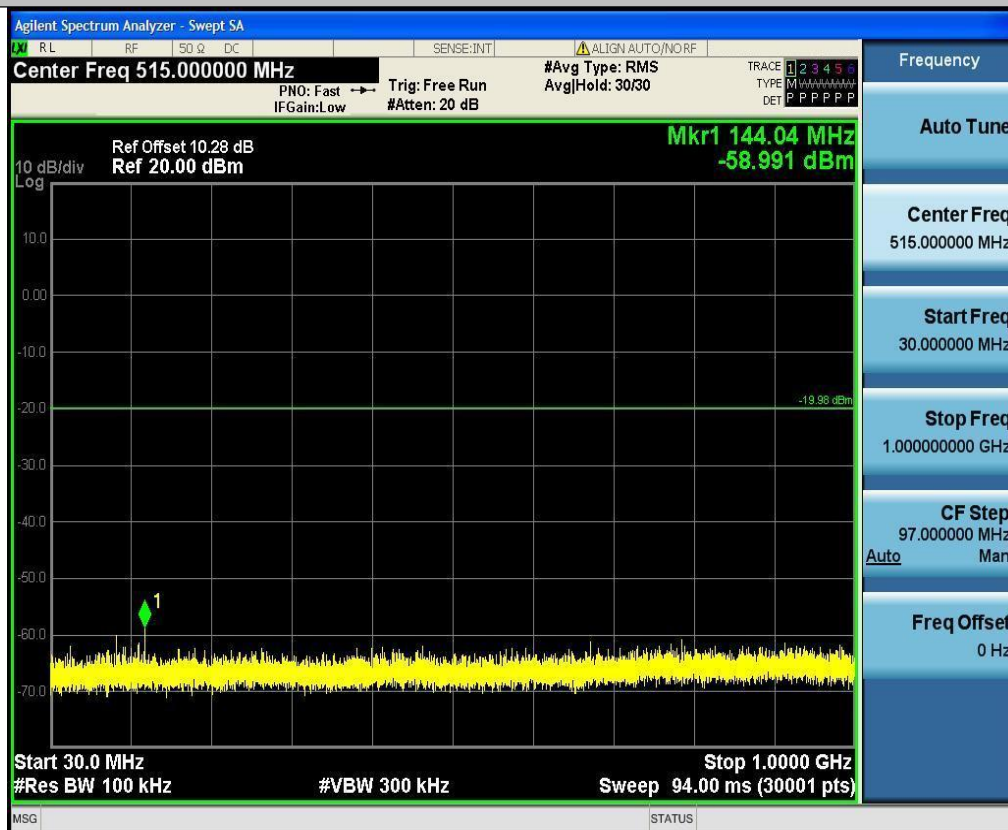

BLE_1M_Ant1_2480_1000~26500

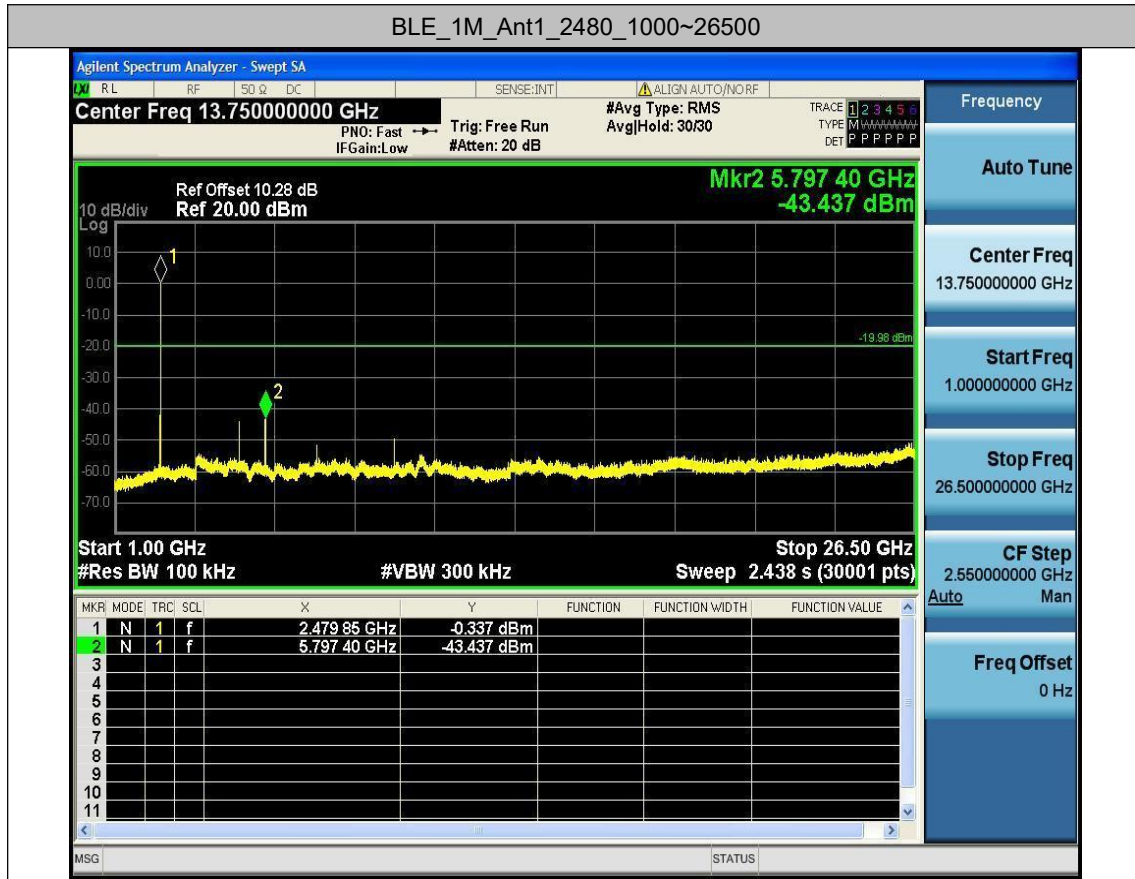


Appendix F: Duty Cycle


Test Result

TestMode	Antenna	Channel	ON Time [ms]	Period [ms]	X	DC [%]	xFactor	Limit	Verdict
BLE_1M	Ant1	2402	2.13	2.50	0.8520	85.20	0.70	---	---
		2440	2.13	2.50	0.8520	85.20	0.70	---	---
		2480	2.13	2.50	0.8520	85.20	0.70	---	---

BLE_1M_Ant1_2402

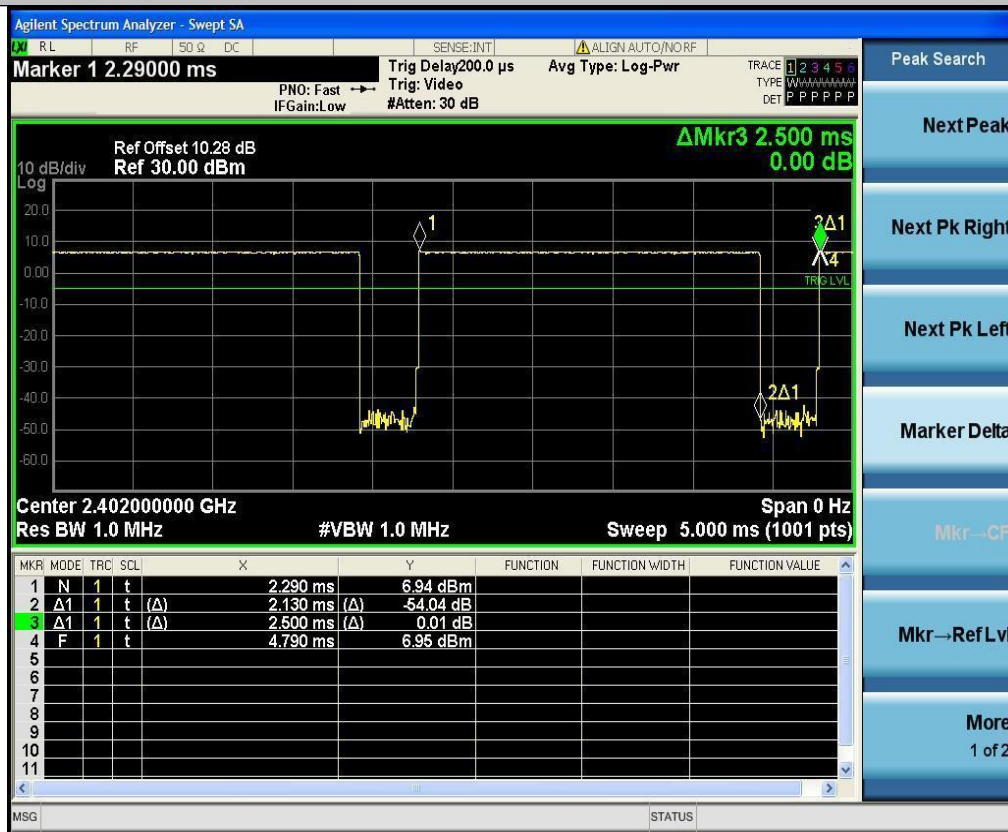

BLE_1M_Ant1_2440

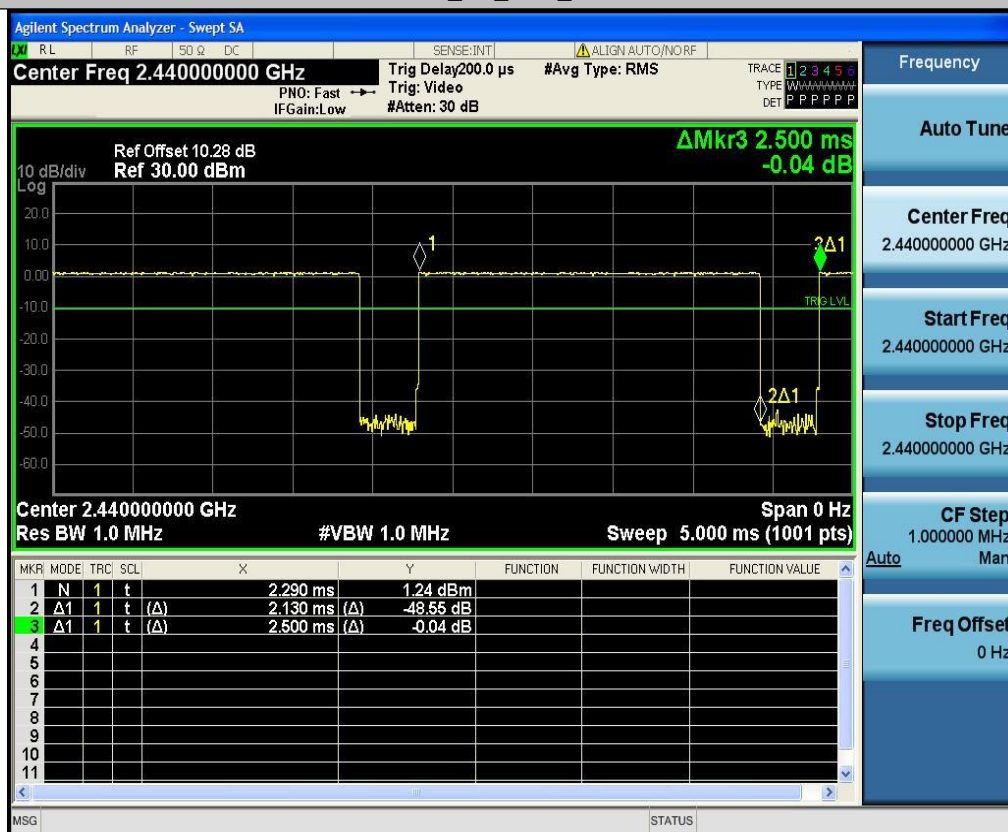

BLE_1M_Ant1_2480

