

# Inverted F Antenna Specification


## Summary

|                      |                                                 |         |         |          |         |         |
|----------------------|-------------------------------------------------|---------|---------|----------|---------|---------|
| ITEM                 | ANT SPEC                                        |         |         |          |         |         |
| Model Name           | 2.4G ANT                                        |         |         |          |         |         |
| Center Frequency     | Horizontal                                      |         |         | Vertical |         |         |
|                      | 2400MHz                                         | 2400MHz | 2500MHz | 2400MHz  | 2400MHz | 2500MHz |
|                      | -1.26                                           | -0.76   | -0.58   | -5.25    | -2.46   | -1.86   |
| MAX. Gain            | -0.58dB                                         |         |         |          |         |         |
| Polarization         | Horizontal and Vertical                         |         |         |          |         |         |
| Azimuth Beam Pattern | Omni-directional                                |         |         |          |         |         |
| Impedance            | 50 Ohm                                          |         |         |          |         |         |
| Antenna Length       | <b>Length:</b>                                  |         |         |          |         |         |
| Manufacture          | Wuhan Ningmei Interconnect Technology Co., Ltd. |         |         |          |         |         |

Building 28, Guanggu Smart Park, No. 7, Financial Port 1st Road, East Lake High-tech Zone, Wuhan City, Hubei Province China.

Type: FPCB ANT


## Antenna Photo & Length (mm)

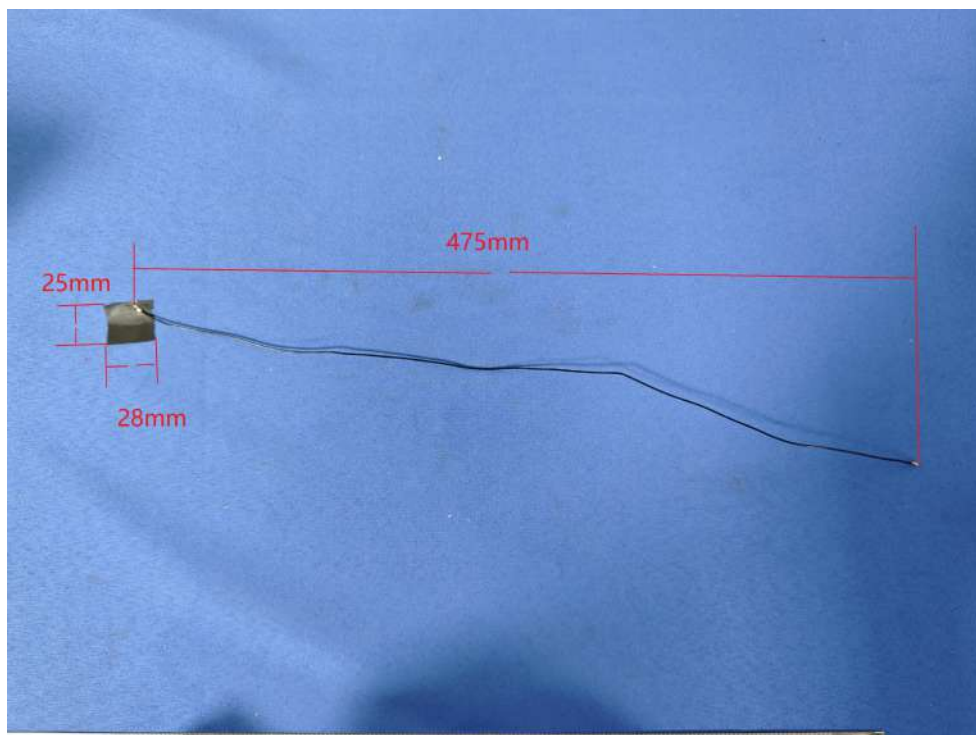

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div

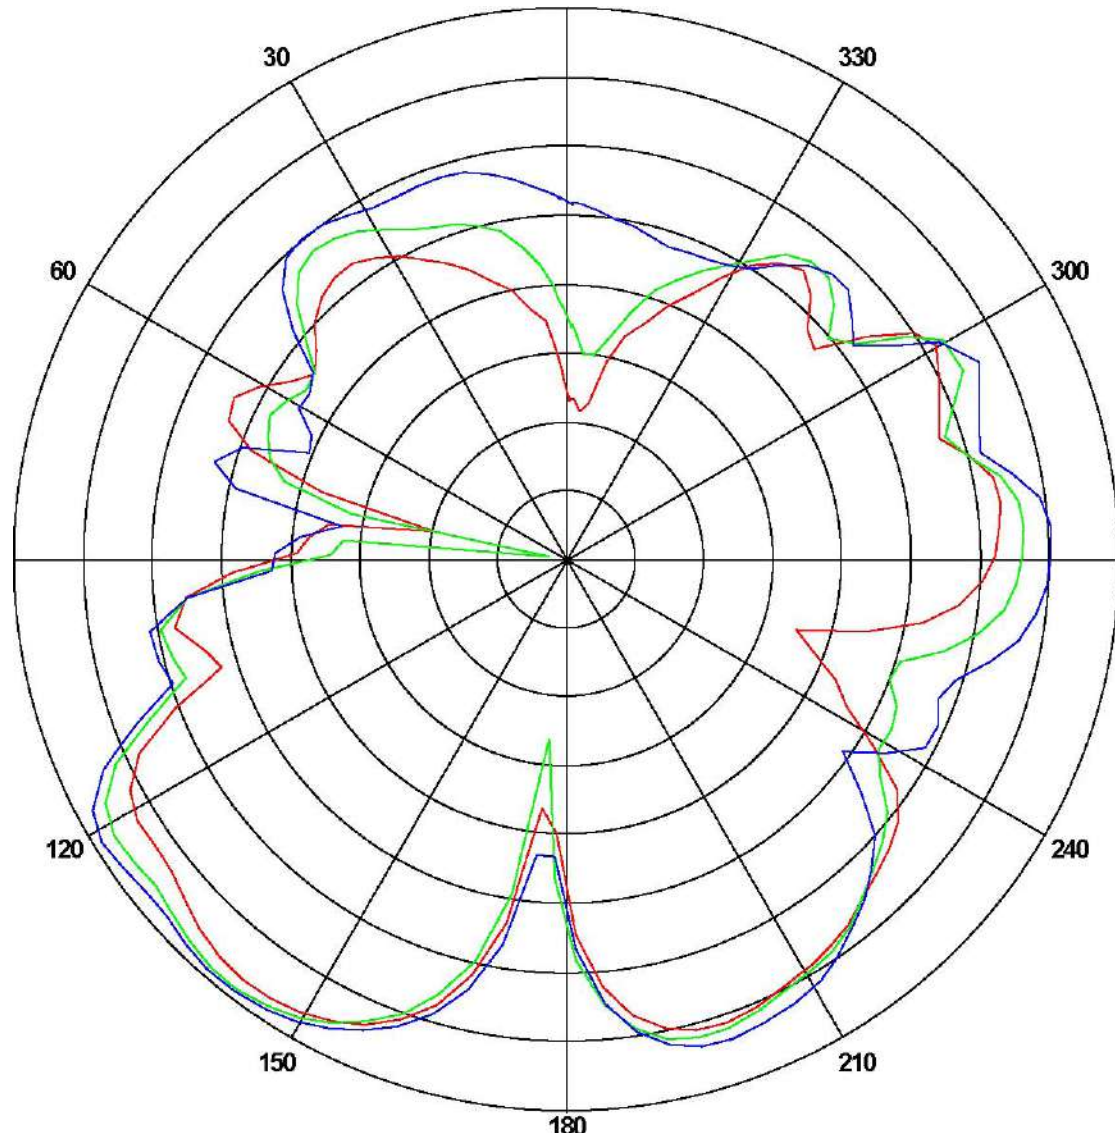


| Frequency<br>(MHz) | Gain(dB)  |          |          |
|--------------------|-----------|----------|----------|
|                    | Max       | Min      | Avg      |
| 2400               | -1.26174  | -30.0801 | -7.18716 |
| 2450               | -0.765802 | -36.5604 | -7.48023 |
| 2500               | -0.585582 | -22.0315 | -6.59127 |

Vertical: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div

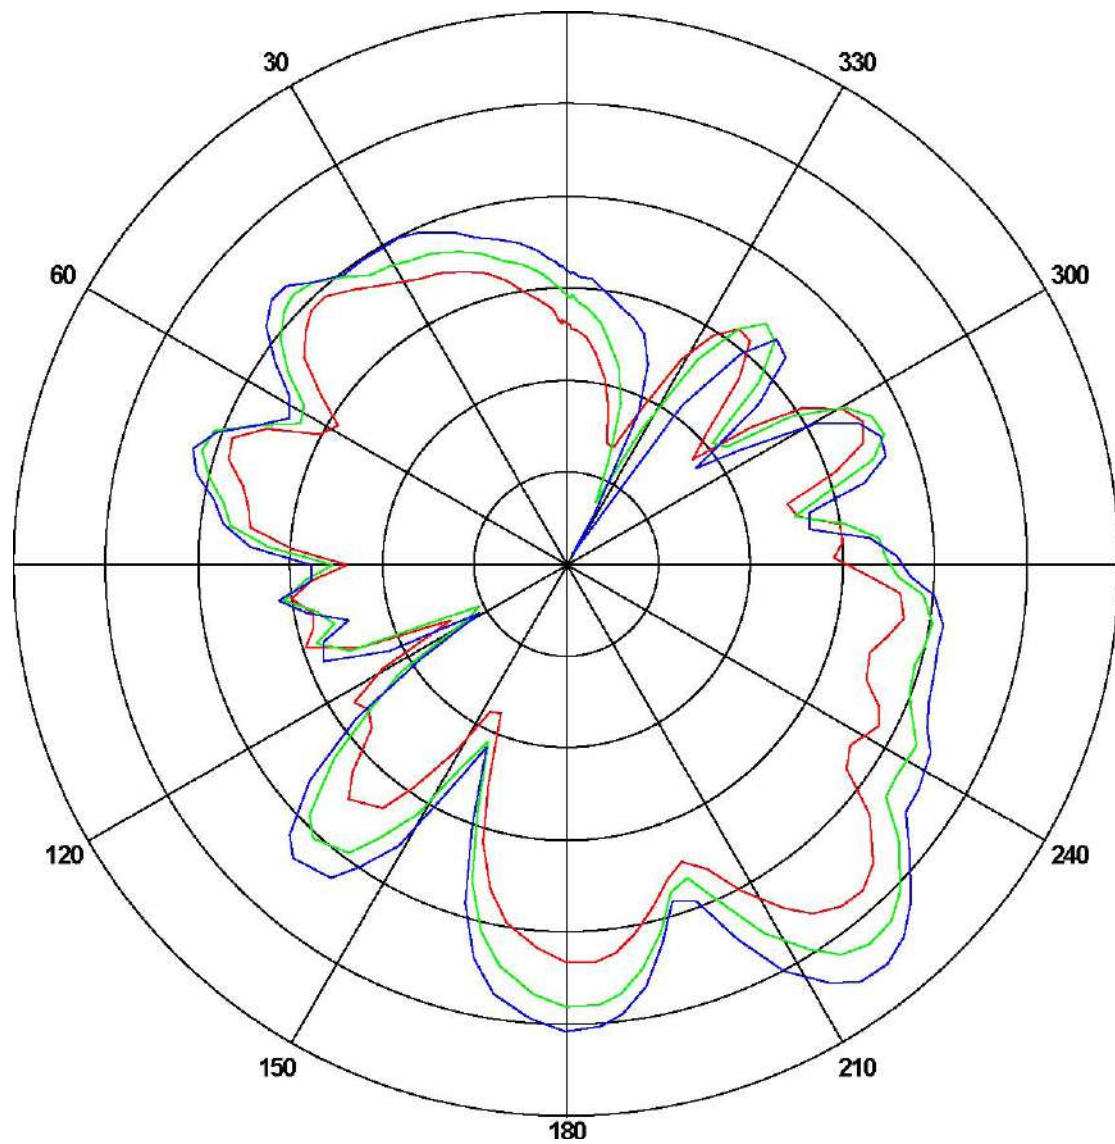

| Frequency<br>(MHz) | Gain(dB) |          |          |
|--------------------|----------|----------|----------|
|                    | Max      | Min      | Avg      |
| 2400               | -5.2537  | -22.1424 | -12.4294 |
| 2450               | -2.4652  | -24.5837 | -10.4702 |
| 2500               | -1.86120 | -29.5214 | -9.20432 |

ANT Test Labs: Attestation of Global Compliance Co., Ltd.