## Antena Test Report







客户名称: 艾莱卡 项目名称: D800S

频段: WIFI2.4G


版本: A 制作日期: 2023-7-6

## Test system



Sequence Number	Test Item	equipment
S parameter	VSWR	Agilent 5071C & Agilent 5062A
OTA Test	TRP&TIS	Agilent 8960 E5515C& Agilent 4438C&CMW500 &CMW270 ETS&SATIMO
Gain & Efficiency	Gain & Efficiency	ETS&SATIMO Agilent 5071C




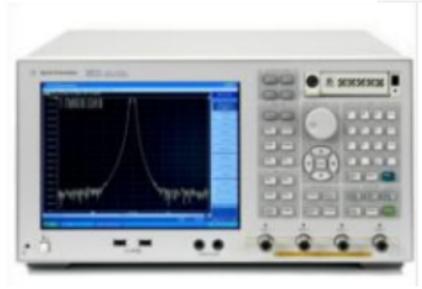



## 天线电路



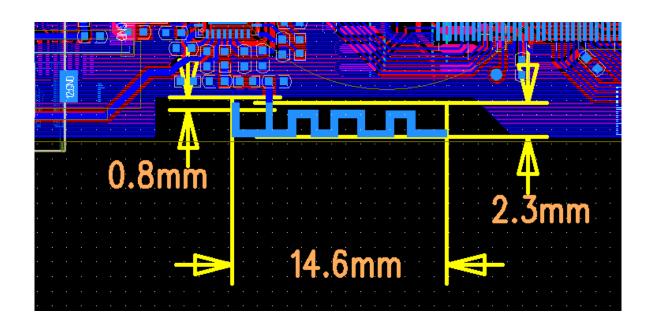

## 效率&增益





FTD		2	2		-	-	7	0	0	10	44	10	10	14	15	16	17	10	10	20	24	22	22	24	ar.	26	27	20	20	20	21
Frequency ID	1	2	3	2220.0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
	2300.0					2350.0												2470.0						2530.0							
Efficiency (dBi)	-11.75		-11.34	-9.98		-9.57	-9.47	-8.94	-8.16	-7.40	1000000	-6.55	-6.58	-5.89	-5.82	-5.70	-5.60	-5.71	-5.80	-5.96	-6.23	-6.11	10000000	-7.29	-7.29	-7.60	-7.87	-8.84	-9.13	-9.76	-9.16
Gain (dBi)	-7.14	-6.71	-6.75	-5.36	-4.86	-4.96	-4.68	-3.80	-3.09	-2.18	100,100	-1.52	-1.49	-0.76	-0.45	-0.23	0.30	0.10	0.41	0.32	-0.24	0.14	-0.90	-1.07	-1.03	-1.53	-1.50	-2.52	-2.59	-3.35	-2.66
Efficiency (%)	6.69	A 100 C 100 C	7.34	10.04	11.29	11.05	11.30	12.77	15.29	18.21	20.61	22.15	22.00	25.75	26.16	26.92	27.53	A 200 A	26.29	25.33	23.81	24.48		18.64	18.67	17.39	16.34	13.06	12.23	10.57	12.13
Directivity (dB)	4.60	4.84	4.59	4.62	4.61	4.61	4.79	5.14	5.06	5.22	5.00	5.03	5.08	5.13	5.37	5.47	5.90	5.81	6.21	6.29	5.99	6.26	6.05	6.23	6.26	6.07	6.36	6.32	6.53	6.41	6.50
Peak Gain Position (Theta)	150.00		150.00	45.00	135.00	135.00	135.00	135.00	135.00	135.00		135.00	135.00	135.00	135.00	135.00	135.00		135.00	135.00		135.00		135.00	135.00	135.00		135.00	135.00	135.00	135.00
Peak Gain Position (Phi)	315.00		315.00	330.00	315.00	315.00	300.00	300.00	300.00	300.00		300.00	300.00	315.00	315.00	315.00	300.00	300.00	300.00	300.00		300.00	300.00	300.00	300.00	300.00	300.00	300.00	300.00	300.00	300.00
Efficiency ThetaPol (%)	2.24		2.42	3.25	3.58	3.46	3.50	3.97	4.66	5.51	6.13	6.58	6.47	7.50	7.37	7.40	7.39	7.18	6.97	6.78	6.46	6.60		5.12	5.07	4.81	4.49	3.59	3.33	2.85	3.31
Efficiency PhiPol (%)	4.45		4.92	6.80	7.70	7.59	7.79	8.81	10.62	12.69	14.48	15.58	15.52	18.25	18.80	19.52	20.14	19.68	19.32	18.55	17.36	17.88	100 M C C C C	13.53	13.60	12.58	11.85	9.48	8.90	7.72	8.81
Upper Hem. Efficiency (%)	3.24		3.55	4.95	5.52	5.55	5.70	6.31	7.70	8.96		10.88	10.79	12.57	12.85	13.45	13.47	13.62	12.81	12.24	11.82	11.60		8.87	8.57	8.24	7.57	6.06	5.71	4.99	5.69
Lower Hem. Efficiency (%)	3.45	3.62	3.79	5.09	5.76	5.49	5.60	6.46	7.59	9.25	10.46	11.28	11.21	13.18	13.31	13.46	14.06	13.24	13.48	13.09	11.99	12.88	10.55	9.78	10.10	9.15	8.76	7.00	6.52	5.57	6.44
T90(H)圆度	14.25	16.46	16.42	17.70	17.40	18.23	18.76	19.65	19.86	23.22	20.73	22.93	26,28	25.24	21,65	20.05	19,31	18.45	20.28	22.67	24.09	22.56	20.88	19.70	21.42	23.55	23.37	22.44	19.05	16.82	16.02
Gain 15deg (dBi)		D 25																1 1								1 1				- 2	
E1(XZ)波瓣宽度	48.00	51.00	56.00	64.00	61.00	64.00	63.00	54.00	62.00	60.00	59.00	56.00	57.00	59.00	62.00	52.00	52.00	59.00	55.00	53.00	48.00	50.00	49.00	50.00	59.00	51.00	53.00	55.00	54.00	55.00	56.00
E1(XZ)前后比	0.65	0.57	0.59	0.25	0.55	0.85	1.23	1.07	1.48	0.71	0.24	0.33	0.63	0.46	0.25	0.00	0.00	0.24	0.45	0.58	1.12	0.94	0.55	0.31	0.00	0.07	0.56	0.12	0.25	0.00	0.00
E2(YZ)波瓣宽度	114.00	115.00	145.00	145.00	144.00	179.00	181.00	130.00	129.00	124.00	122.00	121.00	121.00	118.00	123.00	125.00	125.00	127.00	126.00	127.00	129.00	129.00	132.00	137.00	132.00	139.00	137.00	136.00	137.00	136.00	135.00
E2(YZ)前后比	1.00	0.95	0.37	0.50	0.72	0.85	0.38	0.51	0.18	0.45	0.26	0.51	0.49	0.89	0.82	0.86	0.86	0.94	1.05	0.90	1.01	0.94	1.02	1.09	1.66	1.28	1.53	1.73	1.73	1.52	1,44
最大增益处轴比(P)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
顶点(Theta=0)处轴比(P)	1.50	1.50	1,50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
仰角10度最差(大)轴比(P)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
Hc(XY)波瓣宽度	77.00	79.00	77.00	75.00	75.00	74.00	73.00	72.00	70.00	72.00	74.00	71.00	70.00	68.00	67.00	66.00	65.00	64.00	66.00	64.00	63.00	66.00	66.00	64.00	64.00	65.00	63.00	64.00	62.00	60.00	59.00
Hc(XY)前后比	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
02 100																															
										0.				9	- 1							9									
Empty																						8									

