



Test Report No.:
FCC2024-0047-RF2

TEST REPORT

FCC ID : 2BLRY-CGODMBO355DSB
Applicant : Coates US, Inc
Product Name : Outdoor display unit
Model No. : CD-DDT-O3-55-XD-Y

CVC Testing Technology Co., Ltd.

Product Name	Outdoor display unit	Trade Mark	Coates			
Type/Model	CD-DDT-O3-55-XD-Y	Sample Status	/			
Applicant	Coates US, Inc					
Applicant Address	112 N. May Street, Floor 2, Chicago, IL 60607, USA.					
Manufacturer	Coates Technology Labs Pty Ltd.					
Manufacturer Address	36 Doody St Alexandria, Sydney, NSW, Australia, 2015					
Factory	Dongguan Sampo Electronics Co .,Ltd.					
Factory Address	Building B, Sintave Industrial Park, Lundu Road, QiShaVillage, ShaTian Town, DongGuanCity, Guangdong, China					
Sample Identification	1-1	Test Item	See page 8			
Tested According To	FCC CFR47 Part 15C Radio Frequency Devices ANSI C63.10-2020/Cor1-2023 KDB 558074 D01 15.247 Meas Guidance v05r02					
Receiving Date	2024-09-18	Completing Date	2024-11-22			
Test conclusion	<p>The equipment under test was found to comply with the requirements of the standards applied.</p> <p>Final Verdict: Pass.</p>					
	Seal of CVC					
	Date of issue: 2025-01-09					
Abbreviations: / Pass= passed Fail= failed N/A= not applicable						
This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.						

Approved by:

Chen Huawen



Reviewed by:

Xu Zhenfei



Tested by:

Lu Weiji



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. GENERAL PRODUCT INFORMATION	5
1.1 GENERAL INFORMATION	5
2. TEST SITES	6
2.1 TEST FACILITIES	6
2.2 DESCRIPTION OF NON-STANDARD METHOD AND DEVIATIONS	6
2.3 LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
3. TEST CONFIGURATION	7
3.1 TEST MODE	7
3.2 DUTY CYCLE	8
4. SUMMARY OF MEASUREMENT RESULTS	9
5. MEASUREMENT PROCEDURE	10
5.1 CONDUCTED EMISSION	10
5.2 RADIATED EMISSION	14
5.3 PEAK POWER OUTPUT -CONDUCTED	25
5.4 20DB EMISSION BANDWIDTH	27
5.5 OCCUPIED CHANNEL BANDWIDTH	29
5.6 FREQUENCY SEPARATION	31
5.7 TIME OF OCCUPANCY (DWELL TIME)	33
5.8 BAND EDGE MEASUREMENT	35
5.9 NUMBER OF HOPPING FREQUENCY	37
5.10 SPURIOUS RF CONDUCTED EMISSIONS	39
6. APPENDIX X	41

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCC2024-0047-RF2	Original release	January.09,2025

1. General Product Information

1.1 General information

Product Name	Outdoor display unit
Model No.	CD-DDT-O3-55-XD-Y
Additional model	/
Power Supply	100-240V ac,9.1A,50-60 Hz
Serial Number(SN)	/
Hardware	1020200165-00
Software	/
specific power settings	DH5: Default 2DH5: Default 3DH5: Default
Antenna Type	Internal antenna
Antenna Gain	4.2 dBi (provided by client)
Beamforming gain	Unsupported (provided by client)
Frequency Range	2402MHz~2480MHz
Bluetooth Version:	5.0
Channel Number	79
Type of Modulation	GFSK, π/4DQPSK, 8DPSK
Hopping Channel Type:	Adaptive Frequency Hopping systems
Max. Conducted Power	10.63dBm
Operate Temp.Range	-10°C~+40°C

Note:

1. The information of the EUT is declared by the manufacturer.
2. The laboratory is not responsible for the product technical specification provided by the client.
3. The product models of this application are: CD-DDT-O3-55-XD-Y. All the tests carried out on model CD-DDT-O3-55-XD-Y.

2. Test Sites

2.1 Test Facilities

The tests and measurements refer to this report were performed by RF testing Lab. of CVC Testing Technology Co., Ltd.

Add.: No.3, Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou, Guangdong, 510663, People's Republic of China

Telephone : +86-20-32293888

Fax : +86-20-32293889

FCC(Test firm designation number: CN1282)

2.2 Description of Non-standard Method and Deviations

The testing and measurement methods used in this report are applied by all standard methods. Not any non-standard method or deviation from the used standards was used.

2.3 List of Test and Measurement Instruments

Refer to **Appendix X**.

3. Test Configuration

3.1 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Test Mode	Antenna Delivery	Test Channel
DH1/DH3/DH5 2DH1/2DH3/2DH5 3DH1/3DH3/3DH5	1TX / 1RX	0,39,78,hop

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate and different channels. Preliminary tests have been done on all the configuration for confirming worst case. Data rate and channel below means worst-case rate of each test item.

Worst-case data rates and channels are shown as following table.

Test Items	Test Modes	Test Channels
Conducted Emissions	3DH5	0
Radiated Emissions	3DH5	0
Peak Power Output -Conducted	DH5/2DH5/3DH5	0,39,78
20dB Emission Bandwidth	DH5/2DH5/3DH5	0,39,78
Occupied Channel Bandwidth	DH5/2DH5/3DH5	0,39,78
Frequency Separation	DH5/2DH5/3DH5	hop
Time of Occupancy (Dwell Time)	DH1/DH3/DH5/ 2DH1/2DH3/2DH5/ 3DH1/3DH3/3DH5	hop
Band Edge Compliance	DH5/2DH5/3DH5	0,78
Number of Hopping Frequency	DH5/2DH5/3DH5	hop
Spurious RF Conducted Emissions	DH5/2DH5/3DH5	0,39,78

3.2 Duty cycle

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
DH5	Ant1	2402	2.88	3.75	76.80	---	---
	Ant1	2441	2.88	3.74	77.01	---	---
	Ant1	2480	2.89	3.75	77.07	---	---
2DH5	Ant1	2402	2.89	3.75	77.07	---	---
	Ant1	2441	2.89	3.75	77.07	---	---
	Ant1	2480	2.89	3.75	77.07	---	---
3DH5	Ant1	2402	2.89	3.74	77.27	---	---
	Ant1	2441	2.89	3.75	77.07	---	---
	Ant1	2480	2.89	3.74	77.27	---	---

4. Summary of measurement results

Summary of measurements of results	Clause in FCC rules	Verdict	Note
Conducted Emissions	15.207	PASS	/
Radiated Emissions	15.247(d),15.205,15.209	PASS	/
Peak Power Output -Conducted	15.247(b)(1)	PASS	Appendix C of BT_diagram
20dB Emission Bandwidth	15.247(a)(1)	PASS	Appendix A of BT_diagram
Occupied Channel Bandwidth	15.247(a)(1)	PASS	Appendix B of BT_diagram
Frequency Separation	15.247(a)(1)	PASS	Appendix D of BT_diagram
Time of Occupancy (Dwell Time)	15.247(a)(1)(iii)	PASS	Appendix E of BT_diagram
Band Edge Compliance	15.247(d)	PASS	Appendix G of BT_diagram
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS	Appendix F of BT_diagram
Spurious RF Conducted Emissions	15.247(d)	PASS	Appendix H of BT_diagram
Antenna Requirement	15.203	PASS	See note 1

Note 1: According to 15.203, it is considered sufficient to comply with the provisions of this section.

5. Measurement procedure

5.1 Conducted Emission

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

Method of Measurement:

The EUT was setup according to ANSI C63.10-2020/Cor1-2023 for compliance to FCC 47CFR 15.207 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.


Limits:

Frequency (MHz)	Conducted Limits(dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Test Setup:

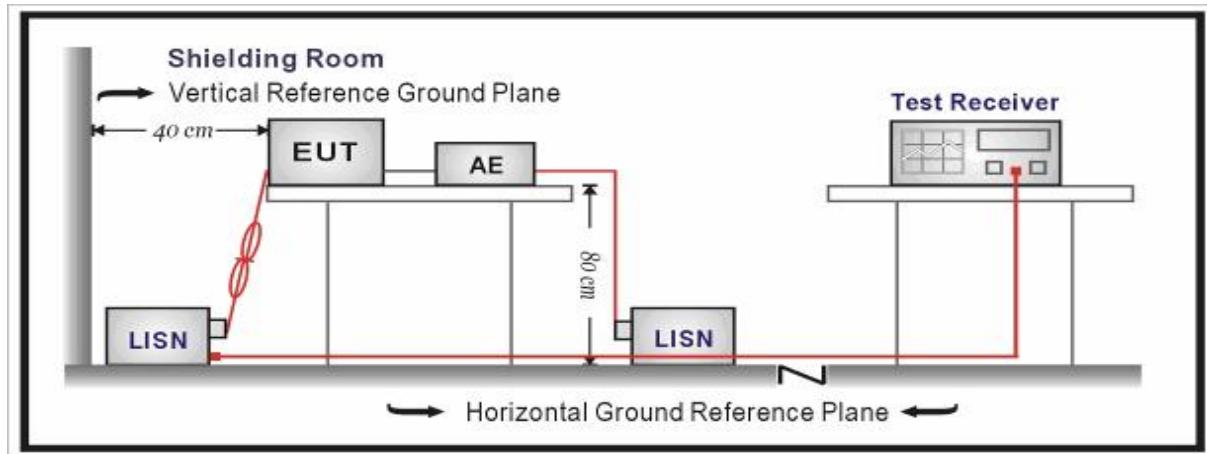

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Level =Reading + Factor.

Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 3.12$ dB.

Test Results:

During the test, the Conducted Emission from 150kHz to 30MHz was performed in all modes with all channels, and all antennas. BT 8DPSK Channel 0, antenna 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


Radiates Emission	150k~30MHz						
Power Line	L						
Test channel	Worst-Case						

Suspected List

Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V]	Limit [dB μ V]	Margin [dB]	Detector	Pass/Fail
1.257	20.01	25.87	45.88	56.00	10.12	PK	PASS
8.3445	20.78	17.57	38.35	60.00	21.65	PK	PASS
9.627	21.40	20.57	41.97	60.00	18.03	PK	PASS

Final Data List

Freq. [MHz]	Factor [dB]	QP Value [dB μ V]	QP Limit [dB μ V]	QP Margin [dB]	AV Value [dB μ V]	AV Limit [dB μ V]	AV Margin [dB]	Pass/Fail
1.2570	20.01	42.54	56.00	13.46	27.37	46.00	18.63	PASS
8.3445	20.78	37.05	60.00	22.95	35.52	50.00	14.48	PASS
9.6270	21.40	40.71	60.00	19.29	38.68	50.00	11.32	PASS

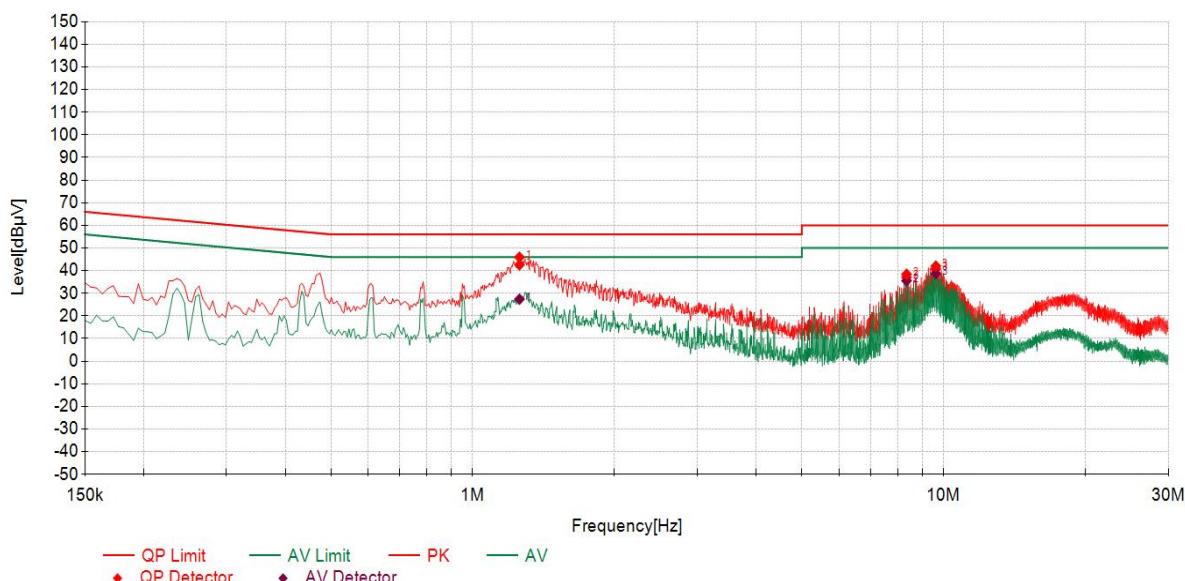


Radiates Emission	150k~30MHz						
Power Line	N						
Test channel	Worst-Case						

Suspected List

Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V]	Limit [dB μ V]	Margin [dB]	Detector	Pass/Fail
0.4695	19.99	18.63	38.62	56.52	17.90	PK	PASS
1.257	20.10	26.23	46.33	56.00	9.67	PK	PASS
9.7125	22.15	21.30	43.45	60.00	16.55	PK	PASS

Final Data List

Freq. [MHz]	Factor [dB]	QP Value [dB μ V]	QP Limit [dB μ V]	QP Margin [dB]	AV Value [dB μ V]	AV Limit [dB μ V]	AV Margin [dB]	Pass/Fail
0.4695	19.99	36.25	56.52	20.27	23.71	46.52	22.81	PASS
1.257	20.10	43.96	56.00	12.04	26.60	46.00	19.40	PASS
9.7125	22.15	40.97	60.00	19.03	39.66	50.00	10.34	PASS

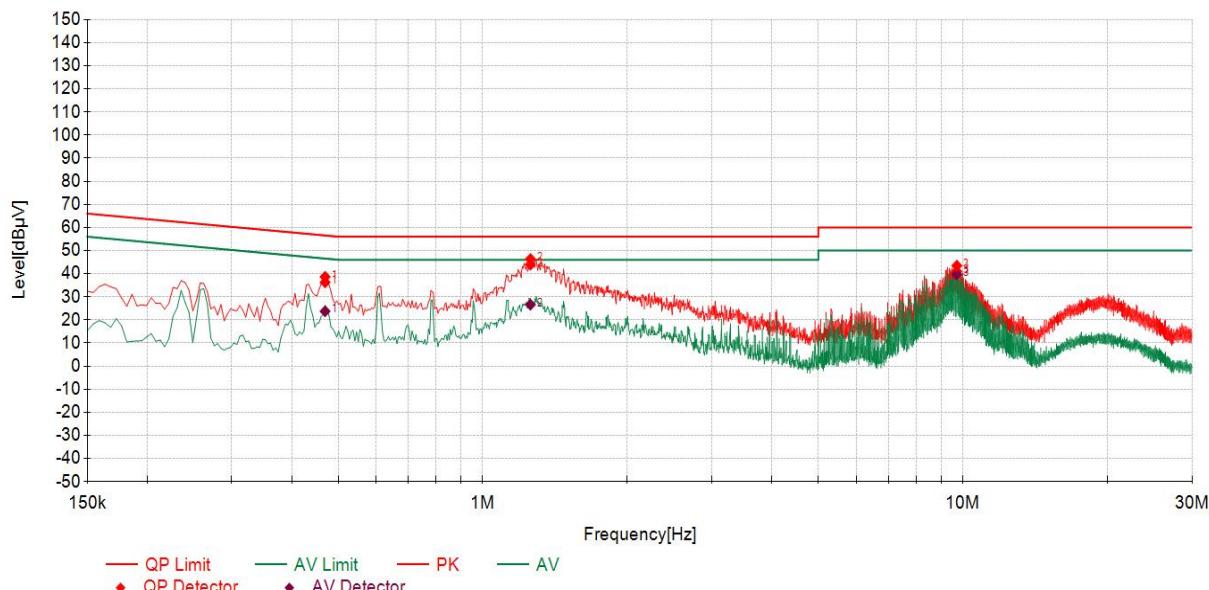

5.2 Radiated Emission

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

Method of Measurement:

The EUT was setup and tested according to ANSI C63.10-2020/Cor1-2023.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from Antenna to the EUT was 3 meters.

The Antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the Antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2020/Cor1-2023 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn Antenna will be bended down a little (as horn

Antenna has the narrow beamwidth) in order to keeping the Antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 10~60 degrees for H-plane and 10~90 degrees for E-plane.

Limits:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Frequency	Limit (μ V/m)	Limit (dB μ V/m @3m)	Remark
0.009MHz-0.490MHz	2400/F(kHz)@300m	20lg(24000000/F(kHz))	Quasi-peak Level
0.490MHz~1.705MHz	24000/F(kHz)@30m	20lg(2400000/F(kHz))	Quasi-peak Level
1.705MHz~30.0MHz	30@30m	69.54	Quasi-peak Level
30MHz-88MHz	100@3m	40.0	Quasi-peak Level
88MHz-216MHz	150@3m	43.5	Quasi-peak Level
216MHz-960MHz	200@3m	46.0	Quasi-peak Level
960MHz-1GHz	500@3m	54.0	Quasi-peak Level


Above 1GHz	500@3m	54.0	Average Level
	5000@3m	74.0	Peak Level

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.
12.57675-12.57725	322-335.4	3600-4400	/
13.36-13.41	/	/	/

Test Setup:


Below 30MHz Test Setup:

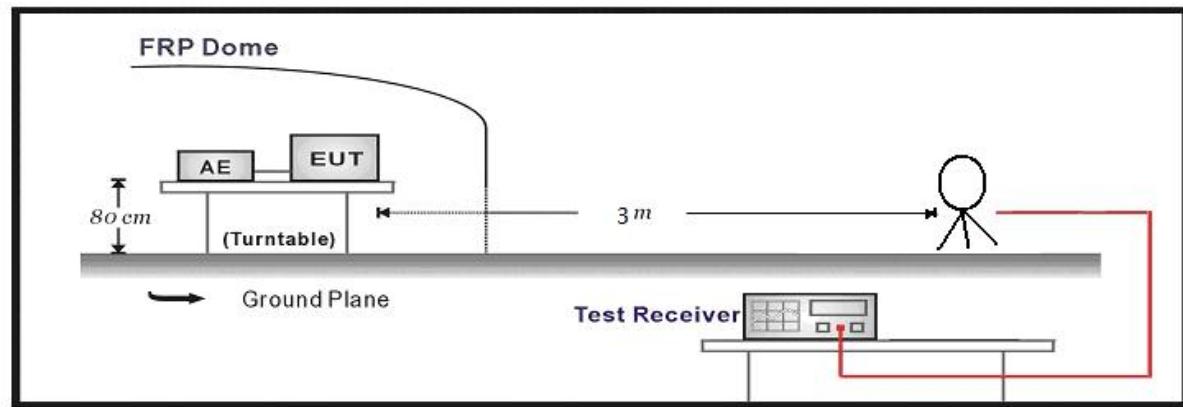

Below 1GHz Test Setup:

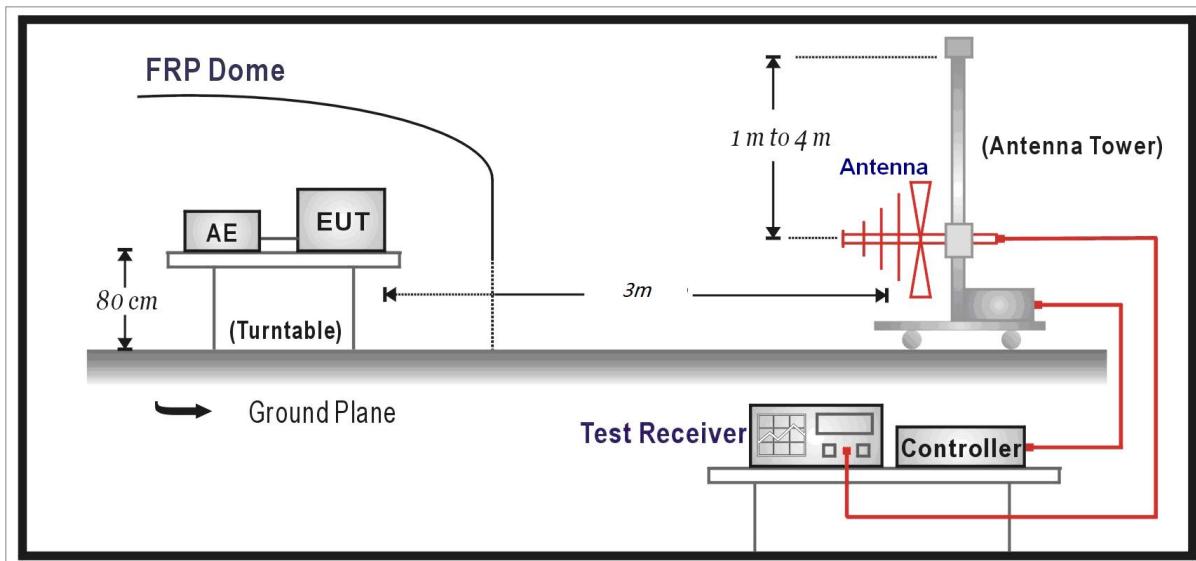

Above 1GHz Test Setup:

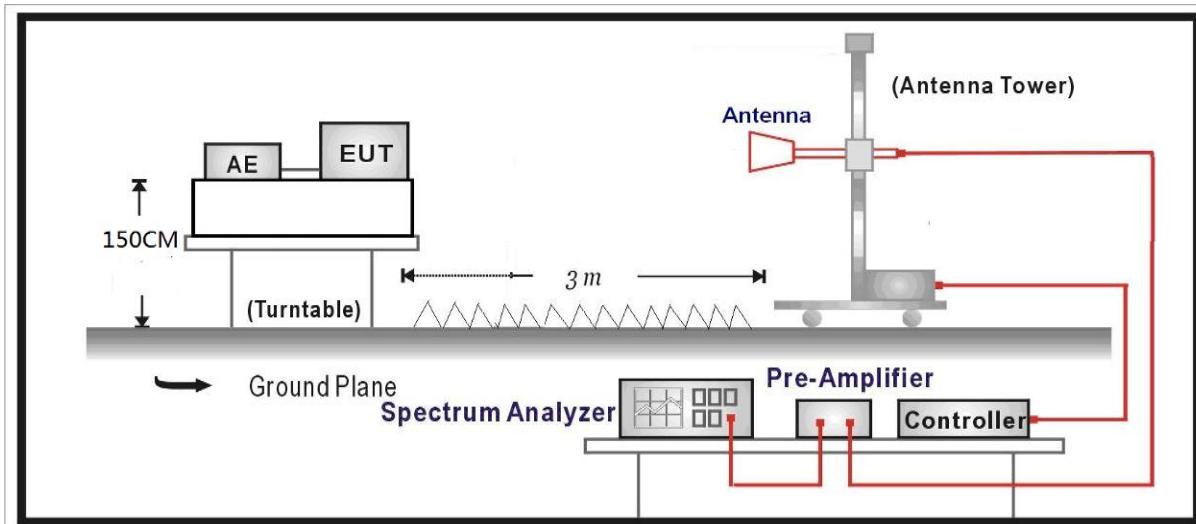

Measurement Data:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Level =Reading - Factor

Factor = Preamplifier Factor – Antenna Factor–Cable Loss

Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB


Test Results:

During the test, the Radiates Emission from 9kHz to 1GHz was performed in all modes with all channels and all antennas. BT 8DPSK Channel 0, antenna 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Radiates Emission	9k~1G								
Test channel	Worst-Case								
Polarity	Horizontal								
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
73.9454	9.22	26.66	35.88	40.00	4.12	PK	100	353	PASS
517.9588	20.15	17.22	37.37	46.00	8.63	PK	100	302	PASS
742.5363	23.81	18.86	42.67	46.00	3.33	PK	100	359	PASS

Note: 9kHz~30MHz have been test and test data more than 20dB margin.


Final Data List							
Frequency [MHz]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pass/Fail
74.2804	9.22	32.80	40.00	7.20	370	358	PASS
520.1326	20.15	33.64	46.00	12.36	330	299	PASS
742.4506	23.81	39.59	46.00	6.41	220	204	PASS

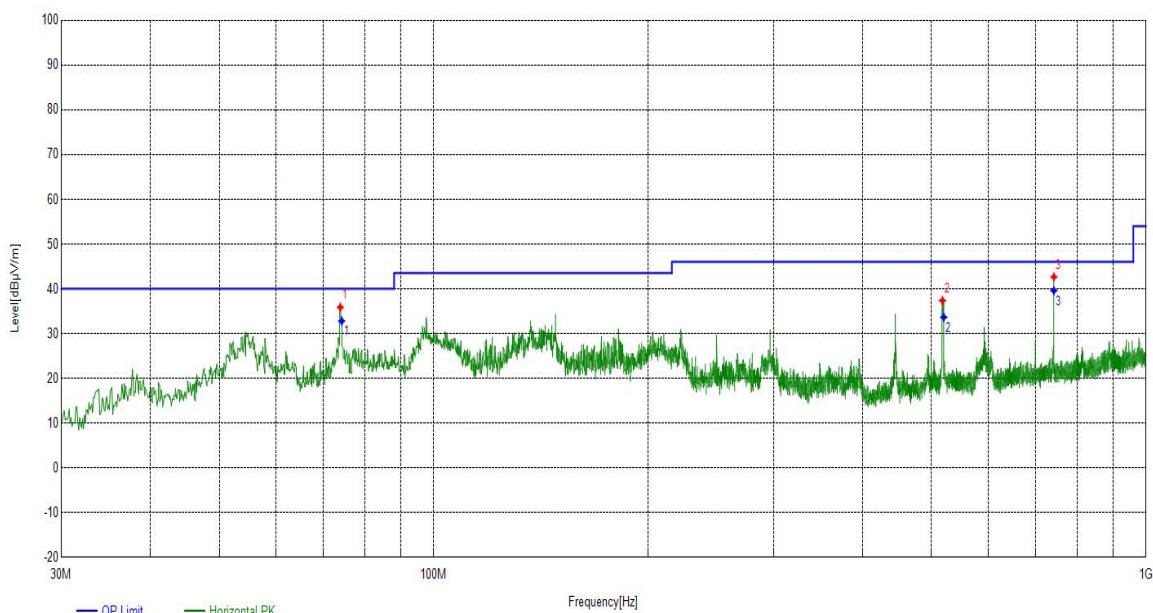

Radiates Emission	9k~1G								
Test channel	Worst-Case								
Polarity	Vertical								
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
57.2597	12.42	22.99	35.41	40.00	4.59	PK	100	102	PASS
445.4925	18.70	22.17	40.87	46.00	5.13	PK	100	102	PASS
891.0581	25.64	15.61	41.25	46.00	4.75	PK	100	8	PASS

Note: 9kHz~30MHz have been test and test data more than 20dB margin.

Final Data List							
Frequency [MHz]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pass/Fail
57.35	12.42	31.70	40.00	8.30	300	107	PASS
445.3764	18.70	35.12	46.00	10.88	340	107	PASS
891.0198	25.64	36.68	46.00	9.32	150	13	PASS

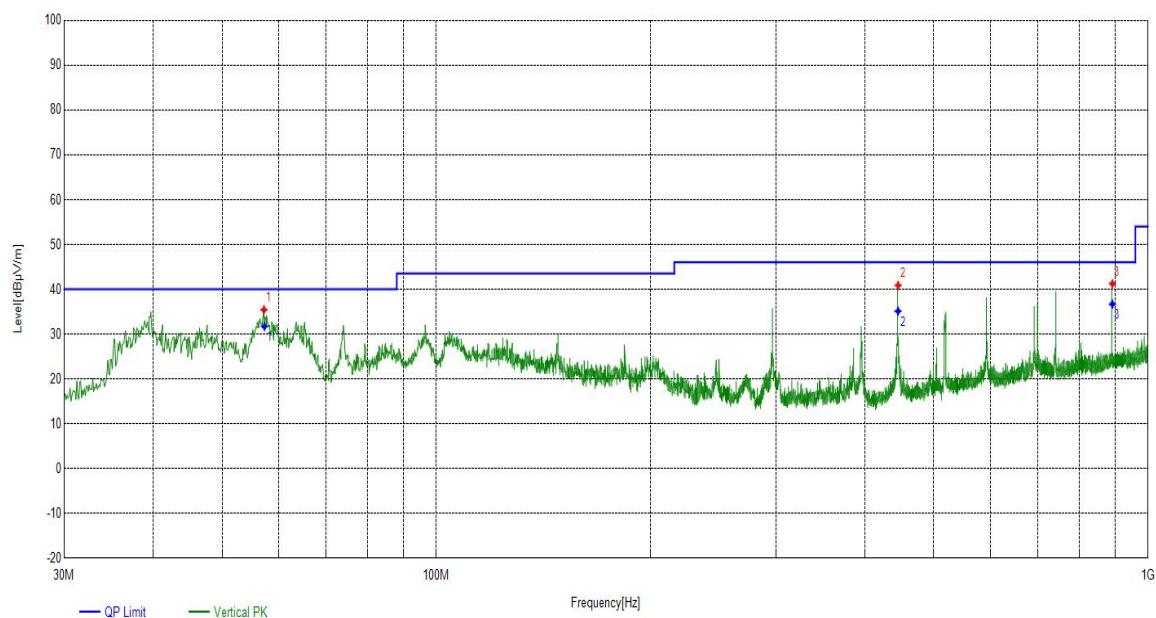

During the test, the Radiates Emission from 1GHz to 40GHz was performed in all modes with all channels and all antennas. BT 8DPSK, Highest, medium, lowest channels, antenna 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Radiates Emission	Above 1G							
Test channel	Lowest							
polarization	Horizontal							
Suspected List								
Frequency [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detect or	Height [cm]	Pass/ Fail
1050.0050	26.60	14.58	41.18	74.00	32.82	PK	150	PASS
2107.1107	34.42	14.56	48.98	74.00	25.02	PK	150	PASS
4422.1422	0.01	38.89	38.90	74.00	35.10	PK	150	PASS
1050.0050	26.60	7.95	34.55	54.00	19.45	AV	150	PASS
2107.1107	34.42	1.86	36.28	54.00	17.72	AV	150	PASS
4296.1296	0.25	28.51	28.76	54.00	25.24	AV	150	PASS

Note: The emission levels of other frequencies were greater than 20dB margin.

Radiates Emission	Above 1G							
Test channel	Lowest							
polarization	Vertical							
Suspected List								
Frequency [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detect or	Height [cm]	Pass/ Fail
1050.0050	26.60	21.82	48.42	74.00	25.58	PK	150	PASS
1650.0650	31.88	17.39	49.27	74.00	24.73	PK	150	PASS
3630.0630	-0.15	40.63	40.48	74.00	33.52	PK	150	PASS
1050.0050	26.60	16.65	43.25	54.00	10.75	AV	150	PASS
1645.0645	31.84	9.20	41.04	54.00	12.96	AV	150	PASS
3631.5631	-0.15	31.53	31.38	54.00	22.62	AV	150	PASS

Note: The emission levels of other frequencies were greater than 20dB margin.

Radiates Emission	Above 1G							
Test channel	Medium							
polarization	Horizontal							

Suspected List

Frequency [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detect or	Height [cm]	Pass/ Fail
1050.0050	26.60	15.24	41.84	74.00	32.16	PK	150	PASS
8375.0375	9.81	35.09	44.90	74.00	29.10	PK	150	PASS
14555.6556	18.18	34.55	52.73	74.00	21.27	PK	150	PASS
1050.0050	26.60	9.05	35.65	54.00	18.35	AV	150	PASS
8484.5484	9.96	25.19	35.15	54.00	18.85	AV	150	PASS
14530.1530	18.27	24.18	42.45	54.00	11.55	AV	150	PASS

Note: The emission levels of other frequencies were greater than 20dB margin.

Radiates Emission	Above 1G							
Test channel	Medium							
polarization	Vertical							

Suspected List

Frequency [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detect or	Height [cm]	Pass/ Fail
1050.0050	26.60	20.45	47.05	74.00	26.95	PK	150	PASS
3381.0381	-0.77	41.09	40.32	74.00	33.68	PK	150	PASS
8154.5154	9.45	35.98	45.43	74.00	28.57	PK	150	PASS
1050.0050	26.60	17.19	43.79	54.00	10.21	AV	150	PASS
3382.5382	-0.76	31.39	30.63	54.00	23.37	AV	150	PASS
7849.9849	9.23	25.72	34.95	54.00	19.05	AV	150	PASS

Note: The emission levels of other frequencies were greater than 20dB margin.

Radiates Emission	Above 1G							
Test channel	Highest							
polarization	Horizontal							

Suspected List

Frequency [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detect or	Height [cm]	Pass/ Fail
1296.2296	28.83	18.39	47.22	74.00	26.78	PK	150	PASS
1400.0400	29.82	18.58	48.40	74.00	25.60	PK	150	PASS
6150.3150	5.89	35.19	41.08	74.00	32.92	PK	150	PASS
1296.0296	28.83	9.44	38.27	54.00	15.73	AV	150	PASS
1400.0400	29.82	6.61	36.43	54.00	17.57	AV	150	PASS
6034.8030	5.74	24.86	30.60	54.00	23.40	AV	150	PASS

Note: The emission levels of other frequencies were greater than 20dB margin.

Radiates Emission	Above 1G							
Test channel	Highest							
polarization	Vertical							

Suspected List

Frequency [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detect or	Height [cm]	Pass/ Fail
1350.0350	29.34	18.25	47.59	74.00	26.41	PK	150	PASS
1643.0643	31.82	18.92	50.74	74.00	23.26	PK	150	PASS
7002.400	8.94	36.51	45.45	74.00	28.55	PK	150	PASS
1350.0350	29.34	13.82	43.16	54.00	10.84	AV	150	PASS
1645.0645	31.84	9.43	41.27	54.00	12.73	AV	150	PASS
7075.9075	8.97	25.46	34.43	54.00	19.57	AV	150	PASS

Note: The emission levels of other frequencies were greater than 20dB margin.

Band Edge:

During the test, the Band Edge was performed in BT all modes with all channels and all antennas.

BT 8DPSK, Highest and lowest channels, antenna 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Test mode	8DPSK								
Test channel	Lowest								
polarization	Horizontal								

Suspected List

Frequency [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
2324.9324	31.80	8.16	39.96	74.00	34.04	PK	150	266	PASS
2376.3376	32.00	14.46	46.46	74.00	27.54	PK	150	217	PASS
2390.1390	32.06	7.71	39.77	74.00	34.23	PK	150	121	PASS
2324.9324	31.80	-0.83	30.97	54.00	23.03	AV	150	0	PASS
2376.3376	32.00	3.61	35.61	54.00	18.39	AV	150	217	PASS
2390.1390	32.06	-0.91	31.15	54.00	22.85	AV	150	157	PASS

Test mode	8DPSK								
Test channel	Lowest								
polarization	Vertical								

Suspected List

Frequency [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
2319.1319	31.78	9.87	41.65	74.00	32.35	PK	150	139	PASS
2379.3379	32.01	13.51	45.52	74.00	28.48	PK	150	211	PASS
2390.1390	32.06	8.86	40.92	74.00	33.08	PK	150	319	PASS
2319.1319	31.78	-1.24	30.54	54.00	23.46	AV	150	26	PASS
2379.3379	32.01	-0.63	31.38	54.00	22.62	AV	150	181	PASS
2390.1390	32.06	-0.37	31.69	54.00	22.31	AV	150	199	PASS

Test mode	8DPSK								
Test channel	Highest								
polarization	Horizontal								

Suspected List

Frequency [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
2483.5483	32.38	8.67	41.05	74.00	32.95	PK	150	289	PASS
2489.1489	32.40	8.37	40.77	74.00	33.23	PK	150	253	PASS
2510.1510	32.49	8.98	41.47	74.00	32.53	PK	150	74	PASS
2483.5483	32.38	-0.49	31.89	54.00	22.11	AV	150	144	PASS
2489.1489	32.40	-0.73	31.67	54.00	22.33	AV	150	168	PASS
2510.1510	32.49	-1.10	31.39	54.00	22.61	AV	150	264	PASS

Test mode	8DPSK								
Test channel	Highest								
polarization	Vertical								

Suspected List

Frequency [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
2483.5483	32.38	7.72	40.10	74.00	33.90	PK	150	359	PASS
2503.3503	32.46	10.34	42.80	74.00	31.20	PK	150	325	PASS
2580.1580	32.77	10.08	42.85	74.00	31.15	PK	150	0	PASS
2483.5483	32.38	-1.06	31.32	54.00	22.68	AV	150	228	PASS
2503.3503	32.46	-0.47	31.99	54.00	22.01	AV	150	276	PASS
2580.1580	32.77	0.82	33.59	54.00	20.41	AV	150	43	PASS

5.3 Peak Power Output -Conducted

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa


Method of Measurement:

During the process of the testing, The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The EUT is controlled by the Bluetooth test set to ensure max power transmission with proper modulation. The peak detector is used.

Limits:

Rule Part 15.247 (b) (1) specifies that " For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts."

Test Setup:

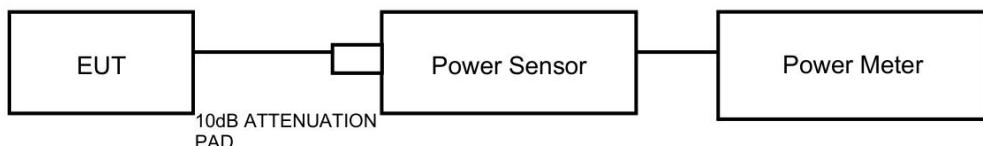

Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

Test Results:

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	10.63	≤30.00	PASS
	Ant1	2441	10.63	≤30.00	PASS
	Ant1	2480	10.11	≤30.00	PASS
2DH5	Ant1	2402	10.28	≤20.97	PASS
	Ant1	2441	10.14	≤20.97	PASS
	Ant1	2480	9.82	≤20.97	PASS
3DH5	Ant1	2402	10.44	≤20.97	PASS
	Ant1	2441	10.35	≤20.97	PASS
	Ant1	2480	9.94	≤20.97	PASS

5.4 20dB Emission Bandwidth

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

Method of Measurement:

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 20 kHz; VBW is set to 100 kHz on spectrum analyzer.

Detector=Peak, Trace mode=Max hold.

Limits:

No specific occupied bandwidth requirements in part 15.247(a) (1).

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:

TestMode	Antenna	Channel	20db EBW[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.94	---	---
	Ant1	2441	0.94	---	---
	Ant1	2480	0.94	---	---
2DH5	Ant1	2402	1.28	---	---
	Ant1	2441	1.28	---	---
	Ant1	2480	1.31	---	---
3DH5	Ant1	2402	1.30	---	---
	Ant1	2441	1.29	---	---
	Ant1	2480	1.30	---	---

5.5 Occupied Channel Bandwidth

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

Method of Measurement:

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 20 kHz; VBW is set to 100 kHz on spectrum analyzer.

Detector=Peak, Trace mode=Max hold.

Limits:

No specific occupied bandwidth requirements in part 15.247(a) (1).

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:

TestMode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.851	---	---
	Ant1	2441	0.848	---	---
	Ant1	2480	0.851	---	---
2DH5	Ant1	2402	1.193	---	---
	Ant1	2441	1.181	---	---
	Ant1	2480	1.217	---	---
3DH5	Ant1	2402	1.202	---	---
	Ant1	2441	1.190	---	---
	Ant1	2480	1.226	---	---

5.6 Frequency Separation

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

Method of Measurement:

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer.

Limits:

Rule Part 15.247(a)(1) specifies that “Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.”

Note: The value of two-thirds of 20 dB bandwidth is always greater than 25 kHz.

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=936$ Hz.

Test Results:

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.154	≥ 0.940	PASS
2DH5	Ant1	Hop	1.116	≥ 0.873	PASS
3DH5	Ant1	Hop	1.017	≥ 0.867	PASS

5.7 Time of Occupancy (Dwell Time)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

Method of Measurement:

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 1MHz and VBW is set to 3MHz on spectrum analyzer. The dwell time is calculated by: Dwell time = time slot length * hop rate * 0.4s with:

The selected EUT Packet type uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600(ch*hop/s) for all channels. So the final hopping rate for all channel is $1600/6=266.67$ (ch*hop/s)

Limits:

Rule Part15.247(a) specifies that " Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed."

Dwell time	$\leq 400\text{ms}$
------------	---------------------

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$.

Requirements	Uncertainty					
	DH5	U=0.70ms	2DH5	U=0.70ms	3DH5	U=0.70ms
Dwell Time						

Test Results:

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.379	320	0.121	≤ 0.4	PASS
DH3	Ant1	Hop	1.626	160	0.26	≤ 0.4	PASS
DH5	Ant1	Hop	2.867	106.67	0.306	≤ 0.4	PASS
2DH1	Ant1	Hop	0.384	320	0.123	≤ 0.4	PASS
2DH3	Ant1	Hop	1.628	160	0.26	≤ 0.4	PASS
2DH5	Ant1	Hop	2.868	106.67	0.306	≤ 0.4	PASS
3DH1	Ant1	Hop	0.384	320	0.123	≤ 0.4	PASS
3DH3	Ant1	Hop	1.626	160	0.26	≤ 0.4	PASS
3DH5	Ant1	Hop	2.870	106.67	0.306	≤ 0.4	PASS

5.8 Band Edge Measurement

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

Method of Measurement:

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer.

Limits:

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 936$ Hz, 2 GHz-3 GHz = 1.407 dB.

Test Result:

TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	10.44	-46.12	≤-9.56	PASS
		High	2480	9.81	-47.79	≤-10.19	PASS
		Low	Hop_2402	10.19	-49.34	≤-9.81	PASS
		High	Hop_2480	10.67	-47.92	≤-9.33	PASS
2DH5	Ant1	Low	2402	8.93	-48.21	≤-11.07	PASS
		High	2480	8.87	-47.24	≤-11.13	PASS
		Low	Hop_2402	7.40	-48.54	≤-12.6	PASS
		High	Hop_2480	9.84	-47.97	≤-10.16	PASS
3DH5	Ant1	Low	2402	8.93	-48.17	≤-11.07	PASS
		High	2480	8.83	-48.04	≤-11.17	PASS
		Low	Hop_2402	7.05	-48.08	≤-12.95	PASS
		High	Hop_2480	9.28	-47.72	≤-10.72	PASS

5.9 Number of hopping Frequency

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

Method of Measurement:

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 100KHz and VBW is set to 300KHz on spectrum analyzer. Set EUT on Hopping on mode.

Limits:

Rule Part 15.247(a) (1) (iii) specifies that" Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels."

Limits	≥ 15 channels

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75$ dB.

Test Results:

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

5.10 Spurious RF Conducted Emissions

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

Method of Measurement:

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100kHz and VBW to 300 kHz, Sweep is set to AUTO .The test is in transmitting mode.

Limits:

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

Test Results:

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	10.47	10.47	---	PASS
			30~1000	10.47	-58.54	≤-9.53	PASS
			1000~26500	10.47	-48.42	≤-9.53	PASS
		2441	Reference	10.40	10.40	---	PASS
			30~1000	10.40	-60.17	≤-9.6	PASS
			1000~26500	10.40	-48.53	≤-9.6	PASS
		2480	Reference	9.83	9.83	---	PASS
			30~1000	9.83	-59.15	≤-10.17	PASS
			1000~26500	9.83	-48.21	≤-10.17	PASS
2DH5	Ant1	2402	Reference	8.96	8.96	---	PASS
			30~1000	8.96	-59.63	≤-11.04	PASS
			1000~26500	8.96	-48.18	≤-11.04	PASS
		2441	Reference	8.60	8.60	---	PASS
			30~1000	8.60	-59.53	≤-11.4	PASS
			1000~26500	8.60	-48.54	≤-11.4	PASS
		2480	Reference	8.79	8.79	---	PASS
			30~1000	8.79	-60.29	≤-11.21	PASS
			1000~26500	8.79	-47.95	≤-11.21	PASS
3DH5	Ant1	2402	Reference	9.05	9.05	---	PASS
			30~1000	9.05	-59.74	≤-10.95	PASS
			1000~26500	9.05	-48.46	≤-10.95	PASS
		2441	Reference	8.61	8.61	---	PASS
			30~1000	8.61	-59.56	≤-11.39	PASS
			1000~26500	8.61	-48.33	≤-11.39	PASS
		2480	Reference	8.75	8.75	---	PASS
			30~1000	8.75	-59.62	≤-11.25	PASS
			1000~26500	8.75	-47.88	≤-11.25	PASS

6. Appendix X

Test Equipment	Type/Mode	SERIAL NO.	Equipment No.	Manufacturer	Cal. Due
Communication Shielded Room 2	4m*3m*3m	CRTDSWKS4 4301	/	CRT	2027/04/22
Spectrum Analyzer	FSV40	101580	DZ-000238-3	R&S	2025/04/22
RF Radio Frequency Switch	JS0806-2	19H9080187	DZ-000241	Tonscend	2025/04/27
Programmable DC Power Supply	E3644A	MY58036222	DZ-000178	KEYSIGHT	2025/04/11
5m Semi-Anechoic Chamber	SAC-5	SAC-5-2.0	EM-000557	COMTEST	2027/02/01
Spectrum Analyzer	N9010B	MY57470323	DZ-000174	KEYSIGHT	2026/01/01
EMI Test Receiver	N9038A-508	MY532290079	EM-000397	Agilent	2025/01/13
EMI Test Receiver	ESR7	102235	EM-000574	R&S	2025/01/13
loop antenna	HLA 6121	540046	EM-000546	TESEQ	2025/06/04
Broadband Antenna	VULB 9163	9163-530	EM-000342	SCHWARZBECK	2025/06/09
Waveguide Horn Antenna	HF906	360306/008	EM-000093	R&S	2025/01/13
Waveguide Horn Antenna	BBHA9170	00949	DZ-000209-2	SCHWARZBECK	2025/08/03
Preamplifier	BBV 9721	9721-050	DZ-000209-1	SCHWARZBECK	2025/06/02
Bandstop Filters	SW-BSF-2400-100-7-A1	/	EM-000495	/	2025/08/29
5G Bandstop Filters	WRCJV12-4900-5100-5900-6100-50EE	1	DZ-000186	WI	2025/12/02
Preamplifier	BBV 9721	9721-050	DZ-000209-1	SCHWARZBECK	2025/06/03
Temperature and humidity meter	MHO-C201	/	DZ-000249-2	Seconds test	2025/07/28
Temperature and humidity meter	MHO-C201	/	DZ-000249-5	Seconds test	2025/07/28

Dynacomm	Software Release	Software Developer
TS1120-3 Test System(Conduction test)	3.3.38	Tonscend
TS+ (5m,Radiation test)	JS32-RE 5.0.0	Tonscend

————— No Body Text Below —————

Important

1. The test report is invalid without the official stamp of CVC;
2. Any part photocopies of the test report are forbidden without the written permission from CVC;
3. The test report is invalid without the signatures of Author and Reviewer;
4. The test report is invalid if altered;
5. Objections to the test report must be submitted to CVC within 15 days;
6. Generally, commission test is responsible for the tested samples only;
7. As for the test result, “—” or “N/A” means “not applicable”, “/” means “not testing”, “P” means “pass” and “F” means “fail”.

Address: No.3,Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou, China (Test location)

Post Code: 510663 Tel: 020-32293888

FAX: 020 32293889 E-mail: office@cvc.org.cn