

1. Antenna Description:

Antenna type	PIFA antenna
Model	iC-Rs+
Frequency range	2400-2500MHz, 5180-5240MHz, 5745-5825MHz
Manufacturer	Xi'an Vidoar Technologies Co., Ltd.
ANT Peak Gain	2400-2500MHz: 2.36dBi 5180-5240MHz: 2.23dBi 5745-5825MHz: 1.91dBi

2. Antenna Photo:

Length: 15.94mm
Width: 15.03mm



Length: 7.69mm
Width: 6.34mm



3. Test Equipment & Conditions

3.1 Test instrument

VSWR is tested using Agilent E5071B connected to a hand mechanism, and the status is free space.

3.2 Test environment and methods


Dark room specifications: ETS-743

TD-SCDMA test equipment: StarPoint SP6010/Agilent 8960

LTE-TDD/FDD-SCDMA test equipment: StarPoint SP8011/CMW500


WCDMA/GSM/CDMA test equipment: Agilent 8960

Passive efficiency testing equipment: Agilent Technologies E5071B

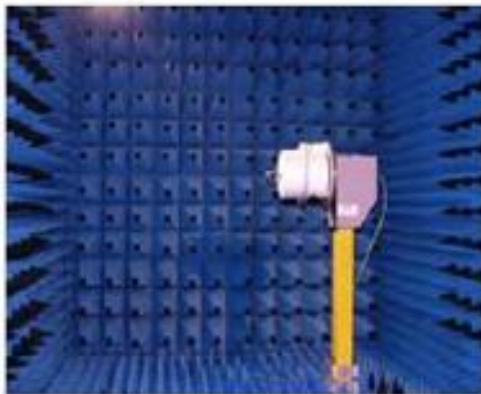


4 . Antenna Radiation Pattern


2400MHz

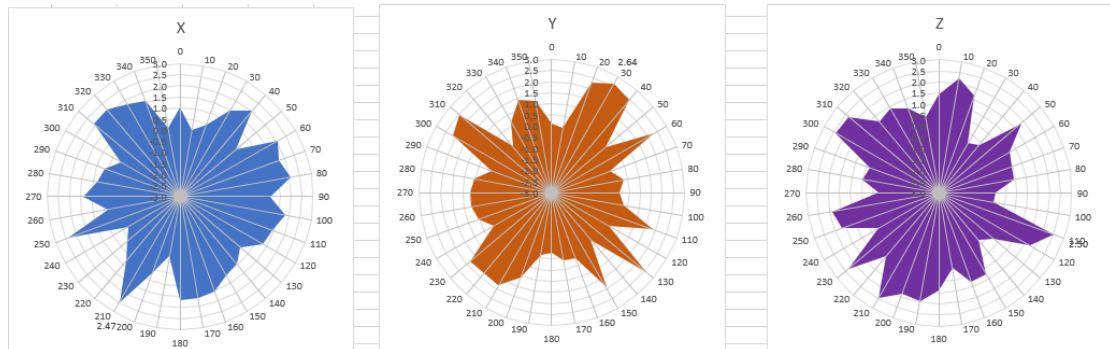


2450MHz

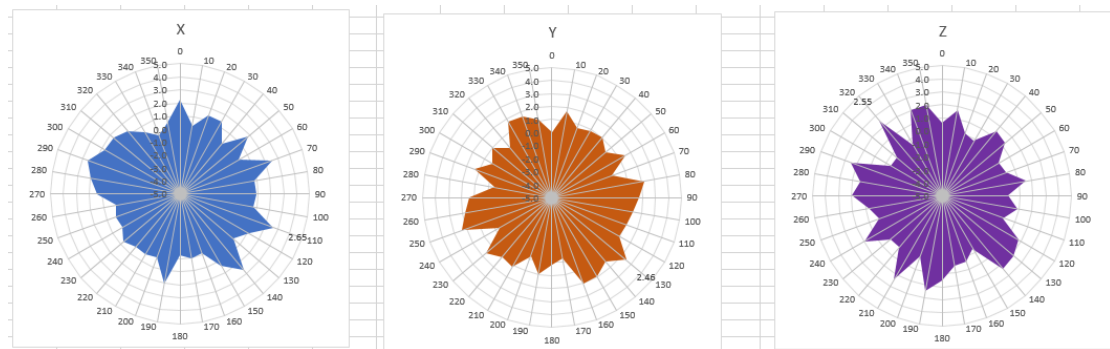


2500MHz

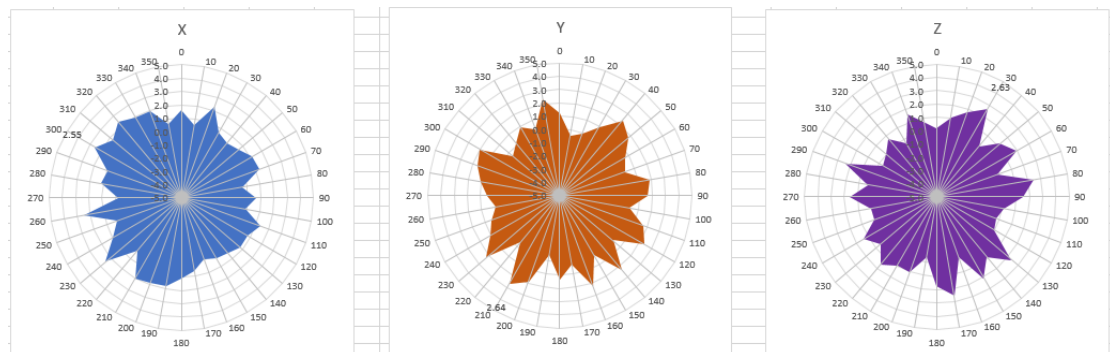



5180MHz

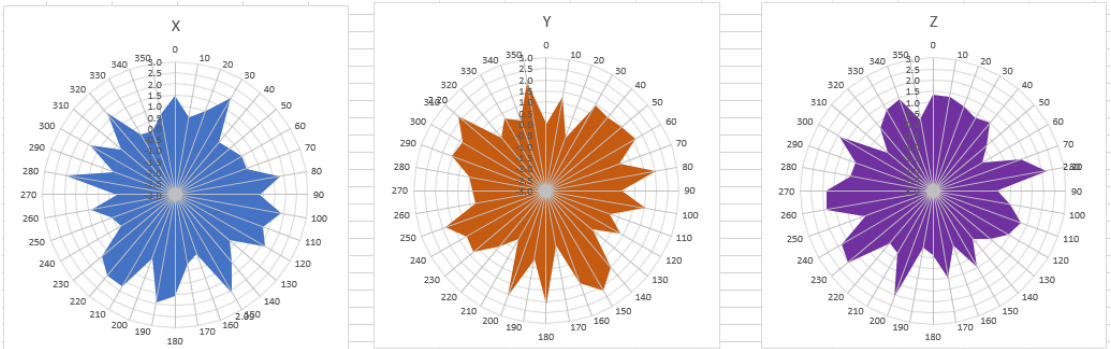


5200MHz

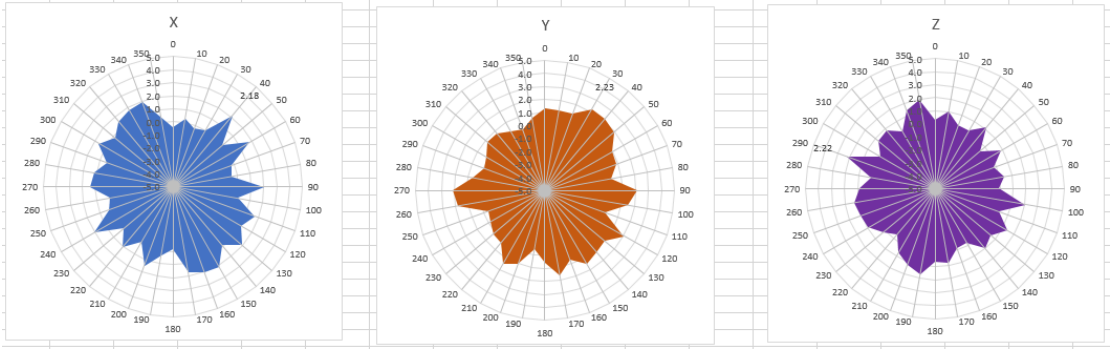


5240MHz

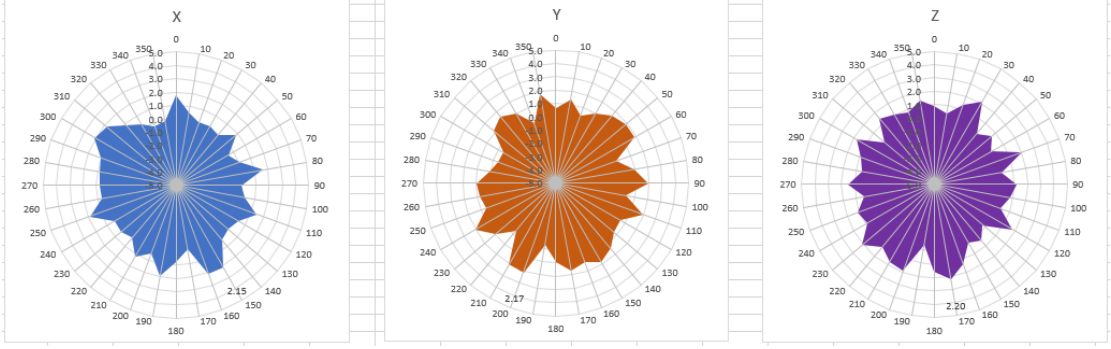

5745MHz

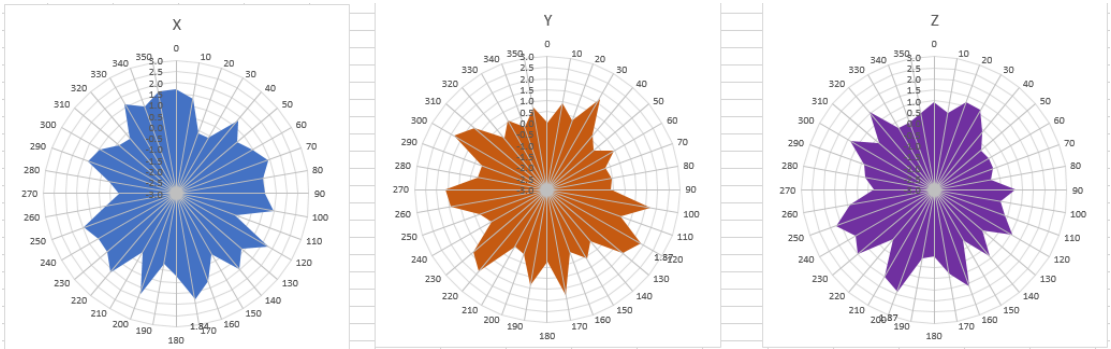

5785MHz

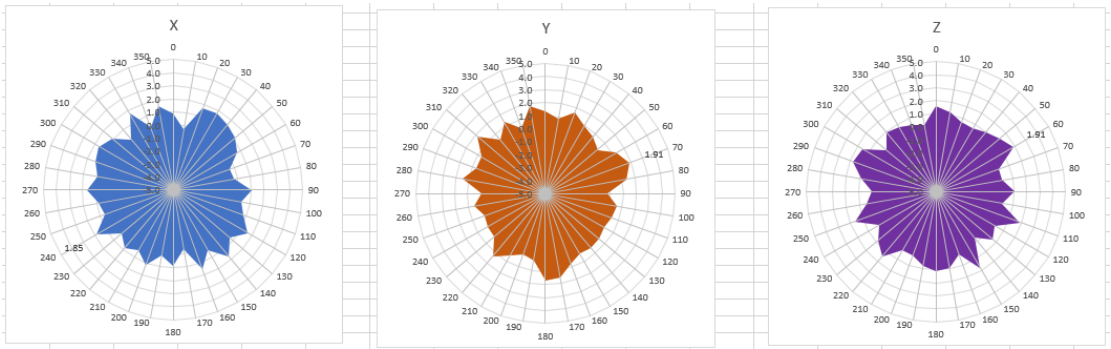

5825MHz

