



TEST REPORT

Product Name: Notebook
FCC ID: 2BLU9-QL15BM
Trademark: **COMPAQ**
Model Number: QL15I5BM8256, QL15I3BM8256, QL15R7BM16512
Prepared For: M&M Electronics, S.A.
Address: Cocosolito, Colon Free Zone, Main Entrance Warehouse 10D and 11D, Colon, Panama
Manufacturer: Shenzhen Bmorn Technology Co., Ltd.
Address: 20th floor, Wanting Building, Baoyuan Road, Bao'an District, Shenzhen, Guangdong, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jul. 09, 2025
Sample tested Date: Jul. 09, 2025 to Sep. 01, 2025
Issue Date: Sep. 01, 2025
Report No.: CTB25070901601RF04
Test Standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407
Test Results: PASS
Remark: This is WIFI-5GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu

Bin Mei

Zhou KuiArron LiuBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment.....	7
4.5 Test Mode	8
4.6 Test Environment.....	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility.....	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	13
6.1 Block Diagram Of Test Setup.....	13
6.2 Limit	13
6.3 Test procedure.....	13
6.4 Test Result.....	15
7. RADIATED SPURIOUS EMISSIONS	17
7.1 Block Diagram Of Test Setup.....	17
7.2 Limit	17
7.3 Test procedure.....	18
7.4 Test Result.....	19
8. BAND EDGE.....	24
8.1 Block Diagram Of Test Setup.....	24
8.2 Limit	24
8.3 Test procedure.....	24
8.4 Test Result.....	25
9. CONDUCTED OUTPUT POWER	33
9.1 Block Diagram Of Test Setup.....	33
9.2 Limit	33

9.3	Test procedure.....	34
9.4	Test Result.....	35
10.	EMISSION BANDWIDTH& OCCUPIED BANDWIDTH.....	46
10.1	Block Diagram Of Test Setup.....	46
10.2	Limits.....	46
10.3	Test Procedure.....	46
10.4	Test Results	48
11.	POWER SPECTRAL DENSITY.....	60
11.1	Block Diagram Of Test Setup.....	60
11.2	Limit.....	60
11.3	Test procedure	60
11.4	Test Result	62
12.	FREQUENCY STABILITY.....	73
12.1	Block Diagram Of Test Setup.....	73
12.2	Limit.....	73
12.3	Test procedure	73
12.4	Test Result	74
13.	OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT	86
13.1	Requirement	86
13.2	Test Results	86
14.	ANTENNA REQUIREMENT	87
15.	EUT TEST SETUP PHOTOGRAPHS.....	88

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB25070901601RF04	Sep. 01, 2025	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(6)	ANSI C63.10-2020	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033	PASS
Band edge	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033	PASS
Emission Bandwidth & Occupied Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)(e)	KDB789033	PASS
Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	KDB789033	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (b)	47 CFR Part 15 Subpart E	PASS
Antenna Requirement	47 CFR Part 15 Subpart E Section 15.203	/	PASS

Remark:

Test according to ANSI C63.10-2020.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Adjacent channel power	$U=\pm 1.3\text{dB}$
Conducted Adjacent channel power	$U=\pm 1.38\text{dB}$
Conducted output power above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density, Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9kHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
Humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$
Conducted emission(150k-30MHz)	3.2dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	QL15I5BM8256, QL15I3BM8256, QL15R7BM16512
Model Description:	All the model are the same circuit and RF module, only the name, CPU and appearance colors are different. Test sample model: QL15I5BM8256
Wi-Fi Specification:	IEEE 802.11a/n/ac
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250MHz/ 4 channel IEEE 802.11n/ac(40M): 5150MHz ~5250MHz/ 2 channel IEEE 802.11ac(80M): 5150MHz ~5250MHz/ 1 channel IEEE 802.11a/n/ac(20M): 5725MHz ~5850MHz/ 5 channel IEEE 802.11n/ac(40M): 5725MHz ~5850MHz/ 2 channel IEEE 802.11ac(80M): 5725MHz ~5850MHz/ 1 channel
Max. RF output power:	WiFi (5G): 16.632dBm
Type of Modulation:	WiFi (5G): OFDM
Antenna installation:	WiFi (5G): FPC antenna WiFi (5.2G): Ant1: 2.3dBi Ant2: 2.04dBi
Antenna Gain:	WiFi (5.8G): Ant1: 3.25dBi Ant2: 3.35dBi
Ratings:	Adapter input: 100-240V~50/60Hz 1.5A DC 11.4V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Monitor	DELL	SE2218HV	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

For 802.11a/n/ac(20M) Operation in the 5180MHz ~5240 MHz band			
Channel	Frequency	Channel	Frequency
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz
For 802.11a/n/ac(20M) Operation in the 5745MHz ~5825 MHz band			
Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz	NA	NA

For 802.11n/ac(40M) Operation in the 5190MHz ~5230 MHz band			
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz
For 802.11n/ac(40M) Operation in the 5755MHz ~5795 MHz band			
Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

For 802.11ac(80M) Operation in the 5210 MHz band			
Channel	Frequency	Channel	Frequency
42	5210MHz	NA	NA
For 802.11ac(80M) Operation in the 5775 MHz band			
Channel	Frequency	Channel	Frequency
155	5775MHz	NA	NA

NOTE: Duty cycle>98%.

Test mode	Rate
802.11a	54M
802.11n	500M
802.11/ac	500M

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11a/n/ac(20M)	5180MHz ~5240 MHz	Channel 36	Channel 40	Channel 48
		5180MHz	5200MHz	5240MHz
802.11n/ac(40M)		Channel 38	N/A	Channel 46
		5190MHz	N/A	5230MHz
802.11ac(80M)	5745MHz ~5825MHz	N/A	Channel 42	N/A
		N/A	5210MHz	N/A
802.11a/n/ac(20M)		Channel 149	Channel 157	Channel 165
		5745MHz	5785MHz	5825MHz
802.11n/ac(40M)		Channel 151	N/A	Channel 159
		5755MHz	N/A	5795MHz
802.11ac(80M)		N/A	Channel 155	N/A
		N/A	5775MHz	N/A

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):NV	11.4V
Normal Temperature(°C):NT	23
Low Temperature(°C):LT	0
High Temperature(°C):HT	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024/10/31	2025/10/30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7	2025/5/23	2026/5/22

					(104489/003)		
18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1


Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/5/22	2026/5/21
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/5/22	2026/5/21
4	Coaxial cable	ZDECL	Z302S	18091904	/	2025/5/22	2026/5/21
5	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/18	2026/6/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2024/10/26	2025/10/25
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2025/5/24	2026/5/23
9	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

Radiated emission(No.1 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/23	2027/6/22
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28

4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2
5	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/5/24	2026/5/23
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/5/24	2026/5/23
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/5/24	2026/5/23
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/5/24	2026/5/23
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

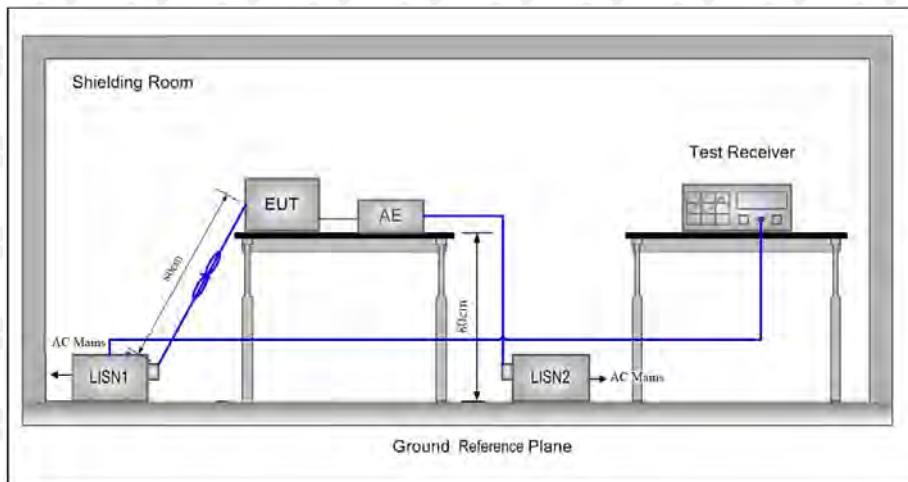

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.


This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Modulation: 802.11a (the worst data)

L:

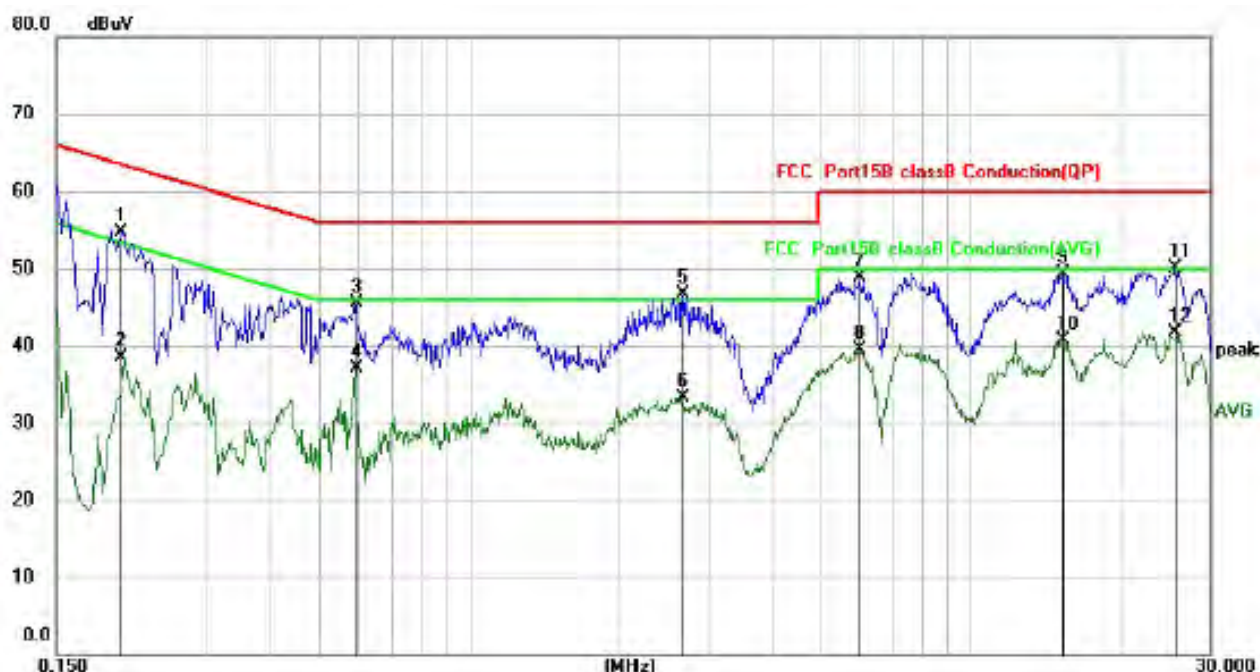


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
		MHz	Level	Factor	ment		
			dBuV	dB	dBuV	dBuV	dB
1		0.2028	44.43	10.18	54.61	63.50	-8.89
2		0.2028	28.28	10.18	38.46	53.50	-15.04
3		0.5936	35.21	10.22	45.43	56.00	-10.57
4		0.5936	26.93	10.22	37.15	46.00	-8.85
5		2.6619	36.02	10.77	46.79	56.00	-9.21
6		2.6619	22.61	10.77	33.38	46.00	-12.62
7		6.0217	36.83	12.10	48.93	60.00	-11.07
8		6.0217	27.45	12.10	39.55	50.00	-10.45
9		15.2339	32.81	16.48	49.29	60.00	-10.71
10		15.2339	24.14	16.48	40.62	50.00	-9.38
11		25.5579	28.50	21.53	50.03	60.00	-9.97
12	*	25.5579	20.26	21.53	41.79	50.00	-8.21

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

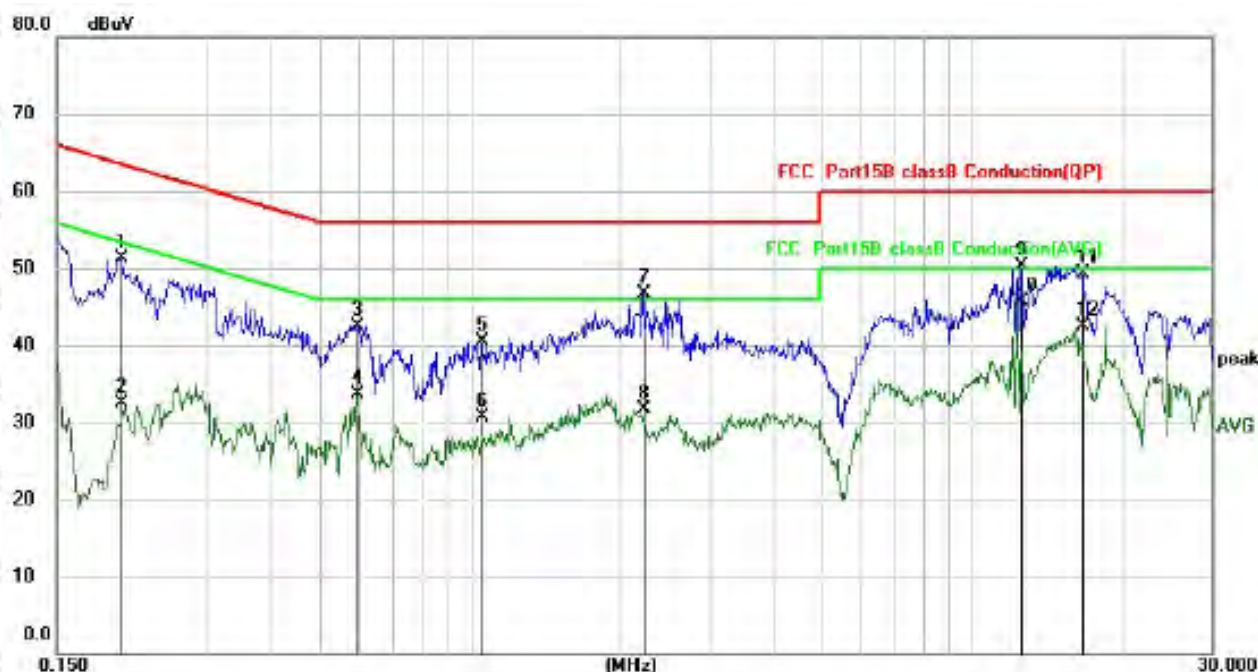

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2020	41.17	10.18	51.35	63.53	-12.18	QP
2		0.2020	22.27	10.18	32.45	53.53	-21.08	AVG
3		0.5977	32.26	10.22	42.48	56.00	-13.52	QP
4		0.5977	23.49	10.22	33.71	46.00	-12.29	AVG
5		1.0580	30.25	10.31	40.56	56.00	-15.44	QP
6		1.0580	20.30	10.31	30.61	46.00	-15.39	AVG
7		2.2058	36.11	10.61	46.72	56.00	-9.28	QP
8		2.2058	21.01	10.61	31.62	46.00	-14.38	AVG
9		12.5137	35.19	15.18	50.37	60.00	-9.63	QP
10	*	12.5137	30.58	15.18	45.76	50.00	-4.24	AVG
11		16.4979	32.17	17.05	49.22	60.00	-10.78	QP
12		16.4979	25.48	17.05	42.53	50.00	-7.47	AVG

Remark:

- Factor = Cable loss + LISN factor, Margin = Limit – Level
- All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- All the test modes completed for test. Only the worst result of was reported.

7. RADIATED SPURIOUS EMISSIONS

7.1 Block Diagram Of Test Setup

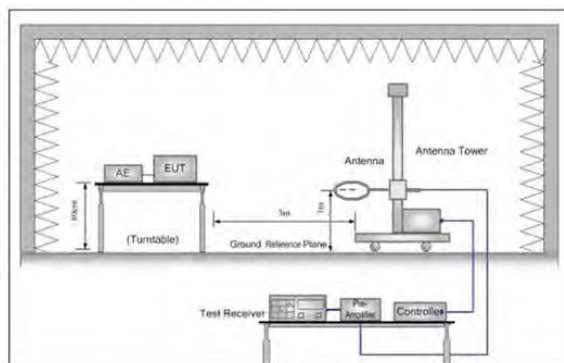


Figure 1. Below 30MHz

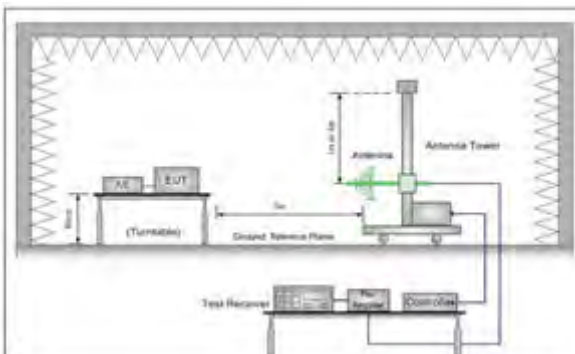


Figure 2. 30MHz to 1GHz

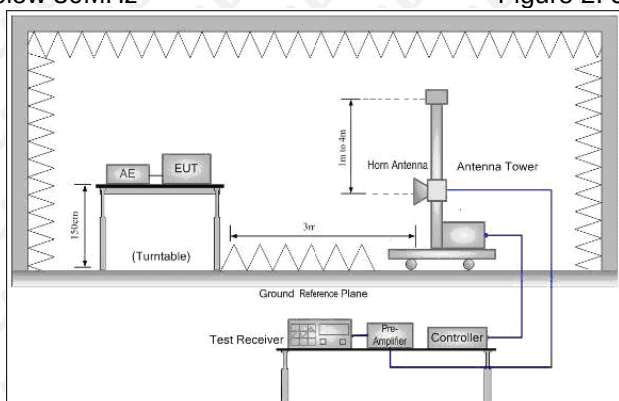


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	$20\log 2400/F \text{ (kHz)} + 80$	Quasi-peak	3
0.490MHz-1.705MHz	$20\log 24000/F \text{ (kHz)} + 40$	Quasi-peak	3
1.705MHz-30MHz	$20\log 30 + 40$	Quasi-peak	3
30MHz-88MHz	40.0	Quasi-peak	3
88MHz-216MHz	43.5	Quasi-peak	3
216MHz-960MHz	46.0	Quasi-peak	3
960MHz-1GHz	54.0	Quasi-peak	3
Above 1GHz	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

If radiated measurements are performed, field strength is then converted to EIRP as follows:

(i) $EIRP = (E \cdot d)^2 / 30$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

(ii) Working in dB units, the above equation is equivalent to:

$$EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$$

(iii) Or, if d is 3 meters:

$$EIRP[dBm] = E[dB\mu V/m] - 95.2$$

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

30MHz-1GHz Test Results:

Modulation: 802.11a (the worst data)

Test Channel: 5780MHz

Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		47.3253	31.46	-6.29	25.17	40.00	-14.83	QP
2		158.6673	32.90	-3.56	29.34	43.50	-14.16	QP
3		201.0399	40.37	-6.42	33.95	43.50	-9.55	QP
4		259.2336	40.13	-4.34	35.79	46.00	-10.21	QP
5		412.5466	38.34	-0.67	37.67	46.00	-8.33	QP
6	*	839.1816	29.73	8.93	38.66	46.00	-7.34	QP

Antenna polarity: V



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1	!	39.3680	40.84	-5.94	34.90	40.00	-5.10	QP
2		144.0817	35.58	-4.98	30.60	43.50	-12.90	QP
3		298.2681	36.62	-2.60	34.02	46.00	-11.98	QP
4		419.8435	36.73	-0.53	36.20	46.00	-9.80	QP
5		580.7024	36.56	3.40	39.96	46.00	-6.04	QP
6	*	704.2259	35.18	6.47	41.65	46.00	-4.35	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Radiated Spurious Emission (Above 1GHz):

Modulation: 802.11(a) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5180MHz									
10360	40.65	16.39	57.04	74	-16.96	PK	1.36	156	H
10360	26.71	16.39	43.10	54	-10.90	AV	1.11	283	H
10360	39.21	16.39	55.60	74	-18.40	PK	1.09	359	V
10360	27.74	16.39	44.13	54	-9.87	AV	1.11	307	V
Channel:5240MHz									
10480	40.91	16.11	57.02	74	-16.98	PK	1.47	213	H
10480	27.32	16.11	43.43	54	-10.57	AV	1.76	28	H
10480	41.80	16.11	57.91	74	-16.09	PK	1.55	8	V
10480	26.55	16.11	42.66	54	-11.34	AV	1.61	321	V
Channel:5745MHz									
11490	39.75	17.46	57.21	74	-16.79	PK	1.51	326	H
11490	27.50	17.46	44.96	54	-9.04	AV	1.51	42	H
11490	40.55	17.46	58.01	74	-15.99	PK	1.03	109	V
11490	26.50	17.46	43.96	54	-10.04	AV	1.04	44	V
Channel:5825MHz									
11650	41.87	17.57	59.44	74	-14.56	PK	1.65	295	H
11650	26.66	17.57	44.23	54	-9.77	AV	1.75	225	H
11650	39.81	17.57	57.38	74	-16.62	PK	1.01	336	V
11650	26.95	17.57	44.52	54	-9.48	AV	1.61	119	V

Modulation: 802.11(n40) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5190MHz									
10380	41.70	16.34	58.04	74	-15.96	PK	1.01	316	H
10380	26.24	16.34	42.58	54	-11.42	AV	1.34	85	H
10380	41.80	16.34	58.14	74	-15.86	PK	1.78	130	V
10380	26.12	16.34	42.46	54	-11.54	AV	1.69	209	V
Channel:5230MHz									
10460	41.63	16.15	57.78	74	-16.22	PK	1.59	140	H
10460	25.67	16.15	41.82	54	-12.18	AV	1.87	47	H
10460	41.71	16.15	57.86	74	-16.14	PK	1.64	142	V
10460	26.79	16.15	42.94	54	-11.06	AV	1.04	130	V
Channel:5755MHz									
11510	39.35	17.49	56.84	74	-17.16	PK	1.74	300	H
11510	26.84	17.49	44.33	54	-9.67	AV	1.68	331	H
11510	39.14	17.49	56.63	74	-17.37	PK	1.14	181	V
11510	26.56	17.49	44.05	54	-9.95	AV	1.86	17	V
Channel:5795MHz									
11590	41.25	17.52	58.77	74	-16.73	PK	1.49	224	H
11590	25.49	17.52	43.01	54	-15.23	AV	1.30	45	H
11590	39.17	17.52	56.69	74	-17.31	PK	1.50	137	V
11590	25.46	17.52	42.98	54	-11.02	AV	1.46	171	V

Modulation: 802.11(VH80) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5210MHz									
10420	41.02	16.25	57.27	74	-16.73	PK	1.05	332	H
10420	25.25	16.25	41.50	54	-12.50	AV	1.86	353	H
10420	39.17	16.25	55.42	74	-18.58	PK	1.34	16	V
10420	27.45	16.25	43.70	54	-10.30	AV	1.47	119	V
Channel:5775MHz									
11550	41.19	17.50	58.69	74	-15.31	PK	1.67	273	H
11550	25.13	17.50	42.63	54	-11.37	AV	1.19	265	H
11550	40.69	17.50	58.19	74	-15.81	PK	1.20	17	V
11550	27.95	17.50	45.45	54	-8.55	AV	1.85	131	V

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

2. The EUT was tested in the low, high channel and the worst case position data was reported.

3. Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. BAND EDGE

8.1 Block Diagram Of Test Setup

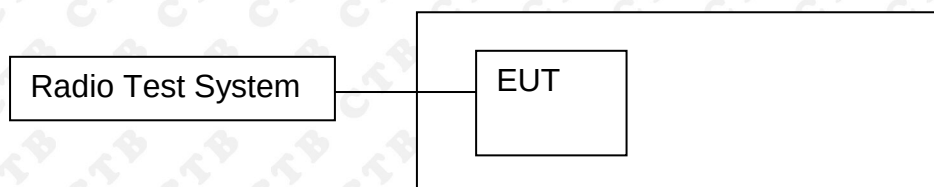

8.2 Limit

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


8.3 Test procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.4 Test Result


Test Graph

ANT 1

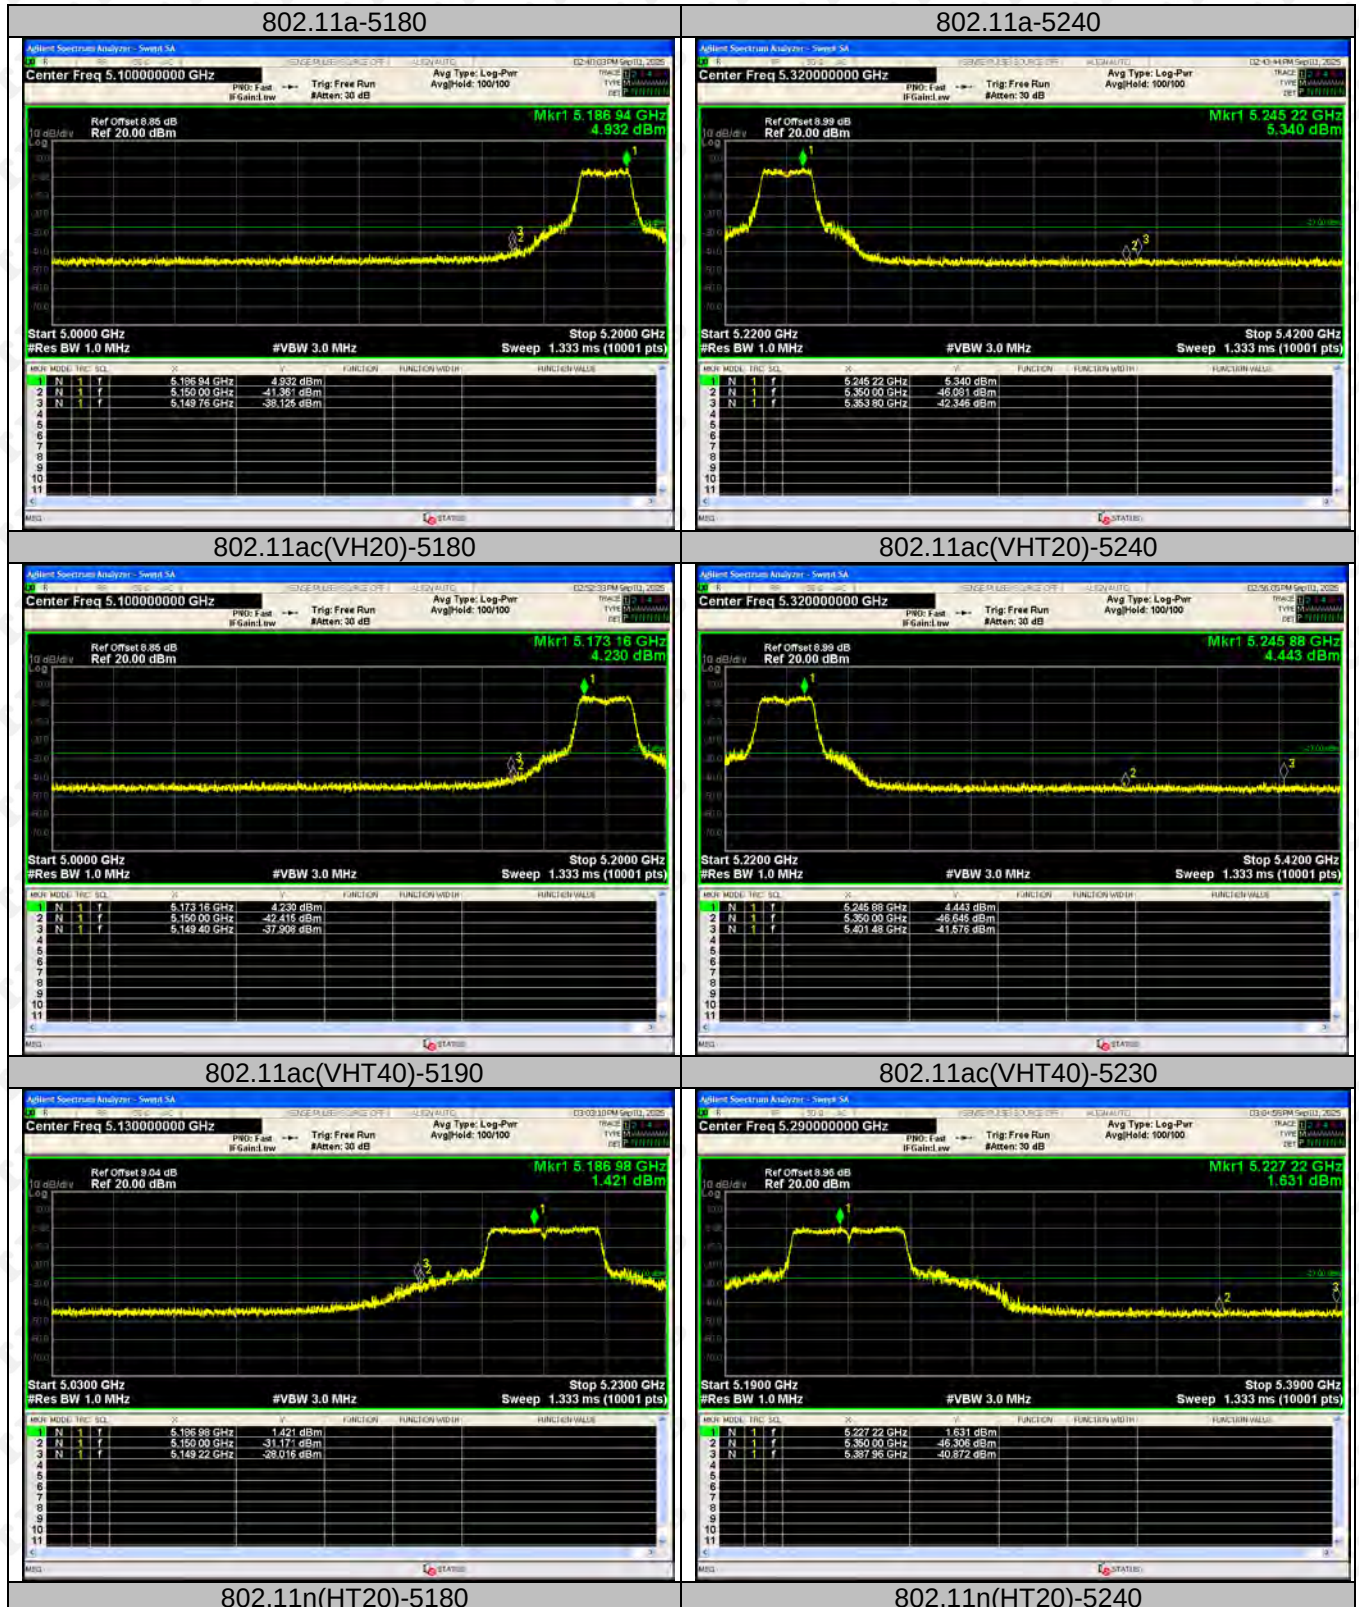


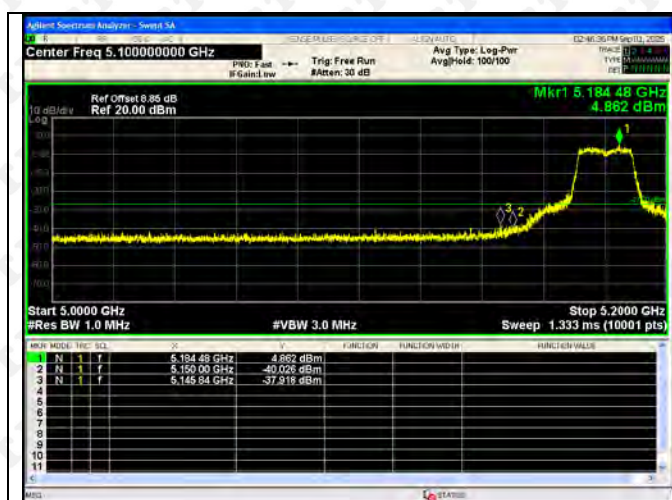

802.11n(HT40)-5190

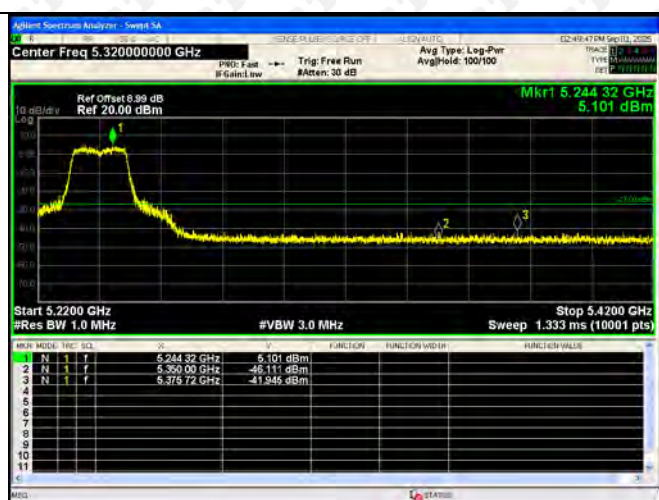


802.11n(HT40)-5230

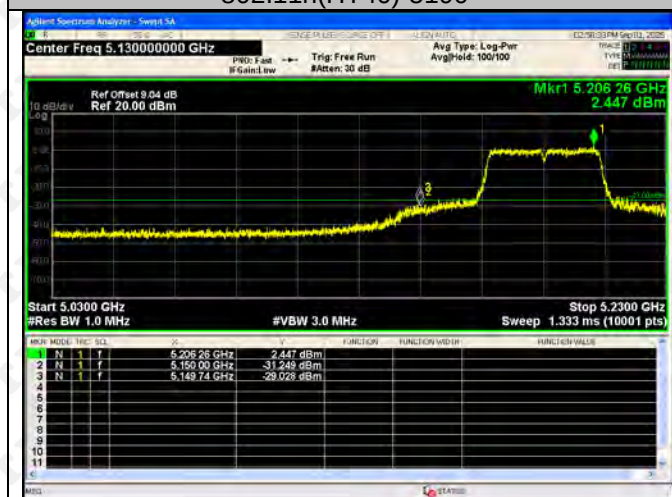


802.11ac(VH80)-5210




ANT2:

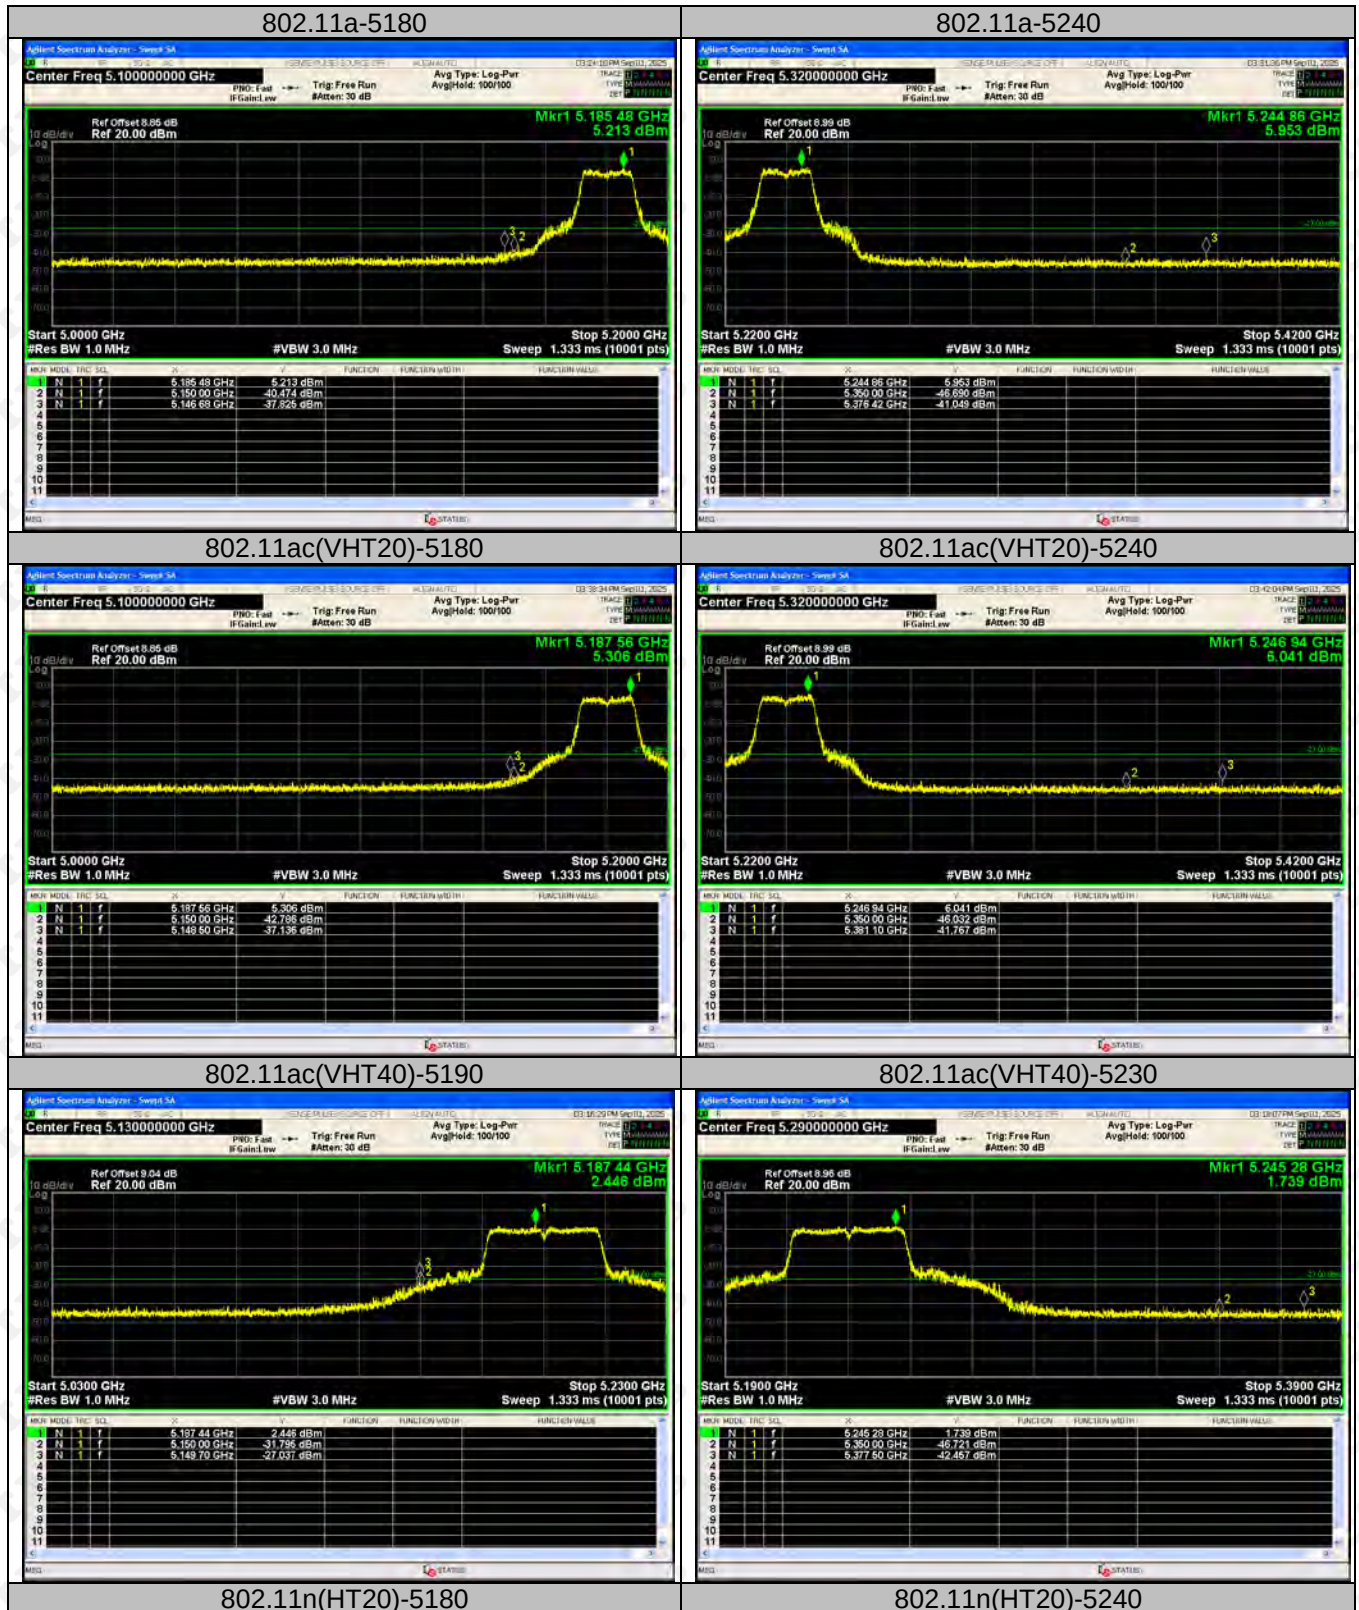


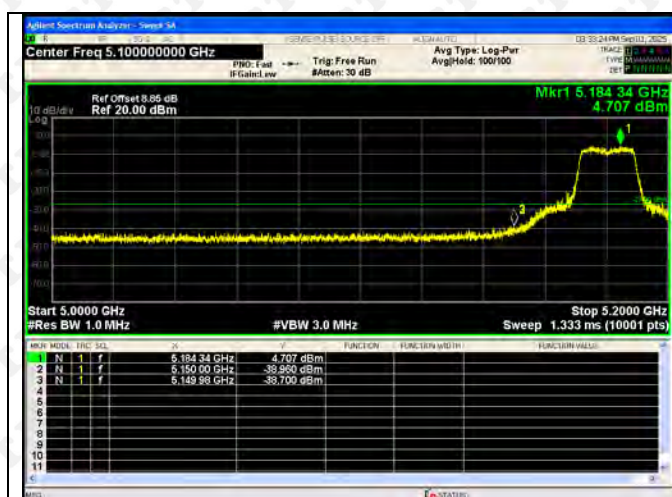


802.11n(HT40)-5190

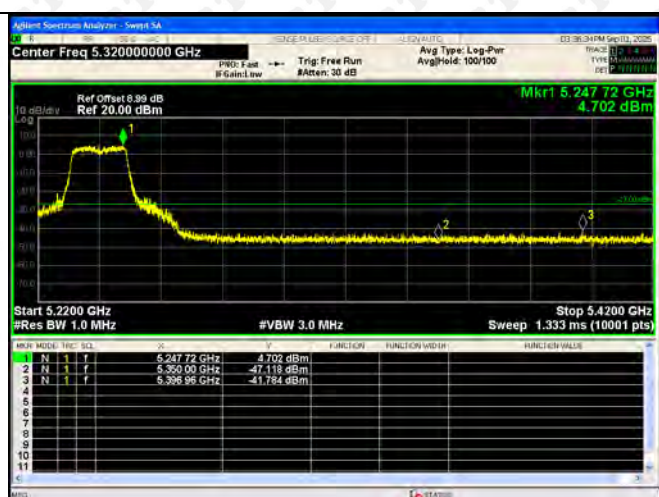


802.11n(HT40)-5230

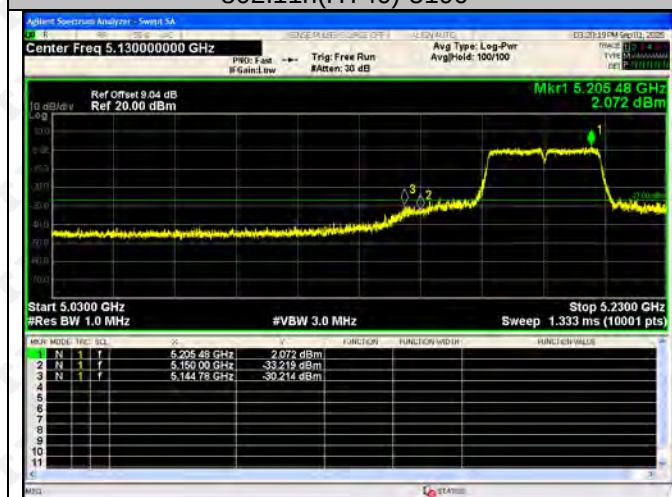

802.11ac(VH80)-5210

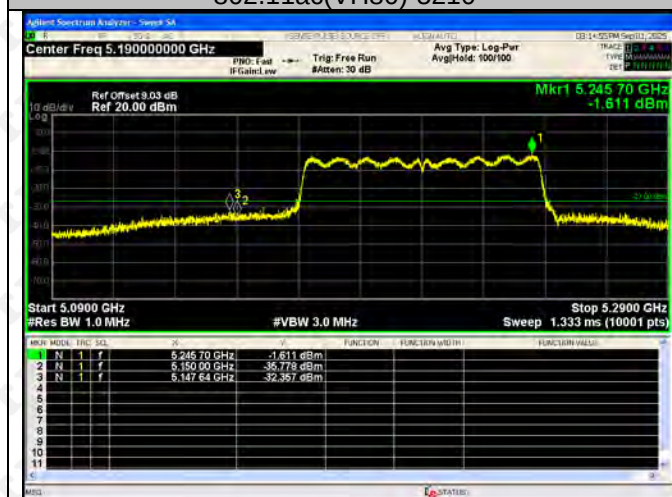


ANT1:

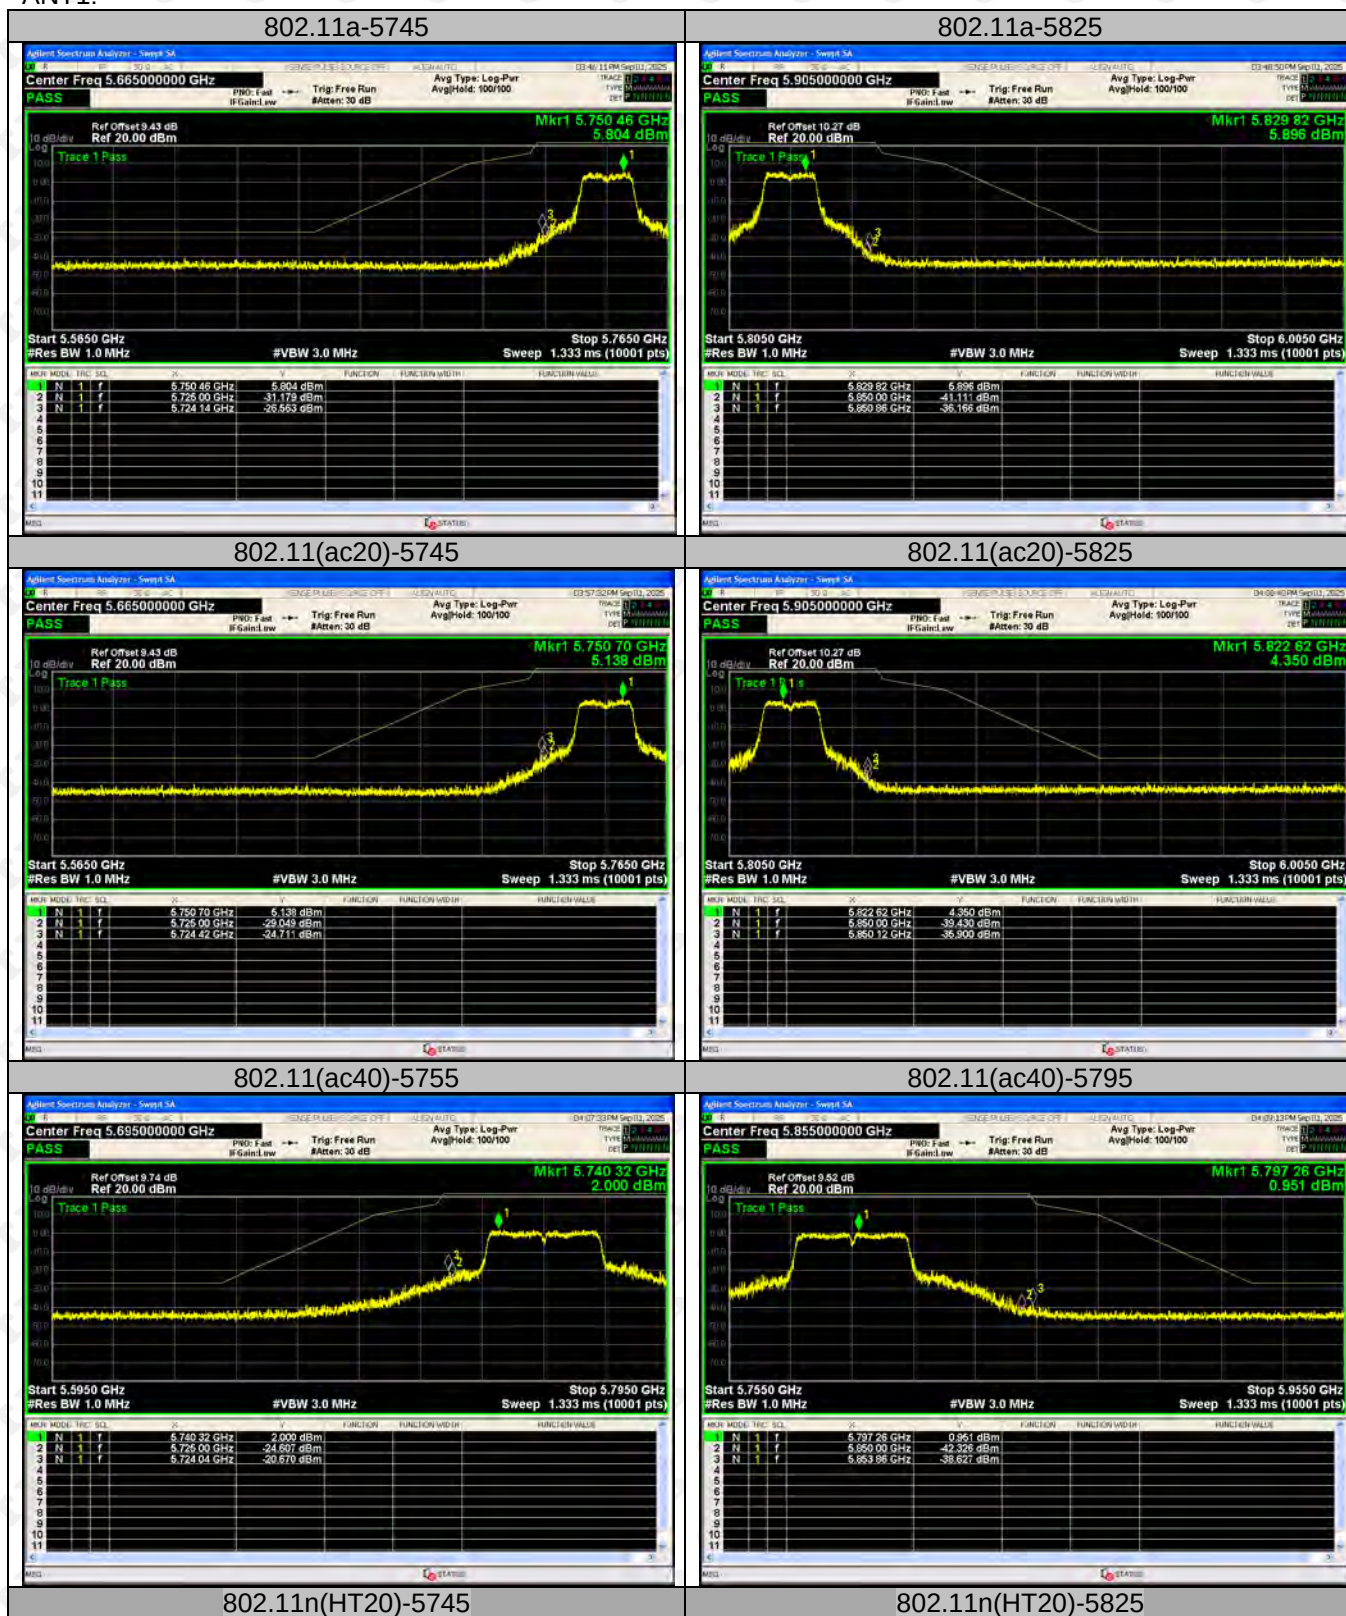




ANT2:

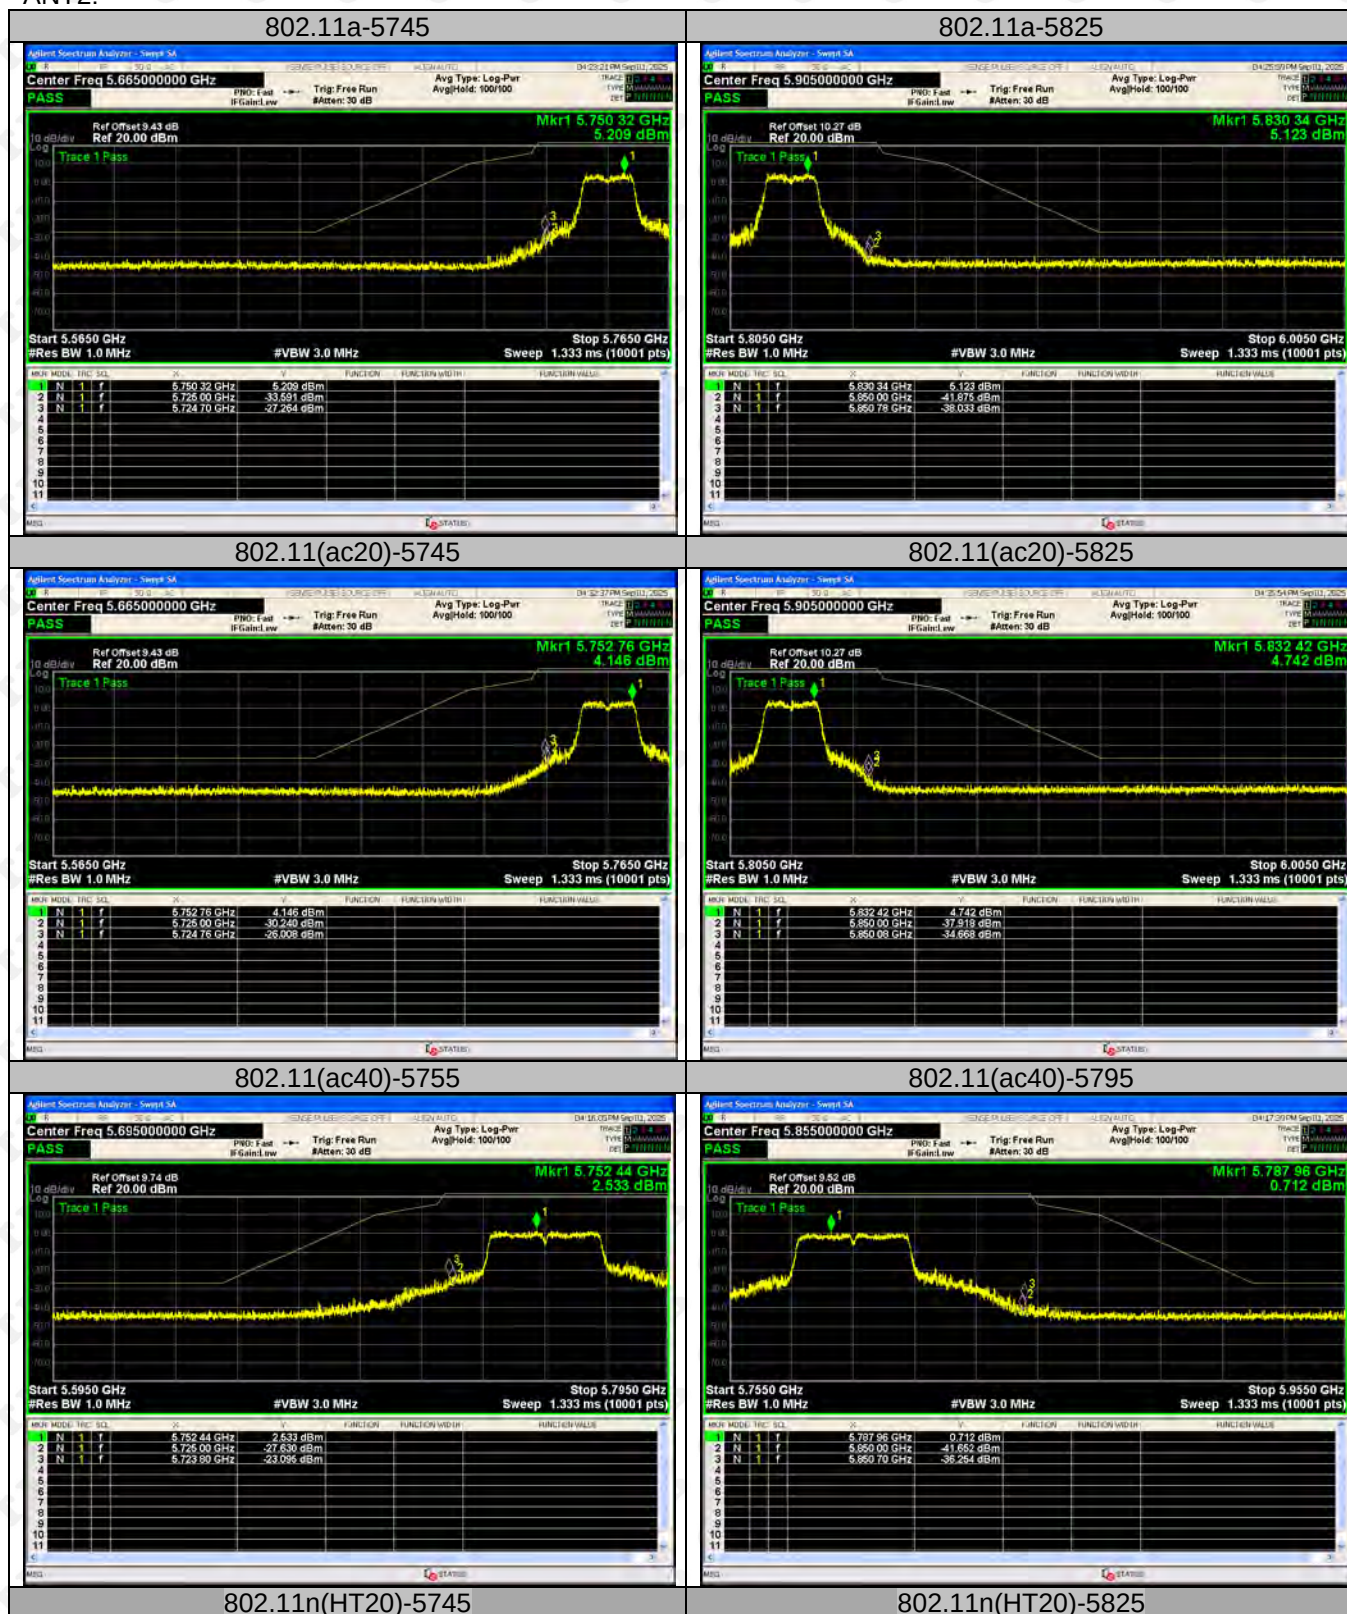



9. CONDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

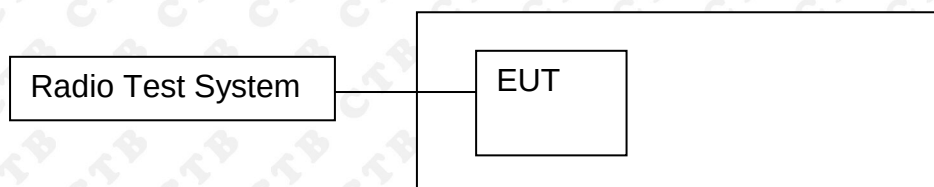

9.2 Limit

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p.

at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

(5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a

bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

(h) Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS).

(1) Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

9.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

(i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW $\geq$ 3 MHz.

(iv) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle $< 98\%$, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."

(viii) Trace average at least 100 traces in power averaging (rms) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

9.4 Test Result

ANT 1+ANT 2

Test mode1	Test Channel (MHz)	Output Power dBm ANT1	Output Power dBm ANT2	Output Power dBm Total	Limit dBm
802.11a	5180	13.222	13.277	/	23.98
	5200	13.651	13.925	/	23.98
	5240	13.775	14.421	/	23.98
802.11ac20	5180	12.915	13.168	16.054	23.98
	5200	13.412	13.752	16.596	23.98
	5240	13.603	14.28	16.965	23.98
802.11ac40	5190	13.065	13.439	16.266	23.98
	5230	13.394	13.902	16.666	23.98
802.11ac80	5210	10.421	10.884	13.669	23.98
802.11n(HT20)	5180	12.993	13.129	16.072	23.98
	5200	13.421	13.655	16.550	23.98
	5240	13.601	14.211	16.927	23.98
802.11n(HT40)	5190	13.292	13.483	16.399	23.98
	5230	13.565	14.032	16.815	23.98

ANT 1+ANT 2

Test mode1	Test Channel (MHz)	Output Power dBm ANT1	Output Power dBm ANT2	Output Power dBm Total	Limit dBm
802.11a	5745	13.776	13.059	/	30
	5785	14.708	13.377	/	30
	5825	15.357	14.221	/	30
802.11ac20	5745	13.528	12.866	16.220	30
	5785	13.698	13.212	16.472	30
	5825	14.378	14.067	17.236	30
802.11ac40	5755	13.886	13.285	16.606	30
	5795	13.354	13.062	16.221	30
802.11ac80	5775	13.771	13.35	16.576	30
802.11n(HT20)	5745	13.443	12.8	16.144	30
	5785	13.572	13.204	16.402	30
	5825	14.277	13.955	17.129	30
802.11n(HT40)	5755	14.048	13.394	16.744	30
	5795	13.475	13.066	16.286	30

5180-5240MHz
ANT 1


802.11a-5180



802.11a-5200




802.11a-5240

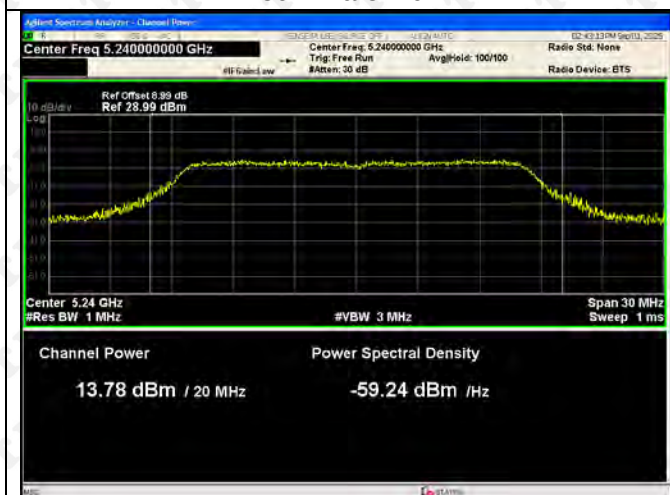

802.11ac(VHT20)-5180



802.11ac(VHT20)-5200

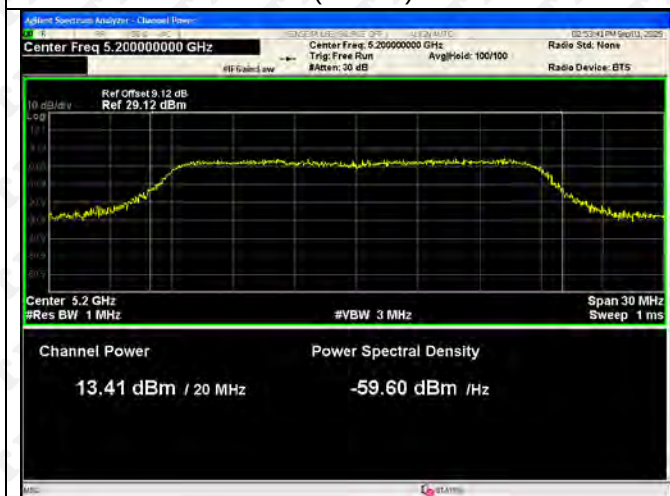


802.11ac(VHT20)-5240



802.11ac(VHT40)-5190


802.11ac(VHT40)-5230

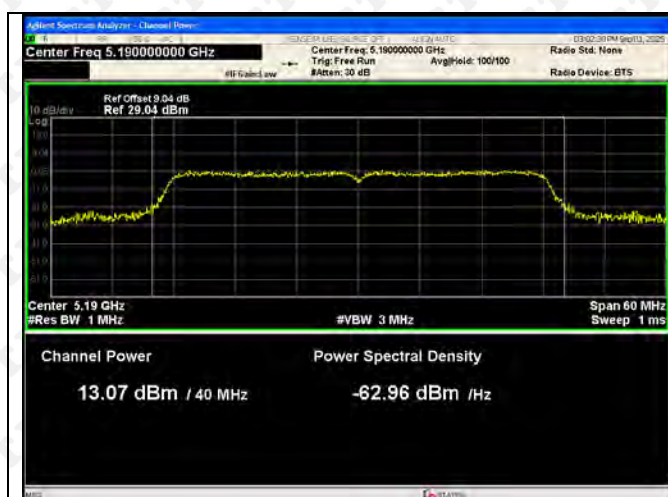


802.11ac(VHT80)-5210




802.11n(HT20)-5180

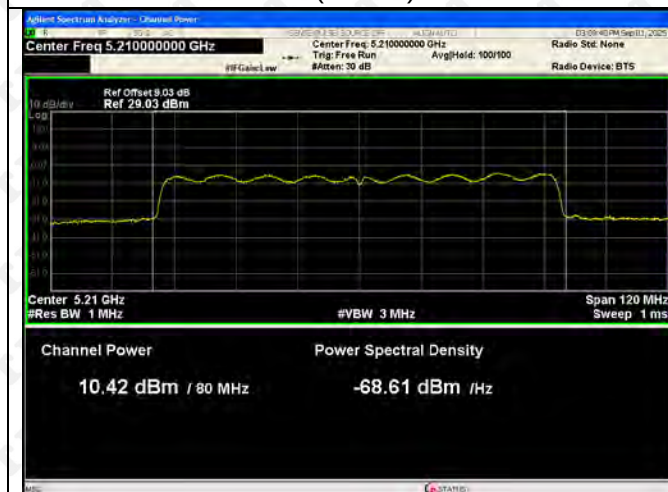


802.11n(HT20)-5200

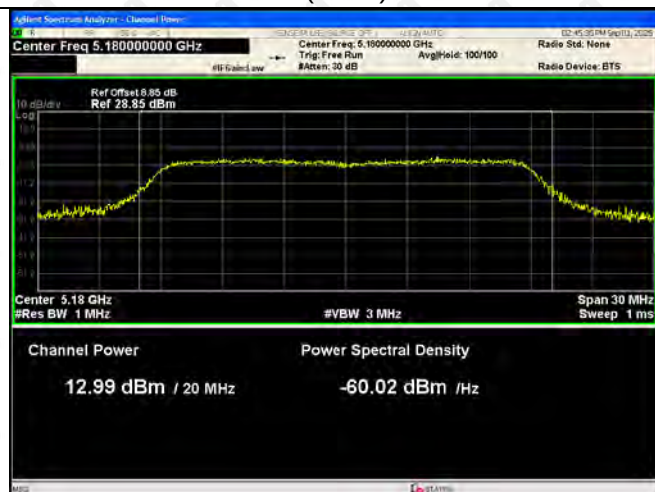


802.11n(HT20)-5240

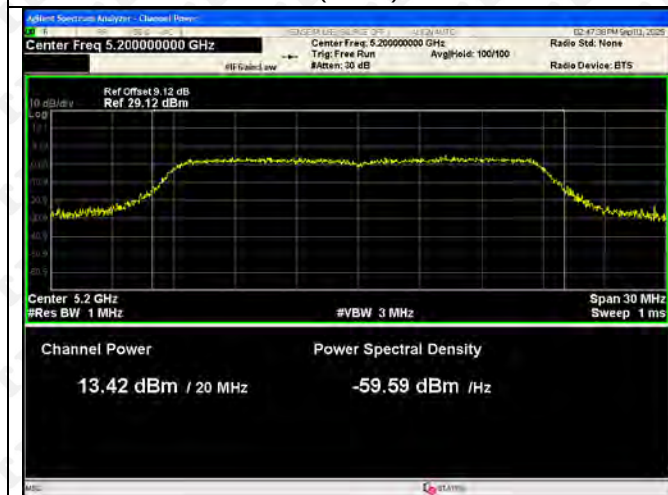


802.11n(HT40)-5190

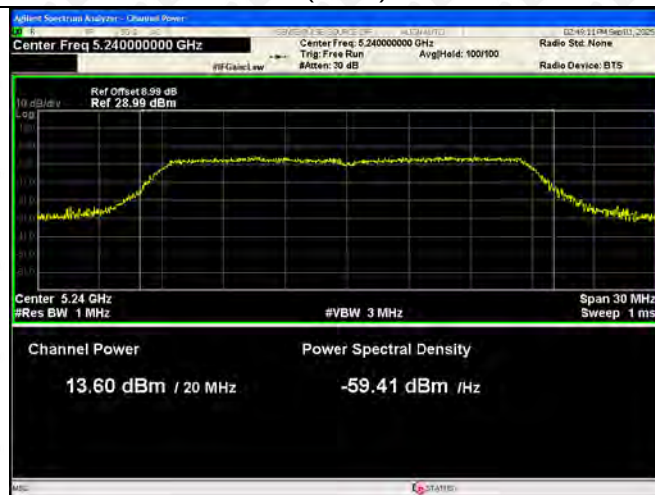


802.11n(HT40)-5230

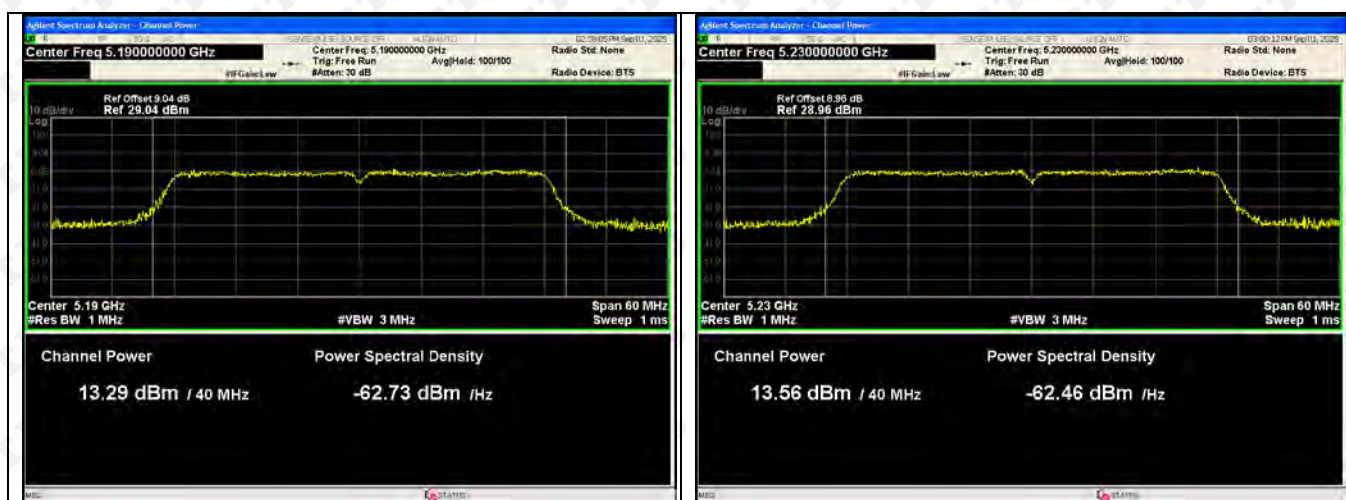

ANT2

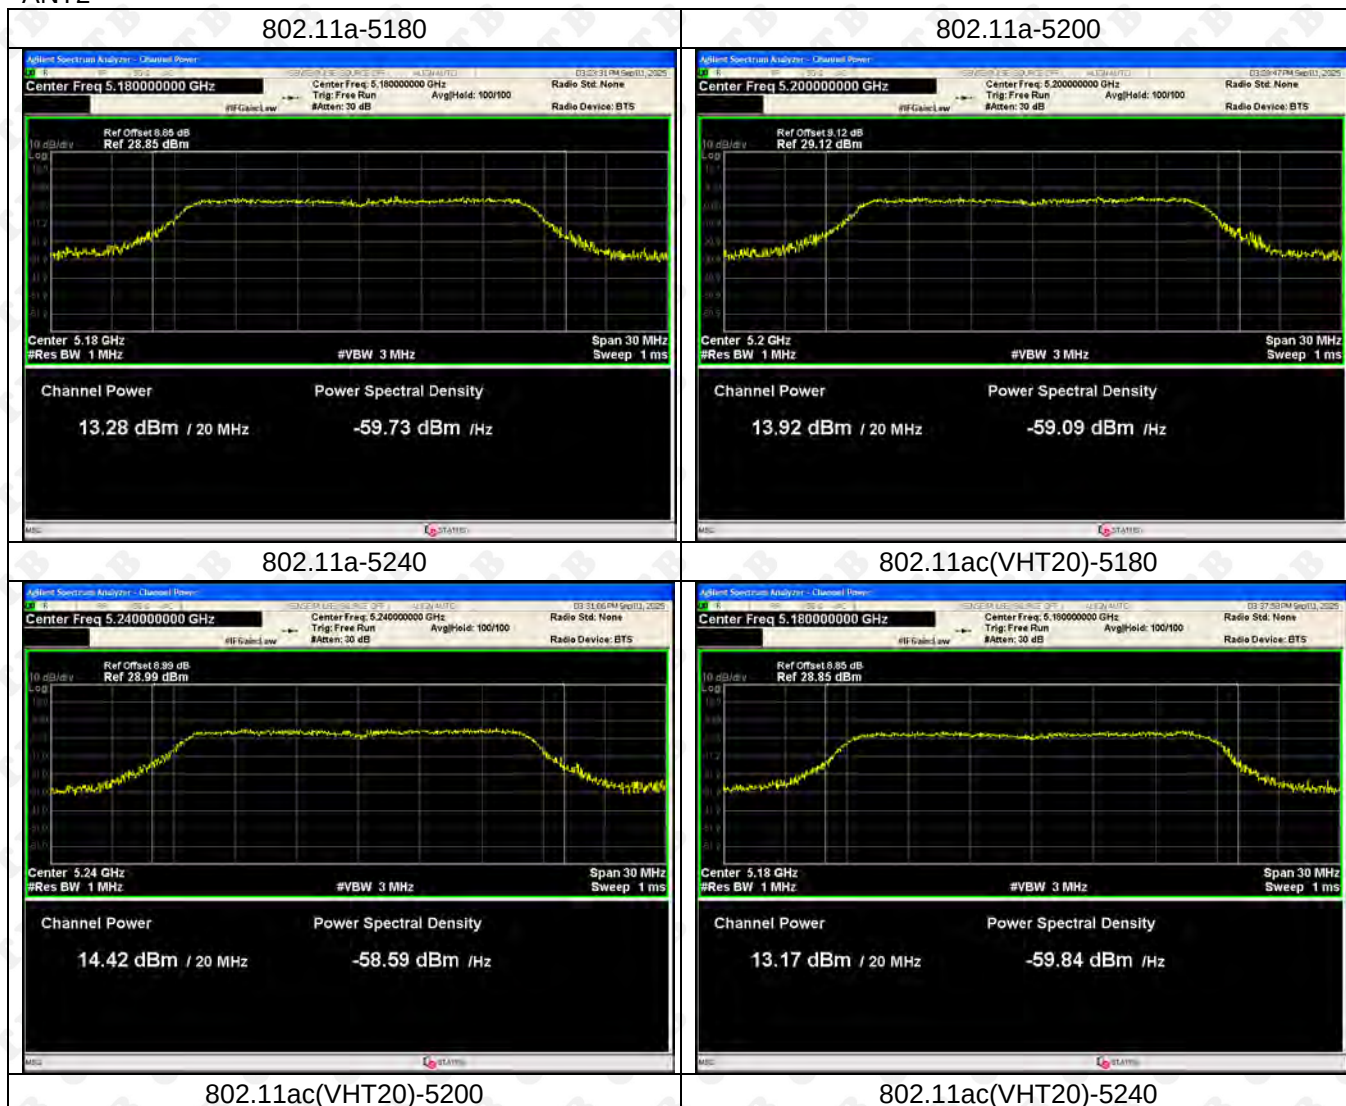

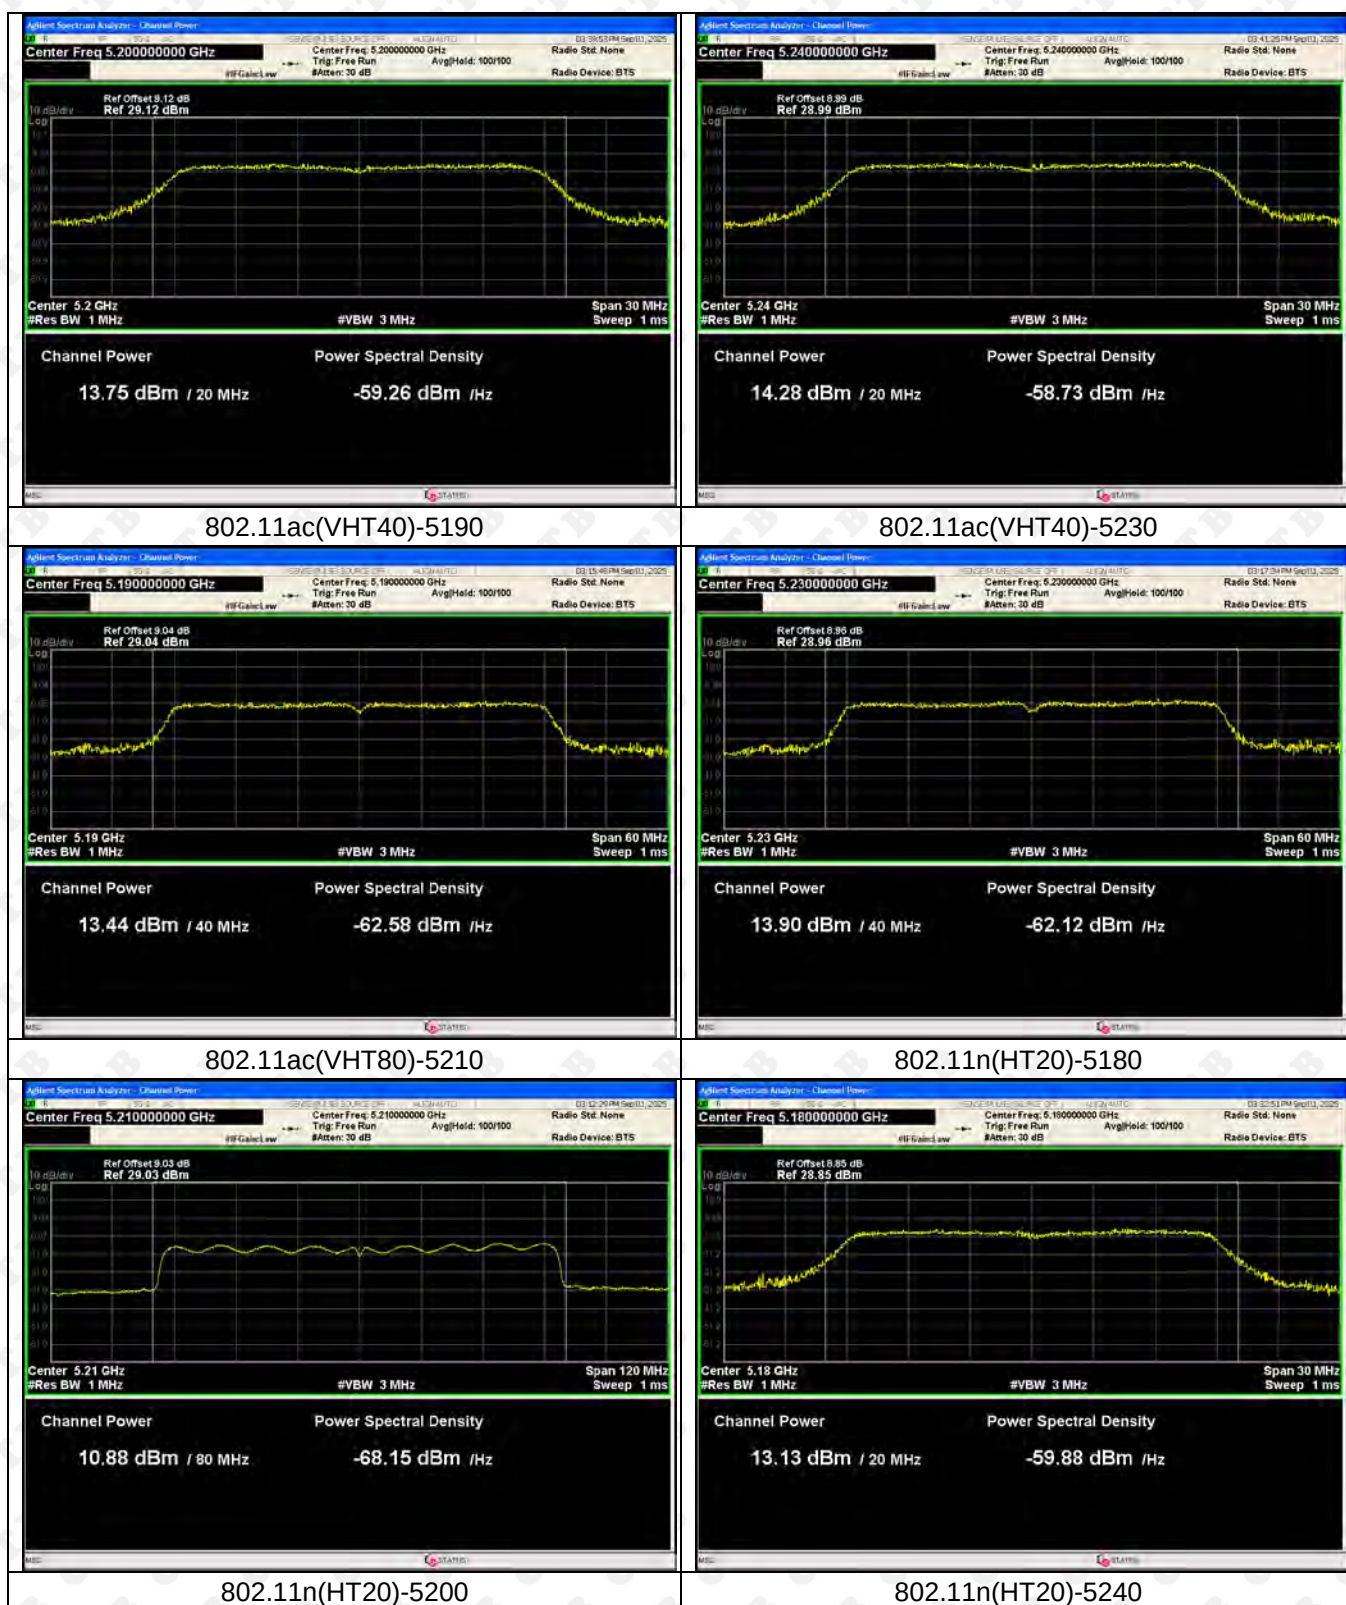



5745-5825MHz

ANT 1:

802.11a-5745



802.11a-5785



802.11a-5825



802.11ac(VHT20)-5745



802.11ac(VHT20)-5785





802.11ac(VHT20)-5825




802.11ac(VHT40)-5755


802.11ac(VHT40)-5795

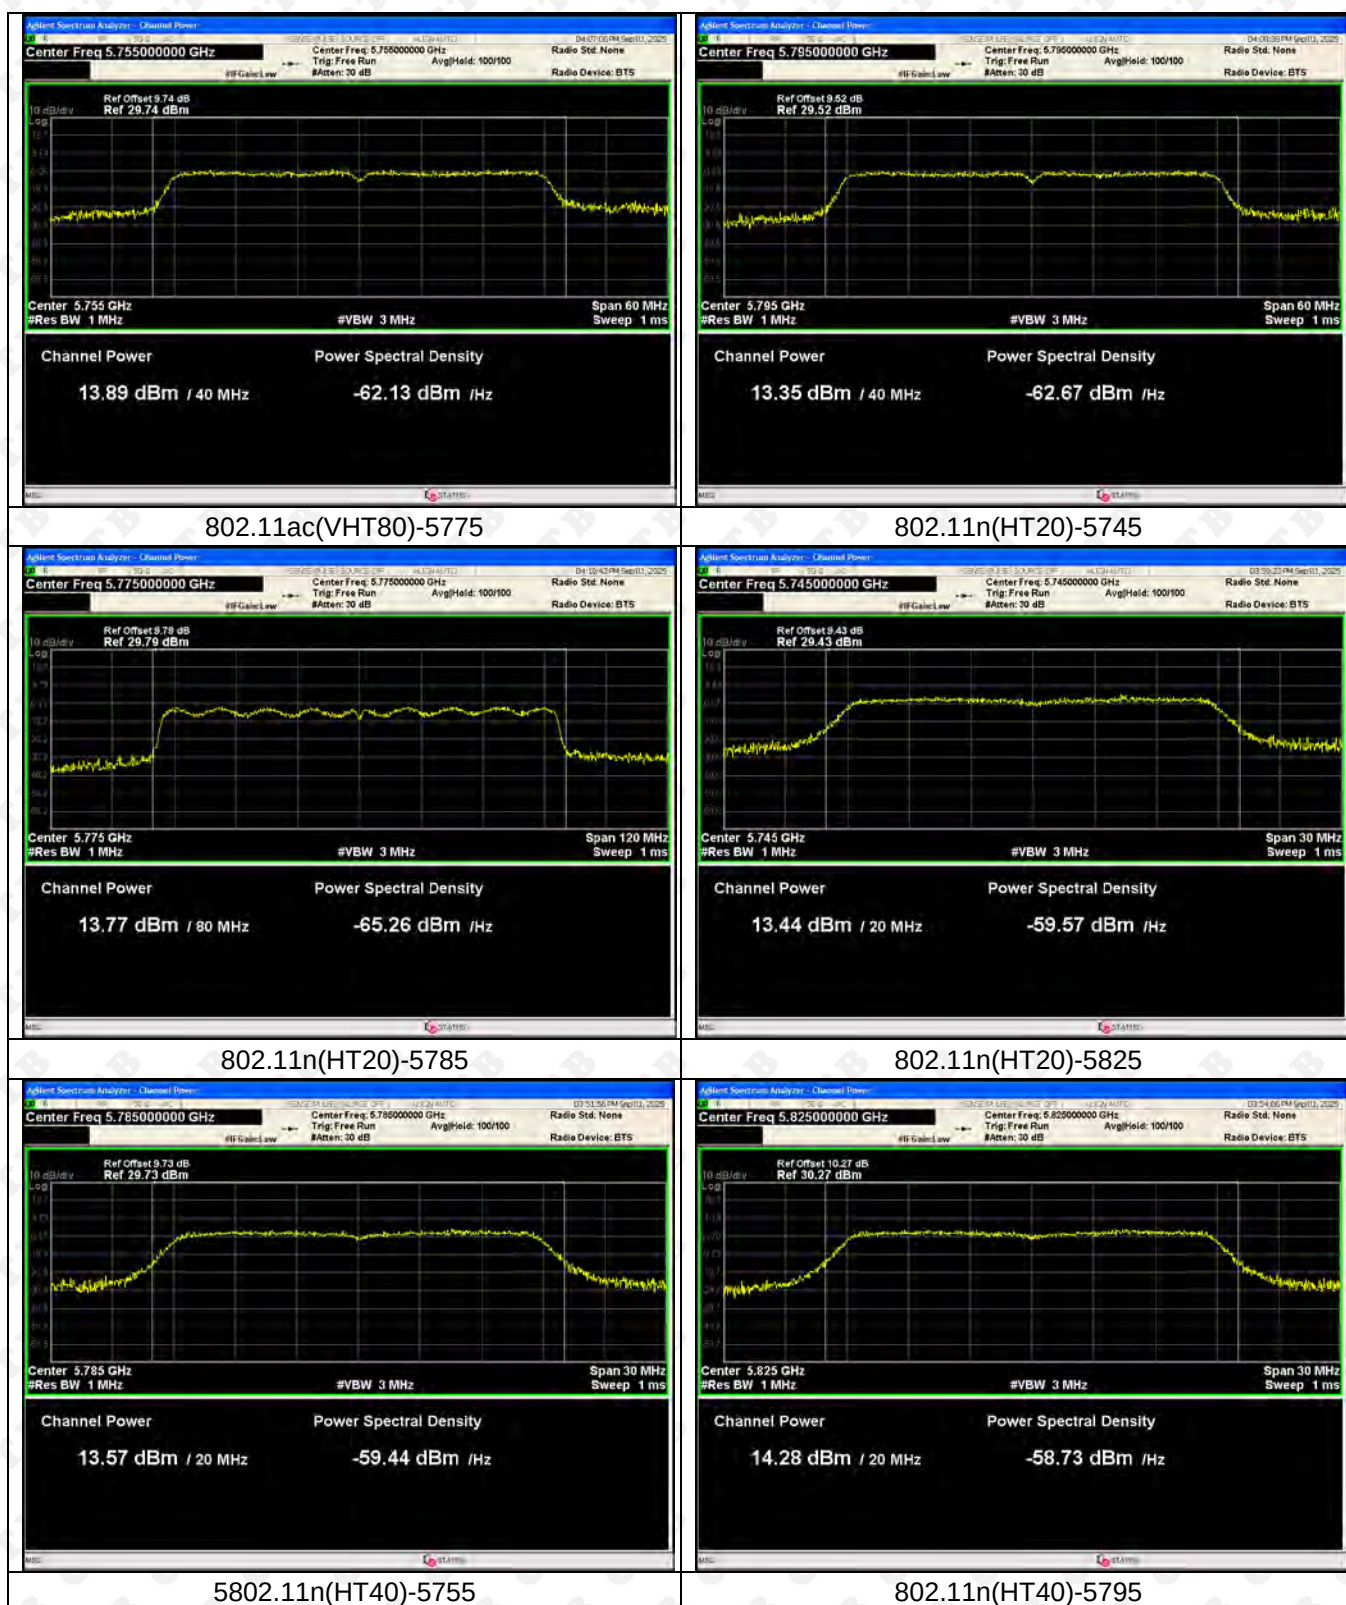


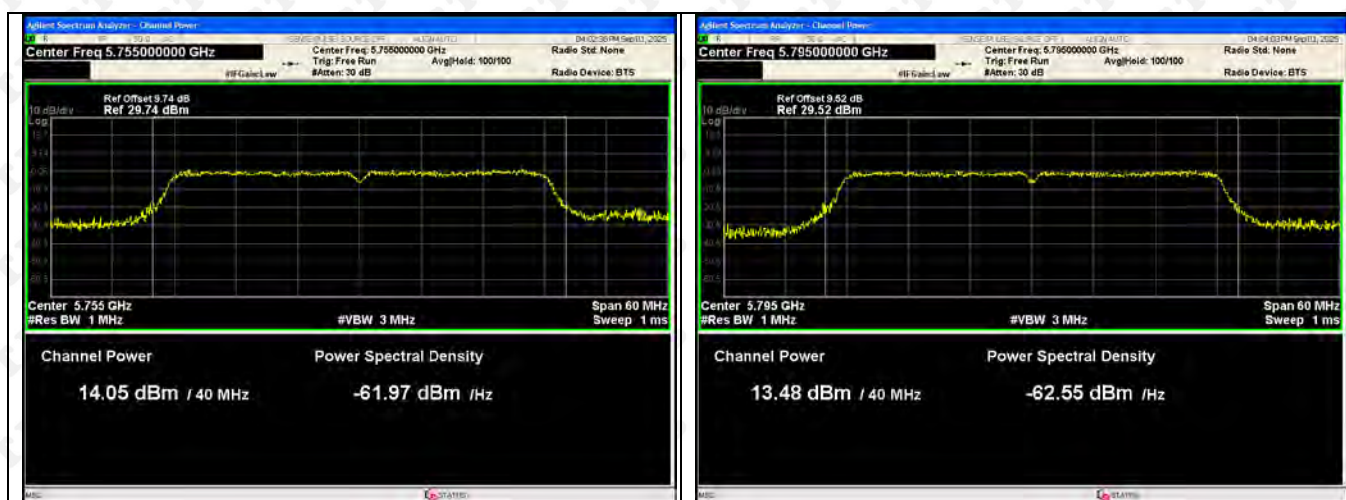

ANT2:

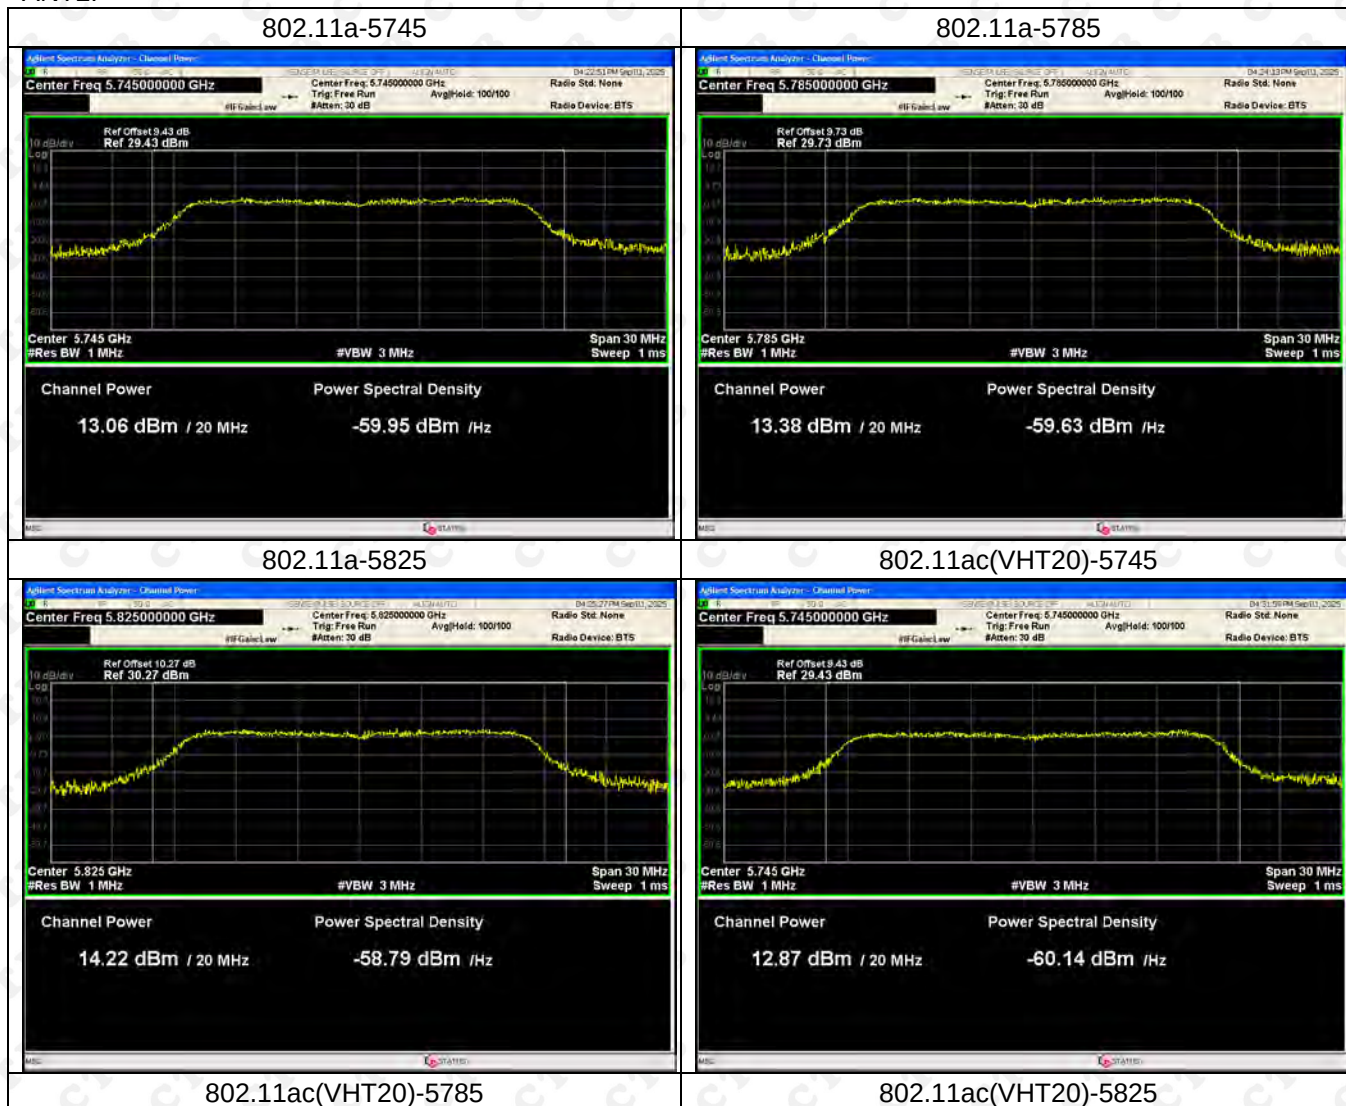


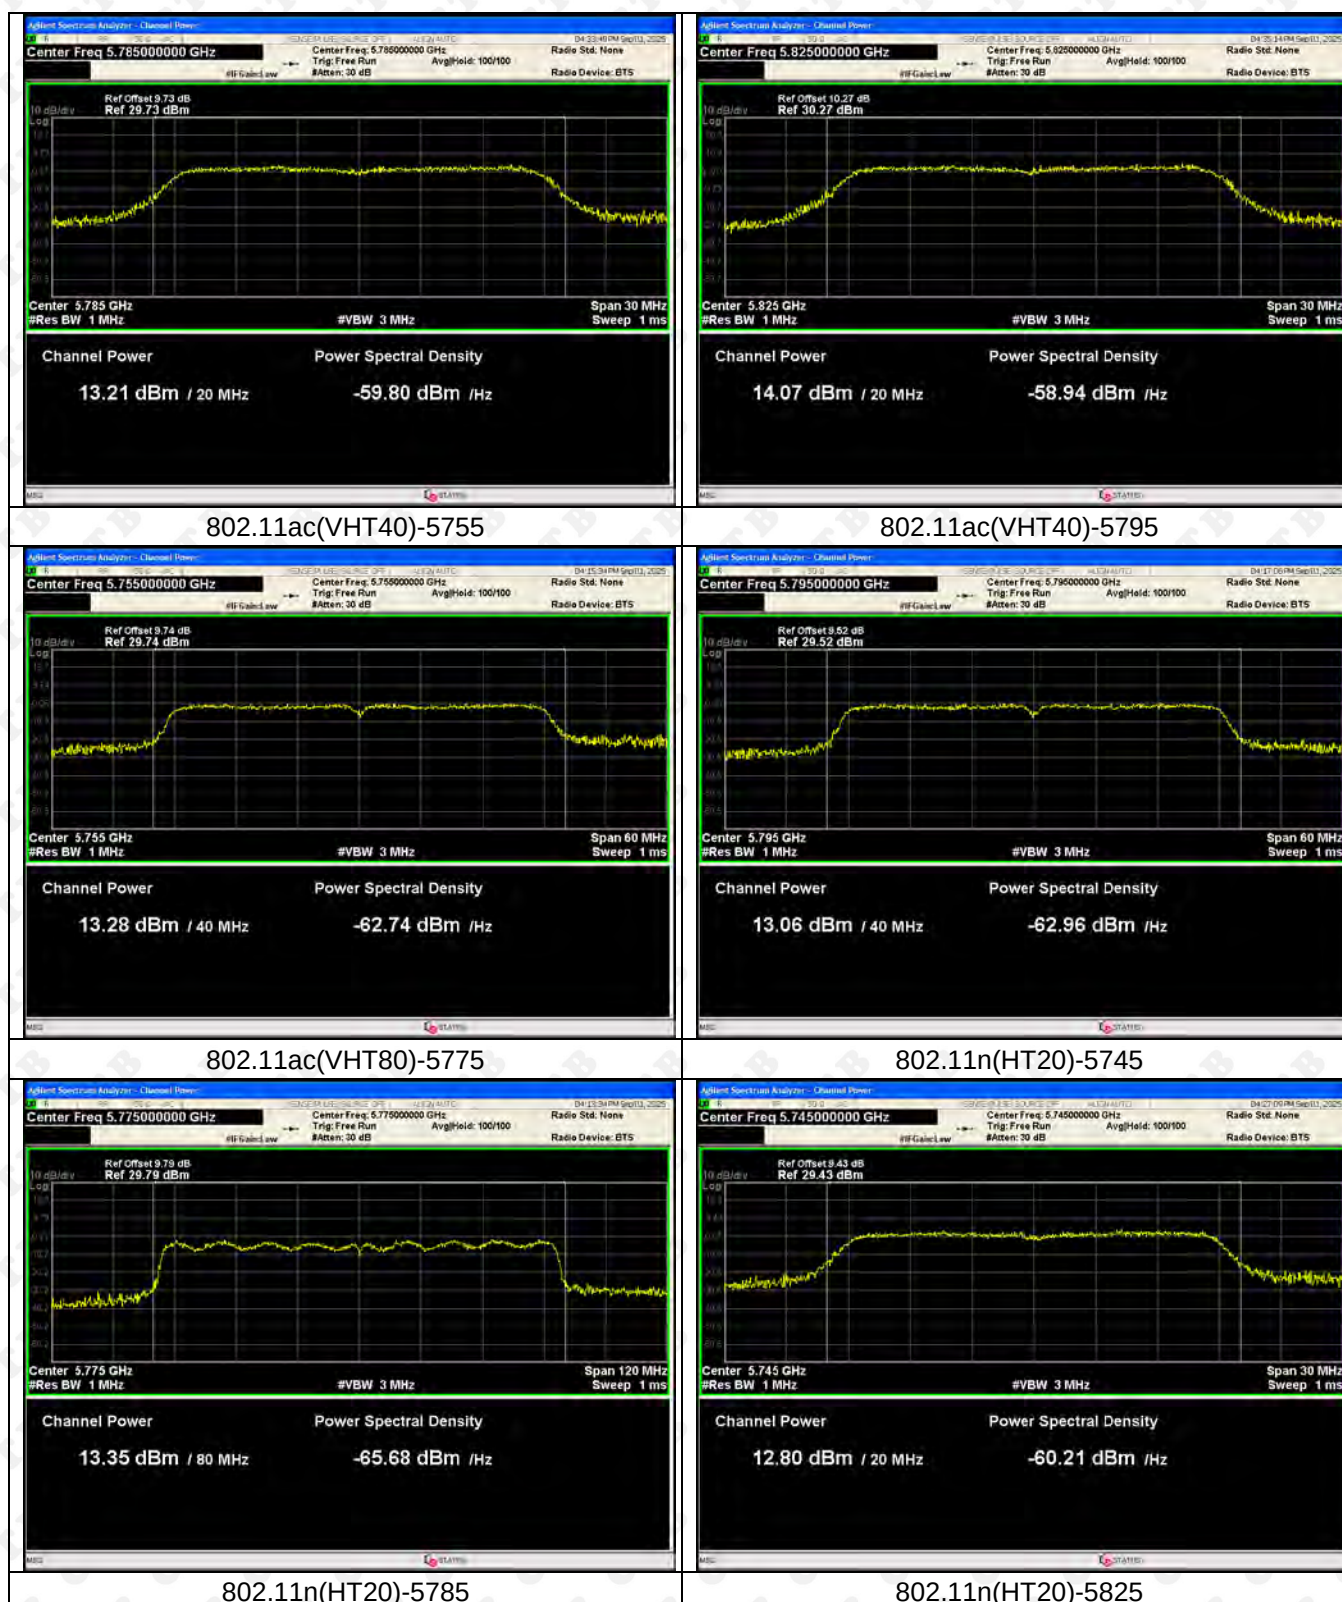

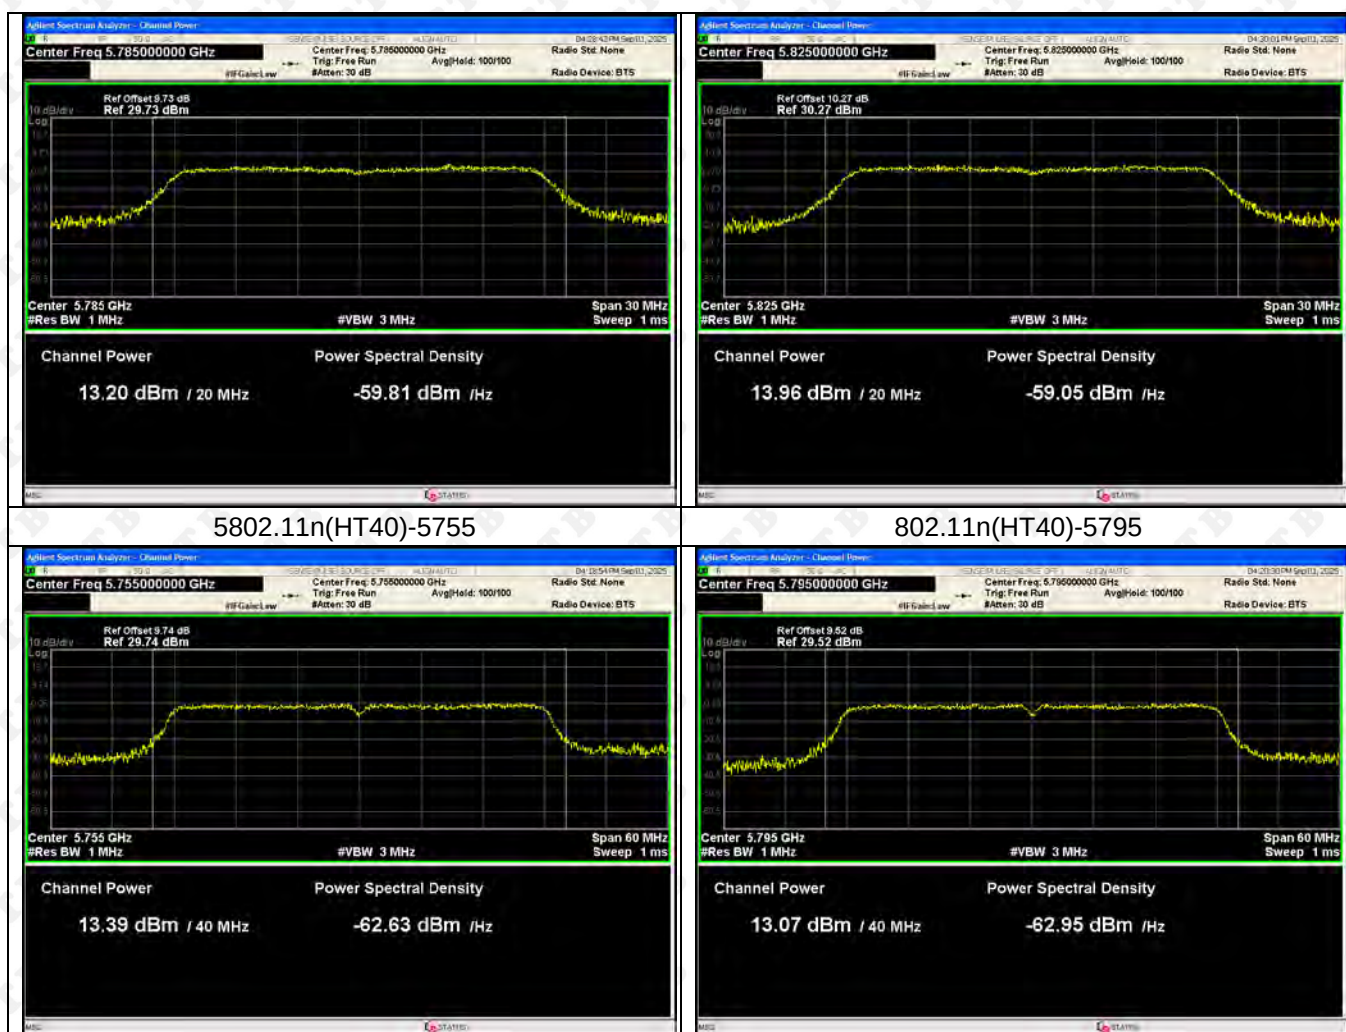

10. EMISSION BANDWIDTH& OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

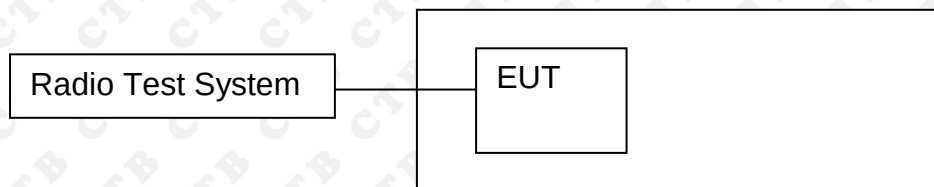

10.2 Limits

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

10.3 Test Procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725–5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.

- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

D. 99% Occupied Bandwidth

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Measurement of the 99% occupied bandwidth is *required* only as a condition for using the optional band-edge measurement techniques described in II.G.3.d). Measurements of 99% occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the 789033 D02 General UNII Test Procedures New Rules v02r01 Page 4 spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with Section 15.407(a).

The following procedure shall be used for measuring (99%) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 * RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99% power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

10.4 Test Results

Test mode ANT 1	Test Channel (MHz)	26dB Bandwidth (MHz)
802.11a	5180	21.559
	5200	21.544
	5240	21.716
802.11ac(VHT20)	5180	22.068
	5200	22.323
	5240	21.867
802.11ac(VHT40)	5190	53.188
	5230	51.516
802.11ac(VHT80)	5210	81.871
802.11n(HT20)	5180	21.27
	5200	21.271
	5240	21.144
802.11n(HT40)	5190	41.535
	5230	41.213

Test mode ANT 2	Test Channel (MHz)	26dB Bandwidth (MHz)
802.11a	5180	21.535
	5200	21.767
	5240	21.586
802.11ac(VHT20)	5180	22.223
	5200	22.212
	5240	21.755
802.11ac(VHT40)	5190	53.615
	5230	50.969
802.11ac(VHT80)	5210	117.27
802.11n(HT20)	5180	21.59
	5200	21.253
	5240	21.004
802.11n(HT40)	5190	41.337
	5230	41.581

5725-5850 MHz

Test mode Ant 1	Test Channel (MHz)	6dB Bandwidth (MHz)	Result
802.11a	5745	16.518	Pass
	5785	16.554	Pass
	5825	16.511	Pass
802.11ac(VHT20)	5745	17.751	Pass
	5785	17.762	Pass
	5825	17.726	Pass
802.11ac(VHT40)	5755	36.53	Pass
	5795	36.464	Pass
802.11ac(VHT80)	5775	76.474	Pass
802.11n(HT20)	5745	17.768	Pass
	5785	17.772	Pass
	5825	17.793	Pass
802.11n(HT40)	5755	36.5	Pass
	5795	36.489	Pass

Test mode Ant 2	Test Channel (MHz)	6dB Bandwidth (MHz)	Result
802.11a	5745	16.531	Pass
	5785	16.511	Pass
	5825	16.533	Pass
802.11ac(VHT20)	5745	17.764	Pass
	5785	17.757	Pass
	5825	17.752	Pass
802.11ac(VHT40)	5755	36.529	Pass
	5795	36.555	Pass
802.11ac(VHT80)	5775	76.382	Pass
802.11n(HT20)	5745	17.776	Pass
	5785	17.764	Pass
	5825	17.77	Pass
802.11n(HT40)	5755	36.466	Pass
	5795	36.468	Pass

5180-5240MHz
ANT 1

802.11a-5180



802.11a-5200



802.11a-5240



802.11ac(VHT20)-5180



802.11ac(VHT20)-5200



802.11ac(VHT20)-5240



802.11ac(VHT40)-5190




802.11ac(VHT40)-5230





802.11ac(VHT80)-5210

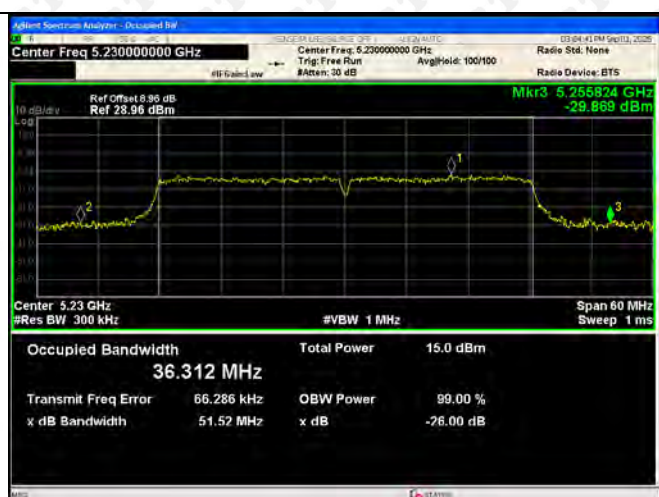


802.11n(HT20)-5180



802.11n(HT20)-5200



802.11n(HT20)-5240

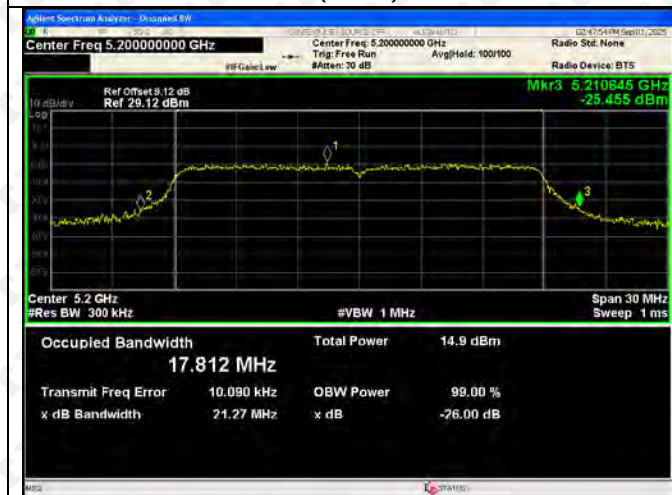

802.11n(HT40)-5190



802.11n(HT40)-5230



ANT2

802.11a-5180



802.11a-5200



802.11a-5240



802.11ac(VHT20)-5180



802.11ac(VHT20)-5200

802.11ac(VHT20)-5240



802.11ac(VHT40)-5190




802.11ac(VHT40)-5230



802.11ac(VHT80)-5210



802.11ac(VHT80)-5230

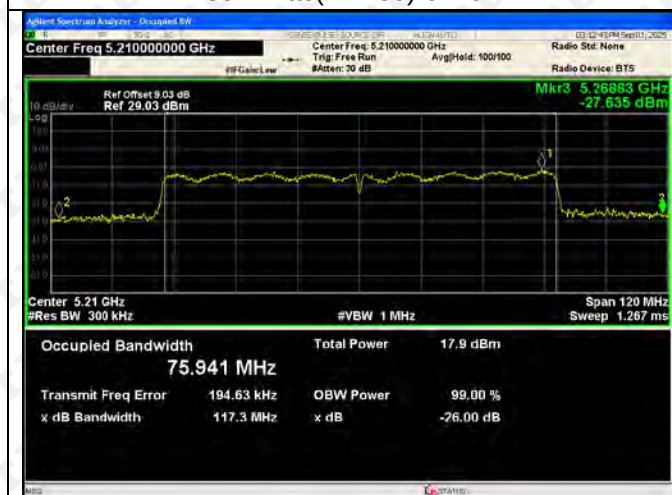

802.11n(HT20)-5180



802.11n(HT20)-5240



802.11n(HT40)-5190

802.11n(HT40)-5230

5745-5825MHz
ANT 1:

802.11a-5745




802.11a-5785



802.11a-5825



802.11ac(VHT20)-5745

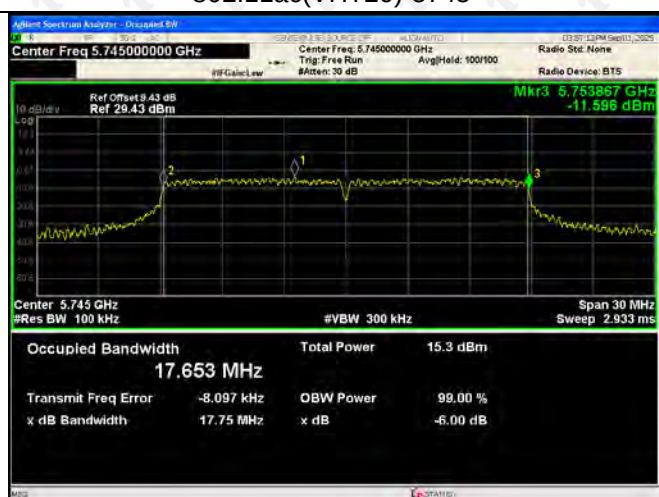

802.11ac(VHT20)-5785



802.11ac(VHT20)-5825



802.11ac(VHT40)-5755




802.11ac(VHT40)-5795





802.11ac(VHT80)-5775

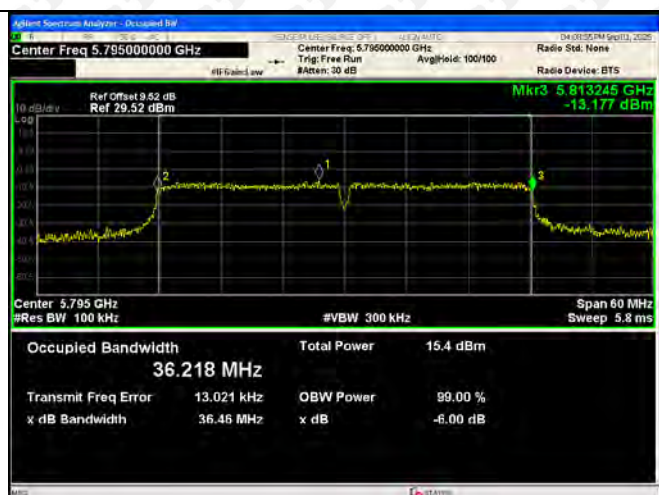

802.11n(HT20)-5745




802.11n(HT20)-5785



802.11n(HT20)-5745



5802.11n(HT40)-5755

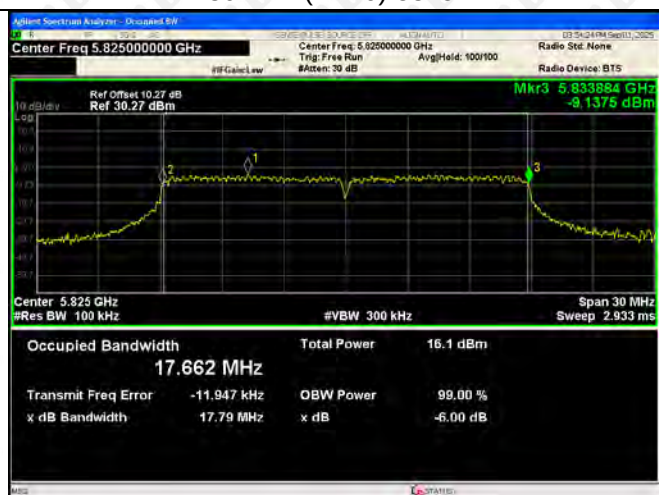

802.11n(HT40)-5795




ANT2:

802.11a-5745




802.11a-5785

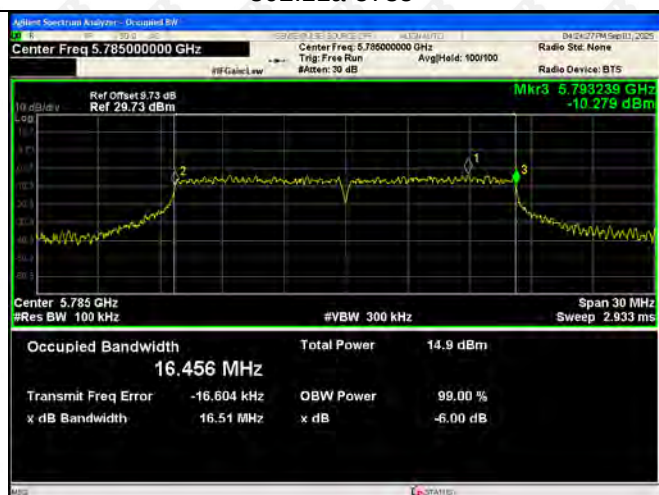

802.11a-5825



802.11ac(VHT20)-5745

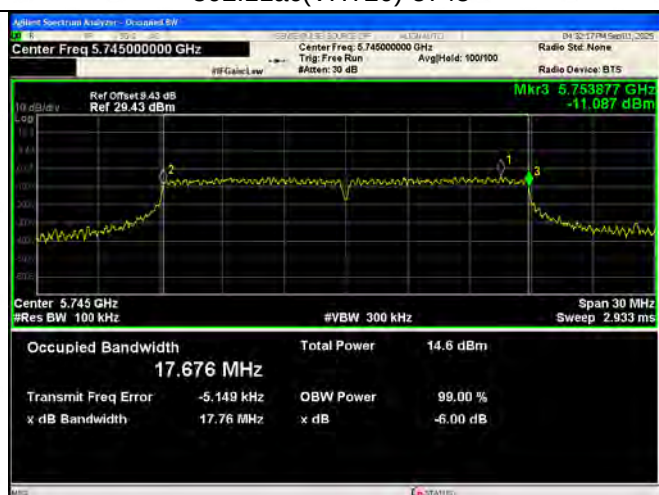


802.11ac(VHT20)-5785

802.11ac(VHT20)-5825




802.11ac(VHT40)-5755

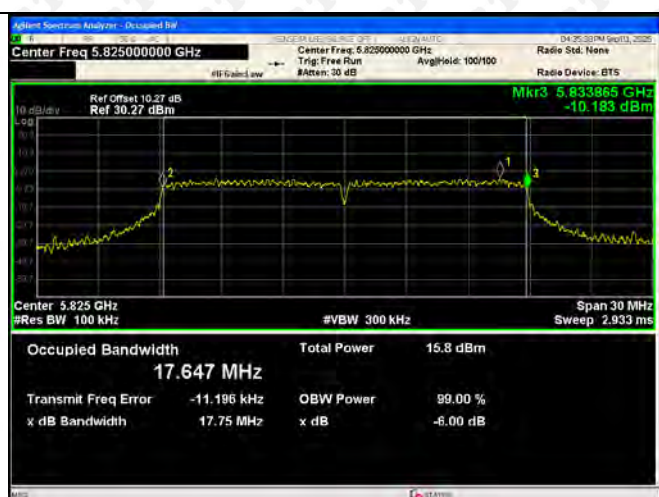


802.11ac(VHT40)-5795



802.11ac(VHT80)-5775

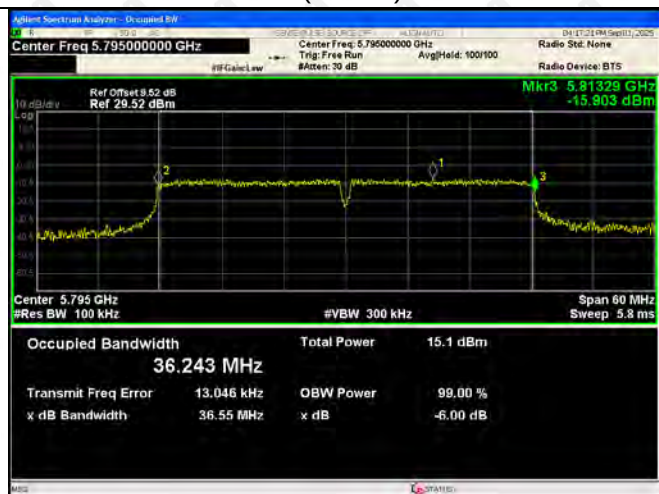

802.11n(HT20)-5745

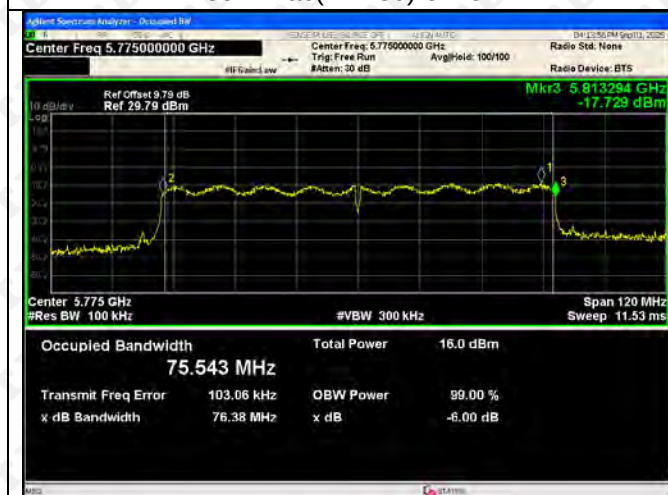

802.11n(HT20)-5785



802.11n(HT20)-5825




5802.11n(HT40)-5755

802.11n(HT40)-5795

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

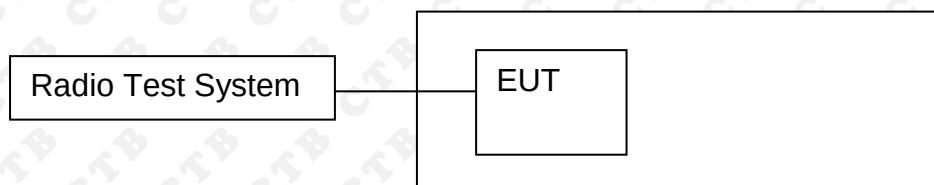

11.2 Limit

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

11.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

For devices operating in the bands 5.15–5.25 GHz, 5.25–5.35 GHz, and 5.47–5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

a) Set $\text{RBW} \geq 1/T$, where T is defined in II.B.I.a).

b) Set $\text{VBW} \geq 3 \text{ RBW}$.

c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz/RBW})$ to the measured result, whereas RBW ($< 500 \text{ kHz}$) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1 \text{ MHz/RBW})$ to the measured result, whereas RBW ($< 1 \text{ MHz}$) is the reduced resolution bandwidth of spectrum analyzer set during measurement.

e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.

11.4 Test Result

ANT 1+ANT2

Test mode	Test Channel (MHz)	PSD [dBm/MHz] ANT 1	PSD [dBm/MHz] ANT 2	PSD [dBm/MHz] Total	Limit (dBm/MHz)	Result
802.11a	5180	3.227	4.01	/	11	Pass
	5200	3.616	4.06	/	11	Pass
	5240	3.712	4.616	/	11	Pass
802.11ac(VHT20)	5180	3.026	3.915	6.504	11	Pass
	5200	3.598	4.282	6.964	11	Pass
	5240	4.521	5.054	7.806	11	Pass
802.11ac(VHT40)	5190	0.197	0.461	3.341	11	Pass
	5230	0.56	0.902	3.745	11	Pass
802.11n(HT20)	5180	-8.098	-5.004	-3.271	11	Pass
	5200	3.331	3.76	6.561	11	Pass
	5240	4.35	3.809	7.098	11	Pass
802.11n(HT40)	5190	4.44	4.736	7.601	11	Pass
	5230	0.389	0.425	3.417	11	Pass
802.11ac(VHT80)	5230	0.541	1.536	4.077	11	Pass

Test mode	Test Channel (MHz)	PSD [dBm/MHz] ANT 1	PSD [dBm/MHz] ANT 2	PSD [dBm/MHz] Total	Limit (dBm)	Result
802.11a	5745	1.023	0.928	/	30	Pass
	5785	2.552	1.323	/	30	Pass
	5825	3.633	2.676	/	30	Pass
802.11ac(VHT20)	5745	1.656	0.624	4.181	30	Pass
	5785	1.288	1.323	4.316	30	Pass
	5825	2.151	1.938	5.056	30	Pass
802.11ac(VHT40)	5755	-0.984	-1.781	1.646	30	Pass
	5795	-1.668	-2.508	0.943	30	Pass
802.11n(HT20)	5775	-4.125	-4.163	-1.134	30	Pass
	5745	1.567	1.272	4.432	30	Pass
	5785	1.676	1.367	4.535	30	Pass
802.11n(HT40)	5825	2.521	2.098	5.325	30	Pass
	5755	-1.489	-1.575	1.479	30	Pass
802.11ac(VHT80)	5795	-1.953	-1.762	1.154	30	Pass

5180-5240MHz
ANT 1

802.11a-5180



802.11a-5200



802.11a-5240



802.11ac(VHT20)-5180



802.11ac(VHT20)-5200



802.11ac(VHT20)-5240



802.11ac(VHT40)-5190

802.11ac(VHT40)-5230



802.11ac(VHT80)-5210




802.11n(HT20)-5180



802.11n(HT20)-5200



802.11n(HT20)-5240

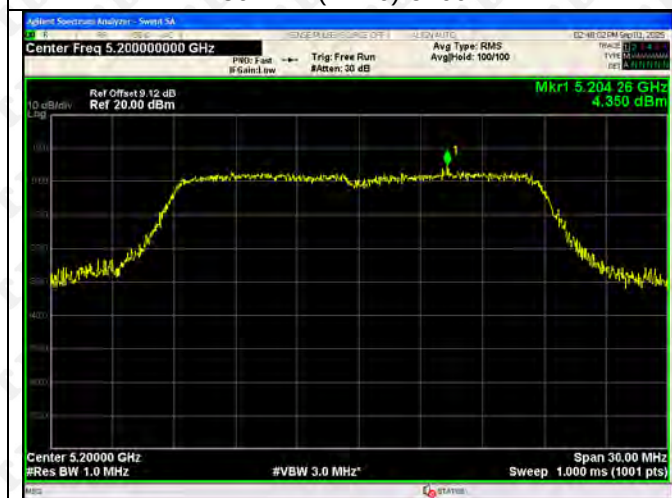


802.11n(HT40)-5190



802.11n(HT40)-5230



ANT2

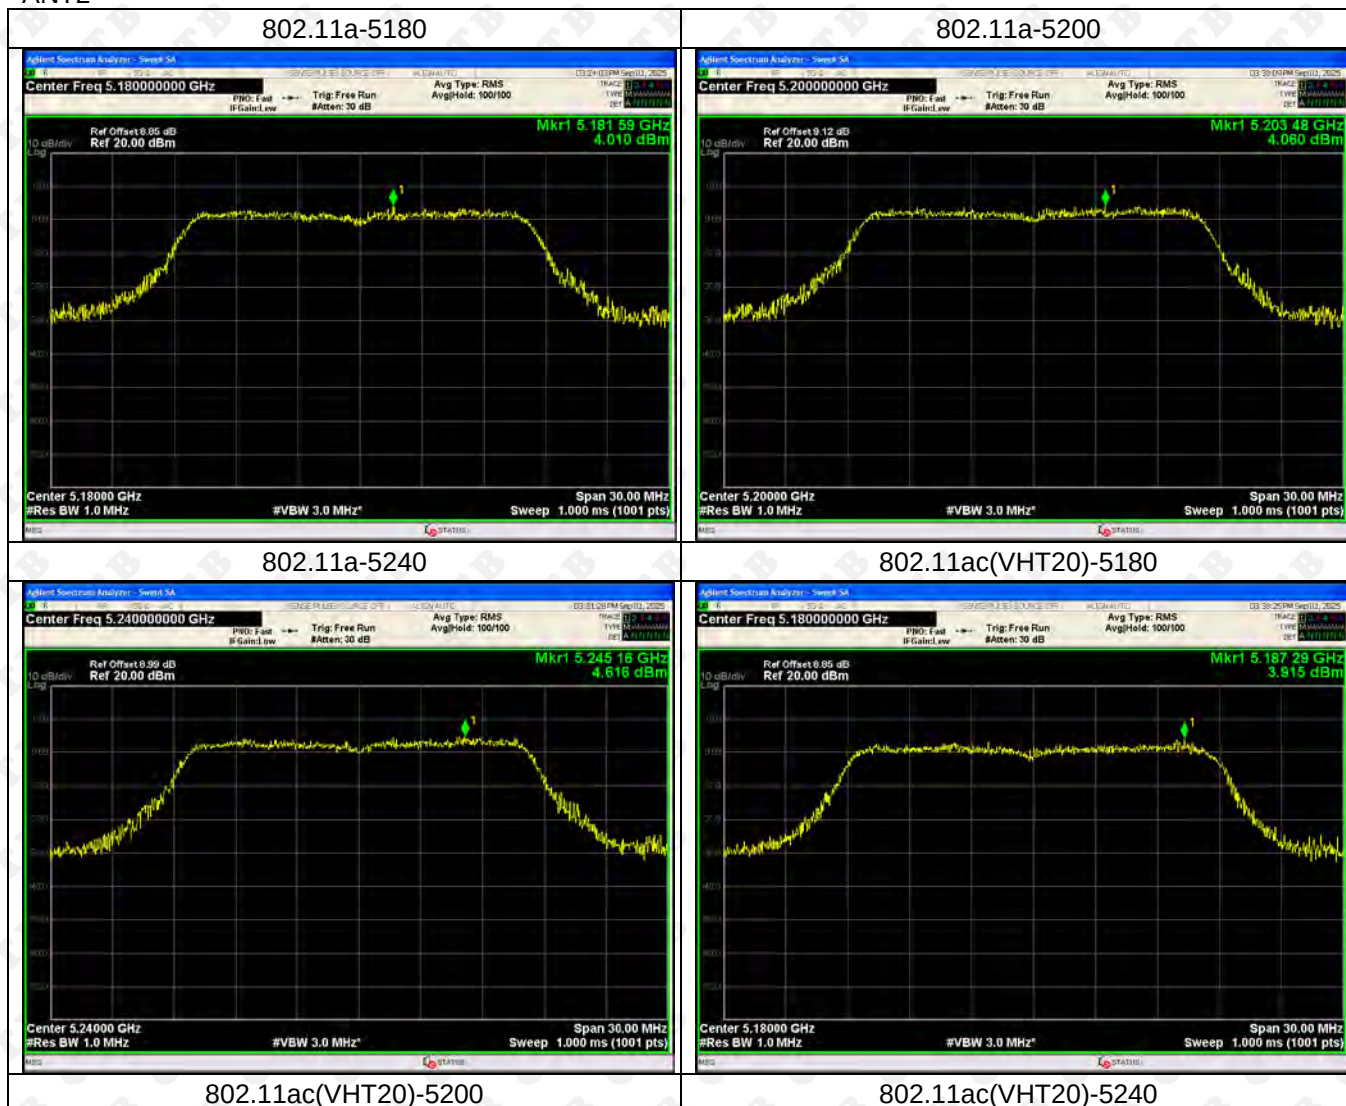



802.11ac(VHT40)-5190



802.11ac(VHT40)-5230



802.11ac(VHT80)-5210



802.11ac(VHT80)-5230



802.11n(HT20)-5200



802.11n(HT20)-5240



802.11n(HT40)-5190




802.11n(HT40)-5230



5745-5825MHz

ANT 1:

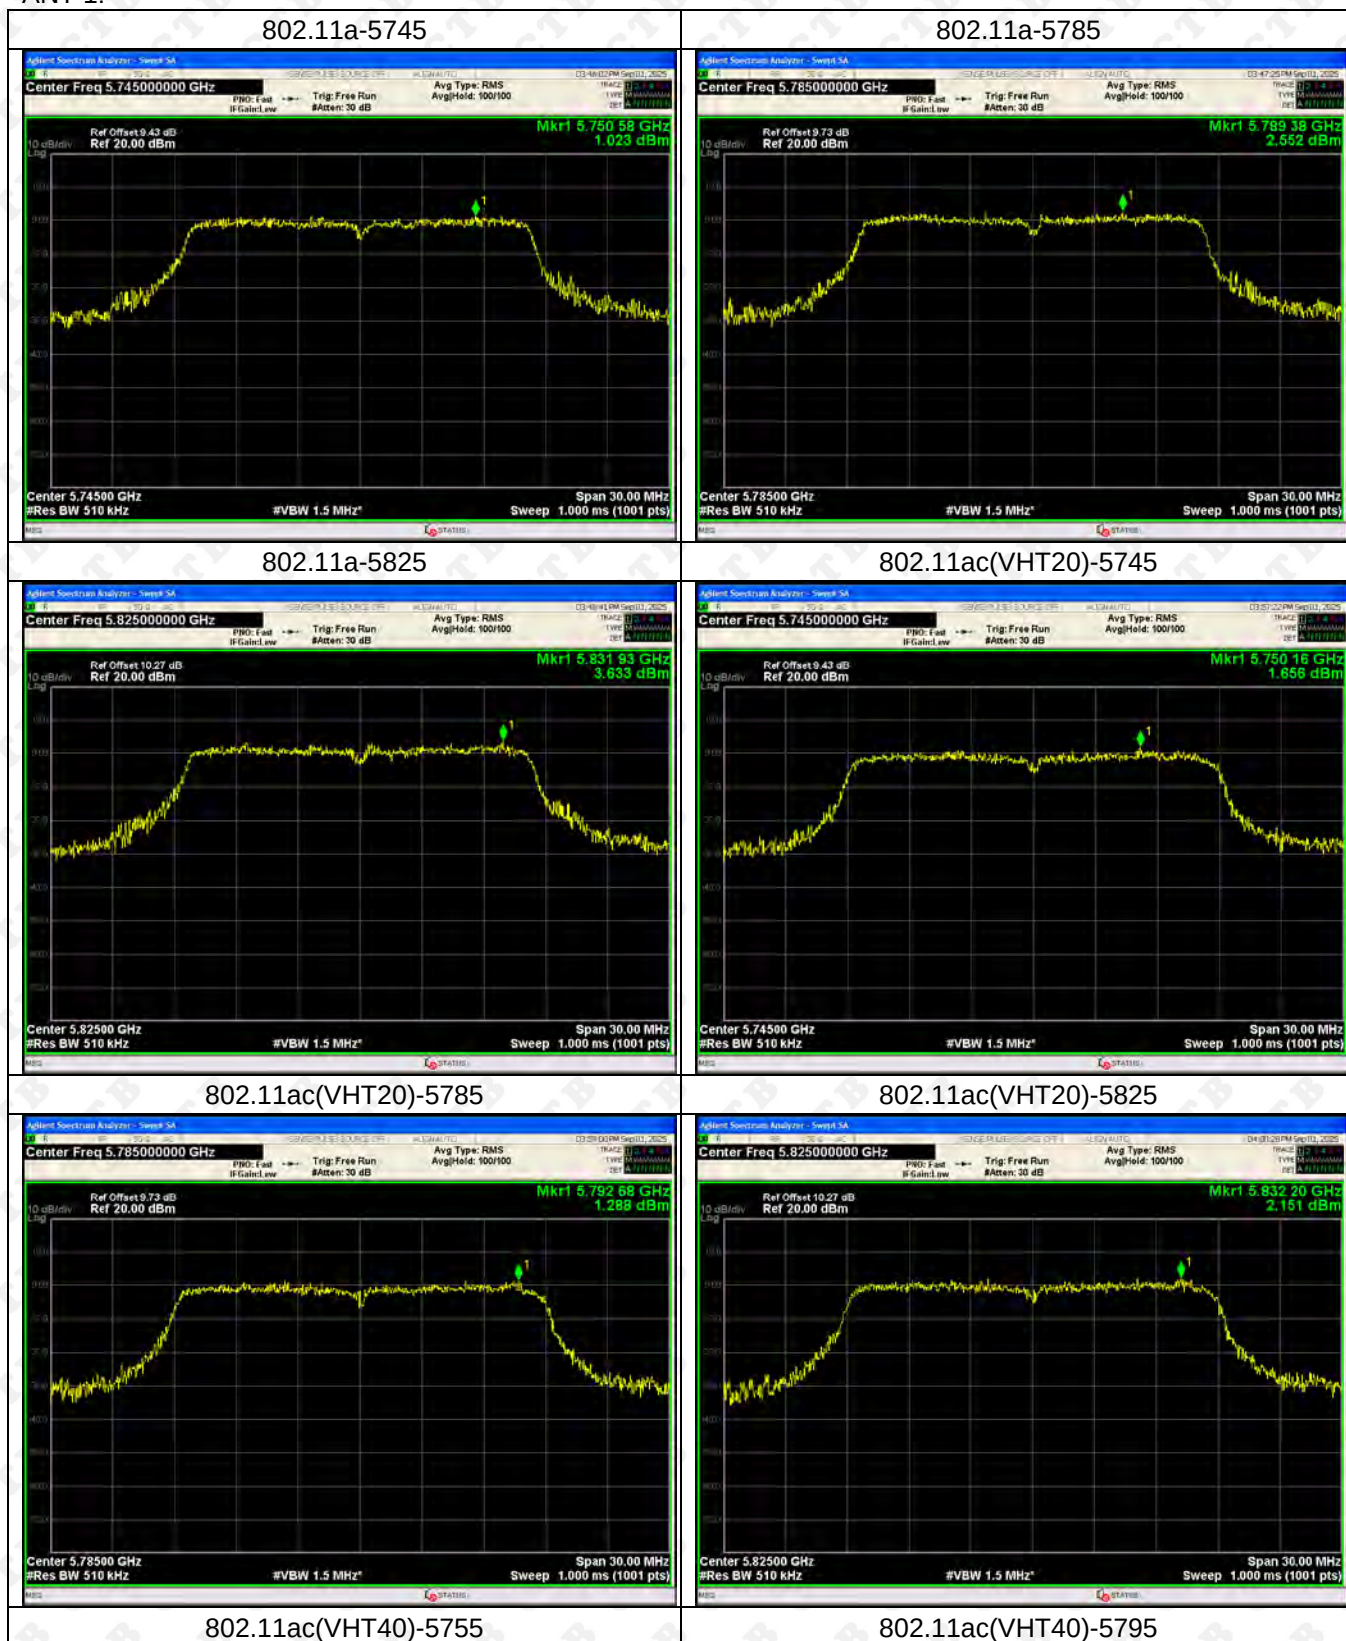



802.11ac(VHT80)-5775



802.11n(HT20)-5745



802.11n(HT20)-5785



802.11n(HT20)-5825




5802.11n(HT40)-5755



802.11n(HT40)-5795



ANT2:

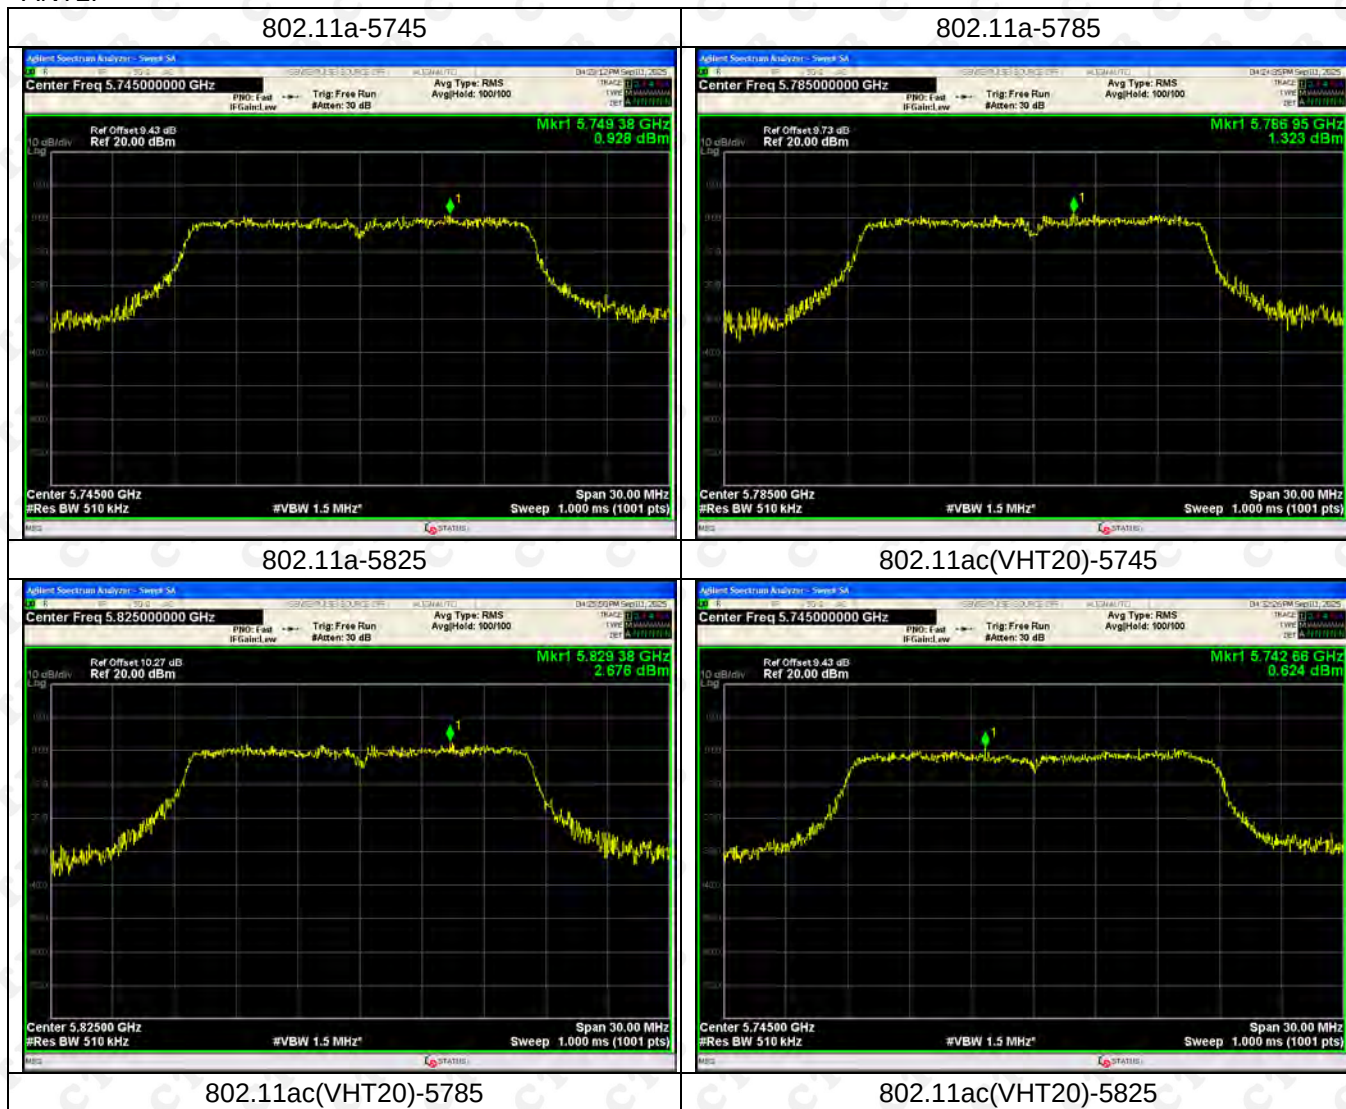



802.11ac(VHT40)-5755



802.11ac(VHT40)-5795



802.11ac(VHT80)-5775




802.11n(HT20)-5745



802.11n(HT20)-5785



802.11n(HT20)-5825

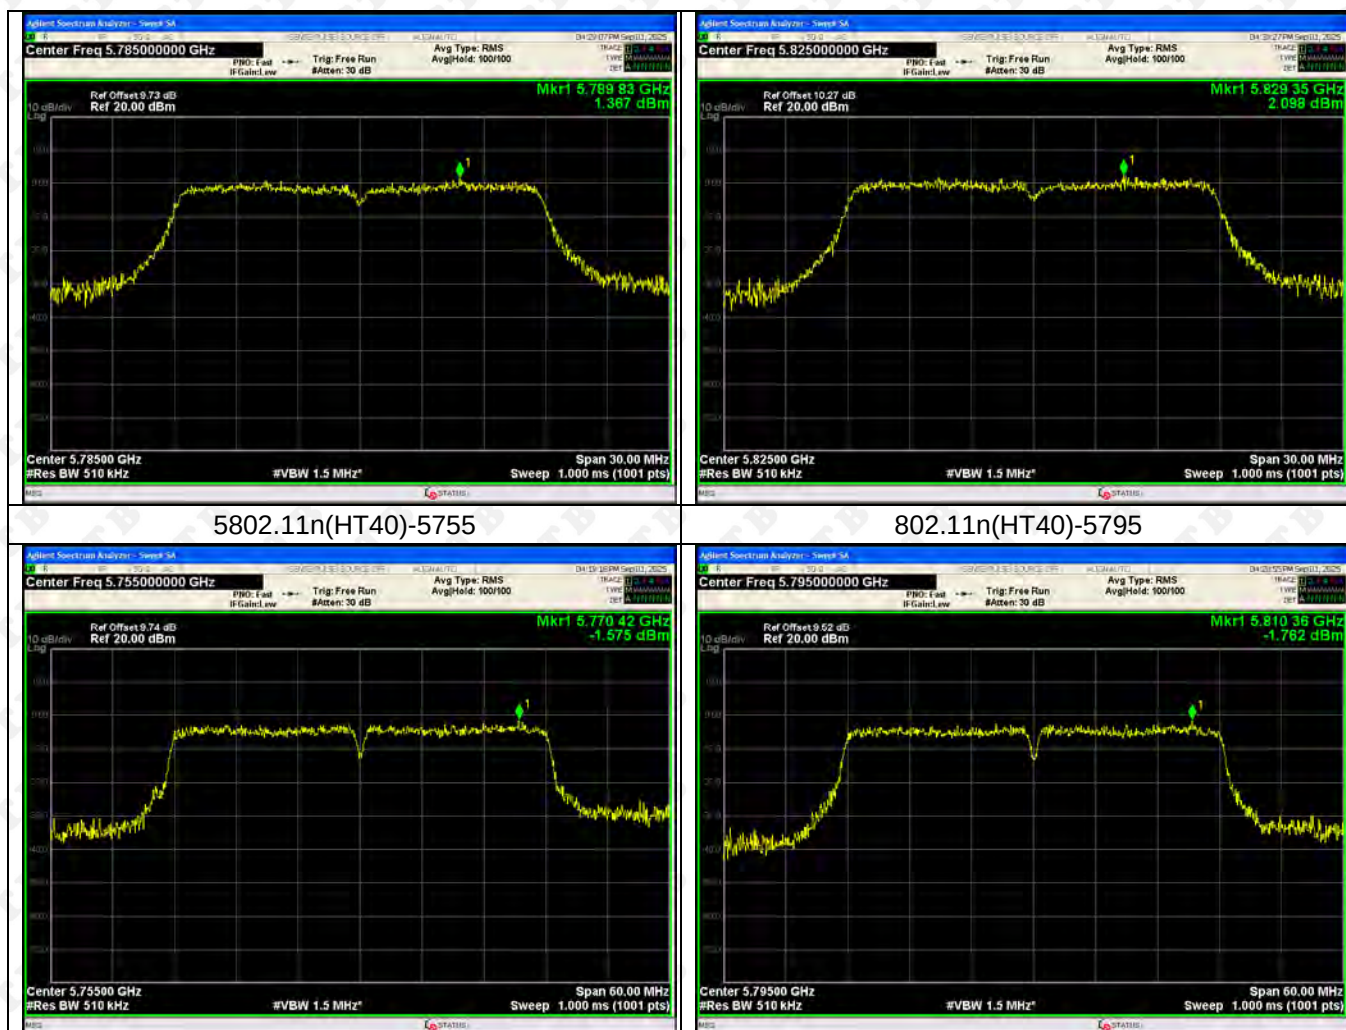


5802.11n(HT40)-5755

802.11n(HT40)-5795

12. FREQUENCY STABILITY

12.1 Block Diagram Of Test Setup

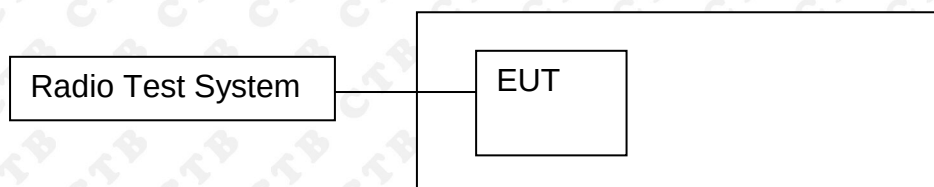

12.2 Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

12.3 Test procedure

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.

12.4 Test Result

ANT1:

TX Frequency (5150-5250MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	20	5180.0004	5180	0.0004	0.0741
		V max (V)	22	5180.0227	5180	0.0227	4.3741
		V min (V)	18	5180.1134	5180	0.1134	21.8877
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	20	T (°C)	0	5180.0134	5180	0.0134	2.5955
		T (°C)	10	5180.0421	5180	0.0421	8.1299
		T (°C)	20	5180.0035	5180	0.0035	0.6730
		T (°C)	30	5180.0041	5180	0.0041	0.7843
		T (°C)	40	5180.0447	5180	0.0447	8.6241
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	20	5200.0276	5200	0.0276	5.3163
		V max (V)	22	5200.0175	5200	0.0175	3.3673
		V min (V)	18	5200.0406	5200	0.0406	7.8101
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	20	T (°C)	0	5200.0390	5200	0.0390	7.5007
		T (°C)	10	5200.0004	5200	0.0004	0.0677
		T (°C)	20	5200.0070	5200	0.0070	1.3379
		T (°C)	30	5200.0106	5200	0.0106	2.0413
		T (°C)	40	5200.0374	5200	0.0374	7.1937
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	20	5240.0385	5240	0.0385	7.3510
		V max (V)	22	5240.0525	5240	0.0525	10.0272
		V min (V)	18	5240.0156	5240	0.0156	2.9741
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	20	T (°C)	0	5240.0123	5240	0.0123	2.3442
		T (°C)	10	5240.0266	5240	0.0266	5.0729
		T (°C)	20	5240.0151	5240	0.0151	2.8881
		T (°C)	30	5240.0499	5240	0.0499	9.5220
		T (°C)	40	5240.0262	5240	0.0262	5.0043
Limits				±20ppm			
Result				Complies			

ANT2:

TX Frequency (5150-5250MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	20	5180.0411	5180	0.0411	7.9380
		V max (V)	22	5180.0347	5180	0.0347	6.7064
		V min (V)	18	5180.0721	5180	0.0721	13.9255
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	20	T (°C)	0	5180.0500	5180	0.0500	9.6580
		T (°C)	10	5180.0773	5180	0.0773	14.9173
		T (°C)	20	5180.0514	5180	0.0514	9.9257
		T (°C)	30	5180.0758	5180	0.0758	14.6305
		T (°C)	40	5180.0100	5180	0.0100	1.9237
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	20	5200.0803	5200	0.0803	15.4426
		V max (V)	22	5200.0089	5200	0.0089	1.7153
		V min (V)	18	5200.0345	5200	0.0345	6.6434
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	20	T (°C)	0	5200.0301	5200	0.0301	5.7929
		T (°C)	10	5200.0031	5200	0.0031	0.5891
		T (°C)	20	5200.0869	5200	0.0869	16.7200
		T (°C)	30	5200.0716	5200	0.0716	13.7784
		T (°C)	40	5200.0207	5200	0.0207	3.9777
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	20	5240.0729	5240	0.0729	13.9167
		V max (V)	22	5240.0098	5240	0.0098	1.8615
		V min (V)	18	5240.0126	5240	0.0126	2.4134
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	20	T (°C)	0	5240.0391	5240	0.0391	7.4701
		T (°C)	10	5240.0094	5240	0.0094	1.7966
		T (°C)	20	5240.0737	5240	0.0737	14.0609
		T (°C)	30	5240.0003	5240	0.0003	0.0540
		T (°C)	40	5240.0016	5240	0.0016	0.3064
Limits				±20ppm			
Result				Complies			

ANT1:

TX Frequency (5725-5850MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	20	5745.0017	5745	0.0017	0.2878
		V max (V)	22	5745.0740	5745	0.0740	12.8886
		V min (V)	18	5745.0017	5745	0.0017	0.2878
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	20	T (°C)	0	5745.0538	5745	0.0538	9.3681
		T (°C)	10	5745.0870	5745	0.0870	15.1498
		T (°C)	20	5745.0263	5745	0.0263	4.5827
		T (°C)	30	5745.0142	5745	0.0142	2.4792
		T (°C)	40	5745.0735	5745	0.0735	12.7856
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	20	5785.0559	5785	0.0559	9.6714
		V max (V)	22	5785.0563	5785	0.0563	9.7372
		V min (V)	18	5785.0608	5785	0.0608	10.5069
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	20	T (°C)	0	5785.0748	5785	0.0748	12.9252
		T (°C)	10	5785.0678	5785	0.0678	11.7164
		T (°C)	20	5785.0706	5785	0.0706	12.2075
		T (°C)	30	5785.0197	5785	0.0197	3.3979
		T (°C)	40	5785.0737	5785	0.0737	12.7409
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	20	5825.0114	5825	0.0114	1.9634
		V max (V)	22	5825.0143	5825	0.0143	2.4574
		V min (V)	18	5825.0505	5825	0.0505	8.6727
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	20	T (°C)	0	5825.0035	5825	0.0035	0.6074
		T (°C)	10	5825.0262	5825	0.0262	4.5044
		T (°C)	20	5825.0205	5825	0.0205	3.5265
		T (°C)	30	5825.0344	5825	0.0344	5.9068
		T (°C)	40	5825.0010	5825	0.0010	0.1690
Limits				±20ppm			
Result				Complies			

ANT2:

TX Frequency (5725-5850MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	20	5745.0426	5745	0.0426	7.4073
		V max (V)	22	5745.0373	5745	0.0373	6.4933
		V min (V)	18	5745.0506	5745	0.0506	8.8073
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	20	T (°C)	0	5745.0049	5745	0.0049	0.8522
		T (°C)	10	5745.0307	5745	0.0307	5.3440
		T (°C)	20	5745.0428	5745	0.0428	7.4569
		T (°C)	30	5745.0163	5745	0.0163	2.8343
		T (°C)	40	5745.0409	5745	0.0409	7.1254
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	20	5785.0076	5785	0.0076	1.3168
		V max (V)	22	5785.0163	5785	0.0163	2.8219
		V min (V)	18	5785.0090	5785	0.0090	1.5594
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	20	T (°C)	0	5785.0132	5785	0.0132	2.2880
		T (°C)	10	5785.0513	5785	0.0513	8.8614
		T (°C)	20	5785.0390	5785	0.0390	6.7374
		T (°C)	30	5785.0720	5785	0.0720	12.4399
		T (°C)	40	5785.0689	5785	0.0689	11.9187
		T (°C)	50	5785.0254	5785	0.0254	4.3919
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	20	5825.0855	5825	0.0855	14.6754
		V max (V)	22	5825.0065	5825	0.0065	1.1144
		V min (V)	18	5825.0932	5825	0.0932	15.9976
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	20	T (°C)	0	5825.0858	5825	0.0858	14.7365
		T (°C)	10	5825.0070	5825	0.0070	1.1984
		T (°C)	20	5825.0119	5825	0.0119	2.0502
		T (°C)	30	5825.0184	5825	0.0184	3.1604
		T (°C)	40	5825.0575	5825	0.0575	9.8743
Limits				±20ppm			
Result				Complies			

13. OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT

13.1 Requirement

15.407(c) requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signal ling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

13.2 Test Results

Operation in the absence of information to the transmit:

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (manufacturer declare)

14. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is FPC antenna and no consideration of replacement. The best case gain of the antenna is WiFi (5.2G): Ant1: 2.3dBi, Ant2: 2.04dBi, WiFi (5.8G): Ant1: 3.25dBi, Ant2: 3.35dBi


15. EUT TEST SETUP PHOTOGRAPHS

Spurious emissions


Below 1G

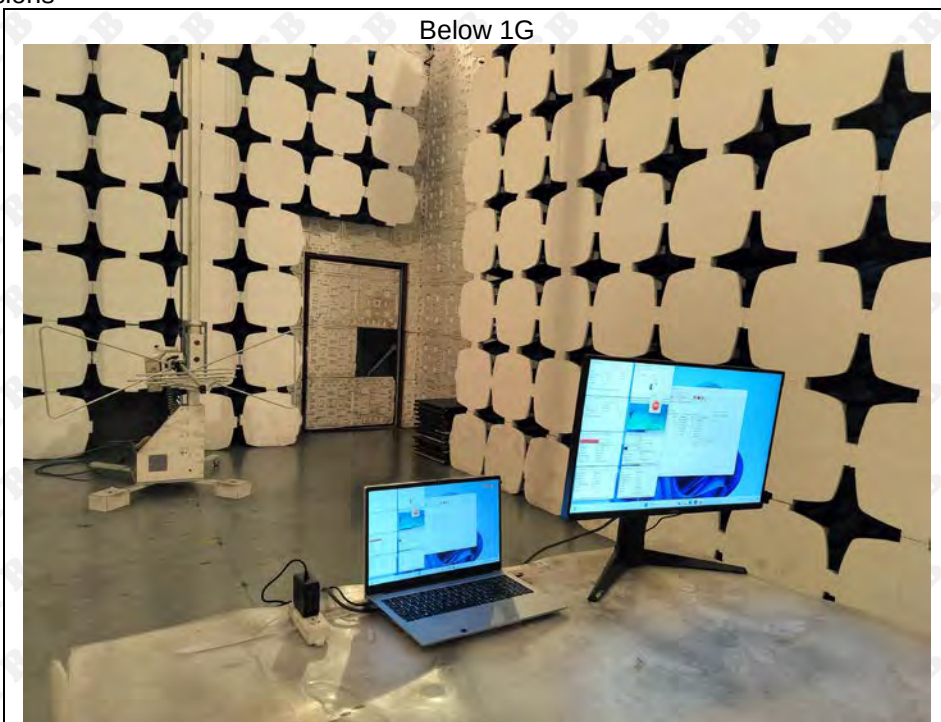

Above 1G

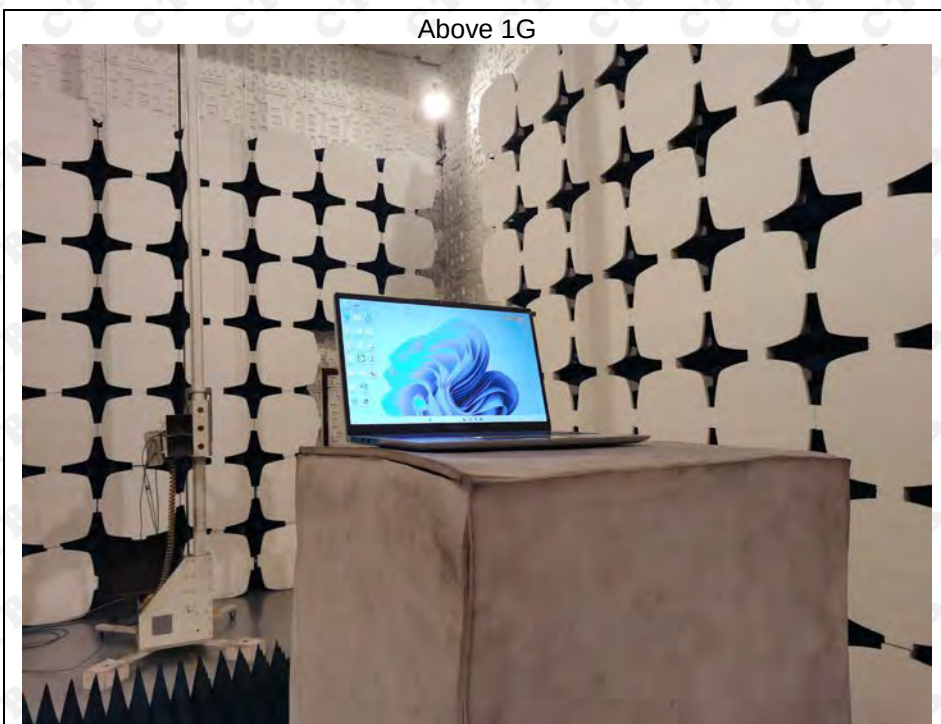

Conducted emission

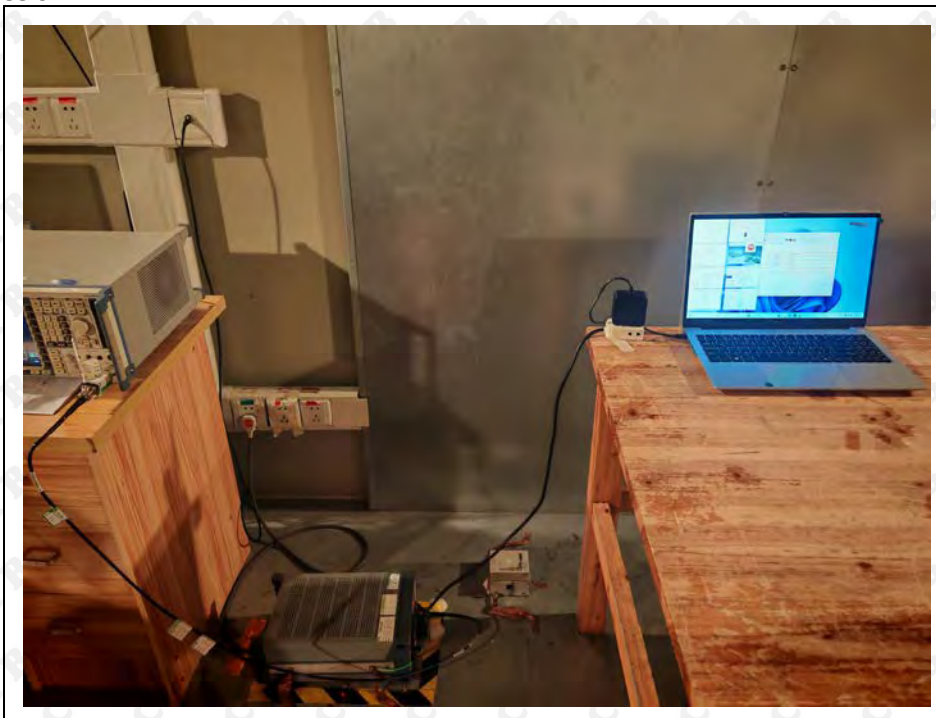

***** END OF REPORT *****