



Appendix B

Detailed Test Results

1. WIFI
WIFI 2.4GHz for Body
WIFI 5.2GHz for Body
WIFI 5.8GHz for Body



Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 6CH Rear side 0mm**DUT: Notebook; Type: QL16I5BM16256 ; Serial: A250312066-1**

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1.009

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.844$ S/m; $\epsilon_r = 39.263$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.43, 7.43, 7.43); Calibrated: 2025/2/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.665 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.325 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.210 W/kg

Maximum value of SAR (measured) = 0.648 W/kg

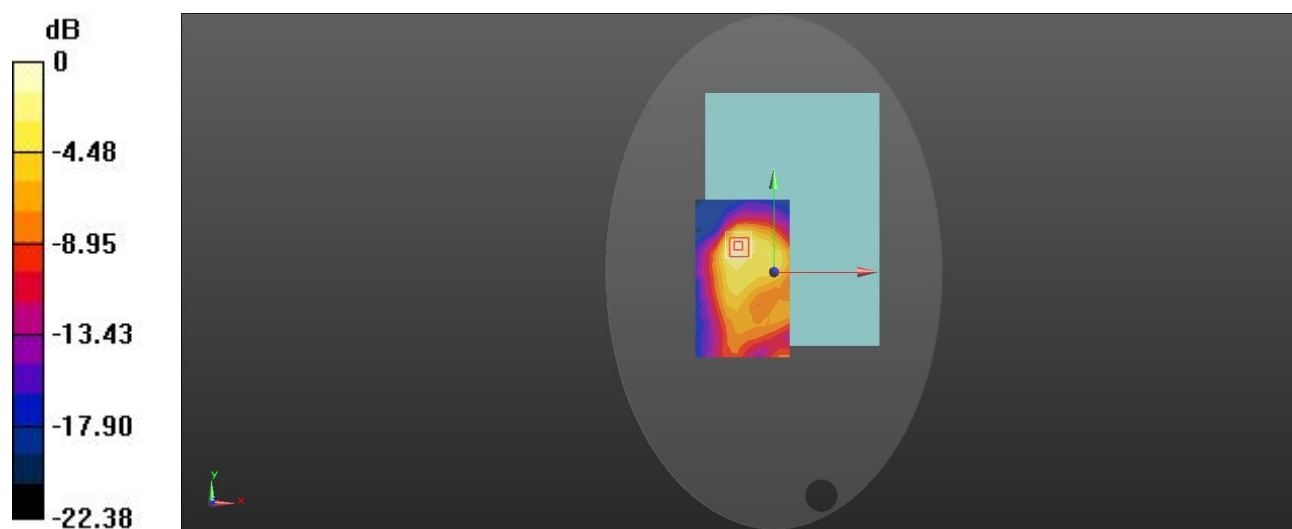

0 dB = 0.648 W/kg = -1.88 dBW/kg



Date: 2025/4/2

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11n20 36CH Rear side 0mm

DUT: Notebook; Type: QL16I5BM16256 ; Serial: A250312066-1

Communication System: UID 0, WI-FI(5.2GHz) (0); Frequency: 5180 MHz;Duty Cycle: 1:1.068

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.523$ S/m; $\epsilon_r = 37.014$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.589 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.415 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.625 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.577 W/kg

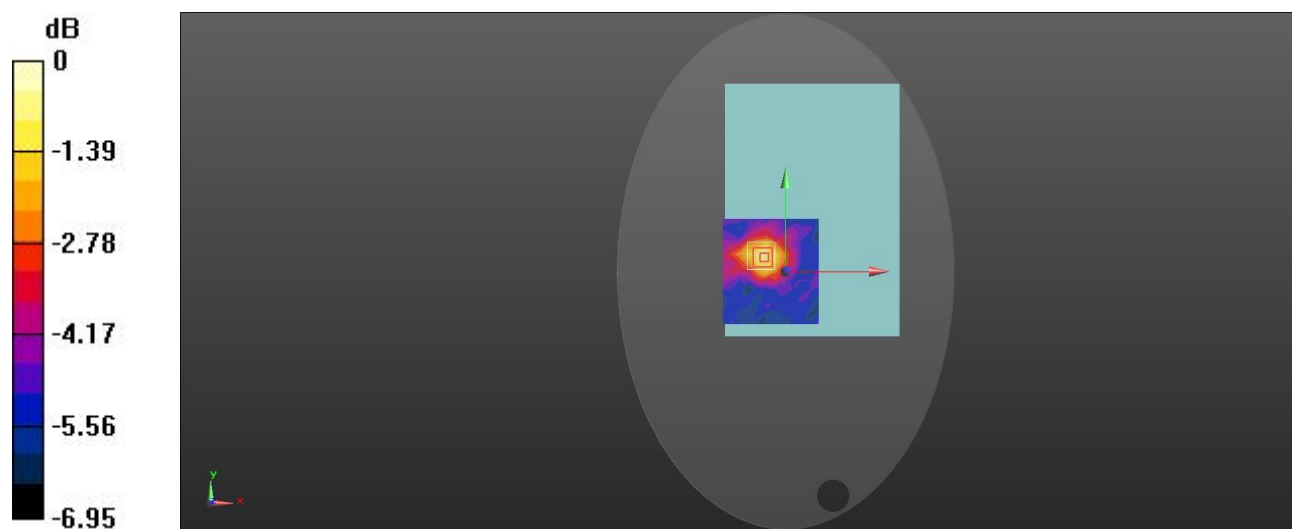

0 dB = 0.577 W/kg = -2.39 dBW/kg



Date: 2025/4/2

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11n20 149CH Rear side 0mm

DUT: Notebook; Type: QL16I5BM16256 ; Serial: A250312066-1

Communication System: UID 0, WI-FI(5.8GHz) (0); Frequency: 5745 MHz;Duty Cycle: 1:1.019

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.375$ S/m; $\epsilon_r = 35.685$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.86, 4.86, 4.86); Calibrated: 2025/2/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.732 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.685 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.368 W/kg

Maximum value of SAR (measured) = 0.719 W/kg

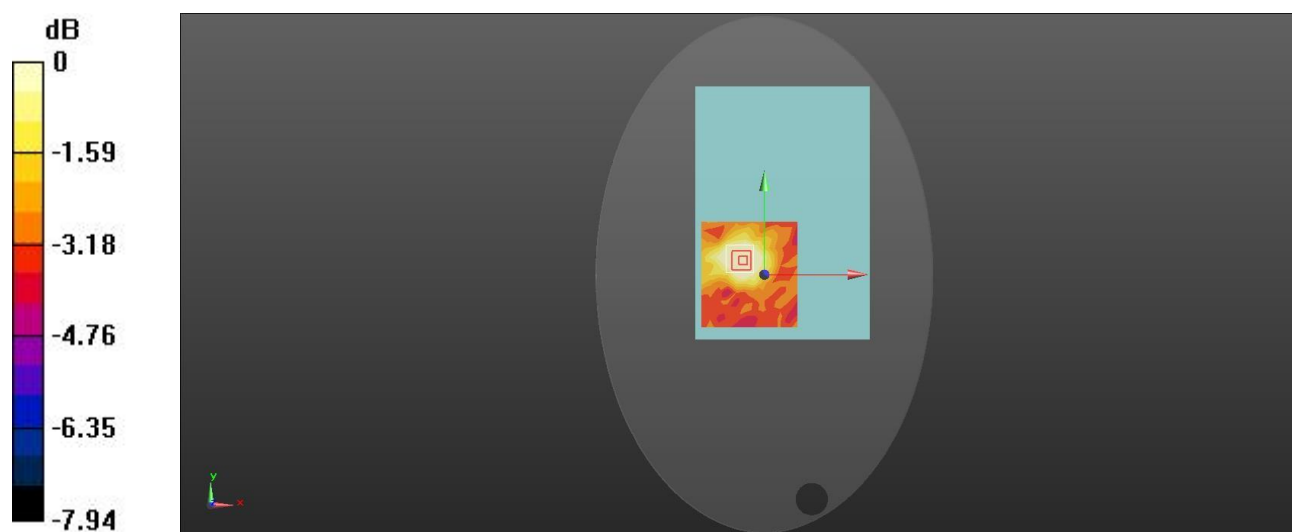

0 dB = 0.719 W/kg = -1.43dBW/kg

