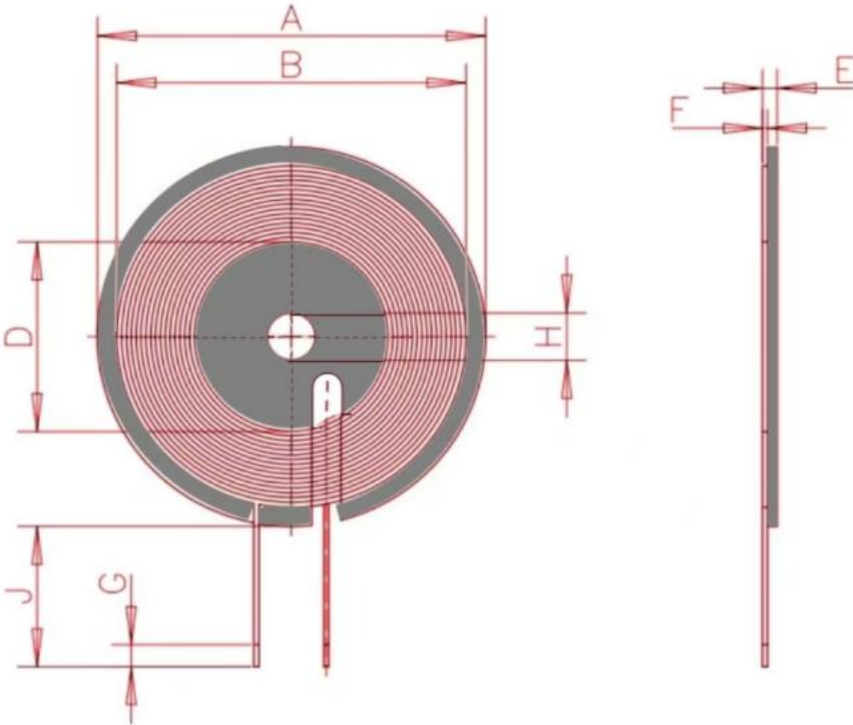
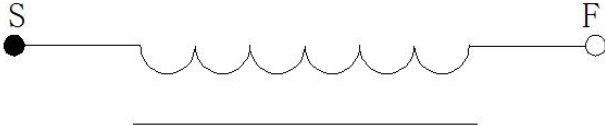


SPECIFICATION

产 品 型 号: DESC		Φ20.5x39-6.8uH-0.08X80P*15mm		版本 Rev: A.0	厂商 man facturer : 客户料号 CUST P/N:	SHENZHEN YIZHI TECHNOLOGY CO. LTD 041-0000-0013																																											
一、尺寸 DIMENSION:(mm)  二、原理图 SCHEMATIC DIAGRAM:  三、绕线参数 Winding Specification: <table><tr><th>序号 NO.</th><th colspan="2">端子 TERMINAL</th><th>线径 WIRE</th><th>圈数 Turns</th><th>绕线方向 Winding Direction</th></tr><tr><td>1</td><td>S</td><td>F</td><td>hot-wire anemometer/0.08*80P</td><td>10Ts</td><td>CCW</td></tr></table> 四、电气特性 ELECTRICAL CHARACTERISTICS: 温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20% <table><tr><th>序号 NO.</th><th>项目 ITEM</th><th>端子 TERMINAL</th><th>标准 SPECIFICATION</th><th>测试条件 TEST FREQUENCY</th><th>测试仪器 TEST EQUIPMENTS</th></tr><tr><td>1</td><td>IND.</td><td>S-F</td><td>4.2uH +10%Individual coil</td><td>100KHz/0.25V</td><td>LCZ METER 1062B</td></tr><tr><td>2</td><td>IND.</td><td>S-F</td><td>6.8uH +10%Magnetized sheet</td><td>100KHz/0.25V</td><td>LCZ METER 1062B</td></tr><tr><td>3</td><td>DCR</td><td>S-F</td><td>≤55m Ω</td><td>100KHz/0.25V</td><td>LCZ METER 502B</td></tr><tr><td>4</td><td>Q 值</td><td>S-F</td><td>≥70</td><td>100KHz/0.25V</td><td>LCZ METER 502B</td></tr></table> 拟制/日期 PREPARED BY/DATE 林素玲 2024.10.15 审核/日期 CHECKED BY/DATE 安帅印 2024.10.15						序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction	1	S	F	hot-wire anemometer/0.08*80P	10Ts	CCW	序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	1	IND.	S-F	4.2uH +10%Individual coil	100KHz/0.25V	LCZ METER 1062B	2	IND.	S-F	6.8uH +10%Magnetized sheet	100KHz/0.25V	LCZ METER 1062B	3	DCR	S-F	≤55m Ω	100KHz/0.25V	LCZ METER 502B	4	Q 值	S-F	≥70	100KHz/0.25V	LCZ METER 502B	A	40±0.5
						序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction																																						
						1	S	F	hot-wire anemometer/0.08*80P	10Ts	CCW																																						
						序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS																																						
						1	IND.	S-F	4.2uH +10%Individual coil	100KHz/0.25V	LCZ METER 1062B																																						
						2	IND.	S-F	6.8uH +10%Magnetized sheet	100KHz/0.25V	LCZ METER 1062B																																						
						3	DCR	S-F	≤55m Ω	100KHz/0.25V	LCZ METER 502B																																						
						4	Q 值	S-F	≥70	100KHz/0.25V	LCZ METER 502B																																						
						B	39.0±1.0																																										
						D	20.5±0.5																																										
						E	1.8±0.2																																										
						F	0.8±0.1																																										
						J	15±2																																										
						H	5.1±0.3																																										
						G	3±1																																										
note:																																																	
1.Cross outlet;																																																	
2.The outlet position is reinforced with glue																																																	
3.The coil is attached to a circular hard disk with grooves																																																	
4.No back glue																																																	