



FCC Test Report

Report Reference No.: **HK2501150317-7E**
FCC ID : **2BLWP-PH970G**
Compiled by
(position+printed name+signature) .: RF Department Manager Len Liao
Supervised by
(position+printed name+signature) .: Technical Manager Sliver Wan
Approved by
(position+printed name+signature) .: General Manager Jason Zhou

Len Liao
Sliver Wan
Jason Zhou

Date of issue: Feb. 26, 2025
Testing Laboratory Name.....: Shenzhen HUAKE Testing Technology Co., Ltd.
Address: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Applicant's name: Shenzhen Zecre Technology CO.,Ltd
Address: RM 501 BLDG B AREA C SHANGXUE INDUSTRIAL PARK, XINXUE
COMMUNITY, BANTIAN, LONGGANG, SHENZHEN, China
Test specification.....:
Standard.....: FCC Part 90
Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.
This publication may be reproduced in whole or in part for non-commercial purposes as long as the
Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen
HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages
resulting from the reader's interpretation of the reproduced material due to its placement and context.
Test item description.....: Trail Camera
Trade Mark.....: N/A
Manufacturer.....: Shenzhen Zecre Technology CO.,Ltd
Model/Type reference: ph970G
Series Models: N/A
Ratings: DC5V From Type-C or DC3.7V From Battery
Modulation: QPSK, 16QAM
Hardware version.....: V2.0
Software version: V2.0
Frequency: LTE Band 26
Result.....: **PASS**

**TEST REPORT****Test Report No. :****HK2501150317-7E**

Feb. 26, 2025

Date of issue

Equipment under Test : Trail Camera

Model /Type : ph970G

Series Models : N/A

Applicant : Shenzhen Zecre Technology CO.,LtdAddress : RM 501 BLDG B AREA C SHANGXUE
INDUSTRIAL PARK, XINXUE COMMUNITY,
BANTIAN, LONGGANG, SHENZHEN, China**Manufacturer : Shenzhen Zecre Technology CO.,Ltd**Address : RM 501 BLDG B AREA C SHANGXUE
INDUSTRIAL PARK, XINXUE COMMUNITY,
BANTIAN, LONGGANG, SHENZHEN, China**Test result****Pass**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Table of Contents

1. Summary	4
1.1 Test Standards.....	4
1.2 Test Description.....	5
2. EUT Description	6
3. General Information.....	7
3.1. Test environment and mode.....	7
3.2. Test Mode.....	8
3.3. Description of Support Units.....	8
3.4. Configuration of Tested System	9
3.5. Measurement Results Explanation Example.....	9
3.6. Equipments Used during the Test	10
4. Facilities and Accreditations	12
4.1. Information of the Test Laboratory	12
4.2. Measurement Uncertainty.....	12
5. Test Results and Measurement Data	13
5.1. Conducted Output Power Measurement	13
5.2. Radiated Output Power	15
5.3. Peak to Average Ratio.....	18
5.4. 99% Occupied Bandwidth and 26dB Bandwidth Measurement	23
5.5. Band Edge and Conducted Spurious Emission Measurement	29
5.6. Field Strength of Spurious Radiation Measurement	43
5.7. Frequency Stability Measurement	49
6. Photographs of Test Setup.....	51
7. Photographs of EUT	52



1. Summary

1.1 Test Standards

The tests were performed according to following standards:

[FCC Part 90](#) : PRIVATE LAND MOBILE RADIO SERVICES

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

47 CFR FCC Part 15 Subpart B: - Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[KDB971168 D01 v03r01](#): MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS



1.2 Test Description

Requirement	CFR 47 Section	Result
Conducted Output Power	§2.1046; §90.635;	PASS
Peak-to-Average Ratio	§2.1046;	PASS
Effective Radiated Power	§2.1046; §90.635;	PASS
Occupied Bandwidth	§2.1049;	PASS
Band Edge	§2.1051; §90.691	PASS
Conducted Spurious Emission	§2.1051; §90.691	PASS
Field Strength of Spurious Radiation	§2.1053; §90.691	PASS
Frequency Stability for Temperature & Voltage	§2.1055; §90.231	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.



2. EUT Description

Product Name:	Trail Camera
Model :	ph970G
Series Models:	N/A
Trade Mark:	N/A
Tx Frequency:	LTE Band 26: 814 MHz ~ 824 MHz
Rx Frequency:	LTE Band 26: 859MHz ~ 869 MHz
Bandwidth:	LTE Band 26: 1.4MHz /3MHz /5MHz /10MHz
Type of Modulation:	QPSK/16QAM
Antenna Type:	Internal Antenna
Antenna Gain:	LTE Band 26: 0.65dBi
Power Supply:	DC5V From Type-C or DC3.7V From Battery



3. General Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation
The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

Description Operation Frequency

LTE Band 26(1.4MHz)		LTE Band 26(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26697	814.7	26705	815.5
26740	819.0	26740	819.0
26783	823.3	26775	822.5
LTE Band 26(5MHz)		LTE Band 26(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26715	816.5	26740	819.0
26740	819.0	-	-
26765	821.5	-	-



3.2. Test Mode

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Band	Radiated TCs	Conducted TCs
LTE Band 26	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz)

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas License Digital Systems v03 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

3.3. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



3.4. Configuration of Tested System

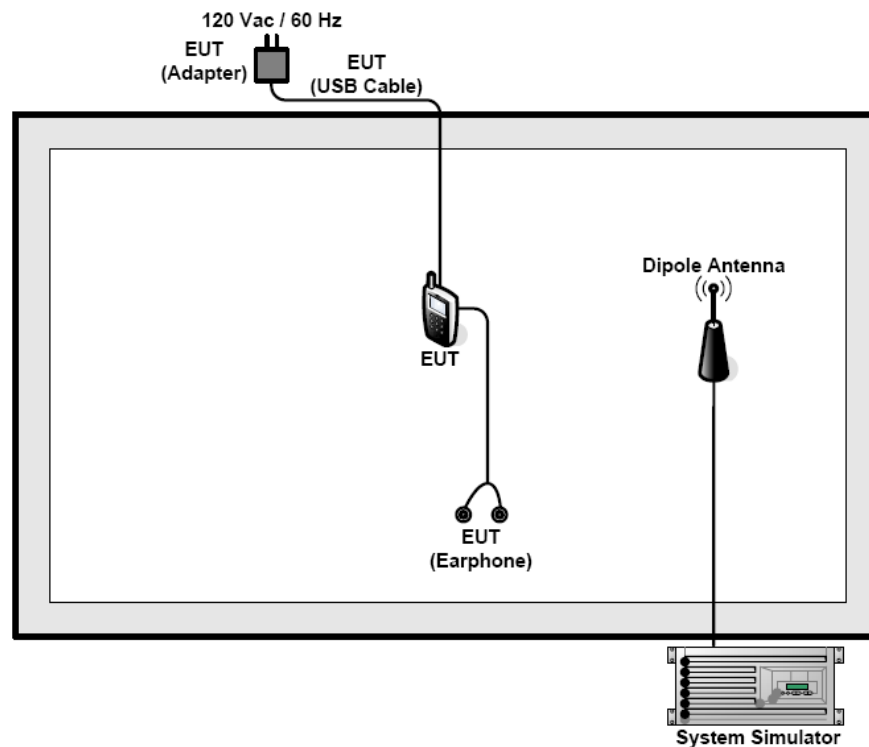

3.5. Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level. The spectrum analyzer offset is derived from RF cable loss and attenuator factor.
Offset = RF cable loss + attenuator factor.



3.6. Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	L.I.S.N.	R&S	ENV216	HKE-002	2024/02/20	2025/02/19
2	L.I.S.N.	R&S	ENV216	HKE-059	2024/02/20	2025/02/19
3	EMI Test Receiver	R&S	ESR	HKE-005	2024/02/20	2025/02/19
4	Spectrum analyzer	Agilent	N9020A	HKE-117	2024/02/20	2025/02/19
5	Spectrum analyzer	R&S	FSV3044	HKE-126	2024/02/20	2025/02/19
6	Preamplifier	EMCI	EMC051845S	HKE-006	2024/02/20	2025/02/19
7	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	2024/02/20	2025/02/19
8	Preamplifier	A.H. Systems	SAS-574	HKE-182	2024/02/20	2025/02/19
9	6dB Attenuator	Pasternack	6db	HKE-184	2024/02/20	2025/02/19
10	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	2024/02/20	2025/02/19
11	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	2024/02/21	2026/02/20
12	Loop Antenna	COM-POWER	AL-130R	HKE-014	2024/02/21	2026/02/20
13	Horn Antenna	Schwarzbeck	9120D	HKE-013	2024/02/21	2026/02/20
14	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16	RF Automatic control unit	Tonscend	JS0806-1	HKE-096	2024/02/20	2025/02/19
17	High pass filter unit	Tonscend	JS0806-F	HKE-055	2024/02/20	2025/02/19
18	Wireless Communication Test Set	R&S	CMU200	HKE-026	2024/02/20	2025/02/19
19	Wireless Communication Test Set	R&S	CMW500	HKE-027	2024/02/20	2025/02/19
20	High-low temperature chamber	Guangke	HT-80L	HKE-118	2024/06/10	2025/06/09
21	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2024/06/10	2025/06/09
22	RF Test Software	Tonscend	JS1120 Version 3.1.46	HKE-183	/	/
23	RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/



Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	L.I.S.N.	R&S	ENV216	HKE-002	2025/02/19	2026/02/18
2	L.I.S.N.	R&S	ENV216	HKE-059	2025/02/19	2026/02/18
3	EMI Test Receiver	R&S	ESR	HKE-005	2025/02/19	2026/02/18
4	Spectrum analyzer	Agilent	N9020A	HKE-117	2025/02/19	2026/02/18
5	Spectrum analyzer	R&S	FSV3044	HKE-126	2025/02/19	2026/02/18
6	Preamplifier	EMCI	EMC051845S	HKE-006	2025/02/19	2026/02/18
7	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	2025/02/19	2026/02/18
8	Preamplifier	A.H. Systems	SAS-574	HKE-182	2025/02/19	2026/02/18
9	6dB Attenuator	Pasternack	6db	HKE-184	2025/02/19	2026/02/18
10	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	2025/02/19	2026/02/18
11	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	2024/02/21	2026/02/20
12	Loop Antenna	COM-POWER	AL-130R	HKE-014	2024/02/21	2026/02/20
13	Horn Antenna	Schwarzbeck	9120D	HKE-013	2024/02/21	2026/02/20
14	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16	RF Automatic control unit	Tonscend	JS0806-1	HKE-096	2025/02/19	2026/02/18
17	High pass filter unit	Tonscend	JS0806-F	HKE-055	2025/02/19	2026/02/18
18	Wireless Communication Test Set	R&S	CMU200	HKE-026	2025/02/19	2026/02/18
19	Wireless Communication Test Set	R&S	CMW500	HKE-027	2025/02/19	2026/02/18
20	High-low temperature chamber	Guangke	HT-80L	HKE-118	2024/06/10	2025/06/09
21	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2024/06/10	2025/06/09
22	RF Test Software	Tonscend	JS1120 Version 3.1.46	HKE-183	/	/
23	RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



4. Facilities and Accreditations

4.1. Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization :

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

4.2. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)


- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. Test Results and Measurement Data

5.1. Conducted Output Power Measurement

5.1.1. Test Specification

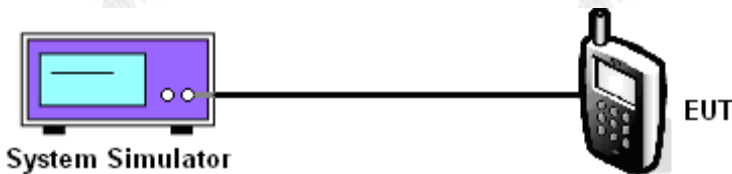Test Requirement:	FCC part 90.635
Test Method:	FCC part 2.1046
Limits:	LTE Band 26: 100W
Test Setup:	 The diagram illustrates the test setup. On the left is a purple rectangular box labeled 'System Simulator' with a blue screen and two small circles. A black line connects this box to a black mobile phone on the right labeled 'EUT'.
Test Procedure:	1. The transmitter output port was connected to the system simulator. 2. Set EUT at maximum power through system simulator. 3. Select lowest, middle, highest channels for each band and different modulation. 4. Measure and record the power level from the system simulator.
Test Result:	PASS

TEST RESULTS

**Conducted Measurement:**

LTE FDD Band 26				
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1 RB low	814.7	23.01	22.02
		819.0	23.31	22.50
		823.3	23.24	22.22
	1 RB high	814.7	23.19	22.07
		819.0	23.46	21.99
		823.3	23.26	21.98
	50% RB mid	814.7	23.30	22.28
		819.0	23.44	22.61
		823.3	23.26	22.28
	100% RB	814.7	23.61	22.18
		819.0	23.58	22.15
		823.3	23.36	22.06
3 MHz	1 RB low	815.5	23.46	22.35
		819.0	23.21	22.24
		822.5	23.31	22.40
	1 RB high	815.5	22.44	21.55
		819.0	22.45	21.44
		822.5	22.49	21.59
	50% RB mid	815.5	23.60	22.38
		819.0	23.32	22.32
		822.5	23.37	22.24
	100% RB	815.5	22.34	21.61
		819.0	22.28	21.25
		822.5	22.31	21.30
5 MHz	1 RB low	816.5	23.23	22.33
		819.0	23.27	22.30
		821.5	23.55	22.70
	1 RB high	816.5	22.38	21.44
		819.0	22.30	21.44
		821.5	22.45	21.42
	50% RB mid	816.5	23.43	22.37
		819.0	23.35	22.51
		821.5	23.39	22.22
	100% RB	816.5	22.36	21.37
		819.0	22.26	21.57
		821.5	22.46	21.40
10 MHz	1 RB low	819.0	23.34	22.21
	1 RB high	819.0	23.56	22.13
	50% RB mid	819.0	23.25	22.19
	100% RB	819.0	22.42	21.46

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China


5.2. Radiated Output Power

LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 90 specifies, " The maximum output power of the transmitter for mobile stations is 100 watts. "

TEST CONFIGURATION

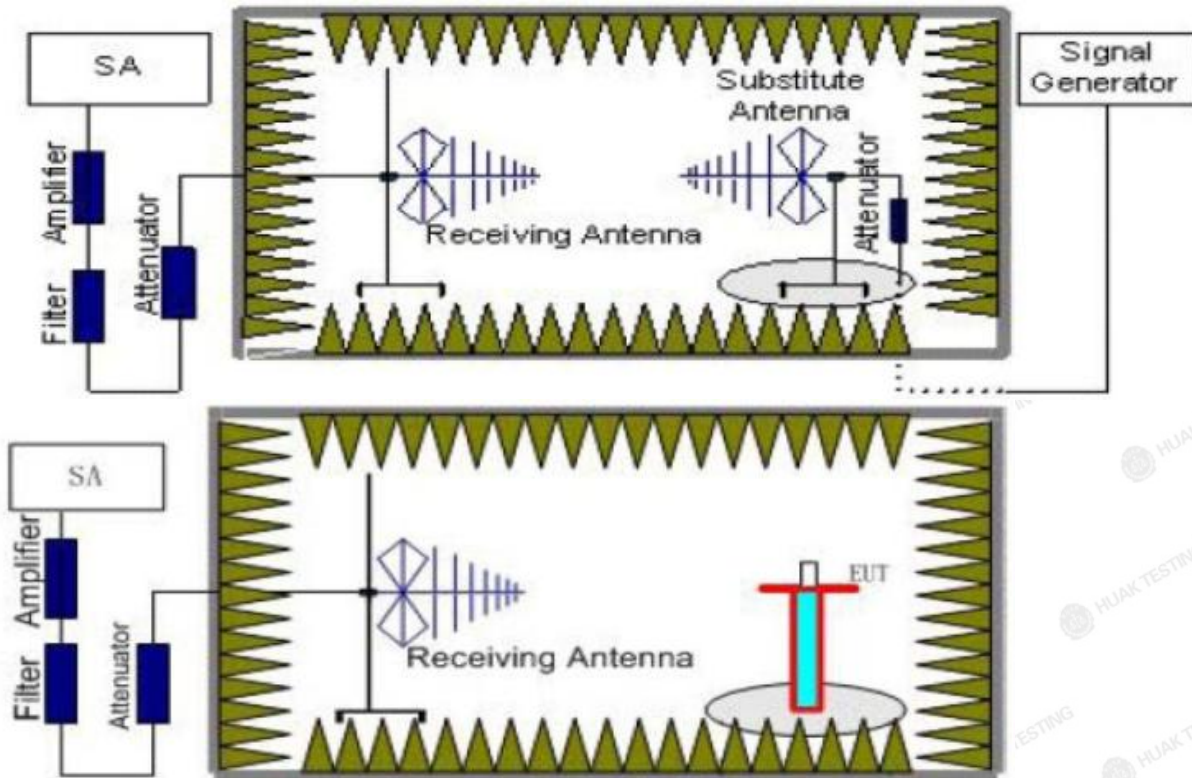

TEST PROCEDURE

1. EUT was placed on a 0.1 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.1m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver.



- reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below: $\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power

Amplifier for substitution test; The measurement results are amend as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{cl} + G_a$$

- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

TEST RESULTS

Radiated Measurement:

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.
- $\text{EIRP} = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
- We measured both Horizontal and Vertical direction, recorded worst case direction.

LTE FDD Band 26_Channel Bandwidth 1.4MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
814.7	-18.89	2.42	8.45	36.82	23.96	21.81	50.00	28.19	V
819.0	-16.94	2.46	8.45	36.82	25.87	23.72	50.00	26.28	V
823.3	-18.49	2.53	8.36	36.82	24.16	22.01	50.00	27.99	V

LTE FDD Band 26_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
815.5	-18.38	2.42	8.45	36.82	24.47	22.32	50.00	27.68	V
819.0	-16.86	2.46	8.45	36.82	25.95	23.80	50.00	26.2	V
822.5	-17.79	2.53	8.36	36.82	24.86	22.71	50.00	27.29	V

LTE FDD Band 26_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
816.5	-18.95	2.42	8.45	36.82	23.9	21.75	50.00	28.25	V
819.0	-16.72	2.46	8.45	36.82	26.09	23.94	50.00	26.06	V
821.5	-18.14	2.53	8.36	36.82	24.51	22.36	50.00	27.64	V

LTE FDD Band 26_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
819.0	-15.94	2.46	8.45	36.82	26.87	24.72	50.00	25.28	V

**LTE FDD Band 26 Channel Bandwidth 1.4MHz 16QAM**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
814.7	-17.62	2.42	8.45	36.82	25.23	23.08	50.00	26.92	V
819.0	-16.97	2.46	8.45	36.82	25.84	23.69	50.00	26.31	V
823.3	-18.29	2.53	8.36	36.82	24.36	22.21	50.00	27.79	V

LTE FDD Band 26 Channel Bandwidth 3MHz 16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
815.5	-18.65	2.42	8.45	36.82	24.20	22.05	50.00	27.95	V
819.0	-17.17	2.46	8.45	36.82	25.64	23.49	50.00	26.51	V
822.5	-18.14	2.53	8.36	36.82	24.51	22.36	50.00	27.64	V

LTE FDD Band 26 Channel Bandwidth 5MHz 16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
816.5	-18.35	2.42	8.45	36.82	24.50	22.35	50.00	27.65	V
819.0	-17.21	2.46	8.45	36.82	25.60	23.45	50.00	26.55	V
821.5	-18.11	2.53	8.36	36.82	24.54	22.39	50.00	27.61	V


LTE FDD Band 26 Channel Bandwidth 10MHz 16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
819.0	-16.32	2.46	8.45	36.82	26.49	24.34	50.00	25.66	V



5.3. Peak to Average Ratio

5.3.1. Test Specification

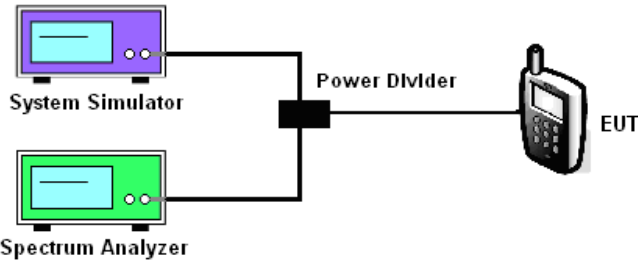Test Method:	FCC KDB 971168 D01v03
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test Setup:	
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 5.7.1. 2. The EUT was connected to spectrum analyzer and system simulator via a power divider. 3. Set EUT to transmit at maximum output power. 4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.
Test Result:	PASS

TEST RESULTS

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.

LTE FDD Band 26				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
1.4 MHz	814.7	1RB#0	3.71	4.72
	819.0		3.57	4.61
	823.3		3.51	4.58
3 MHz	815.5	1RB#0	3.62	4.51
	819.0		3.60	4.92
	822.5		3.56	4.61
5 MHz	816.5	1RB#0	3.57	4.46
	819.0		3.66	4.45
	821.5		3.75	4.39
10 MHz	819.0	1RB#0	3.56	4.68




LTE FDD Band 26-1.4MHz Channel Bandwidth PAPR

QPSK

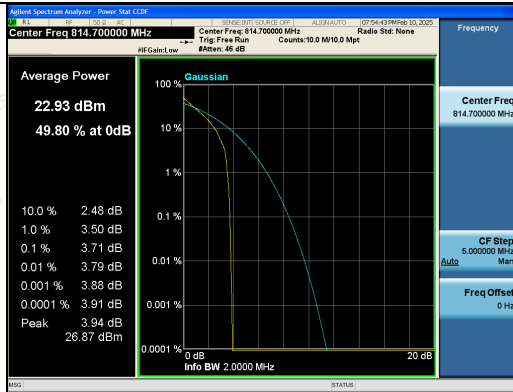


1RB#0

16QAM

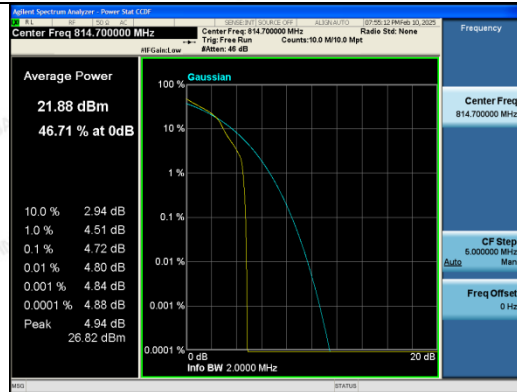


1RB#0

Low Channel

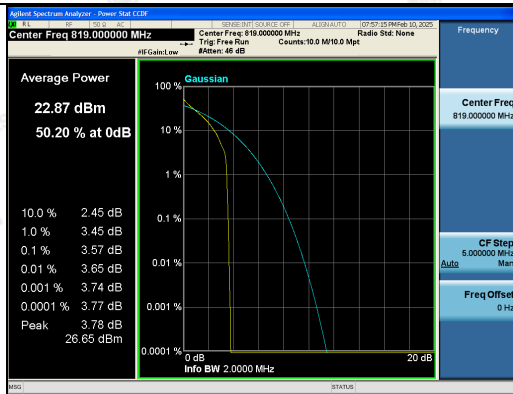


1RB#0

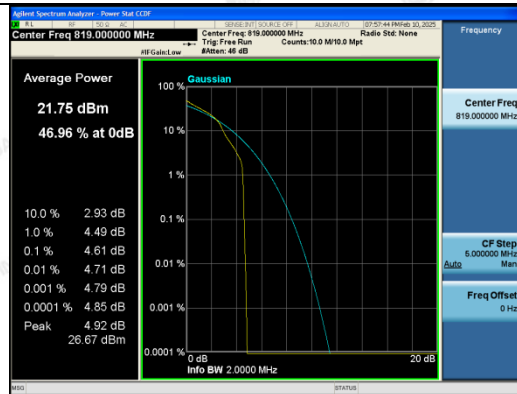


1RB#0

Middle Channel

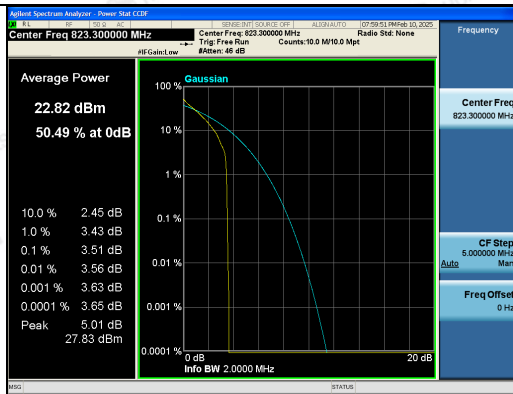

1RB#0

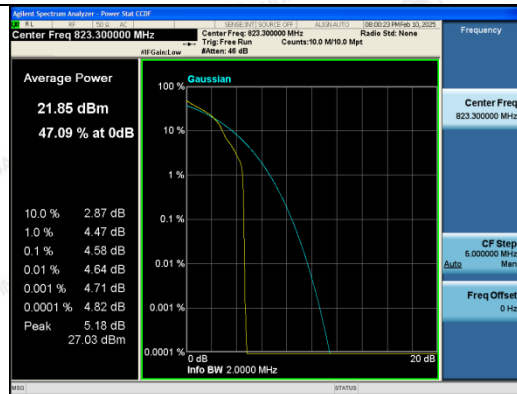

1RB#0



High Channel



LTE FDD Band 26-3MHz Channel Bandwidth PAPR

QPSK



16QAM

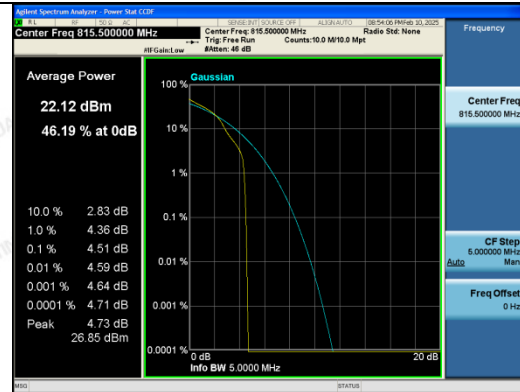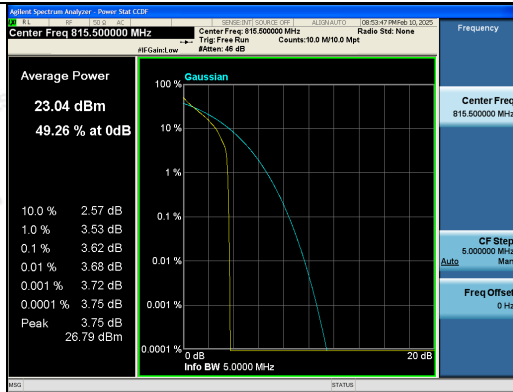

1RB#0

1RB#0



Low Channel

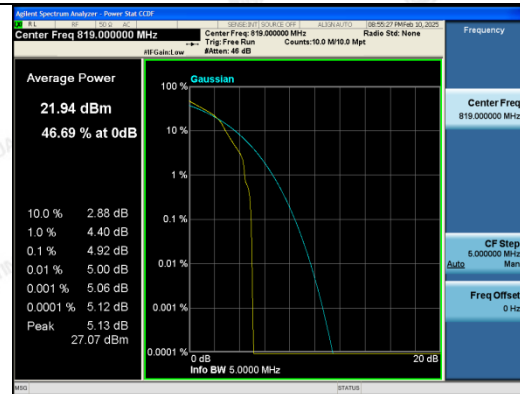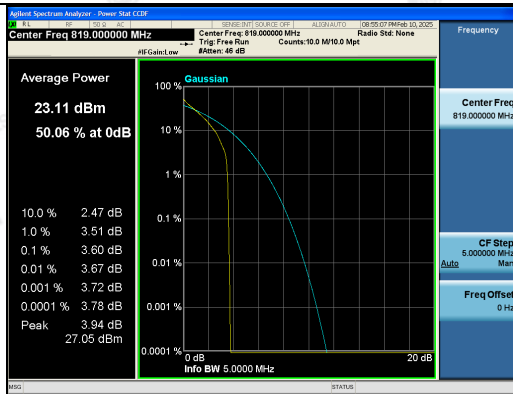

1RB#0

1RB#0

Middle Channel

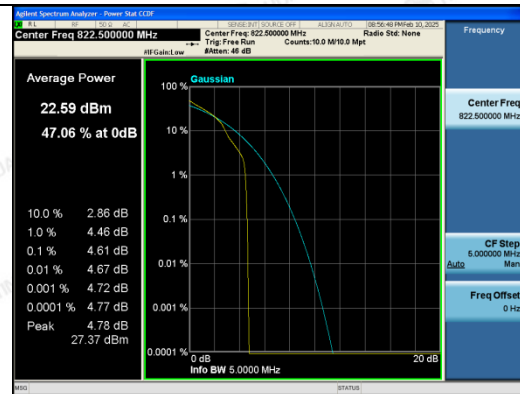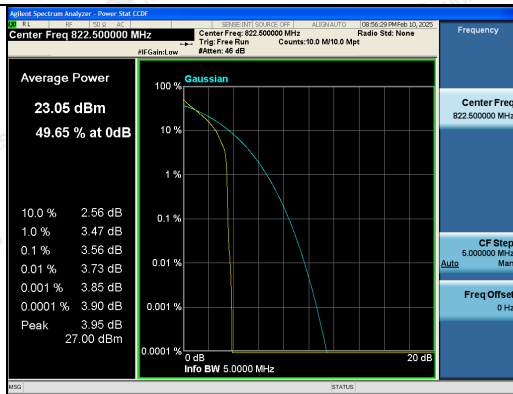

1RB#0


1RB#0

High Channel




LTE FDD Band 26-5MHz Channel Bandwidth PAPR

QPSK

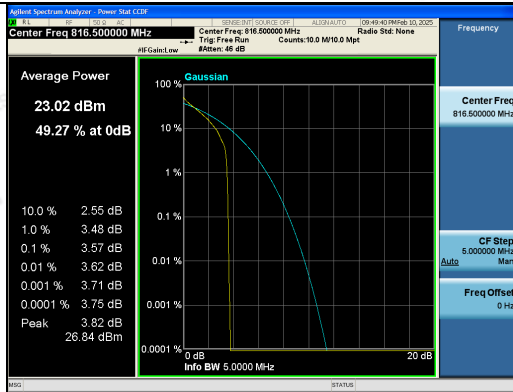


1RB#0

16QAM

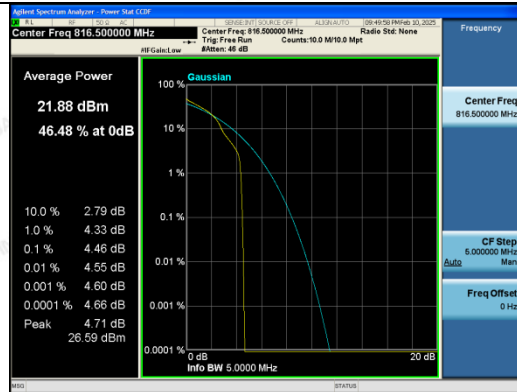


1RB#0

Low Channel

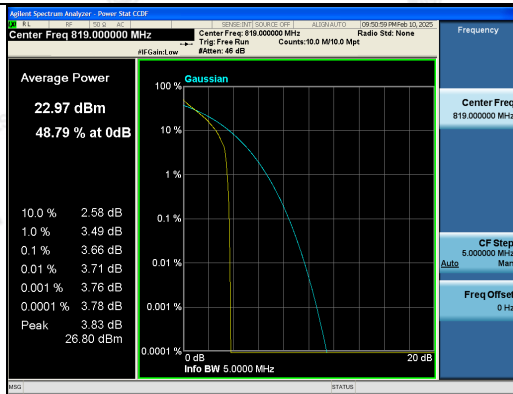

1RB#0

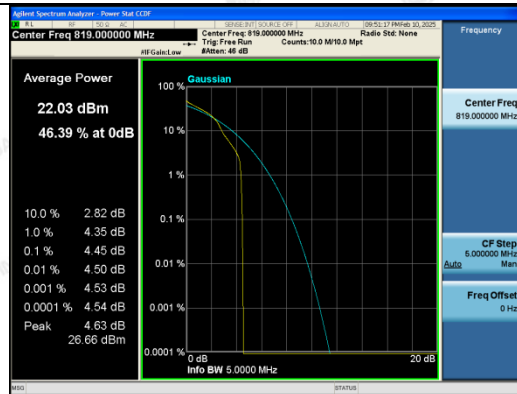

1RB#0

Middle Channel



1RB#0




1RB#0

High Channel




LTE FDD Band 26-10MHz Channel Bandwidth PAPR

QPSK

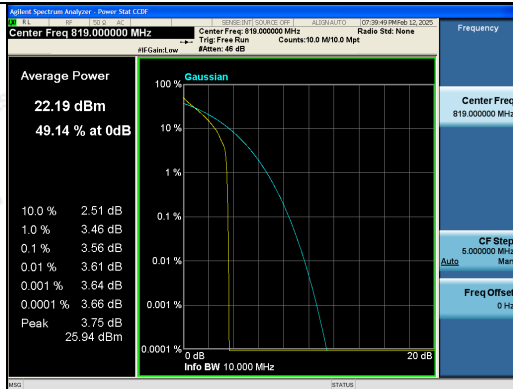

1RB#0

16QAM

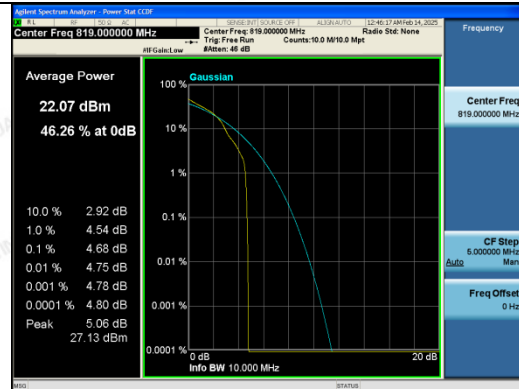


1RB#0



5.4. 99% Occupied Bandwidth and 26dB Bandwidth Measurement

5.4.1. Test Specification

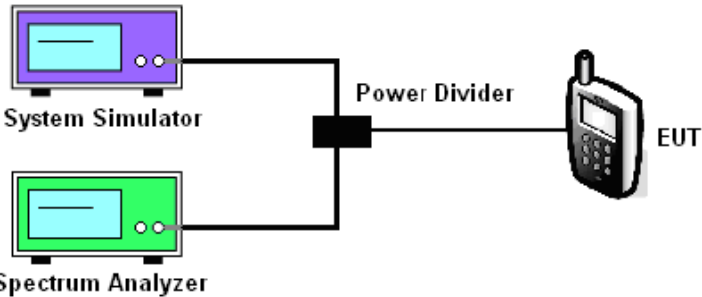Test Method:	FCC part 2.1049
Limit:	N/A
Test Setup:	 The diagram shows a test setup where a System Simulator and a Spectrum Analyzer are connected to a Power Divider. The Power Divider is then connected to the EUT (Equipment Under Test).
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 4.2. 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider. 3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 4. The 99% occupied bandwidth were measured, set RBW= 1% of OBW, VBW= 3*RBW, sample detector, trace maximum hold. 5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.
Test Result:	PASS

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.




<i>LTE FDD Band 26</i>						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	814.7	1.318	1.307	1.0936	1.0971
		819.0	1.303	1.304	1.0947	1.0957
		823.3	1.287	1.305	1.0963	1.0944
3 MHz	15RB#0	815.5	2.967	2.972	2.6974	2.6922
		819.0	2.962	2.976	2.7091	2.7001
		822.5	2.960	2.977	2.6994	2.6928
5 MHz	25RB#0	816.5	5.014	4.976	4.5068	4.5000
		819.0	5.002	5.024	4.4939	4.5076
		821.5	5.008	5.046	4.5039	4.5209
10 MHz	50RB#0	819.0	9.829	/	8.9639	/




LTE FDD Band 26-1.4MHz Channel Bandwidth

QPSK

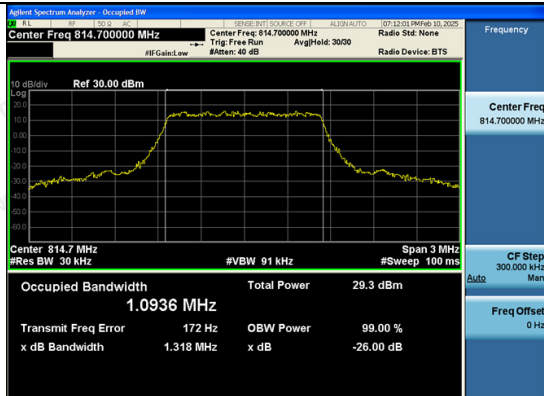


6RB#0

16QAM

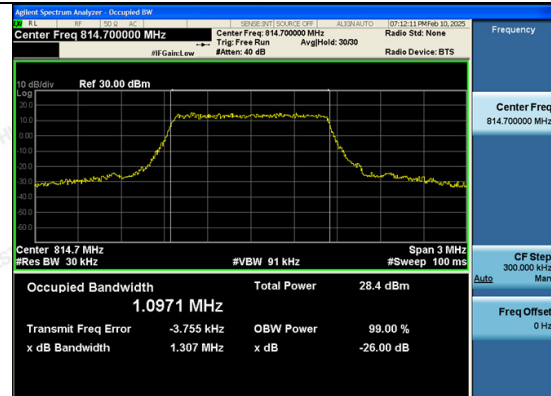


6RB#0

Low Channel

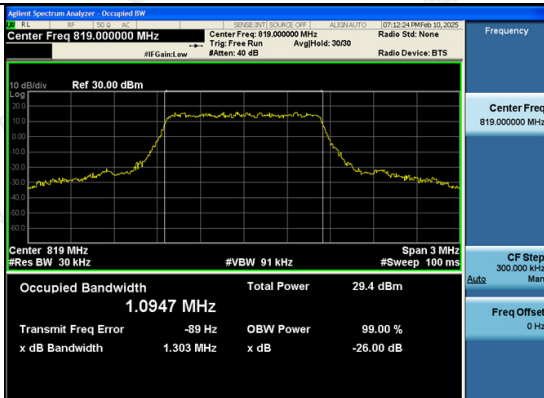


6RB#0

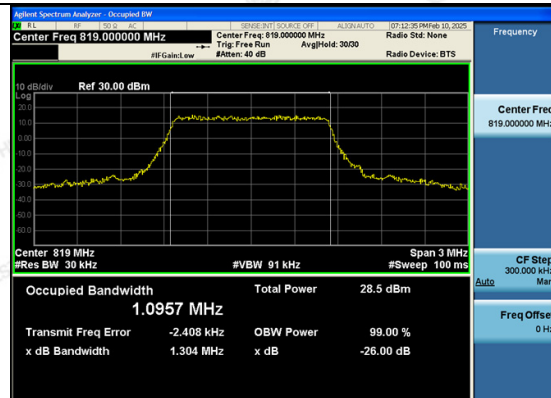


6RB#0

Middle Channel

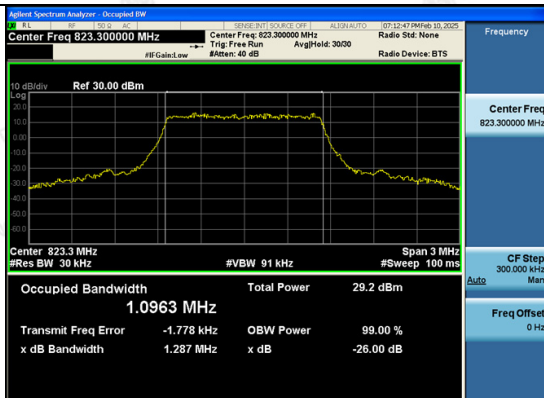

6RB#0

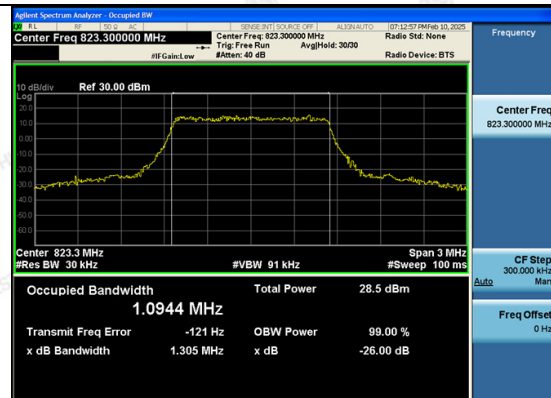


6RB#0

High Channel




LTE FDD Band 26-3MHz Channel Bandwidth

QPSK

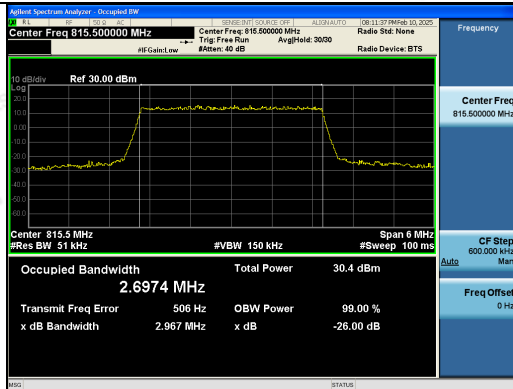



16QAM

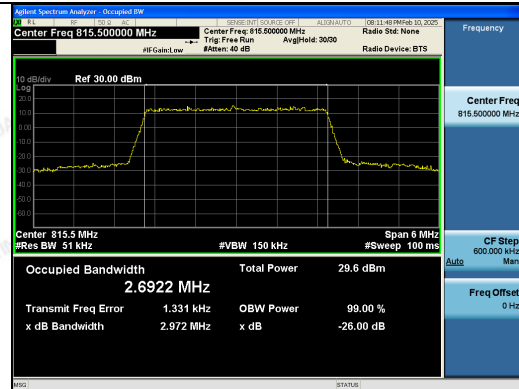

15RB#0

15RB#0



Low Channel

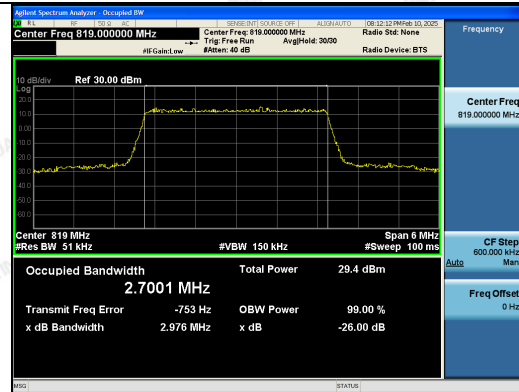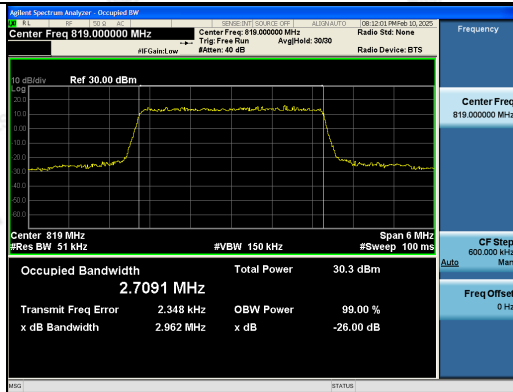

15RB#0

15RB#0

Middle Channel

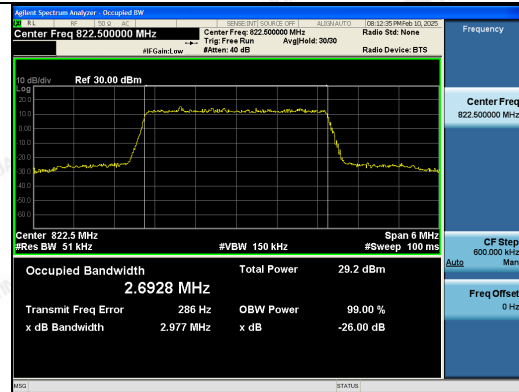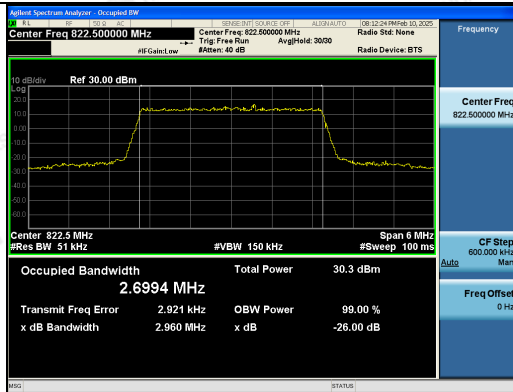

15RB#0


15RB#0

High Channel




LTE FDD Band 26-5MHz Channel Bandwidth

QPSK

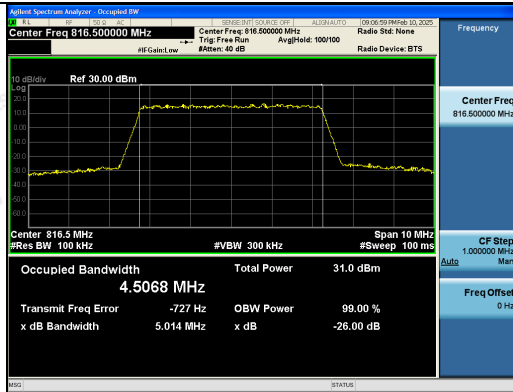



16QAM

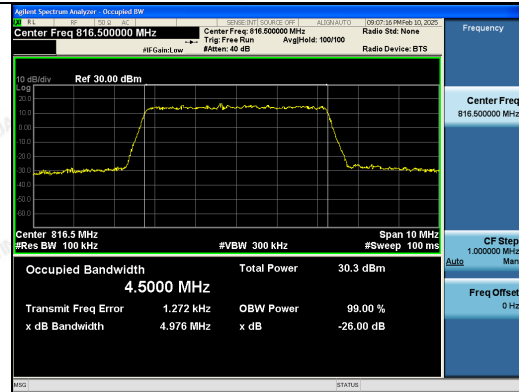

25RB#0

25RB#0



Low Channel

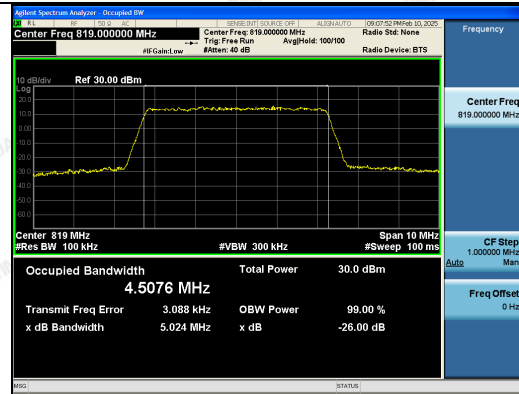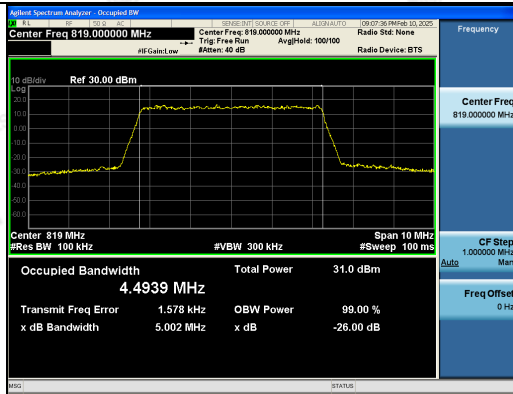

25RB#0

25RB#0

Middle Channel

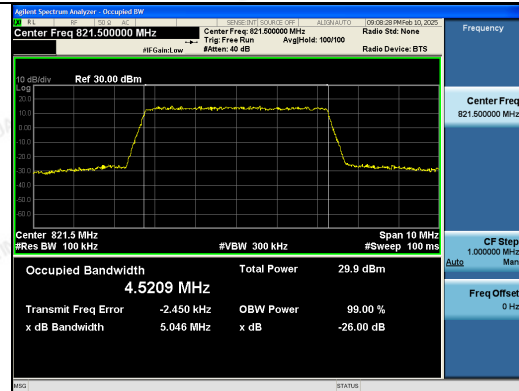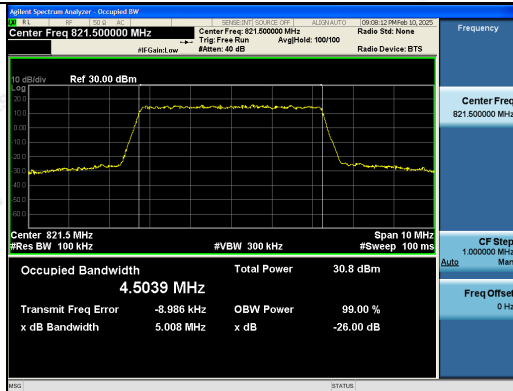


25RB#0

25RB#0

High Channel



LTE FDD Band 26-10MHz Channel Bandwidth QPSK

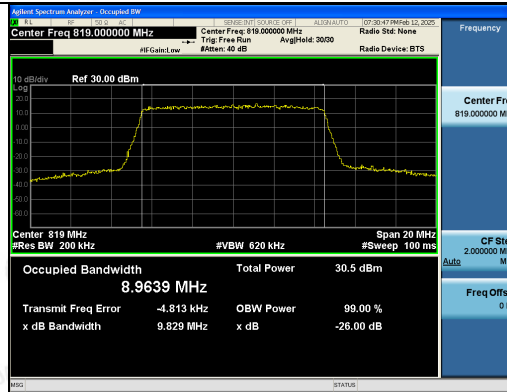


50RB#0



5.5. Band Edge and Conducted Spurious Emission Measurement

5.5.1. Test Specification

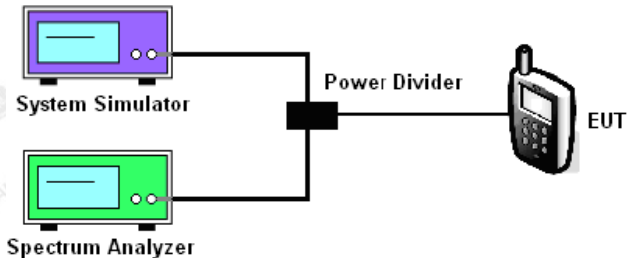Test Requirement:	FCC part 90.691
Test Method:	FCC part 2.1051
Limit:	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
Test Setup:	 The diagram shows a System Simulator (purple box) and a Spectrum Analyzer (green box) connected to a Power Divider (black box). The Power Divider is also connected to the EUT (Equipment Under Test, represented by a mobile phone icon).
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 6.0. 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider. 3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement. 4. The band edges of low and high channels for the highest RF powers were measured. 5. The conducted spurious emission for the whole frequency range was taken. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.

LTE FDD Band 26-1.4MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	1	809.00 MHz	813.96 MHz	100.0 kHz	813.96363 MHz	-30.72 dBm	-17.72 dB
2	2	813.96 MHz	814.00 MHz	2.000 kHz	813.99935 MHz	-36.98 dBm	-16.98 dB
3	3	814.00 MHz	815.40 MHz	100.0 kHz	815.16720 MHz	-8.439 dBm	-41.56 dB
4	4	815.40 MHz	815.44 MHz	2.000 kHz	815.435363 MHz	-36.40 dBm	-16.40 dB
5	5	815.44 MHz	820.40 MHz	100.0 kHz	815.510900 MHz	-29.19 dBm	-16.19 dB

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	1	809.00 MHz	813.96 MHz	100.0 kHz	813.957538 MHz	-28.89 dBm	-15.89 dB
2	2	813.96 MHz	814.00 MHz	2.000 kHz	813.99763 MHz	-39.62 dBm	-19.62 dB
3	3	814.00 MHz	815.40 MHz	100.0 kHz	815.080800 MHz	-7.523 dBm	-42.48 dB
4	4	815.40 MHz	815.44 MHz	2.000 kHz	815.400450 MHz	-37.80 dBm	-17.80 dB
5	5	815.44 MHz	820.40 MHz	100.0 kHz	815.500975 MHz	-30.32 dBm	-17.32 dB

6RB#0

6RB#0

Low Channel


Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	1	817.60 MHz	822.56 MHz	100.0 kHz	822.527763 MHz	-27.33 dBm	-14.33 dB
2	2	822.56 MHz	822.60 MHz	2.000 kHz	822.586463 MHz	-35.95 dBm	-15.95 dB
3	3	822.60 MHz	824.00 MHz	100.0 kHz	822.812800 MHz	-8.334 dBm	-41.67 dB
4	4	824.00 MHz	824.04 MHz	2.000 kHz	824.036728 MHz	-35.78 dBm	-15.78 dB
5	5	824.04 MHz	829.00 MHz	100.0 kHz	824.102013 MHz	-28.09 dBm	-15.09 dB

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	1	817.60 MHz	822.56 MHz	100.0 kHz	822.507913 MHz	-30.03 dBm	-17.03 dB
2	2	822.56 MHz	822.60 MHz	2.000 kHz	822.595350 MHz	-38.35 dBm	-18.35 dB
3	3	822.60 MHz	824.00 MHz	100.0 kHz	823.328000 MHz	-7.325 dBm	-42.68 dB
4	4	824.00 MHz	824.04 MHz	2.000 kHz	824.036776 MHz	-38.54 dBm	-18.54 dB
5	5	824.04 MHz	829.00 MHz	100.0 kHz	824.110900 MHz	-30.11 dBm	-17.11 dB

6RB#0

6RB#0

High Channel

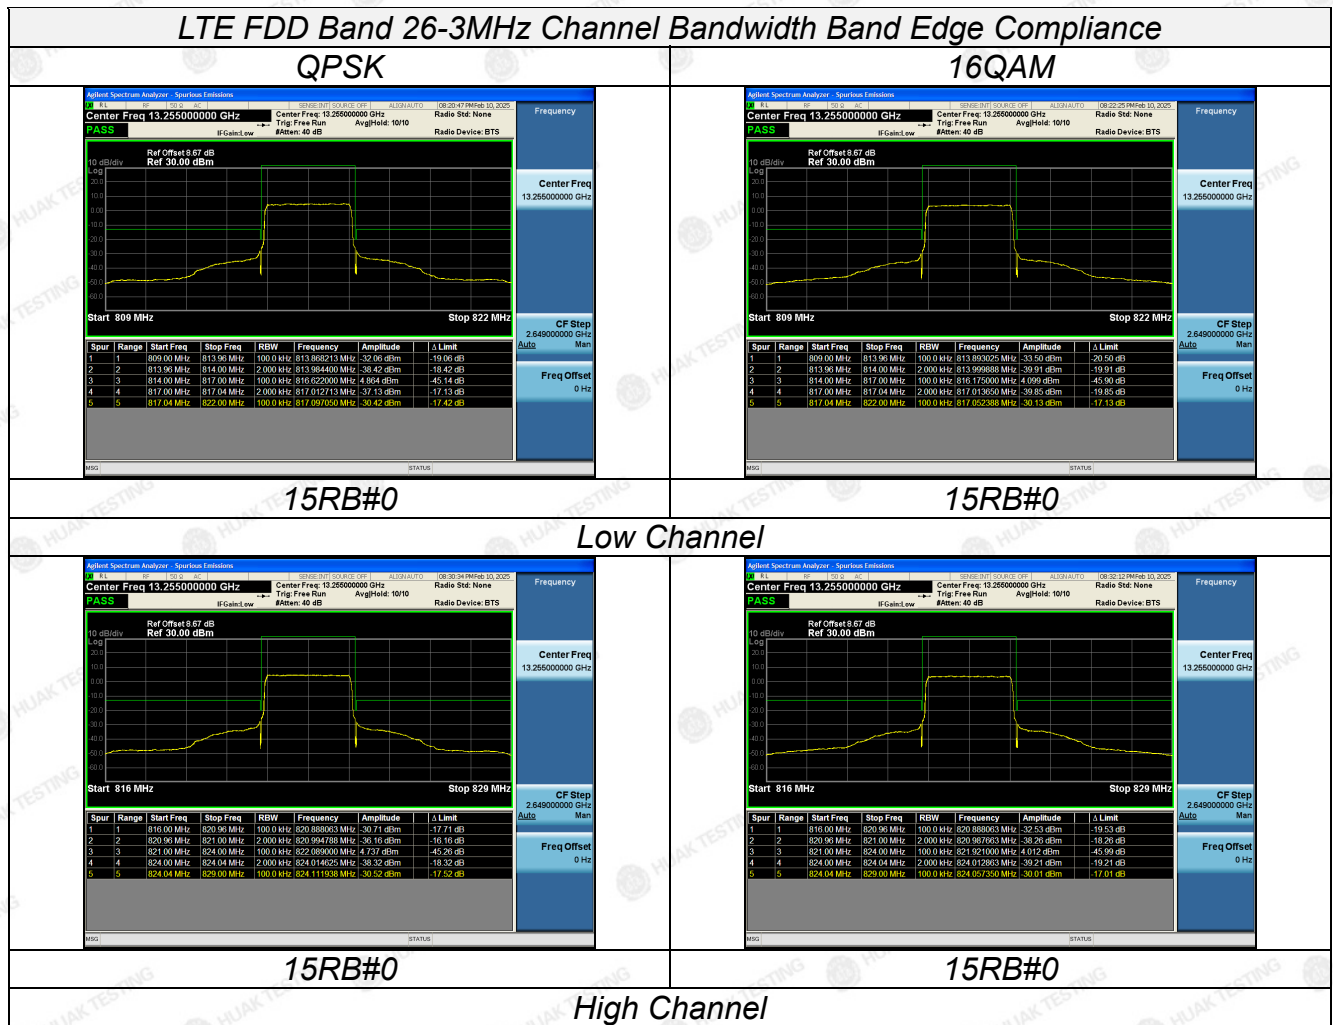





LTE FDD Band 26-5MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM

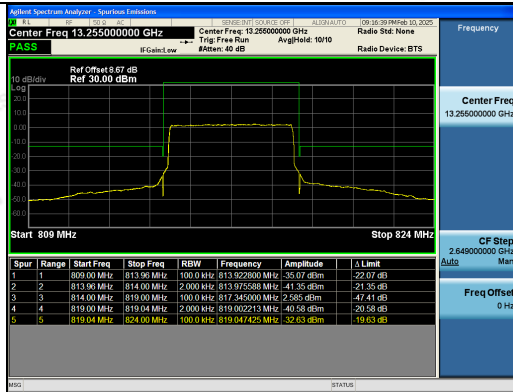


25RB#0

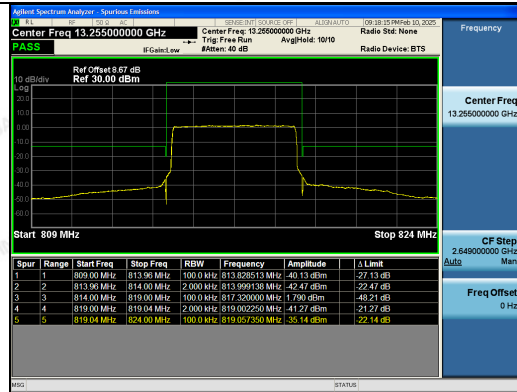


25RB#0

Low Channel

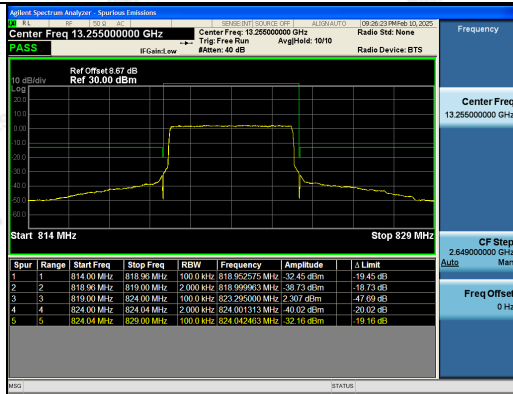

25RB#0

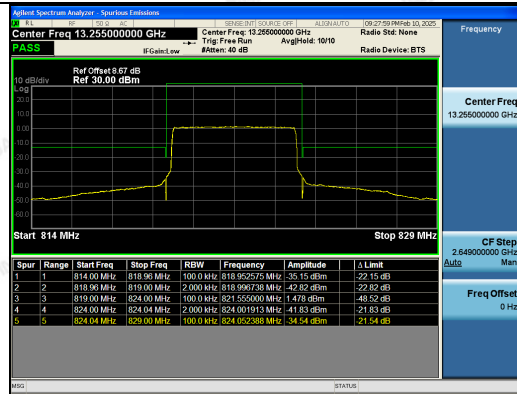


25RB#0

High Channel

LTE FDD Band 26-10MHz Channel Bandwidth Band Edge Compliance

QPSK

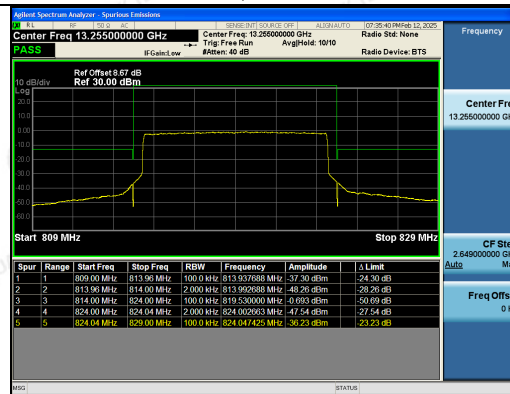

50RB#0