




802.11g_2437MHz-2

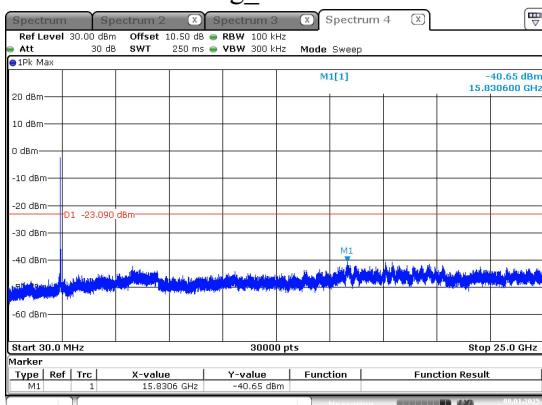


802.11g_2462MHz-1

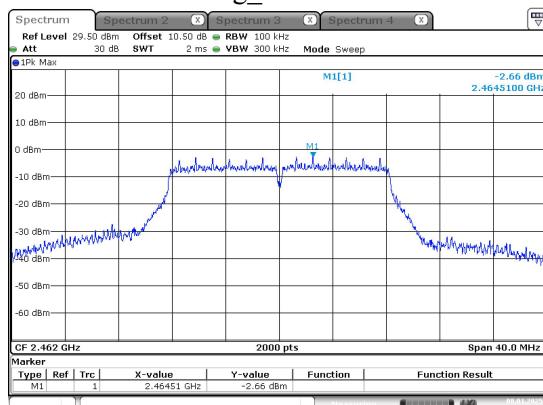


802.11g_2462MHz-2

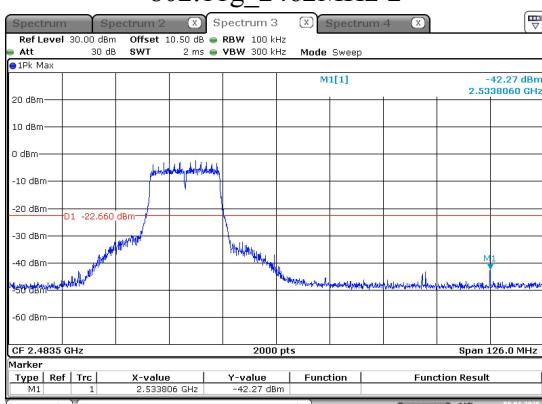


802.11g_2462MHz-3

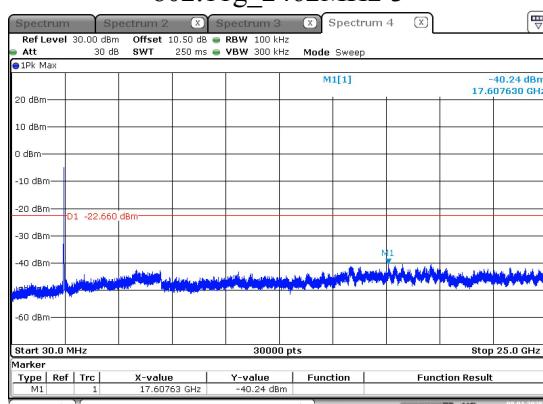


802.11n20_2412MHz-1

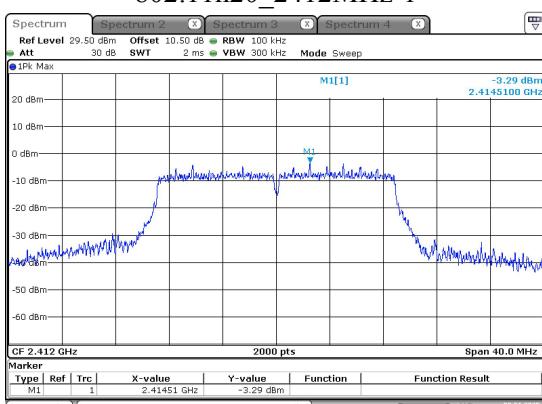

802.11n20_2412MHz-2

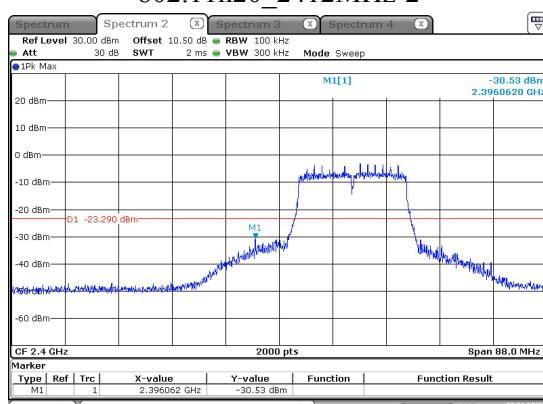


802.11n20_2412MHz-3

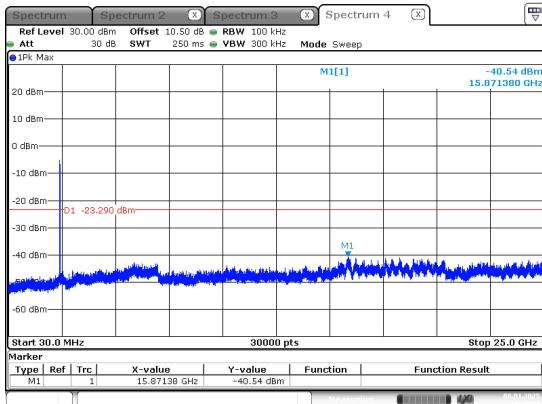

ProjectNo.:2402Z104436E Tester:Jeff Wei
Date: 8.JAN.2025 11:30:51


802.11n20_2437MHz-1

802.11n20_2437MHz-1

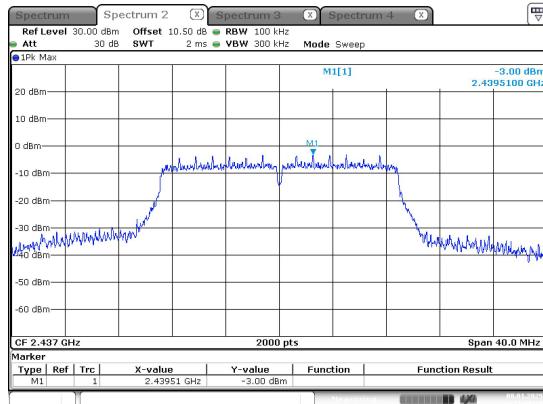

ProjectNo.:2402Z104436E Tester:Jeff Wei
Date: 8.JAN.2025 11:48:15


802.11n20_2437MHz-2

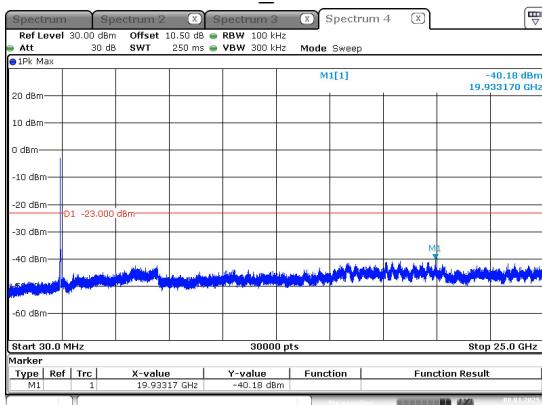


ProjectNo.:2402Z104436E Tester:Jeff Wei
Date: 8.JAN.2025 11:49:45

802.11n20_2462MHz-2

802.11n20_2462MHz-1

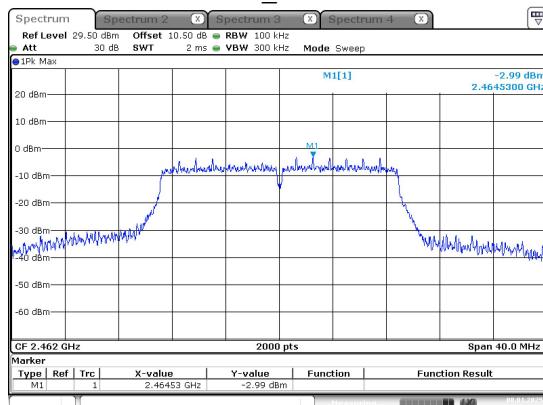


ProjectNo.:2402Z104436E Tester:Jeff Wei
Date: 8.JAN.2025 11:48:15

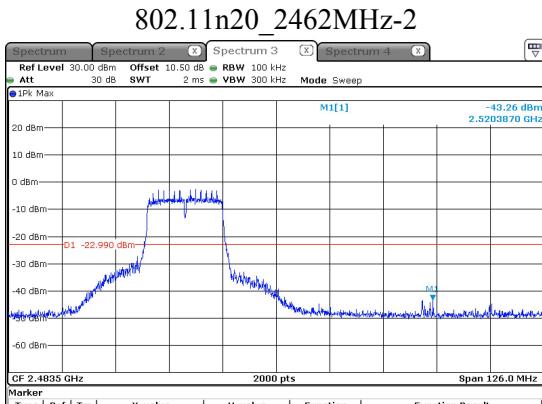

ProjectNo.:2402Z104436E Tester:Jeff Wei
Date: 8.JAN.2025 11:46:14

802.11n20_2462MHz-3

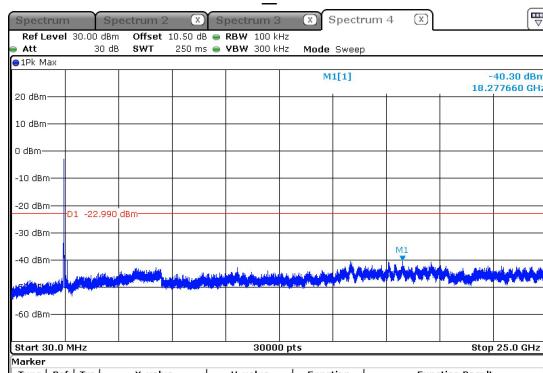

ProjectNo.:2402Z104436E Tester:Jeff Wei
Date: 8.JAN.2025 11:47:09

5.8 Duty Cycle

Test Information:

Serial No.:	2UCN-4	Test Date:	2024/12/02~2024/12/07
Test Site:	RF	Test Mode:	Transmitting
Tester:	Tower Qing	Test Result:	N/A

Environmental Conditions:

Temperature: (°C):	21.9~23.1	Relative Humidity: (%)	39~48	ATM Pressure: (kPa)	101.6~102
--------------------	-----------	------------------------	-------	---------------------	-----------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/06/13	2025/06/12
R&S	Spectrum Analyzer	FSV40	101589	2024/09/05	2025/09/04

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Mode	Antenna	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	1/Ton (Hz)	VBW Setting (kHz)
802.11b	Chain 0	2437	12.215	14.253	85.70	82	0.100
802.11g	Chain 0	2437	2.011	4.056	49.58	497	0.500
802.11n20	Chain 0	2437	1.888	3.917	48.20	530	1

Duty Cycle = Ton/(Ton+Toff)*100%


2412~2462

802.11b_2437MHz

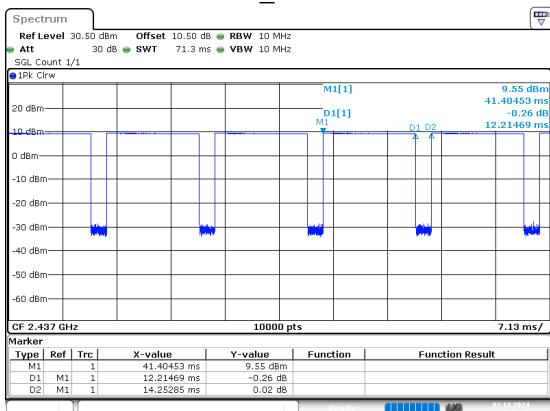


ProjectNo.:2402Z104436E-RF Tester:Tower Qing
Date: 2-DEC-2024 09:49:26

802.11g_2437MHz

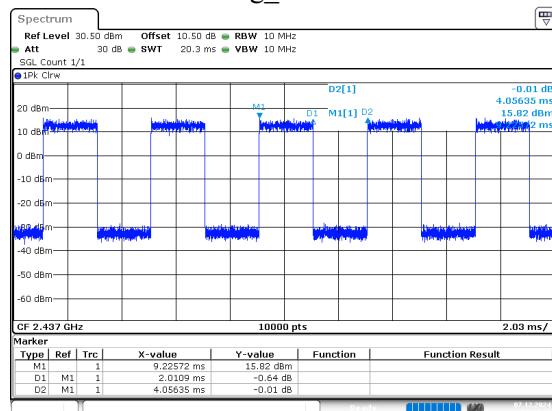

ProjectNo.:2402Z104436E-RF Tester:Tower Qing
Date: 2-DEC-2024 13:44:42

802.11n20_2437MHz

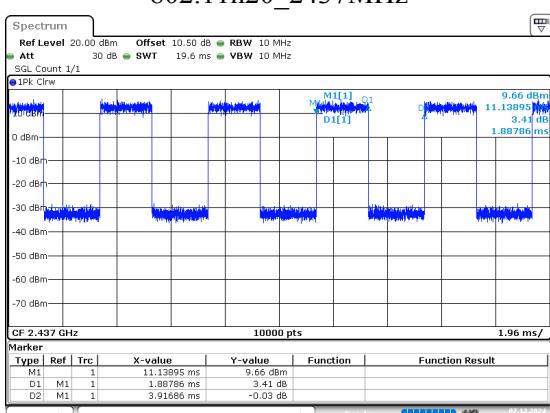

ProjectNo.:2402Z104436E-RF Tester:Tower Qing
Date: 7-DEC-2024 13:46:39

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2402Z104436E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2402Z104436E-RF-INP EUT INTERNAL PHOTOGRAPHS.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2402Z104436E-RF-00-TSP TEST SETUP PHOTOGRAPHS.

EXHIBIT C - RF EXPOSURE EVALUATION

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is \leq 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is $<$ 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The max conducted power including tune-up tolerance is 8.5 dBm (7.08 mW).
 $[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 7.08 / 5 * (\sqrt{2.462}) = 2.2 < 3.0$

Note: the max conducted power including tune-up tolerance was declared by manufacturer.

Result: Compliant. The stand-alone SAR evaluation is not necessary.

***** END OF REPORT *****