

Appendix B

Detailed Test Results

WIFI 2.4G for Body & Limbs
WIFI 5G for Body & Limbs
2.4G SDR for Body & Limbs
5G SDR for Body & Limbs
BT for Body & Limbs



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057

t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

YKBP2 WIFI 2.4G 802.11ax HE20 6CH Right side 0mm MIMO**YKBP2**

Communication System: WLAN 2.4GHz; Frequency: 2437.000

Medium: Head Simulating Liquid. Medium parameters used: $f=2437.000$ MHz; $\sigma=1.81$ S/m; $\epsilon_r=38.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.13, 6.8, 7.01); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2219
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (96.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 2.03 W/kg; SAR (10g) = 0.804 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.04 dB

SAR (1g) = 2.08 W/kg; SAR (10g) = 0.859 W/kg;

M2/M1 [%]=51.6

Dist 3dB Peak [mm]=7.3

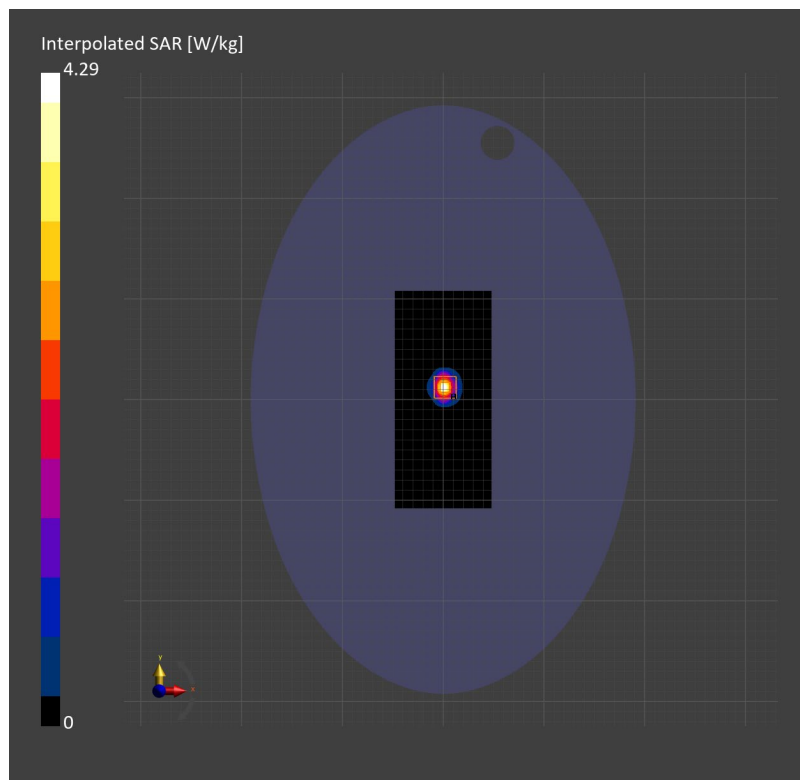

YKBP2 WIFI 2.4G 802.11ax HE20 6CH Bottom side 0MM MIMO**YKBP2**

Communication System: WLAN 2.4GHz; Frequency: 2437.000

Medium: Head Simulating Liquid. Medium parameters used: $f=2437.000$ MHz; $\sigma=1.81$ S/m; $\epsilon_r=38.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.13, 6.8, 7.01); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2219
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (96.0 mm x 312.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.029 W/kg; SAR (10g) = 0.016 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.05 dB

SAR (1g) = 0.030 W/kg; SAR (10g) = 0.016 W/kg;

M2/M1 [%]=59.1

Dist 3dB Peak [mm]=12.1

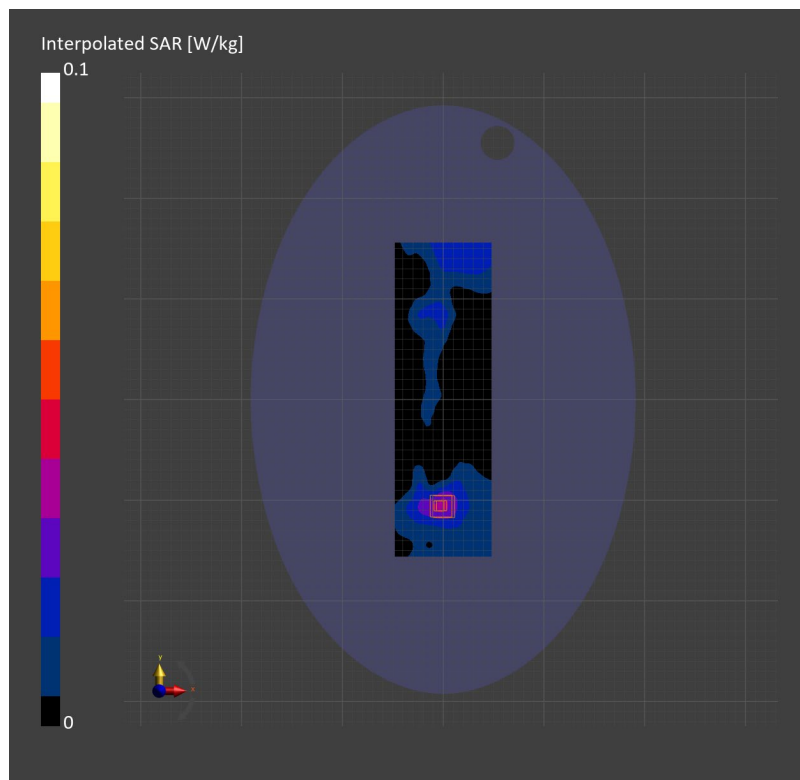

YKBP2 WIFI 5G 802.11ac VHT80 155CH Left side 0mm MIMO**YKBP2**

Communication System: WLAN 5GHz; Frequency: 5775.000

Medium: Head Simulating Liquid. Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.45$ S/m; $\epsilon_r = 35.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(5.18, 4.94, 5.09); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2219
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (100.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.22 W/kg; SAR (10g) = 0.420 W/kg;


Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 2.0 mm

Power Drift = -0.02 dB

SAR (1g) = 1.36 W/kg; SAR (10g) = 0.451 W/kg;

M2/M1 [%]=47.9

Dist 3dB Peak [mm]=5.9

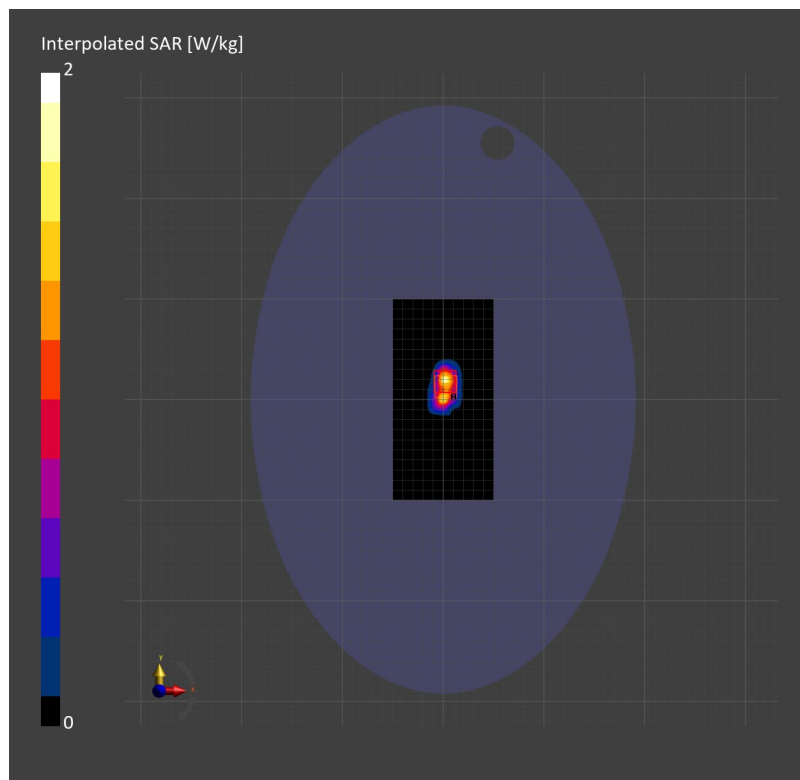

YKBP2 WIFI 5G 802.11ac VHT40 38CH Bottom side 0mm MIMO**YKBP2**

Communication System: WLAN 5GHz; Frequency: 5190.000

Medium: Head Simulating Liquid. Medium parameters used: $f = 5190.000$ MHz; $\sigma = 4.76$ S/m; $\epsilon_r = 36.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(5.52, 5.26, 5.42); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2219
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (100.0 mm x 300.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.097 W/kg; SAR (10g) = 0.037 W/kg;


Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 2.0 mm

Power Drift = 0.03 dB

SAR (1g) = 0.111 W/kg; SAR (10g) = 0.040 W/kg;

M2/M1 [%]=54.4

Dist 3dB Peak [mm]=8.0

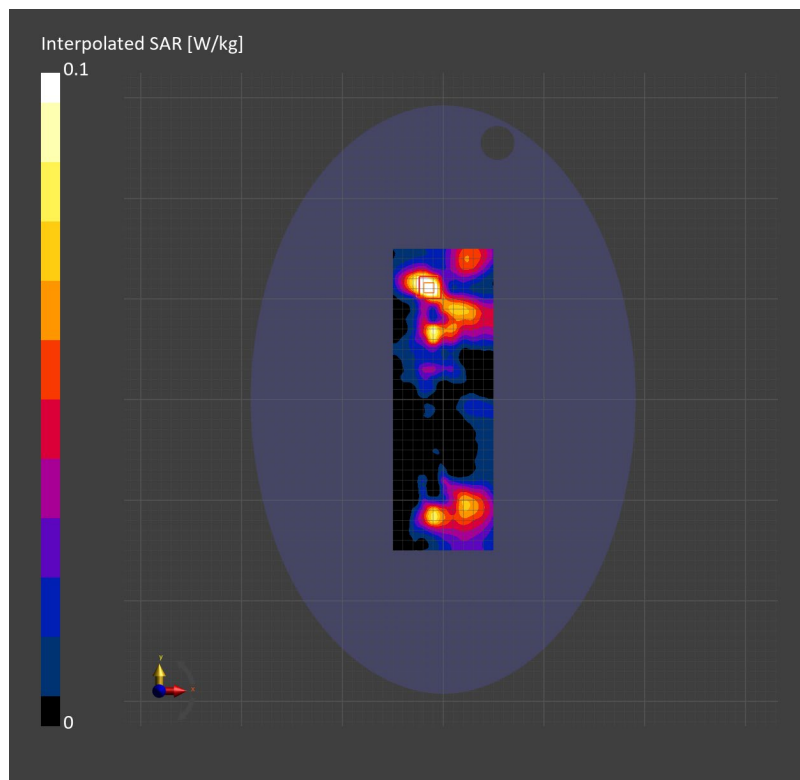

YKBP2 SDR 2.4G 40M 2437.5Mhz Bottom side 0mm Ant0+1**YKBP2**

Communication System: SDR 2.4GHz; Frequency: 2437.500

Medium: Head Simulating Liquid. Medium parameters used: $f = 2437.500$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.13, 6.8, 7.01); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2219
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (96.0 mm x 312.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.052 W/kg; SAR (10g) = 0.028 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.03 dB

SAR (1g) = 0.052 W/kg; SAR (10g) = 0.029 W/kg;

M2/M1 [%]=63.8

Dist 3dB Peak [mm]=8.3

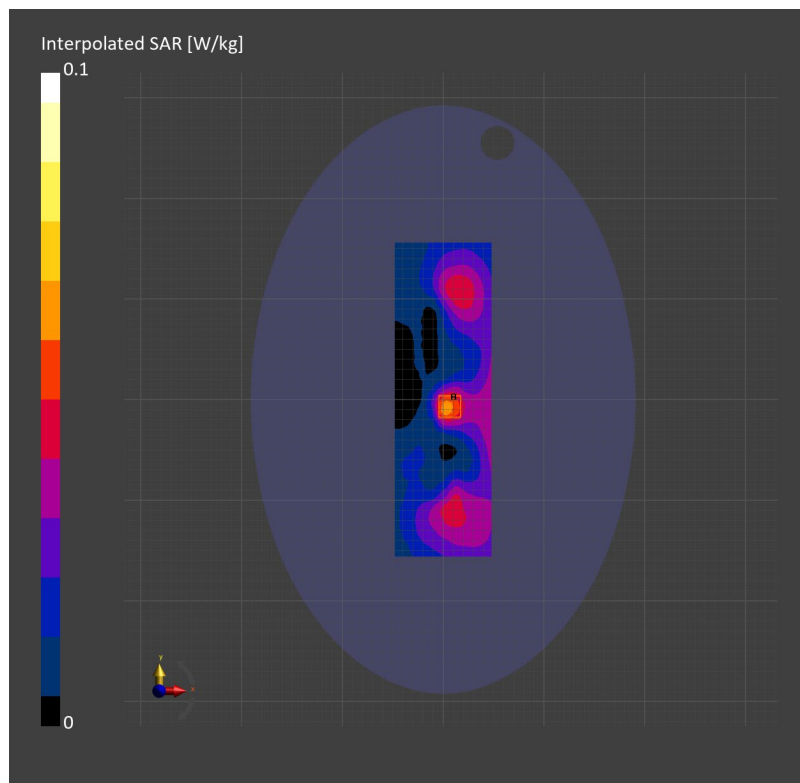

YKBP2 SDR 2.4G 40M 2437.5Mhz Top side 0mm Ant4+5**YKBP2**

Communication System: SDR 2.4G; Frequency: 2437.500

Medium: Head Simulating Liquid. Medium parameters used: $f = 2437.500$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.13, 6.8, 7.01); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2219
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (96.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 2.28 W/kg; SAR (10g) = 0.945 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.05 dB

SAR (1g) = 2.02 W/kg; SAR (10g) = 0.838 W/kg;

M2/M1 [%]=48.5

Dist 3dB Peak [mm]=6.8

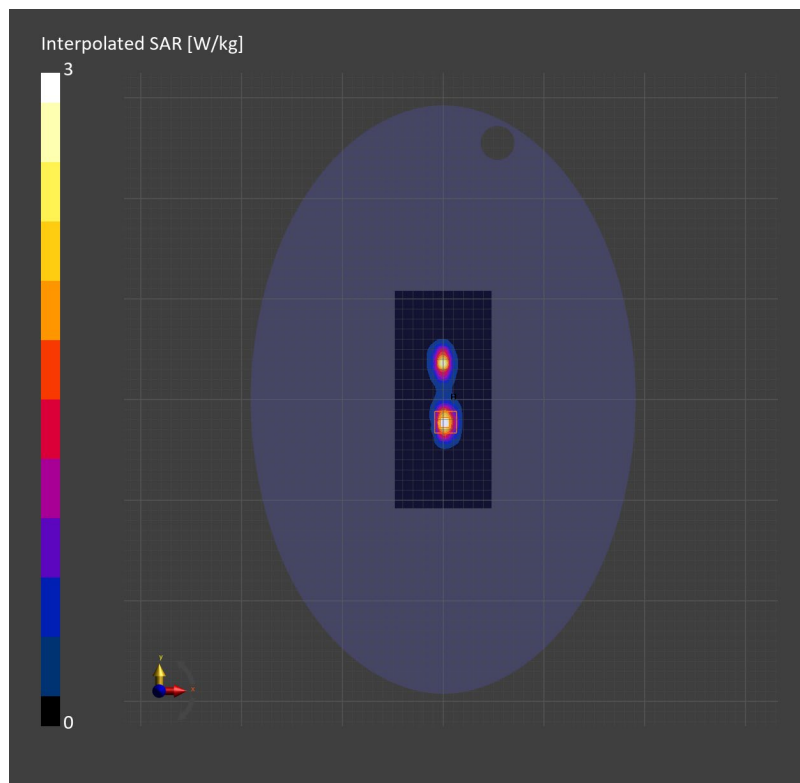

YKBP2 SDR 5G 10M 5200Mhz Bottom side 0mm Ant0+1**YKBP2**

Communication System: SDR 5G; Frequency: 5200.000

Medium: Head Simulating Liquid. Medium parameters used: $f = 5200.000$ MHz; $\sigma = 4.78$ S/m; $\epsilon_r = 36.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(5.52, 5.26, 5.42); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2219
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (100.0 mm x 300.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.035 W/kg; SAR (10g) = 0.015 W/kg;


Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 2.0 mm

Power Drift = 0.09 dB

SAR (1g) = 0.035 W/kg; SAR (10g) = 0.013 W/kg;

M2/M1 [%]=63.3

Dist 3dB Peak [mm]=8.7

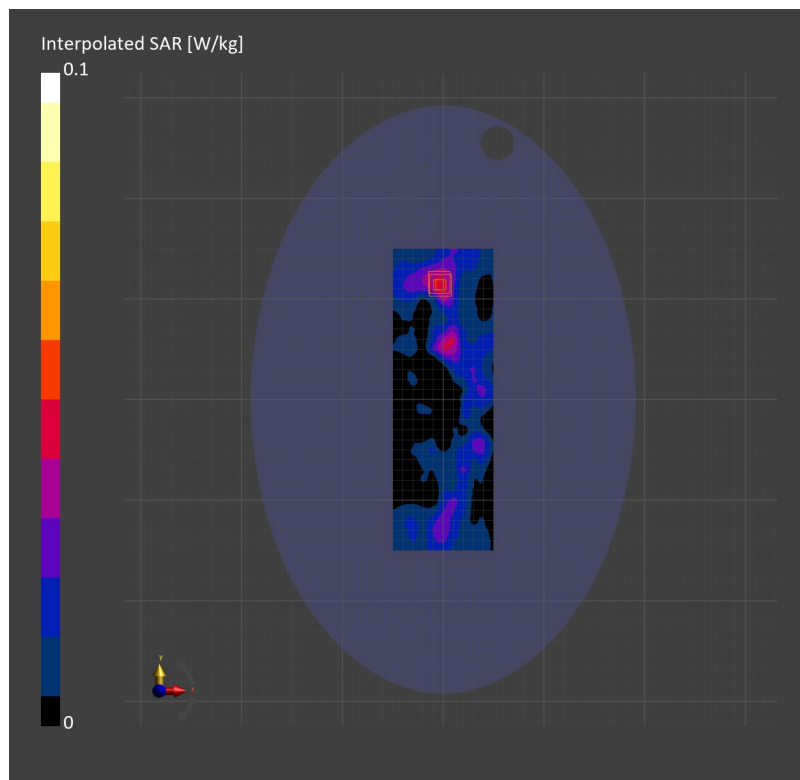

YKBP2 SDR 5G 10M 5844.5Mhz Top side 0mm Ant4+5**YKBP2**

Communication System: SDR 5G; Frequency: 5844.500

Medium: Head Simulating Liquid. Medium parameters used: $f = 5844.500$ MHz; $\sigma = 5.49$ S/m; $\epsilon_r = 35.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(5.18, 4.94, 5.09); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2219
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (100.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 4.65 W/kg; SAR (10g) = 1.58 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.17 dB

SAR (1g) = 5.03 W/kg; SAR (10g) = 1.65 W/kg;

M2/M1 [%]=63.8

Dist 3dB Peak [mm]=8.4

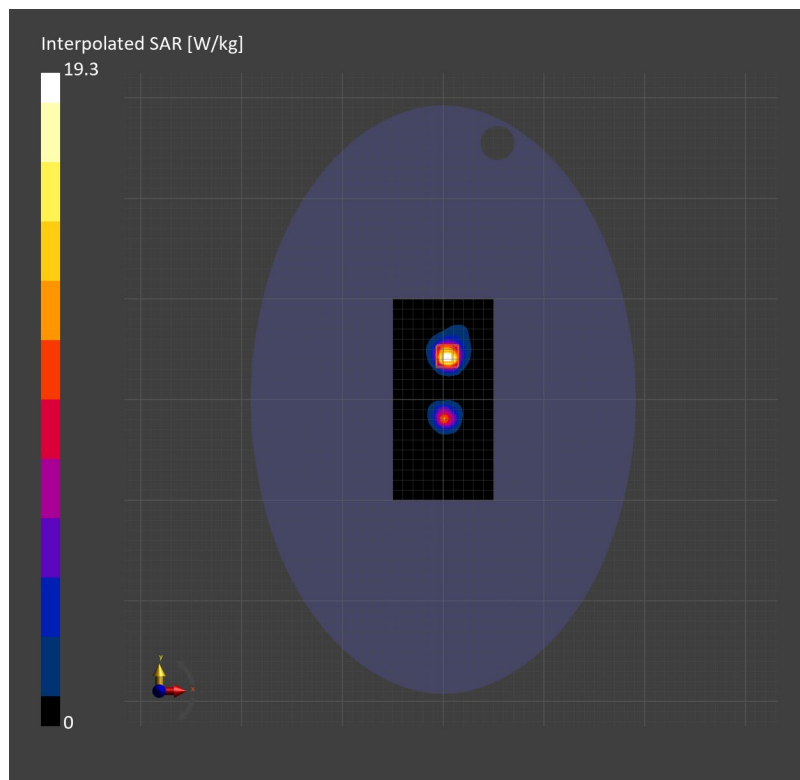

YKBP2 Bluetooth BLE 2M 19CH Right side 0mm ANT0**YKBP2**

Communication System: ISM 2.4 GHz Band; Frequency: 2440.000

Medium: Head Simulating Liquid. Medium parameters used: $f = 2440.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 38.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.13, 6.8, 7.01); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2219
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (96.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.211 W/kg; SAR (10g) = 0.086 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.06 dB

SAR (1g) = 0.227 W/kg; SAR (10g) = 0.093 W/kg;

M2/M1 [%]=50.3

Dist 3dB Peak [mm]=8.0

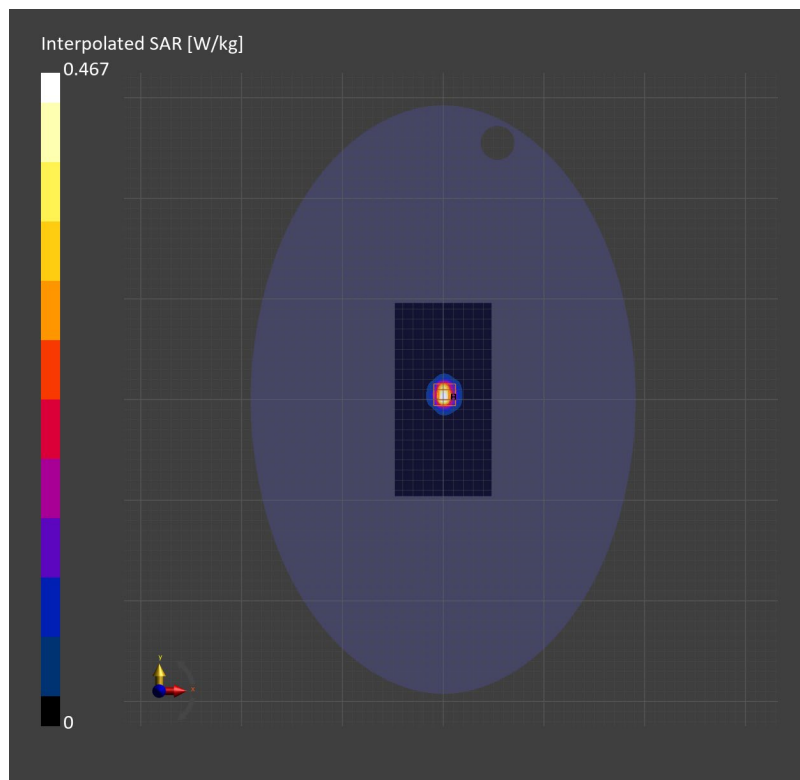

YKBP2 Bluetooth BLE 2M 19CH Bottom side 0mm ANT0

YKBP2

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000
Medium: Head Simulating Liquid. Medium parameters used: $f=2441.000$ MHz; $\sigma=1.82$ S/m; $\epsilon_r=38.3$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(7.13, 6.8, 7.01); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: ELI V8.0 (20deg probe tilt); Serial: 2219
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (96.0 mm x 312.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.018 W/kg; SAR (10g) = 0.01 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.08 dB
SAR (1g) = 0.016 W/kg; SAR (10g) = 0.008 W/kg;
M2/M1 [%]=55.0
Dist 3dB Peak [mm]=9.0

