


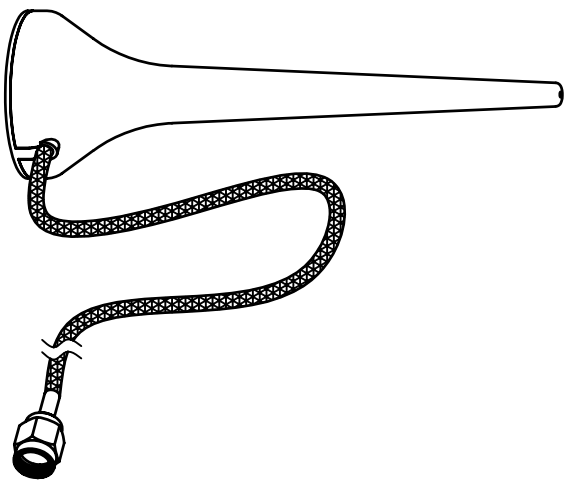

MECHANICAL

Antenna Cover : ABS

Antenna Base : ABS


Color : Black

ELECTRICAL

Frequency : 2.4GHz

Connector : SMA Male RP

Cable : Coaxial Cable RG-178

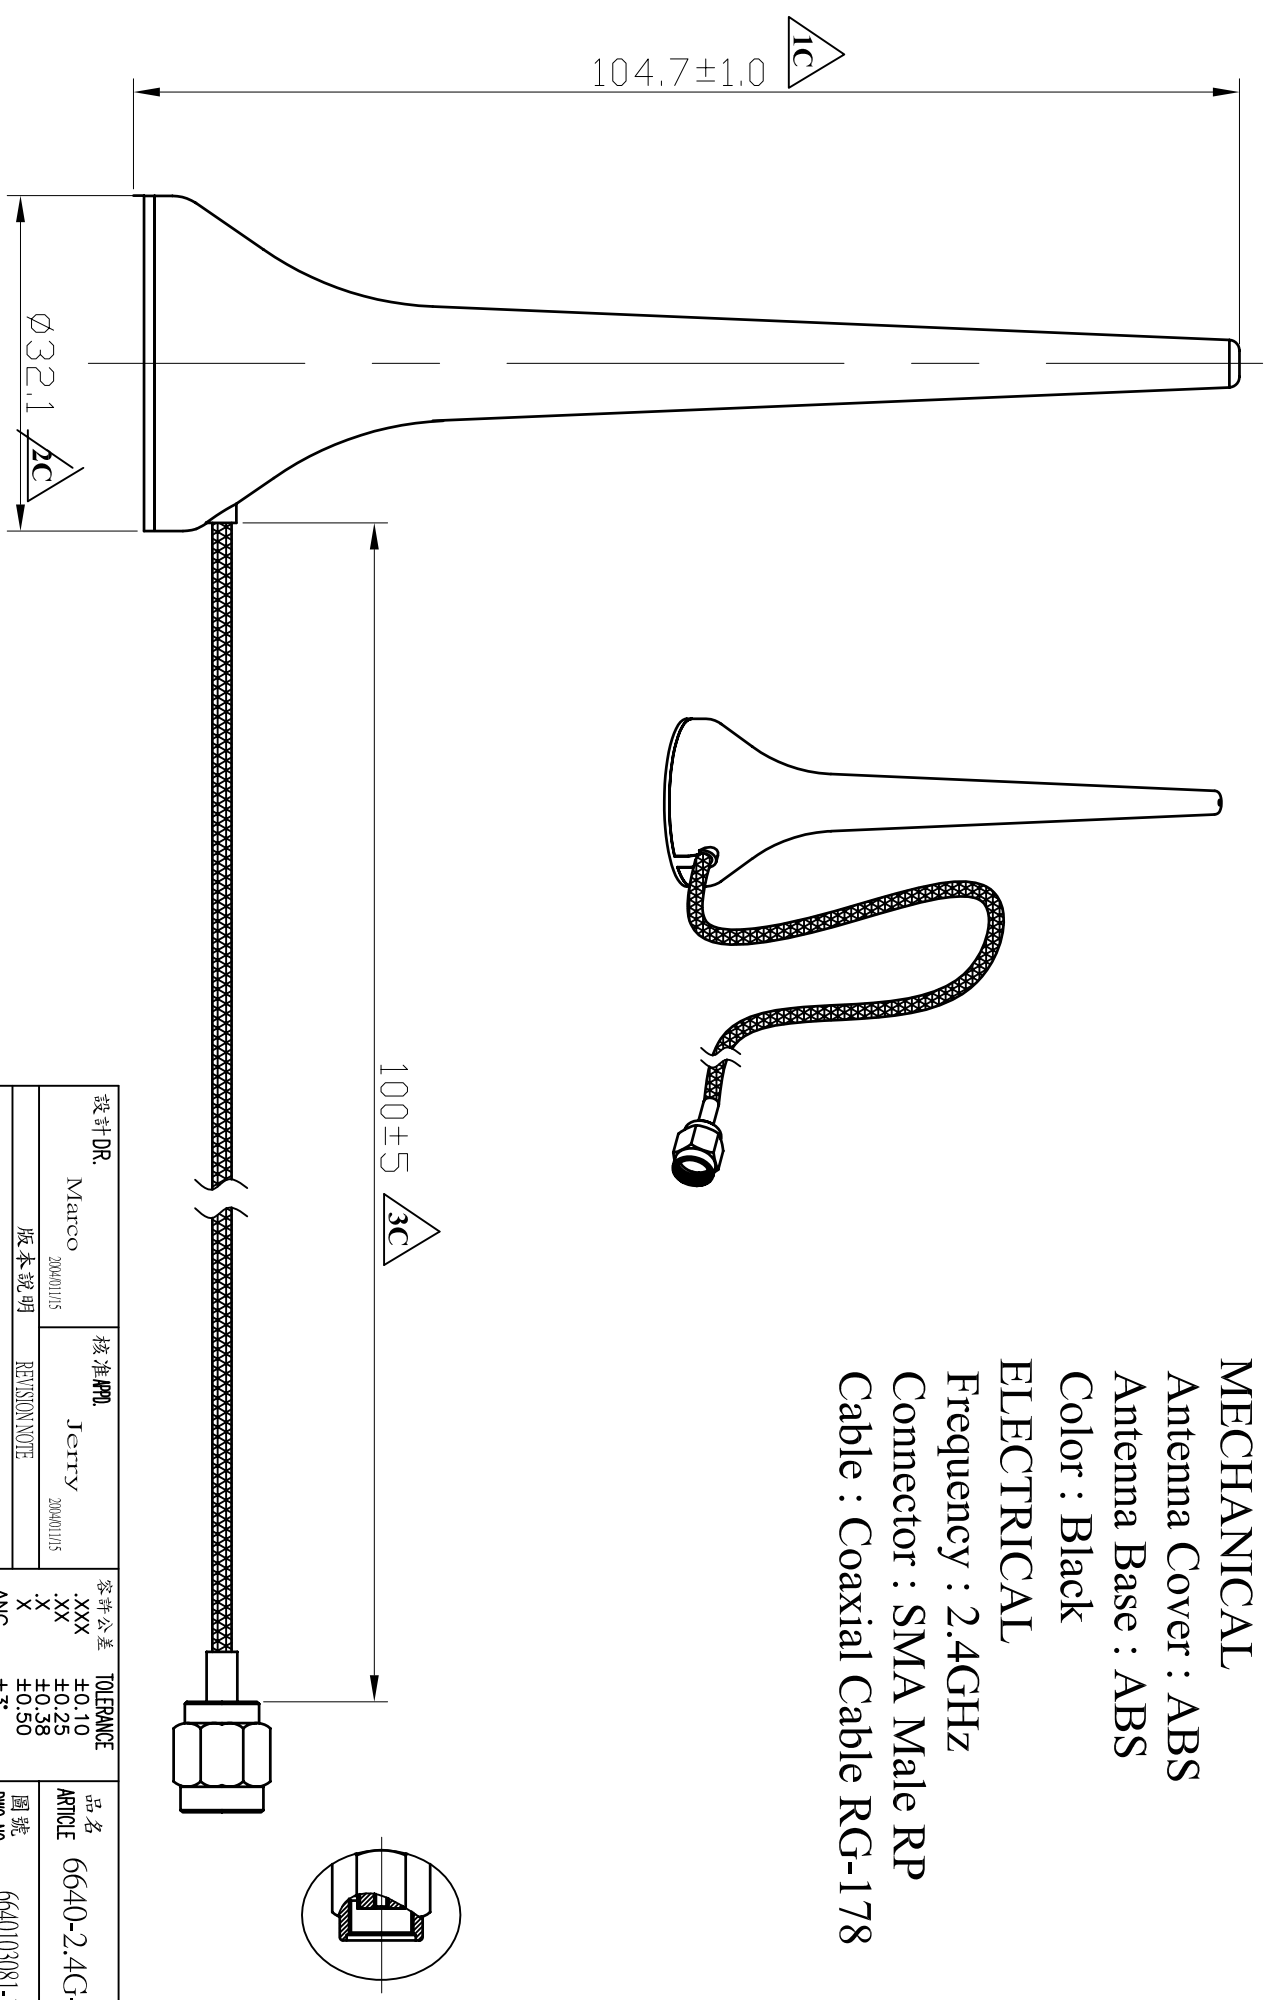

※凡標註 $\sqrt{\quad}$ 記號者,為品管檢驗之尺寸

設計DR. Marco 20040115		核准APP Jerry 20040115		容許公差 .XXX .XX .X ANG		TOLERANCE ± 0.10 ± 0.25 ± 0.38 ± 0.50 $\pm 3^\circ$		品名 ARTICLE 6640-2.4G-SMA	
版本說明 REVISION NOTE				圖號 DWG NO.		單位 UNIT		比例 SCALE	
				6640103081-10M		mm		2/1	
								1/1	
								A	




附件一

Brand / Model : 6640103081-10M

Remark : 2495MHz

Tested by : Wind-Kuo

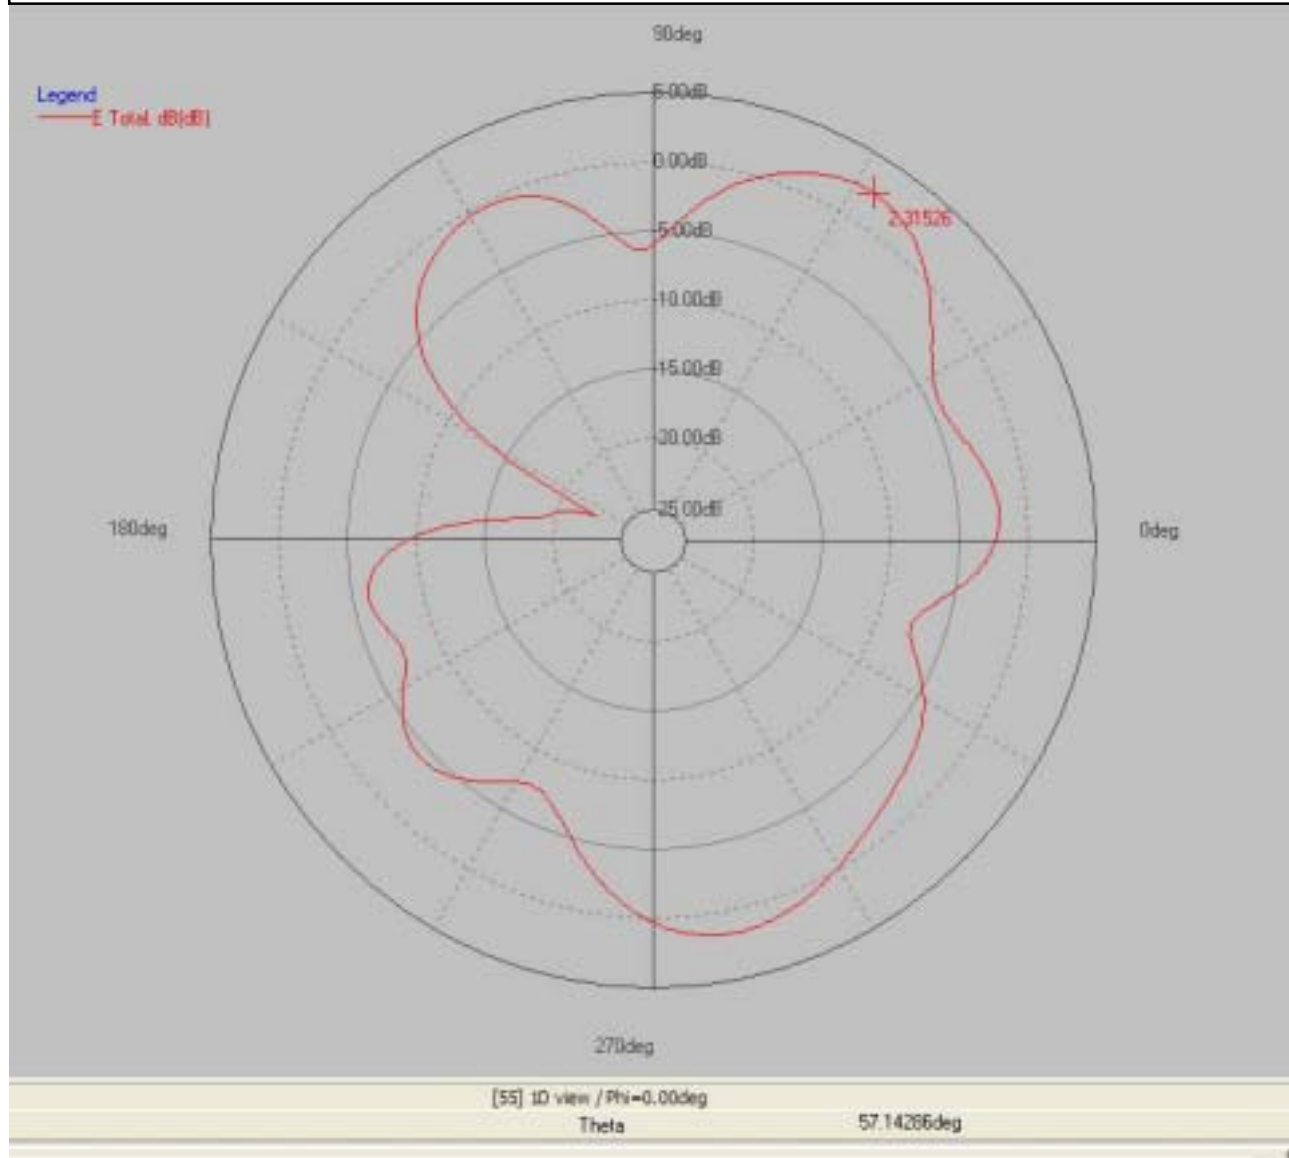

-- : Max. deg

Frequency(MHz) : 2495

Pattern Field : **E plane**

Average Gain(dB) : **-3.24dB**

Maximum Gain(dB) : **2.32dB**

Maximum Gain(degree) : **57.14**

Minimum Gain(dB) : **-22.96dB**

Minimum Gain(degree) : **157.14**

附件二

Brand / Model : 6640103081-10M

Remark : 2495MHz

Tested by : Wind-Kuo



-- : Max. deg

Frequency(MHz) : 2495

Pattern Field : **H plane**

Average Gain(dB) : **0.14dB**

Maximum Gain(dB) : **2.39dB**


Maximum Gain(degree) : **167.42**

Minimum Gain(dB) : **-1.45dB**

Minimum Gain(degree) : **279.04**

S11-Return Loss

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

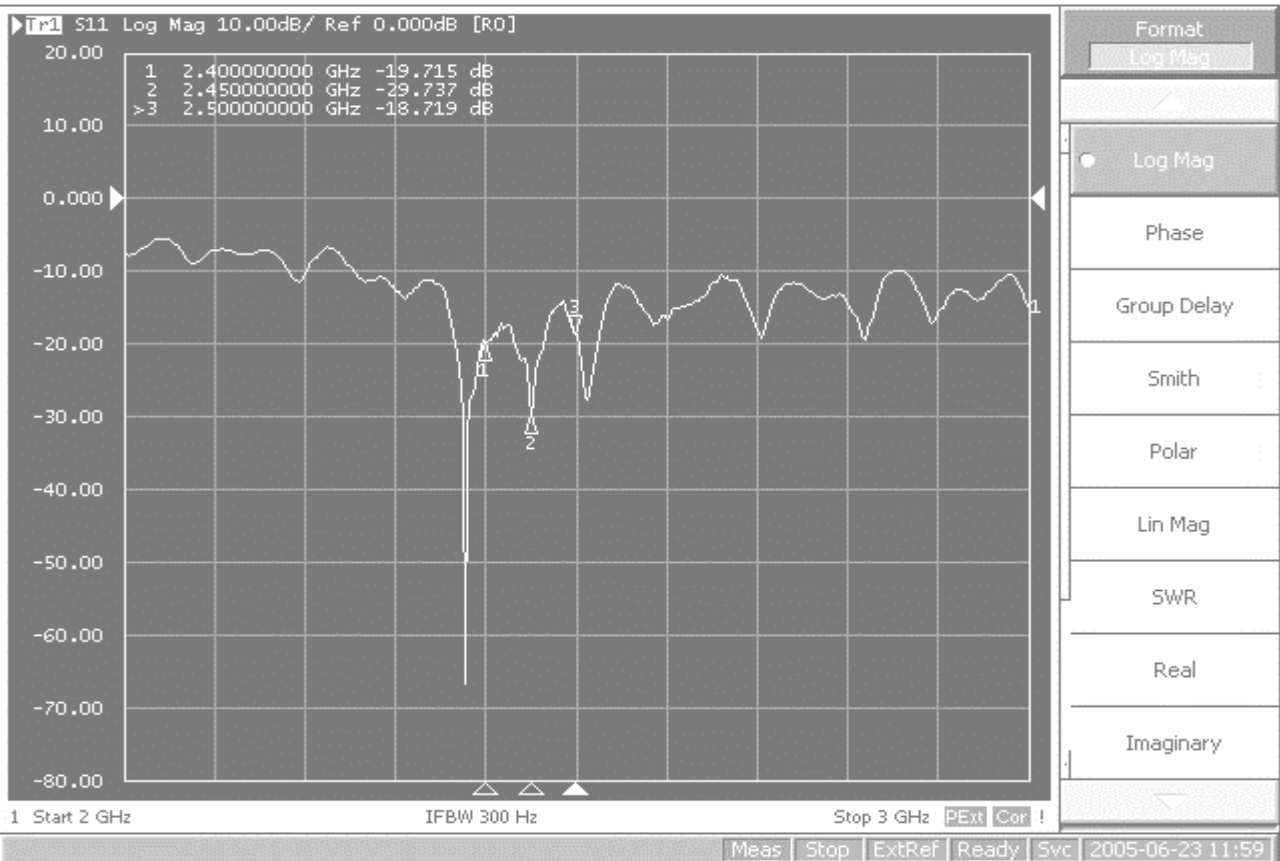

VSWR

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

