

Letter of acceptance

Customer name: _____

Customer PN : _____

Our model: _____YZ-G25(2.6-6.8UH-3000GS-10MM)_____

Sample delivery date: _____Apr. 13, 2024_____

Supplier: _____

Draw	Check	Approval
Feng Boqun	Su Yanping	



Customer recognition:

Appositional	Incongruent case	Acknowledge
Remark		

Shenzhen Shenchuang Hi-Tech Electronics Co.,Ltd
F/6 Building A, JingFaZhiZao Park, Gushu Community, Baoan District, Shenzhen
518126, China

Customer name	Customer PN	Our model	Edition	Date
	18-XQ-00019	YZ-G25-2.6-6.8UH-3000GS-10MM	A0	Apr. 13, 2024

一、Plane structure: unit:MM

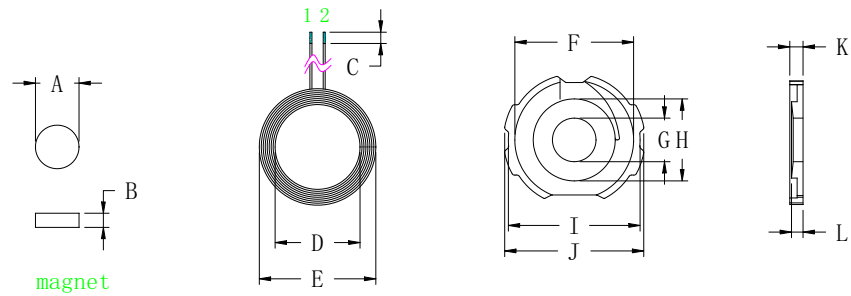

A	7.6 ± 0.1
B	2.0 ± 0.1
C	2 ± 1
D	15 ± 0.2
E	20.7 ± 0.3
F	21 ± 0.2
G	7.7 ± 0.1
H	14.5 ± 0.2
I	23.5 ± 0.3
J	25 ± 0.2
K	2.6 ± 0.15
L	2.5 ± 0.15
M	10 ± 1

二、Product parameter:

Foot position	Wire diameter	Number of turns	remark
1 - 2	0.08*24	12	Hot air stranding wire

三、Technical requirements: (Magnetic force of 2900~3100 Gauss)

1. Secure the cable end to prevent loose cables
2. According to customer requirements, the long thread is cut and tinned, and the tinning depth is 2 ± 1 MM
3. Spot the appropriate white glue on the magnetic disc, attach the coil, and ensure that the product surface is clean and tidy during the process.
4. The magnetic disc used is with round hole, without damage

5. Additional process (according to customer requirements) : Install 7.6x2.0mm magnet in the middle round hole of the finished product and attach a double-sided adhesive with a diameter of 14mm after the finished product, and then pack

四、Electrical parameter:

1. Inductance value, Q value:

PIN 1 — 2 = $6.8\mu\text{H} \pm 0.3\mu\text{H}$

Q value ≥ 25

The above inductance values are based on Quanhua 1062B instrument, 10KHZ/0.3Vrms as the standard or equivalent instrument.

Q value is based on Quanhua 1062B instrument, 100KHZ/0.3Vrms as the standard or equivalent instrument

五、Bill of materials:

Serial number	name	material	supplier	remark
1	Hot air stranding wire	0.08X24	Weihaan or equivalent	
2	Magnetic sheet	G25 Die cast substrate	Tiantong or equivalent	
3	tin	High temperature environmental protection	Thousand Islands or equivalent	
4	White glue	BY882	Moon or equivalent	
5	Strong magnetic	7.6*2 (intensity 3000GS±100GS)	United win or equivalent	Additional processes, according to customer requirements
6	Double-sided tape	513-14mm	Honghui or equivalent	