



## FCC TEST REPORT

FCC ID: 2BM33-ACTA

On Behalf of

Jakin Technology Limited

ACTA series

Model No.: See Model List

Prepared for : Jakin Technology Limited  
Address : Unit 913-914, 9/F., Worldwide Industrial Centre, 43-47 Shan Mei Street, Fotan, Shatin, N.T., Hong Kong

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

Report Number : A2410081-C01-R06  
Date of Receipt : December 12, 2024  
Date of Test : December 12, 2024 – December 30, 2024  
Date of Report : January 2, 2025  
Version Number : V0  
**Result** : **Pass**

## TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
<b>1. Summary of Standards And Results</b> -----	<b>6</b>
1.1. Description of Standards and Results -----	6
<b>2. General Information</b> -----	<b>7</b>
2.1. Description of Device (EUT) -----	7
2.2. Accessories of Device (EUT) -----	8
2.3. Tested Supporting System Details-----	8
2.4. Block Diagram of connection between EUT and simulators-----	8
2.5. Test Mode Description -----	9
2.6. Test Conditions -----	9
2.7. Test Facility -----	10
2.8. Measurement Uncertainty -----	10
2.9. Test Equipment List-----	11
<b>3. Spurious Emission</b> -----	<b>12</b>
3.1. Test Limits-----	12
3.2. Test Procedure-----	15
3.3. Test Setup-----	15
3.4. Test Results-----	16
<b>4. Power line Conducted Emission</b> -----	<b>31</b>
4.1. Test Limits-----	31
4.2. Test Procedure-----	31
4.3. Test Setup-----	31
4.4. Test Results-----	32
<b>5. Conducted Maximum Output Power</b> -----	<b>34</b>
5.1. Test limits-----	34
5.2. Test Procedure-----	34
5.3. Test Setup-----	34
5.4. Test Results-----	34
<b>6. Peak Power Spectral Density</b> -----	<b>35</b>
6.1. Test limits-----	35
6.2. Test Procedure-----	35
6.3. Test Setup-----	35
6.4. Test Results-----	36
<b>7. Bandwidth</b> -----	<b>41</b>
7.1. Test limits-----	41
7.2. Test Procedure-----	41
7.3. Test Setup-----	41
7.4. Test Results-----	41
<b>8. Band Edge Check</b> -----	<b>52</b>
8.1. Test limits-----	52
8.2. Test Procedure-----	52
8.3. Test Setup-----	52
8.4. Test Results-----	52
<b>9. Antenna Requirement</b> -----	<b>61</b>

---

9.1. Standard Requirement-----	61
9.2. Antenna Connected Construction -----	61
9.3. Results-----	61
<b>10. Test setup photo-----</b>	<b>62</b>
10.1. Photo of Radiated Emission test-----	62
10.2. Photo of Conducted Emission test -----	63
<b>11. Model List -----</b>	<b>64</b>

### TEST REPORT DECLARATION

Applicant : Jakin Technology Limited  
 Address : Unit 913-914, 9/F., Worldwide Industrial Centre, 43-47 Shan Mei Street, Fotan, Shatin, N.T., Hong Kong  
 Manufacturer : Jakin Technology Limited  
 Address : Unit 913-914, 9/F., Worldwide Industrial Centre, 43-47 Shan Mei Street, Fotan, Shatin, N.T., Hong Kong  
 EUT Description : ACTA series  
 (A) Model No. : See Model List  
 (B) Trademark : ACTATEK

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247, ANSI C63.10:2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen  
Project Engineer



Approved by (name + signature).....: Jack Xu  
Project Manager



Date of issue.....: January 2, 2025

**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	January 2, 2025	Initial released Issue	Yannis Wen

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Conducted Emission	FCC Part 15: 15.207 ANSI C63.10 :2013	P
6dB Bandwidth	FCC PART 15:15.247(a)(2) ANSI C63.10 :2013	P
Output Power	FCC Part 15: 15.247(b)(3) ANSI C63.10 :2013	P
Radiated Spurious Emission	FCC Part 15: 15.209, FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Conducted Spurious & Band Edge Emission	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Spectral Density	FCC PART 15:15.247(e) ANSI C63.10 :2013	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Antenna Requirement	FCC Part 15: 15.203	P
Note:	1. P is an abbreviation for Pass.  2. F is an abbreviation for Fail.  3. N/A is an abbreviation for Not Applicable.	

1. Pass: The EUT complies with the essential requirements in the standard.

2. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Description/PMN	:	ACTA series
Model Number/HVIN(s)	:	See Model List
Diff.	:	N/A
Test Voltage	:	There is no difference except the name of the model, the Model ID formats starting with AT-XK- and A-XK- use XK to represent the supported number of users from 1000 to 500000 Users. All tests are made with the AT-XK-FA-FST-WI4-P model.

Radio Technology	:	2.4G WIFI
------------------	---	-----------

Operation frequency	:	2412MHz-2462MHz for IEEE 802.11 b, g, n/HT20
Channel No.	:	802.11b/802.11g /802.11n(HT20): 11
Modulation type	:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n :OFDM(64QAM, 16QAM, QPSK, BPSK)
Antenna Type	:	Ceramic antenna, Maximum Gain is 2.499dBi. (Antenna information is provided by applicant.)
Software Version	:	V1.0
Hardware version/FVIN	:	V1.0
Intend use environment	:	Residential, commercial and light industrial environment


## 2.2. Accessories of Device (EUT)

Accessories : AC ADAPTOR  
Manufacturer : Ktec®  
Model : KSAFF1200225W1UV-1  
Ratings : INPUT: 100-240V ~ 50/60Hz 0.8A  
OUTPUT: 12V = 2.25A

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1	Notebook	Thinkpad	E14	N/A	N/A

## 2.4. Block Diagram of connection between EUT and simulators

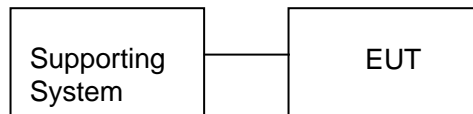



## 2.5. Test Mode Description

Duty cycle :100%Keeping TX			
Mode	Data rate (Mbps)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11 n/HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462

Note: 1. According exploratory test, EUT will have maximum output power in those data rate. So those data rate were used for all test.

Channel list:					
For IEEE 802.11b, g, n/HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2412	CH5	2432	CH9	2452
CH2	2417	CH6	2437	CH10	2457
CH3	2422	CH7	2442	CH11	2462
CH4	2427	CH8	2447		

## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

Designation Number: CN1236

July 15, 2019 Certificated by IC

Registration Number: 12135A

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for radio frequency	$5.06 \times 10^{-8}$ GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%
Uncertainty for Power Spectral Density	0.39dB
Uncertainty for Occupied-Bandwidth	968Hz

## 2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.18	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2024.08.08	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2024.08.08	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2024.08.08	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2024.08.08	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2024.08.08	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2024.08.08	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2024.08.08	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2024.08.08	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2024.08.08	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2024.08.08	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2024.08.08	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	2Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2024.08.08	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2024.08.08	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2024.08.08	1 Year
Electronic Thermo-Hygrometer	S.H.Qixiang	HTC-1	/	N/A	2024.08.11	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2024.08.08	1 Year
Adjustable attenuator	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

### 3. SPURIOUS EMISSION

#### 3.1. Test Limits

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

#### RSS-GEN Restricted frequency band

**Table 7 – Restricted frequency bands**<sup>Note 1</sup>

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 – 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12

6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 – 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 – 8500	
108 – 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

## 15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	$2400/F(\text{KHz})$	/
0.490-1.705	30	$24000/F(\text{KHz})$	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	
Note 1: The peak limit is 20 dB higher than the average limit			
Note 2: Peak limit applies (AVG limit + 20 dB) as well as RSS-247 Section 5.5			

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ( $\mu\text{V}/\text{m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ( $\mu\text{A}/\text{m}$ )	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	$6.37/F$ (F in kHz)	300
490 - 1705 kHz	$63.7/F$ (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

### 3.2. Test Procedure

The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz.

The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above 1GHz testing, the table was rotated 360 degrees to determine the position of the highest radiation


The Test antenna shall vary between 1m and 4m, both Horizontal and Vertical antenna are set of make measurement.

The initial step in collecting radiated emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Quasi Peak Detector mode premeasured


If Peak value comply with QP limit below 1GHz, the EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.

For the actual test configuration, please see the test setup photo.


### 3.3. Test Setup

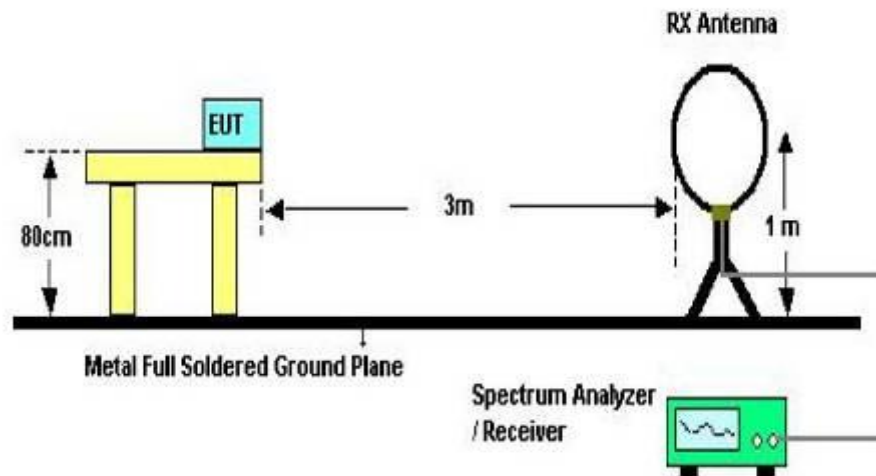

Below 30MHz Test Setup

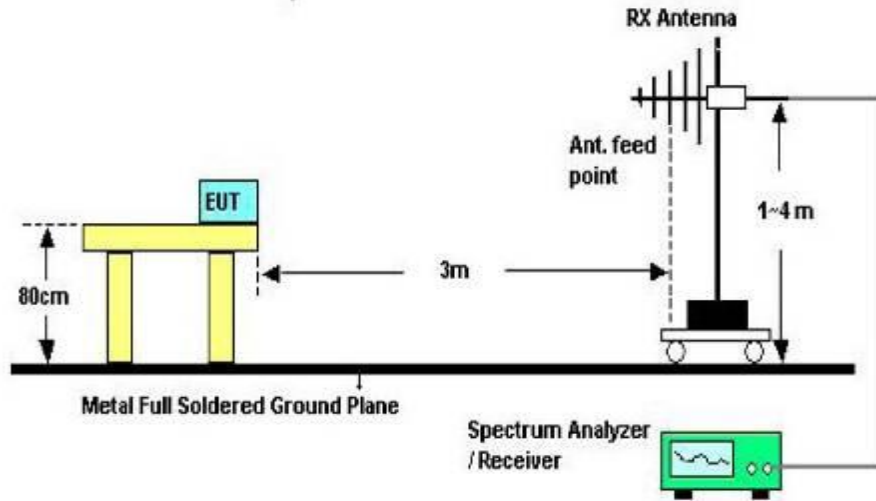

Above 30MHz Test Setup

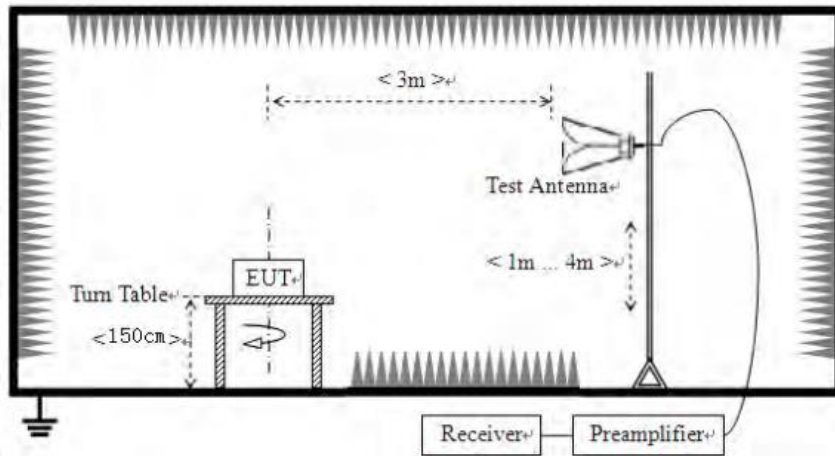

Above 1GHz Test Setup

### 3.4. Test Results

Test Condition

Continual Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHZ~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

We have scanned the EUT from 9kHz up to the 10th harmonic of the fundamental.

Detailed information please see the following page.


From 9KHz to 30MHz: Conclusion: PASS

Note: 1.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Test result

Vertical:

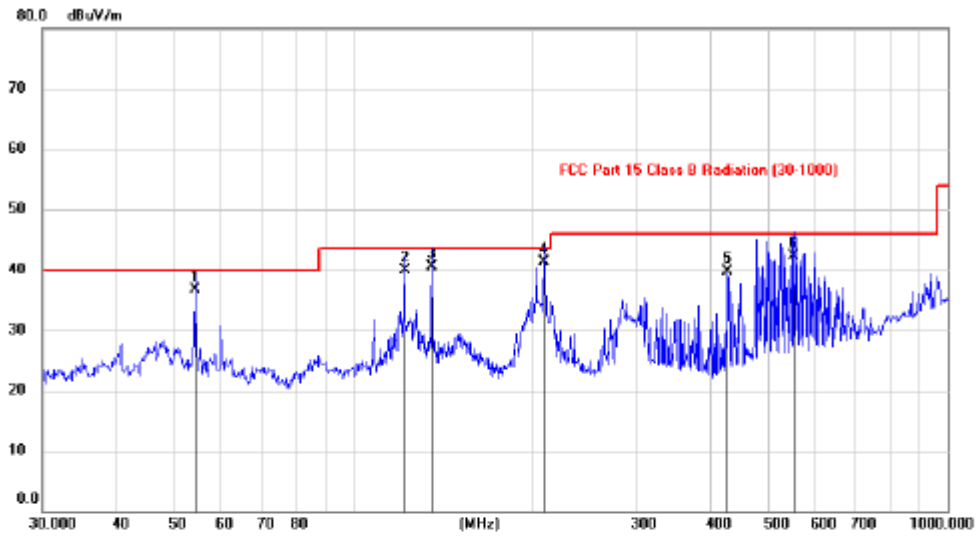


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		54.2419	23.07	13.68	36.75	40.00	-3.25	QP		
2		122.0468	26.74	13.15	39.89	43.50	-3.61	QP		
3		135.6168	26.58	13.99	40.57	43.50	-2.93	QP		
4	*	210.0481	30.19	11.07	41.26	43.50	-2.24	QP		
5		427.9692	22.64	17.01	39.65	46.00	-6.35	peak		
6		552.0438	23.13	19.23	42.36	46.00	-3.64	QP		

Note:1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Horizontal:

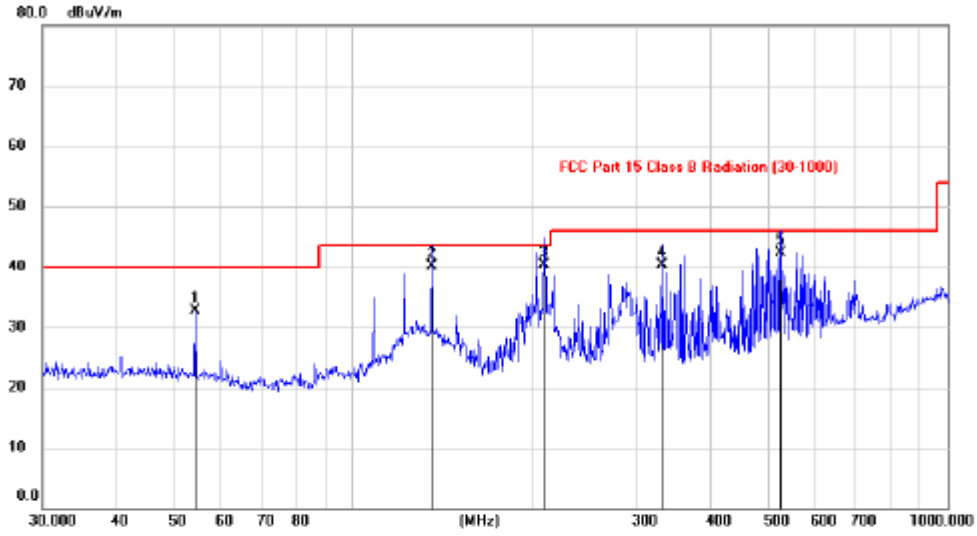

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		54.2355	19.10	13.68	32.78	40.00	-7.22			peak
2		135.6168	26.11	13.99	40.10	43.50	-3.40			QP
3	*	209.9251	29.14	11.07	40.21	43.50	-3.29			QP
4		332.0138	25.45	14.87	40.32	46.00	-5.68			QP
5		524.0028	23.70	18.70	42.40	46.00	-3.60			QP

Note: 1. \*:Maximum data; x:Over limit; !:over margin.  
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Notes: Above is below 1GHz test data. This report only shall the worst case mode for b 2412MHz.

From 1G-25GHz


Test Mode: IEEE 802.11b TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	44.95	V	33.95	10.18	34.26	54.82	74	-19.18	PK
4824	34.47	V	33.95	10.18	34.26	44.34	54	-9.66	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
4824	46.32	H	33.95	10.18	34.26	56.19	74	-17.81	PK
4824	34.15	H	33.95	10.18	34.26	44.02	54	-9.98	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11b TX Mid									
4874	44.44	V	33.93	10.2	34.29	54.28	74	-19.72	PK
4874	31.11	V	33.93	10.2	34.29	40.95	54	-13.05	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	47.62	H	33.93	10.2	34.29	57.46	74	-16.54	PK
4874	34.82	H	33.93	10.2	34.29	44.66	54	-9.34	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11b TX High									
4924	47.95	V	33.98	10.22	34.25	57.90	74	-16.10	PK
4924	36.23	V	33.98	10.22	34.25	46.18	54	-7.82	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
4924	48.23	H	33.98	10.22	34.25	58.18	74	-15.82	PK
4924	35.99	H	33.98	10.22	34.25	45.94	54	-8.06	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Test Mode: IEEE 802.11g TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	46.14	V	33.95	10.18	34.26	56.01	74	-17.99	PK
4824	35.15	V	33.95	10.18	34.26	45.02	54	-8.98	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
4824	43.55	H	33.95	10.18	34.26	53.42	74	-20.58	PK
4824	35.77	H	33.95	10.18	34.26	45.64	54	-8.36	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11g TX Mid									
4874	44.99	V	33.93	10.2	34.29	54.83	74	-19.17	PK
4874	31.02	V	33.93	10.2	34.29	40.86	54	-13.14	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	47.26	H	33.93	10.2	34.29	57.10	74	-16.90	PK
4874	35.37	H	33.93	10.2	34.29	45.21	54	-8.79	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11g TX High									
4924	47.86	V	33.98	10.22	34.25	57.81	74	-16.19	PK
4924	34.77	V	33.98	10.22	34.25	44.72	54	-9.28	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
4924	45.76	H	33.98	10.22	34.25	55.71	74	-18.29	PK
4924	35.65	H	33.98	10.22	34.25	45.60	54	-8.40	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Test Mode: IEEE 802.11n HT20 TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	42.52	V	33.95	10.18	34.26	52.39	74	-21.61	PK
4824	35.45	V	33.95	10.18	34.26	45.32	54	-8.68	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
4824	45.57	H	33.95	10.18	34.26	55.44	74	-18.56	PK
4824	36.81	H	33.95	10.18	34.26	46.68	54	-7.32	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11n HT20 TX Mid									
4874	45.66	V	33.93	10.2	34.29	55.50	74	-18.50	PK
4874	31.37	V	33.93	10.2	34.29	41.21	54	-12.79	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	44.80	H	33.93	10.2	34.29	54.64	74	-19.36	PK
4874	34.53	H	33.93	10.2	34.29	44.37	54	-9.63	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11n HT20 TX High									
4924	45.25	V	33.98	10.22	34.25	55.20	74	-18.80	PK
4924	37.56	V	33.98	10.22	34.25	47.51	54	-6.49	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
4924	47.40	H	33.98	10.22	34.25	57.35	74	-16.65	PK
4924	33.30	H	33.98	10.22	34.25	43.25	54	-10.75	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									


**Conducted RF Spurious Emission**

Tx. Spurious NVNT b 2412MHz Ant1 Ref

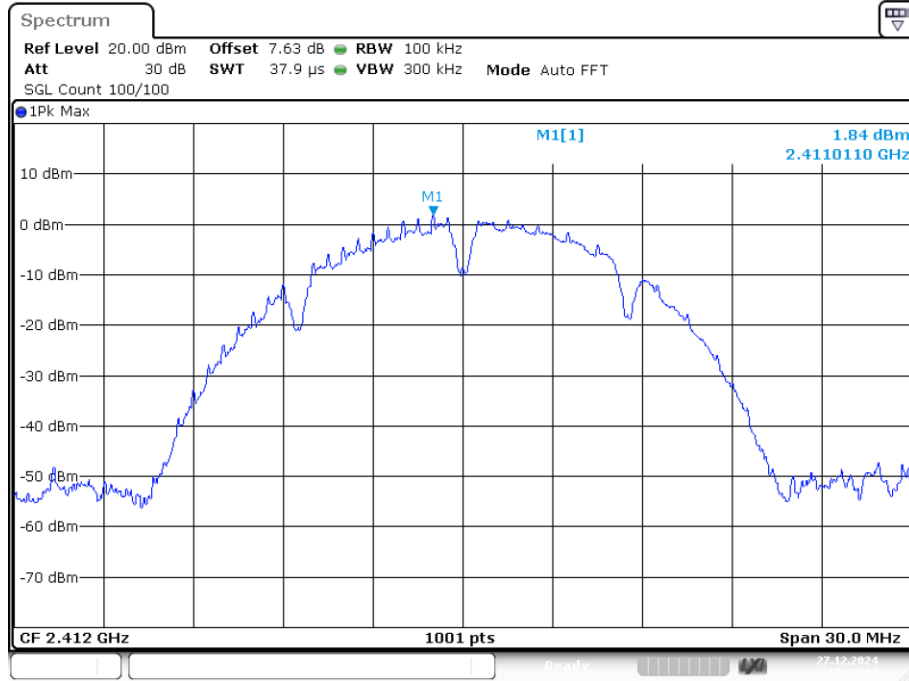


Date: 27.DEC.2024 17:12:09

Tx. Spurious NVNT b 2412MHz Ant1 Emission

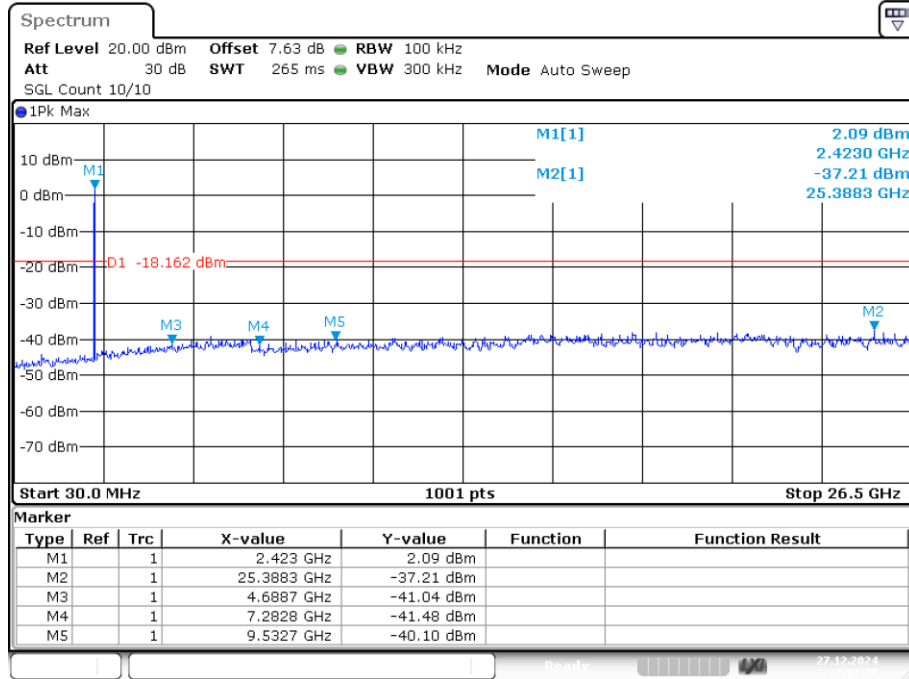


Date: 27.DEC.2024 17:12:27

Tx. Spurious NVNT b 2437MHz Ant1 Ref

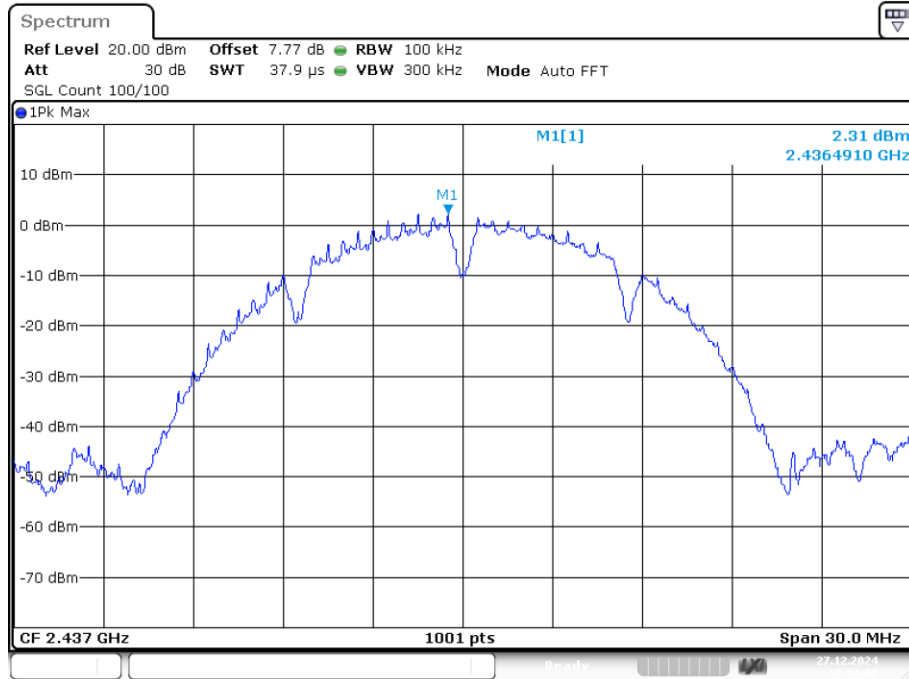


Date: 27.DEC.2024 17:14:09

Tx. Spurious NVNT b 2437MHz Ant1 Emission

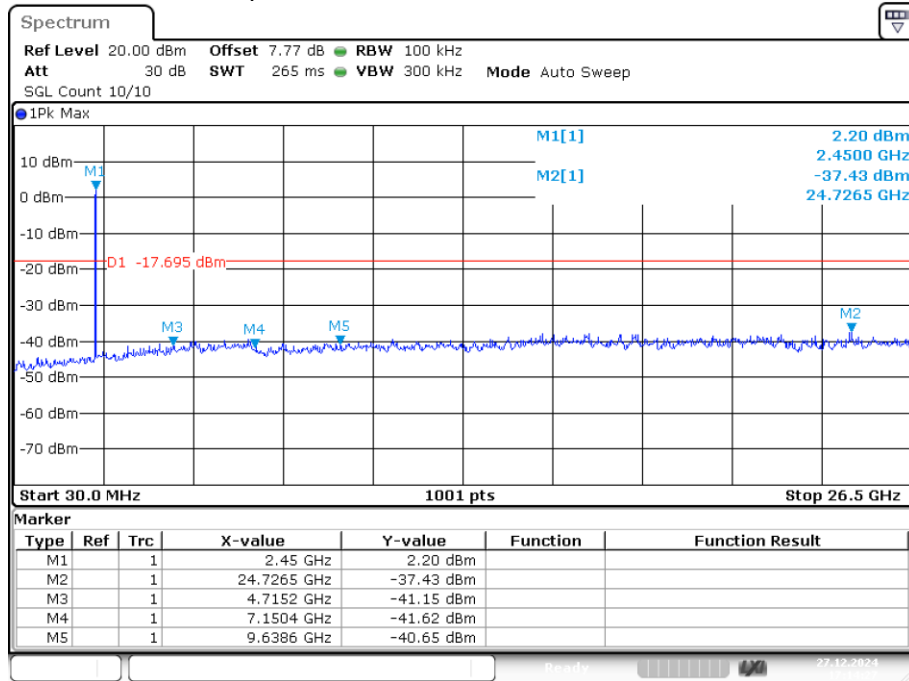


Date: 27.DEC.2024 17:14:26

Tx. Spurious NVNT b 2462MHz Ant1 Ref

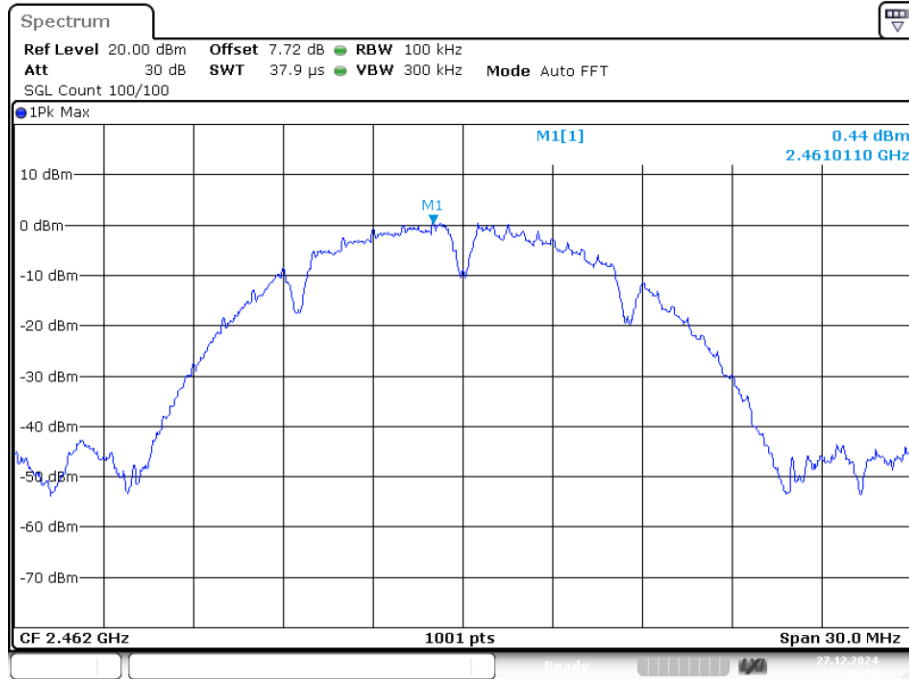

Date: 27.DEC.2024 17:16:20


Tx. Spurious NVNT b 2462MHz Ant1 Emission

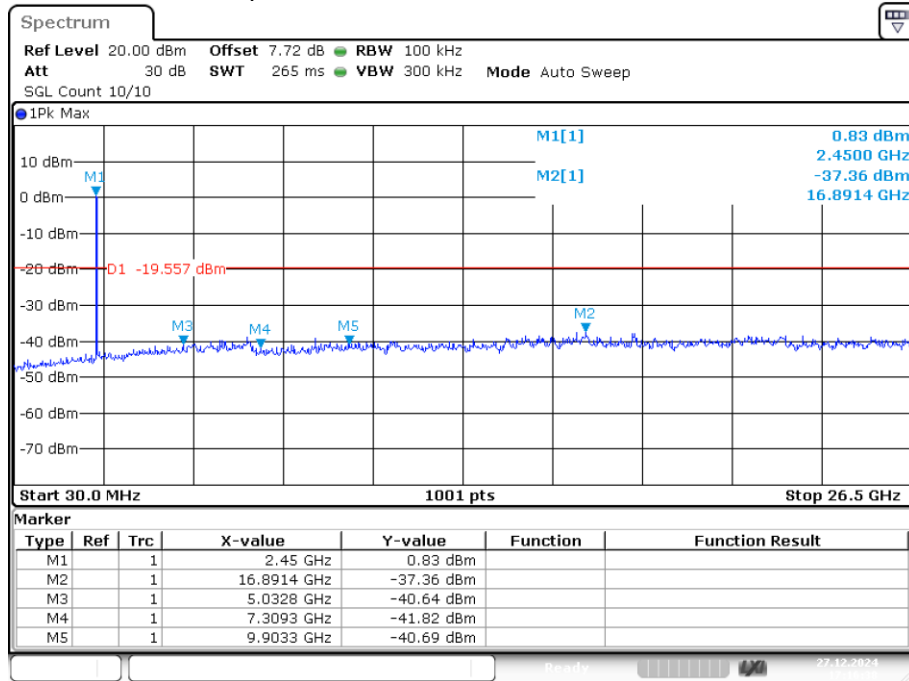

Date: 27.DEC.2024 17:16:38


Tx. Spurious NVNT g 2412MHz Ant1 Ref



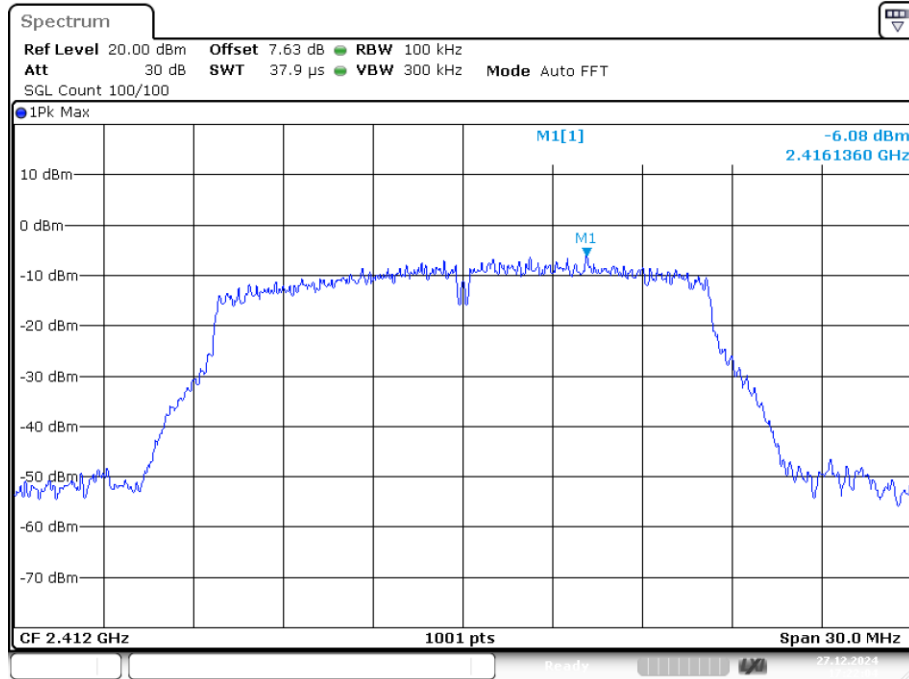


Date: 27.DEC.2024 17:22:04

Tx. Spurious NVNT g 2412MHz Ant1 Emission

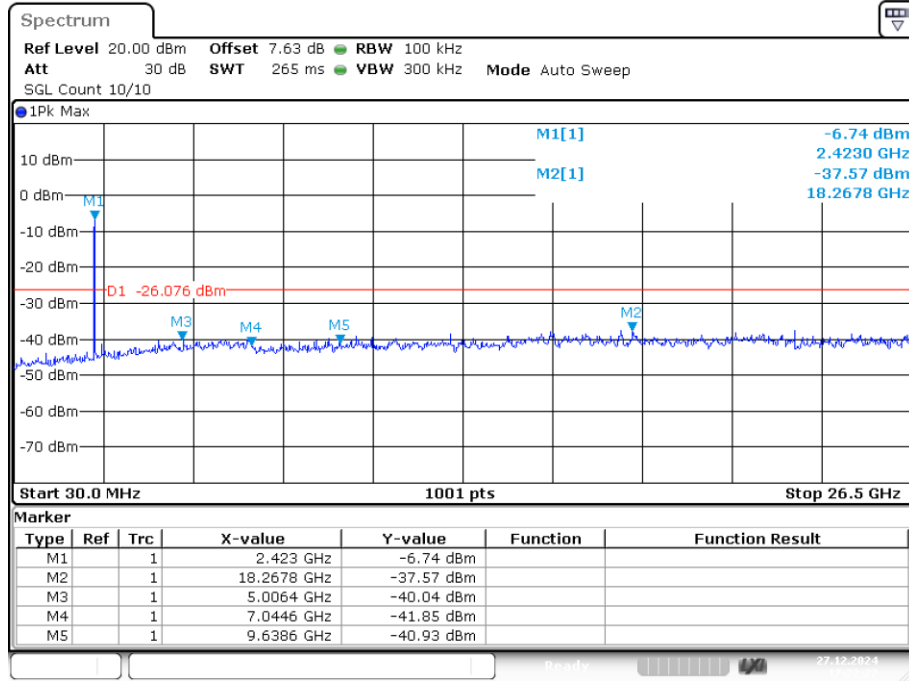


Date: 27.DEC.2024 17:22:22


Tx. Spurious NVNT g 2437MHz Ant1 Ref

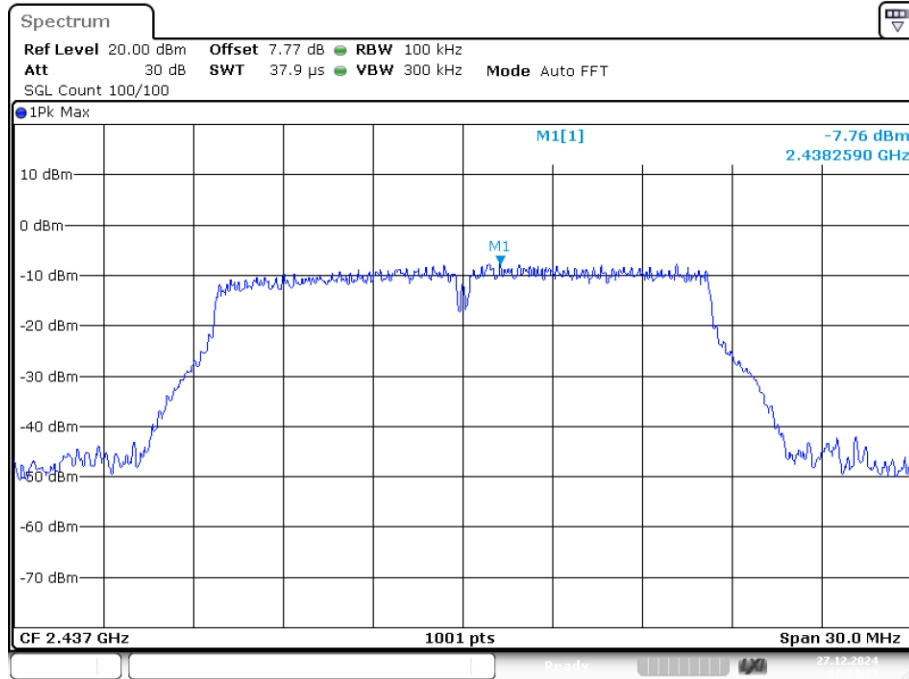

Tx. Spurious NVNT g 2437MHz Ant1 Emission

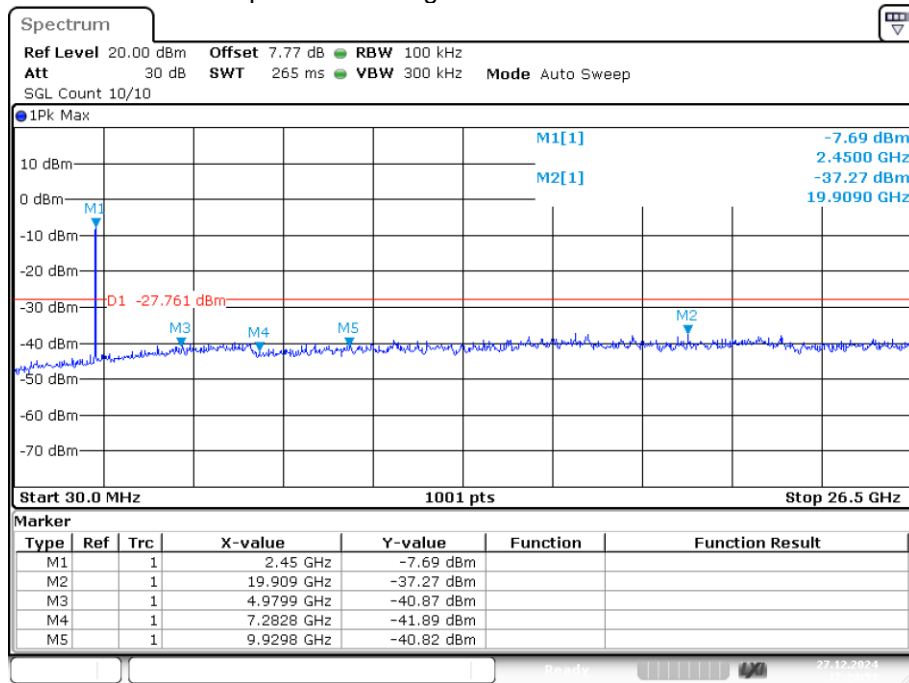


Tx. Spurious NVNT g 2462MHz Ant1 Ref

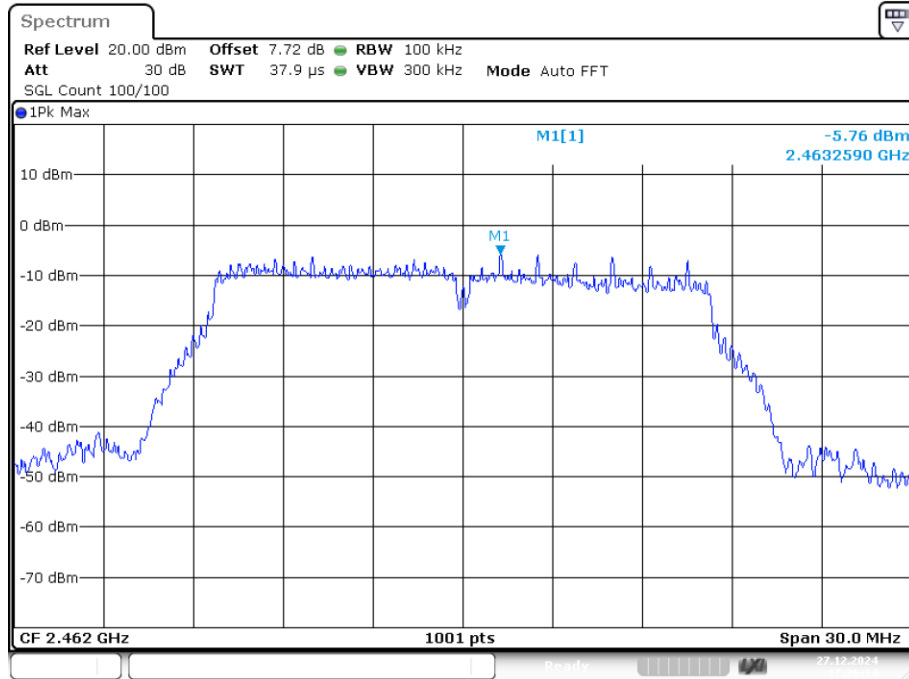


Date: 27.DEC.2024 17:26:14

Tx. Spurious NVNT g 2462MHz Ant1 Emission

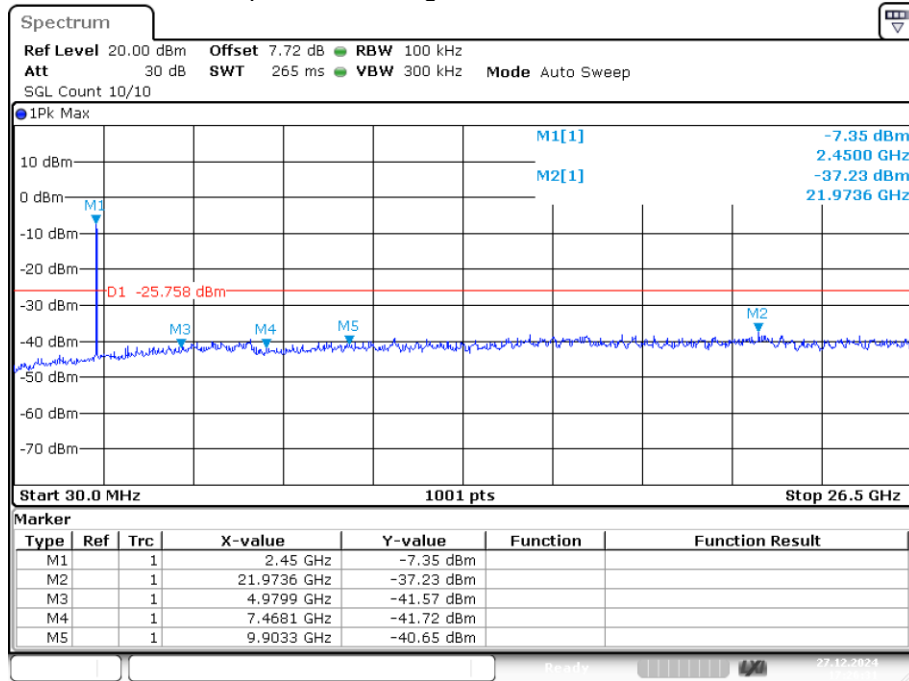


Date: 27.DEC.2024 17:26:31


Tx. Spurious NVNT n20 2412MHz Ant1 Ref

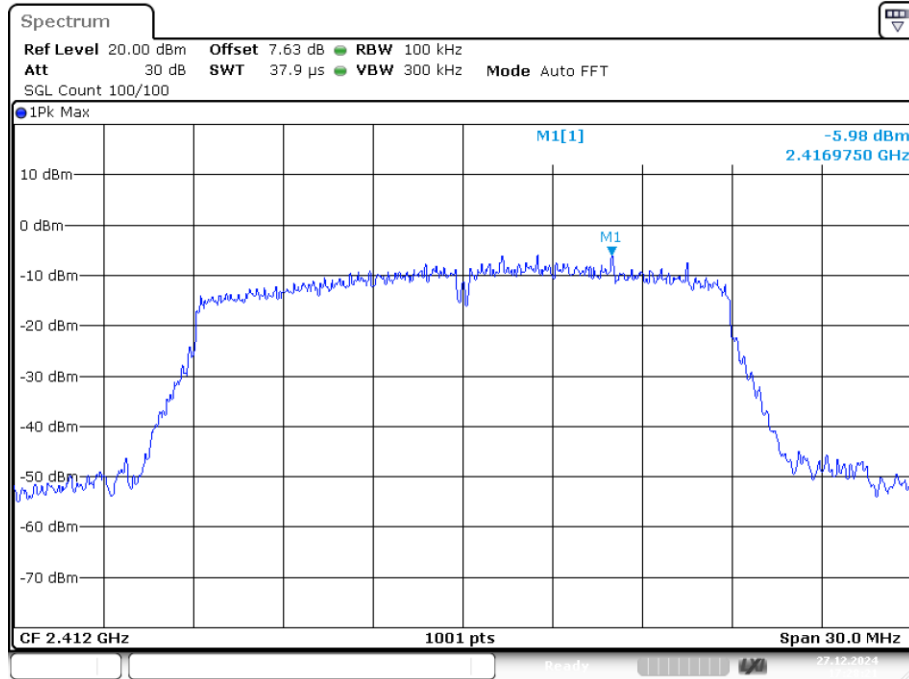


Tx. Spurious NVNT n20 2412MHz Ant1 Emission

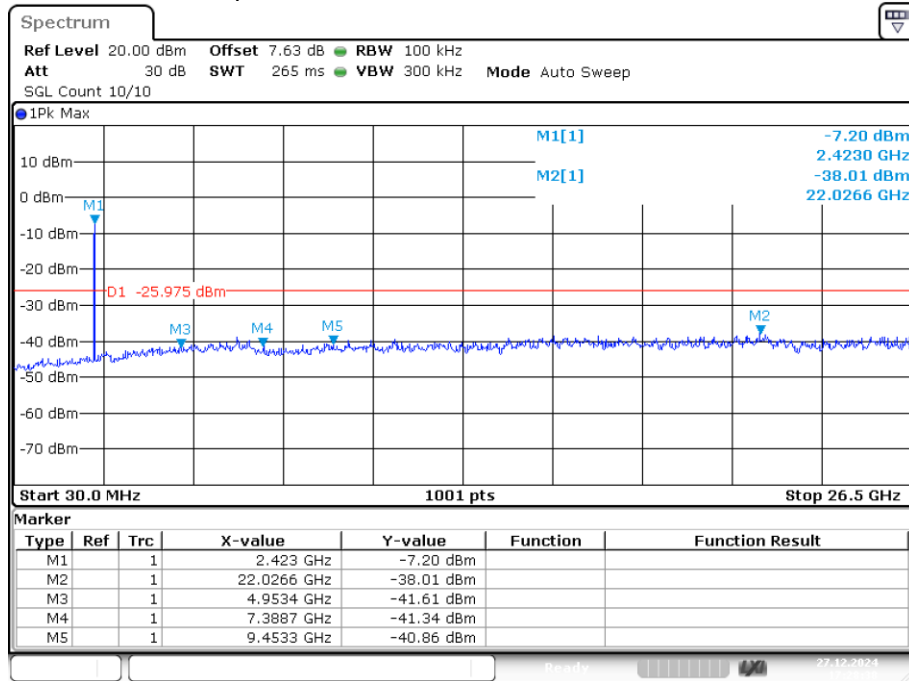


Tx. Spurious NVNT n20 2437MHz Ant1 Ref

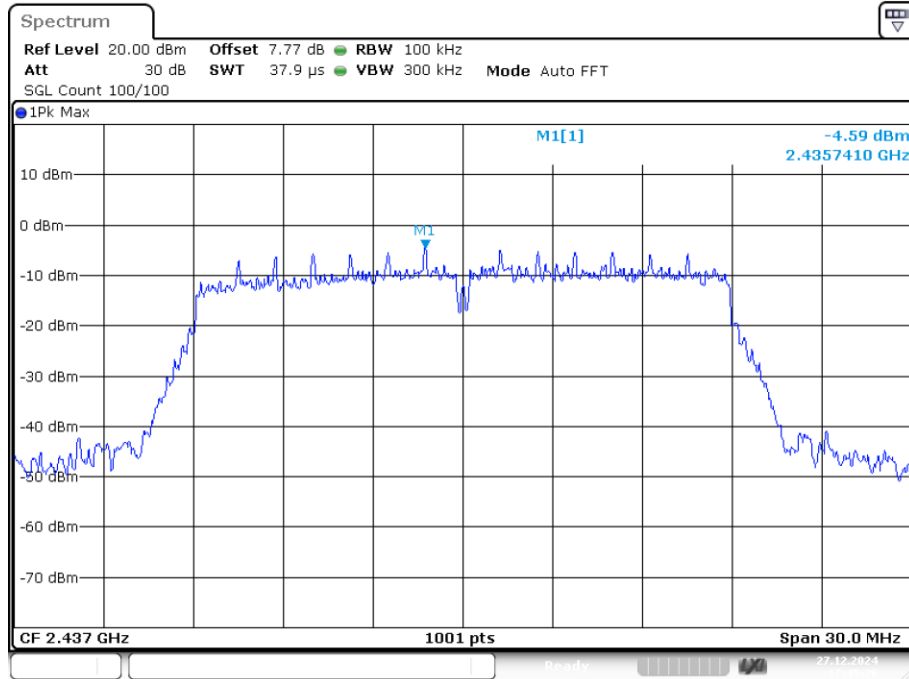

Tx. Spurious NVNT n20 2437MHz Ant1 Emission

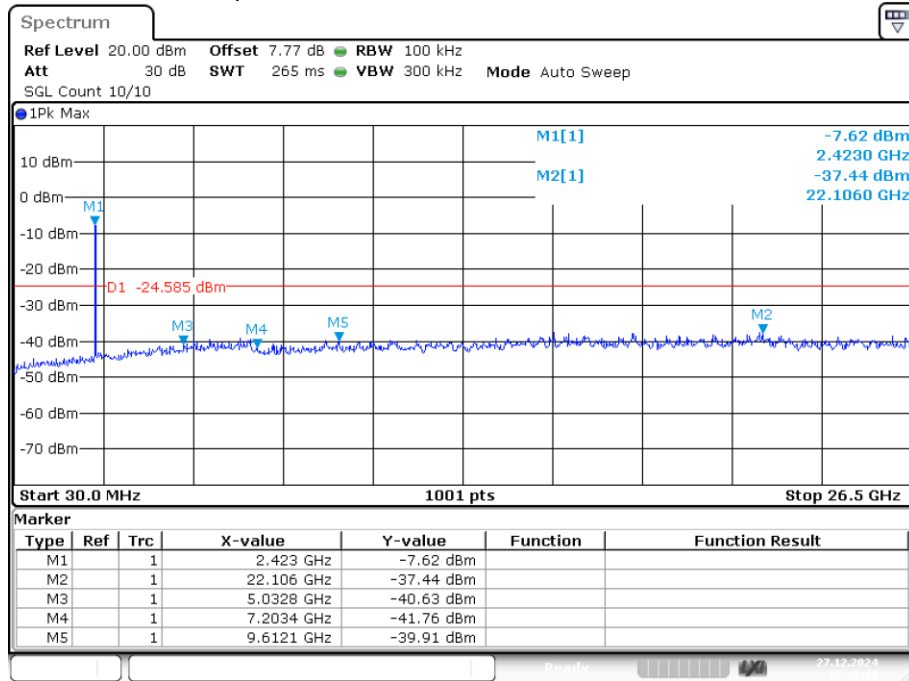


Tx. Spurious NVNT n20 2462MHz Ant1 Ref

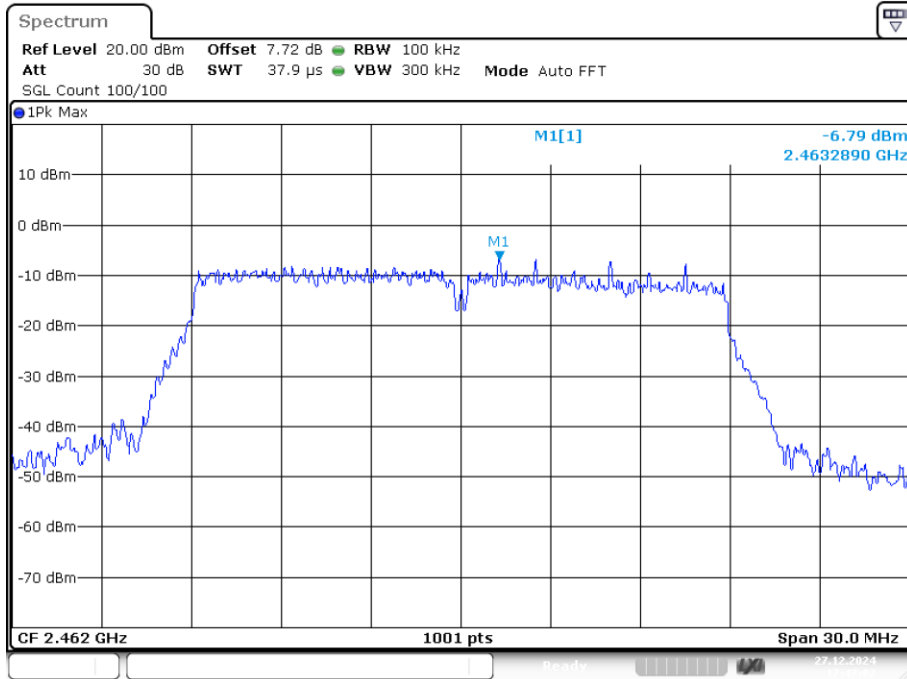

Date: 27.DEC.2024 17:47:01

Tx. Spurious NVNT n20 2462MHz Ant1 Emission

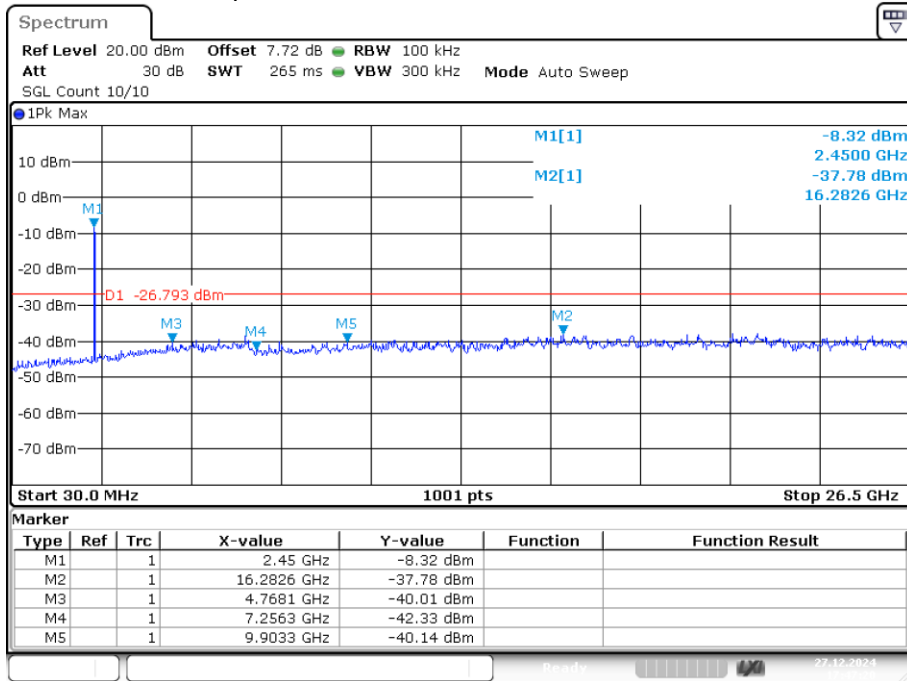

Date: 27.DEC.2024 17:47:19

## 4. POWER LINE CONDUCTED EMISSION

### 4.1. Test Limits

Frequency MHz	Limits dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. \*Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.


### 4.3. Test Setup

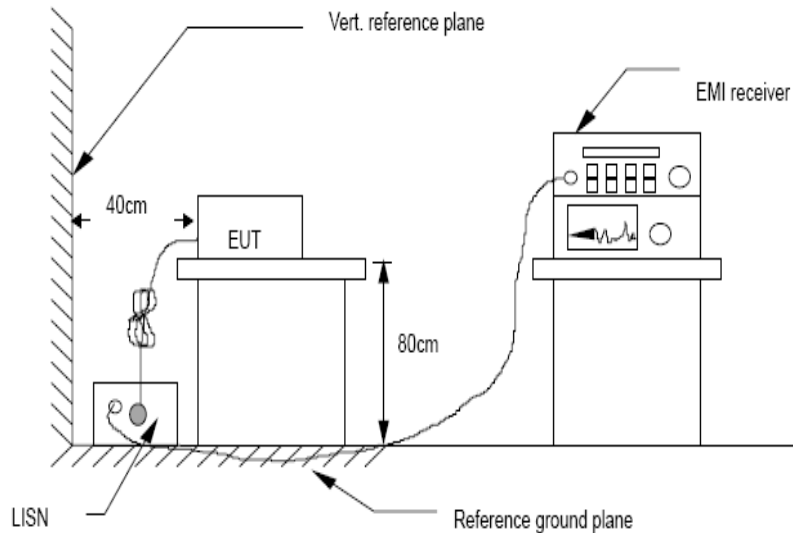

### 4.4. Test Results

Test result

Line:

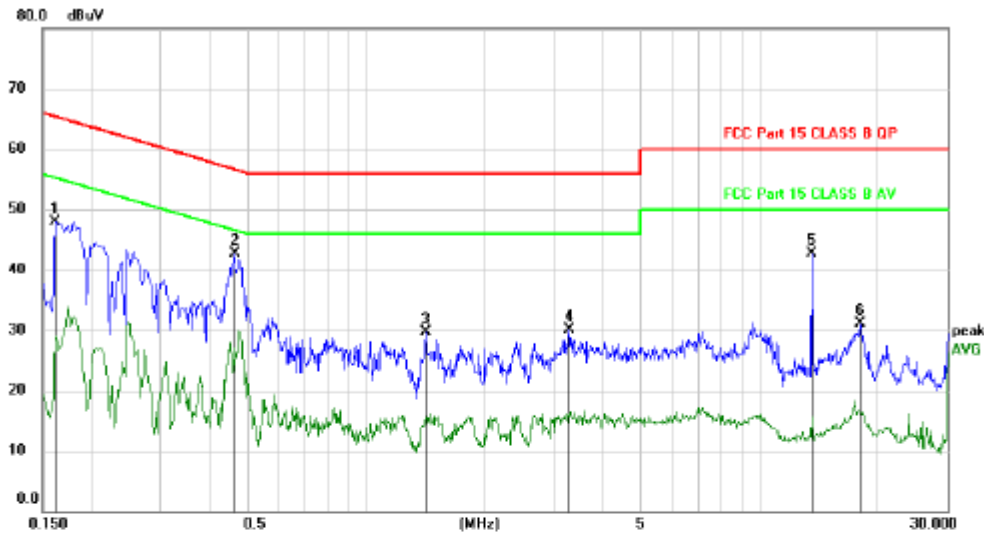


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1620	38.04	9.93	47.97	65.36	-17.39	peak	
2 *	0.4620	32.83	9.95	42.78	56.66	-13.88	peak	
3	1.4160	19.79	9.90	29.69	56.00	-26.31	peak	
4	3.2820	20.13	9.95	30.08	56.00	-25.92	peak	
5	13.5780	32.45	10.30	42.75	60.00	-17.25	peak	
6	17.9880	20.62	10.41	31.03	60.00	-28.97	peak	

\*:Maximum data x:Over limit !:over margin (Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable



Neutral:

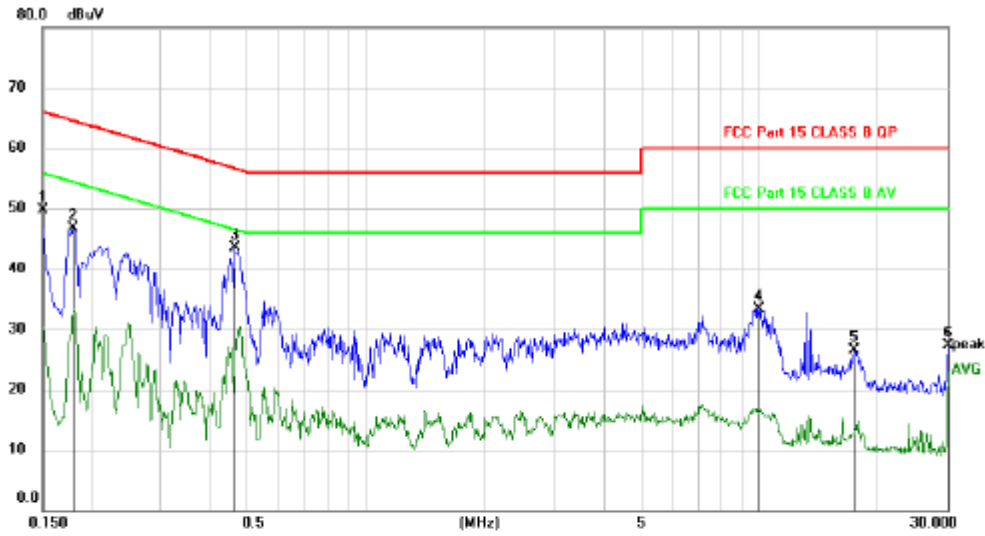

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	39.69	9.94	49.63	66.00	-16.37	peak	
2	0.1800	36.86	9.93	46.79	64.49	-17.70	peak	
3 *	0.4620	33.56	9.95	43.51	58.68	-13.15	peak	
4	9.9450	23.17	10.21	33.38	60.00	-26.62	peak	
5	17.4270	16.10	10.40	26.50	60.00	-33.50	peak	
6	30.0000	16.71	10.67	27.38	60.00	-32.62	peak	

\*:Maximum data x:Over limit !:over margin (Reference Only)  
 Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Notes: This report only shall the worst case mode for b 2412MHz.

## 5. CONDUCTED MAXIMUM OUTPUT POWER

### 5.1. Test limits

Please refer FCC PART 15: 15.247.

Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1W(30dBm).

### 5.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02


5.2.1 Place the EUT on the table and the EUT is configured to transmit continuously or to transmit with a constant duty cycle.

5.2.2 At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.

5.2.3 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

### 5.3. Test Setup

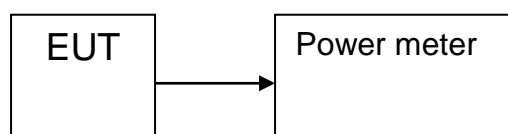

### 5.4. Test Results

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	14.644	30	Pass
NVNT	b	2437	Ant1	14.966	30	Pass
NVNT	b	2462	Ant1	14.677	30	Pass
NVNT	g	2412	Ant1	14.262	30	Pass
NVNT	g	2437	Ant1	14.321	30	Pass
NVNT	g	2462	Ant1	14.121	30	Pass
NVNT	n20	2412	Ant1	14.43	30	Pass
NVNT	n20	2437	Ant1	14.786	30	Pass
NVNT	n20	2462	Ant1	14.12	30	Pass

## 6. PEAK POWER SPECTRAL DENSITY

### 6.1. Test limits

6.1.1 Please refer FCC PART 15: 15.247.

6.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

6.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

### 6.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

6.2.1 Place the EUT on the table and set it in transmitting mode.


6.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3 Set the spectrum analyzer as RBW = 3kHz(Set the RBW to:  $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .), VBW = 10kHz(Set the  $\text{VBW} \geq 3 \times \text{RBW}$ ), span  $\geq 1.5 \times \text{DTS bandwidth}$ ., detail see the test plot.

6.2.4 Record the max reading.

6.2.5 Repeat the above procedure until the measurements for all frequencies are completed.


### 6.3. Test Setup

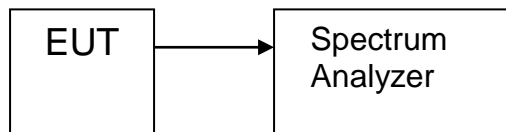

### 6.4. Test Results


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	5.33	8	Pass
NVNT	b	2437	Ant1	5.276	8	Pass
NVNT	b	2462	Ant1	4.968	8	Pass
NVNT	g	2412	Ant1	-7.956	8	Pass
NVNT	g	2437	Ant1	-1.994	8	Pass
NVNT	g	2462	Ant1	-1.856	8	Pass
NVNT	n20	2412	Ant1	-1.458	8	Pass
NVNT	n20	2437	Ant1	-2.243	8	Pass
NVNT	n20	2462	Ant1	-1.955	8	Pass

PSD NVNT b 2412MHz Ant1

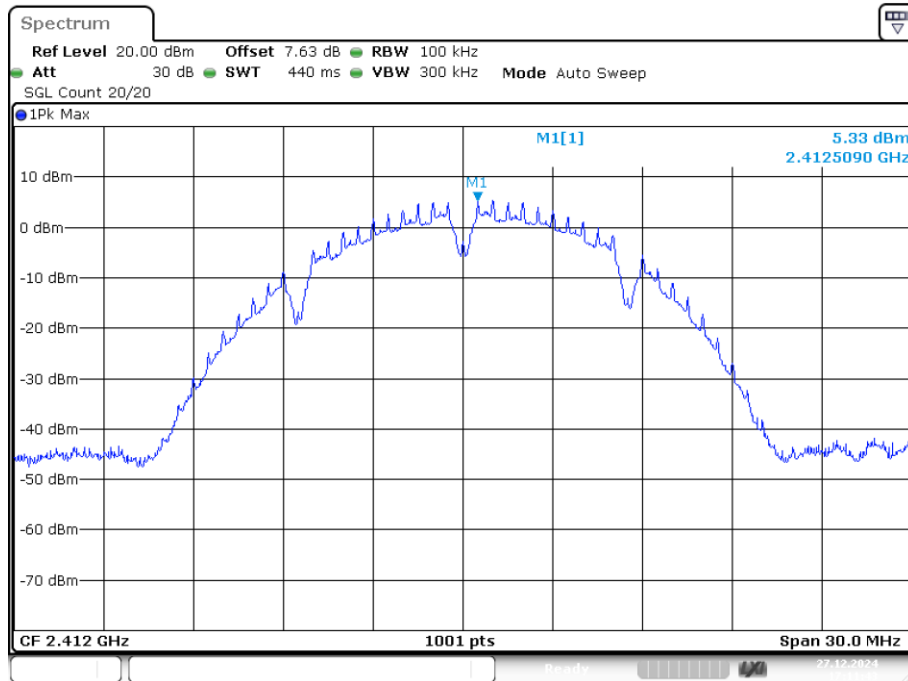


Date: 27.DEC.2024 17:11:44


PSD NVNT b 2437MHz Ant1

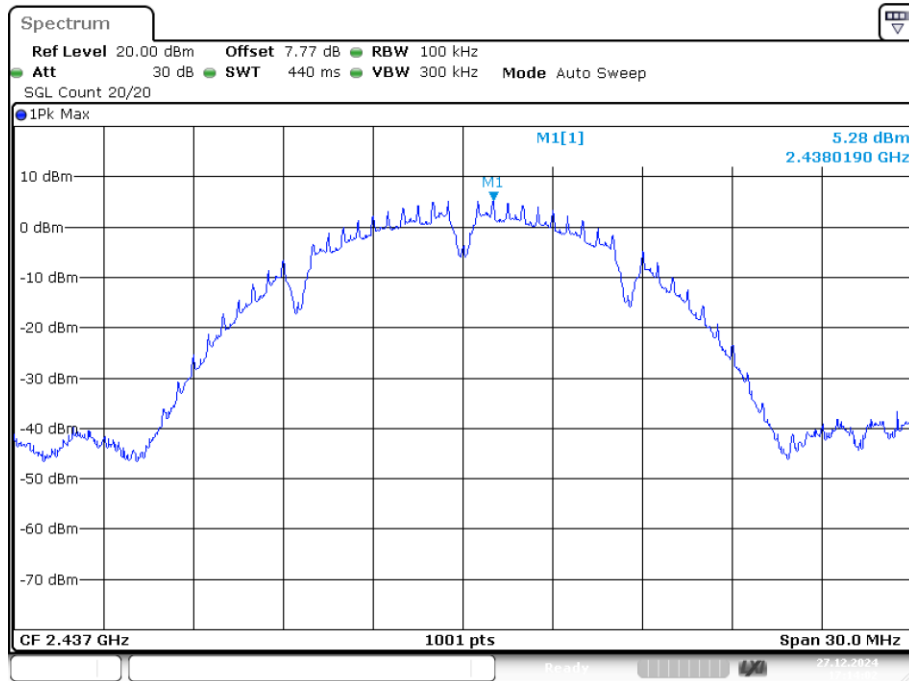


PSD NVNT b 2462MHz Ant1

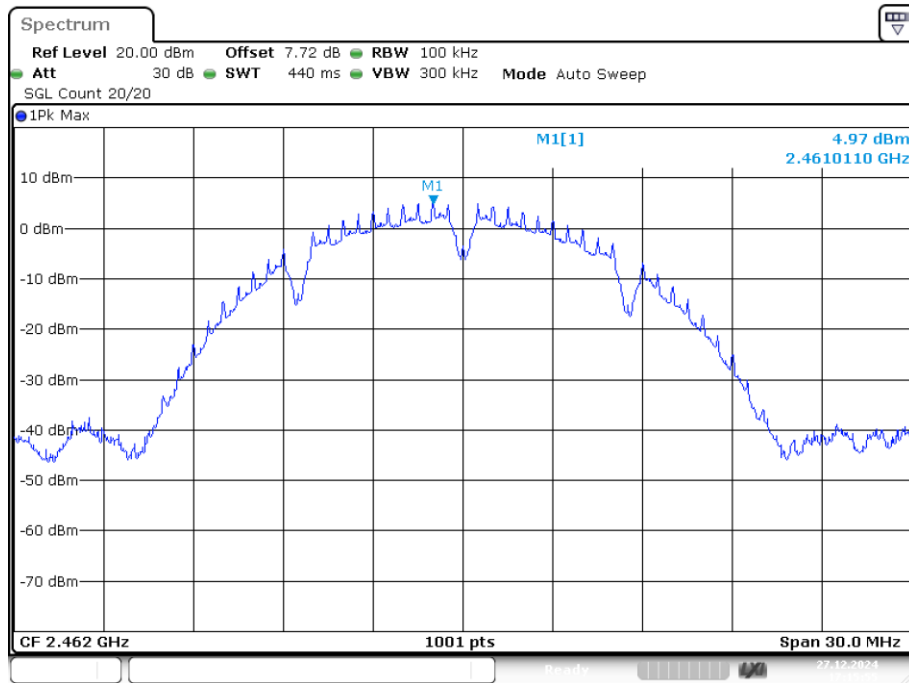


PSD NVNT g 2412MHz Ant1

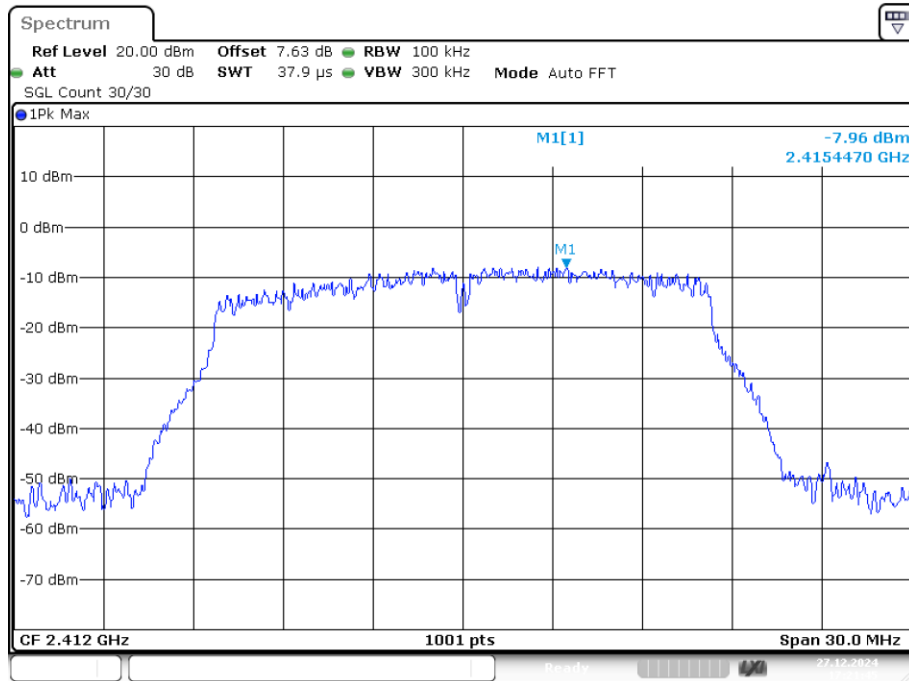

PSD NVNT g 2437MHz Ant1

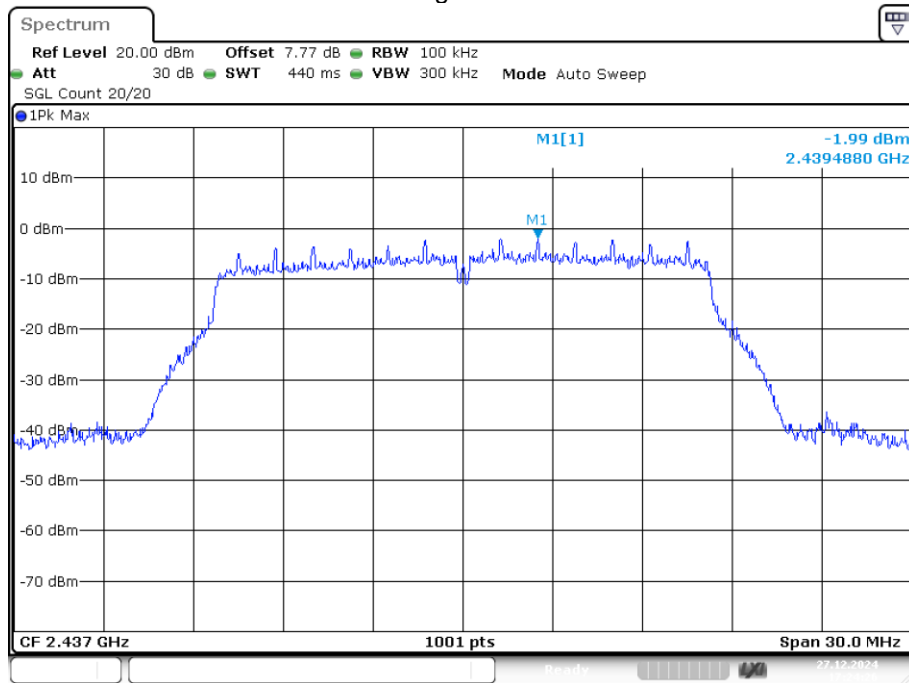


PSD NVNT g 2462MHz Ant1

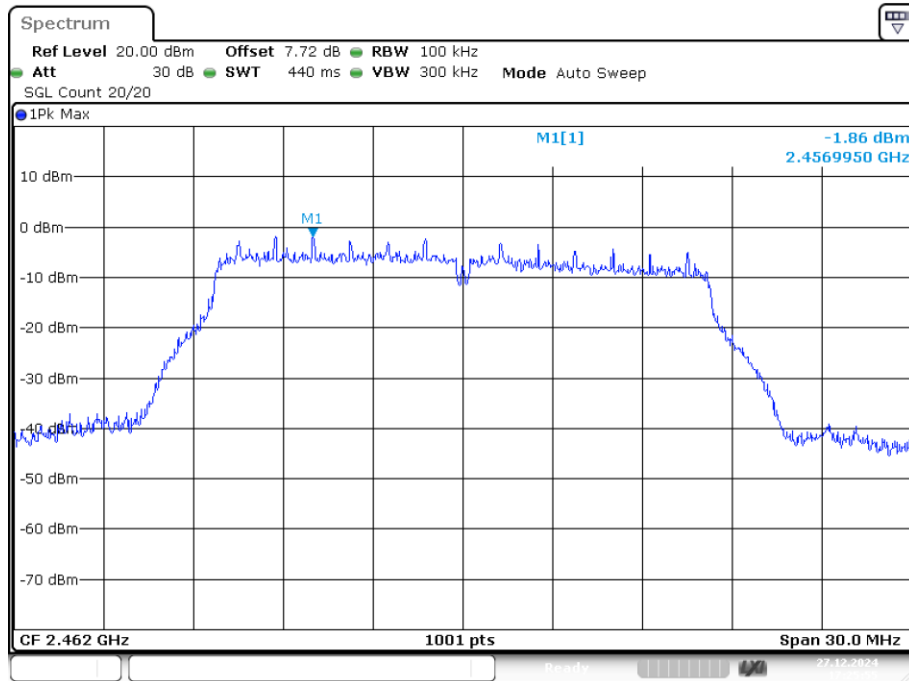


Date: 27.DEC.2024 17:25:54

PSD NVNT n20 2412MHz Ant1

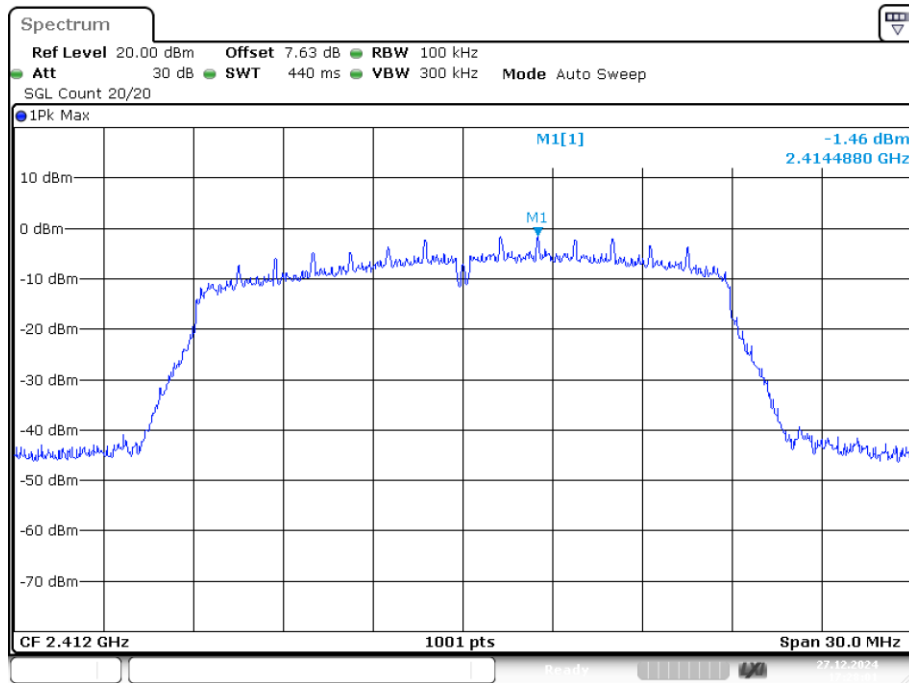


Date: 27.DEC.2024 17:28:02

PSD NVNT n20 2437MHz Ant1

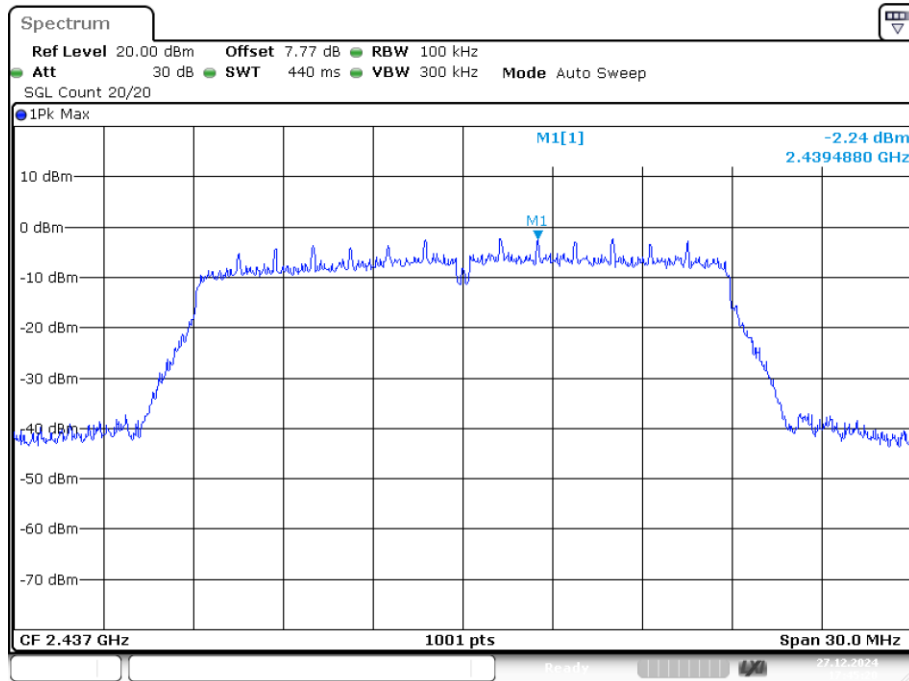

PSD NVNT n20 2462MHz Ant1

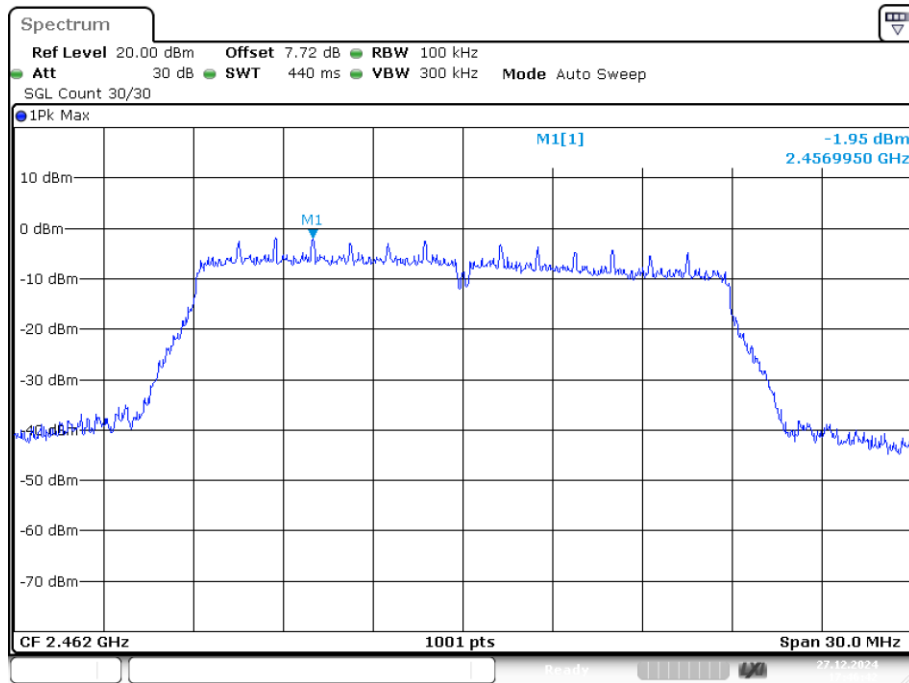



## 7. BANDWIDTH

### 7.1. Test limits

Please refer FCC PART 15: 15.247

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.

### 7.2. Test Procedure


Details see the KDB558074 D01 Meas Guidance v05r02

a) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

b) The test receiver set RBW = 1-5%BW, VBW ≥ 3\*RBW, Sweep time set auto, detail see the test plot for 99% Bandwidth.

c) The test receiver set RBW = 100kHz, VBW ≥ 3\*RBW = 300kHz, Sweep time set auto, detail see the test plot for 6dB Bandwidth.

### 7.3. Test Setup

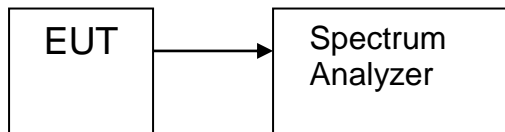


### 7.4. Test Results

#### -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	7.59	0.5	Pass
NVNT	b	2437	Ant1	8.07	0.5	Pass
NVNT	b	2462	Ant1	8.55	0.5	Pass
NVNT	g	2412	Ant1	13.86	0.5	Pass
NVNT	g	2437	Ant1	16.35	0.5	Pass
NVNT	g	2462	Ant1	16.47	0.5	Pass
NVNT	n20	2412	Ant1	16.05	0.5	Pass
NVNT	n20	2437	Ant1	16.68	0.5	Pass
NVNT	n20	2462	Ant1	12.3	0.5	Pass

-6dB Bandwidth NVNT b 2412MHz Ant1

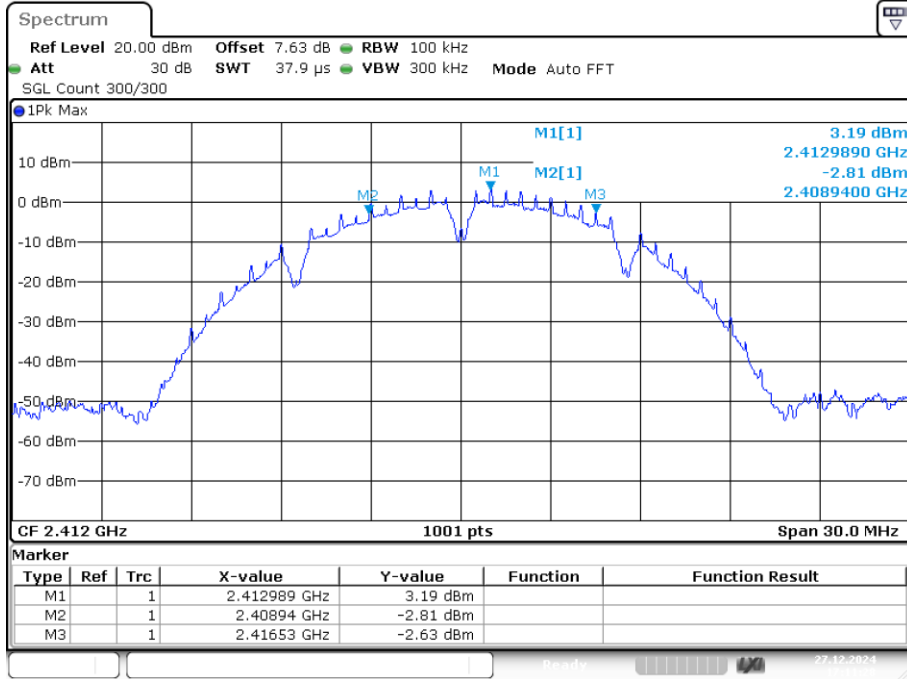


Date: 27.DEC.2024 17:11:28

-6dB Bandwidth NVNT b 2437MHz Ant1

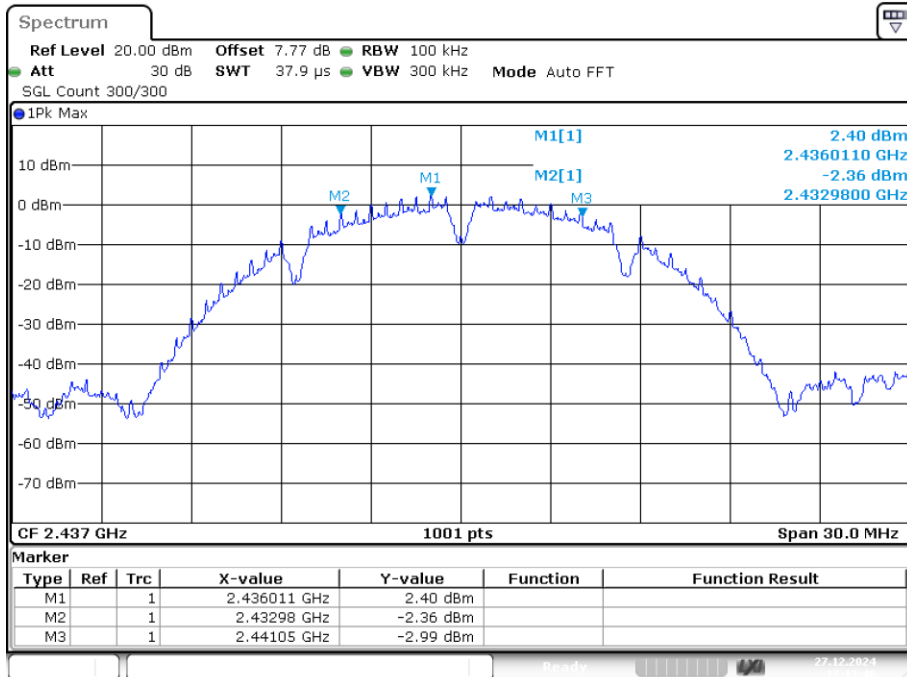


Date: 27.DEC.2024 17:13:46

-6dB Bandwidth NVNT b 2462MHz Ant1

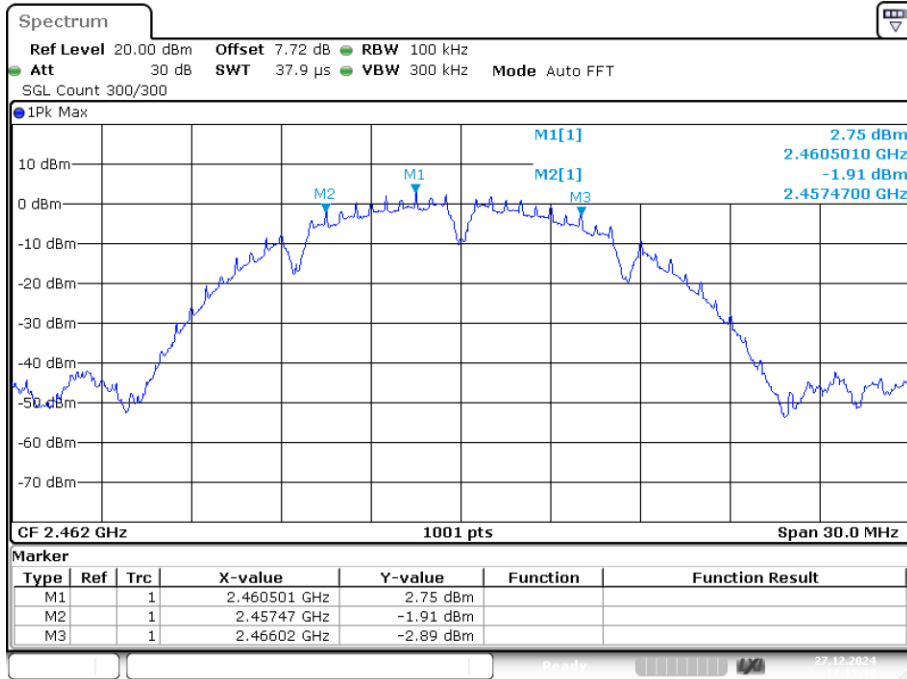


Date: 27.DEC.2024 17:15:38

-6dB Bandwidth NVNT g 2412MHz Ant1

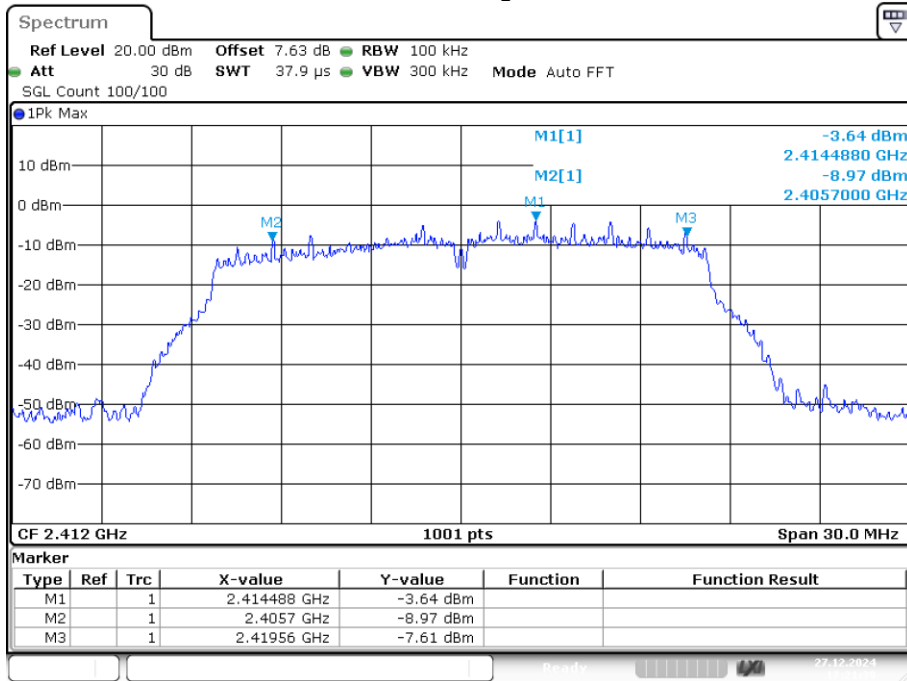


Date: 27.DEC.2024 17:21:39

-6dB Bandwidth NVNT g 2437MHz Ant1

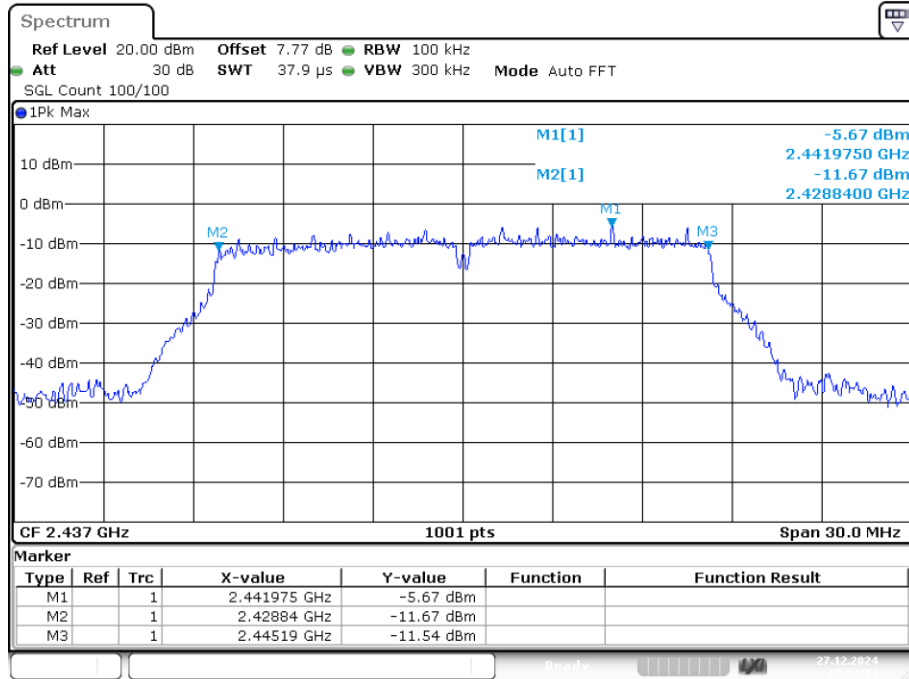


Date: 27.DEC.2024 17:24:11

-6dB Bandwidth NVNT g 2462MHz Ant1

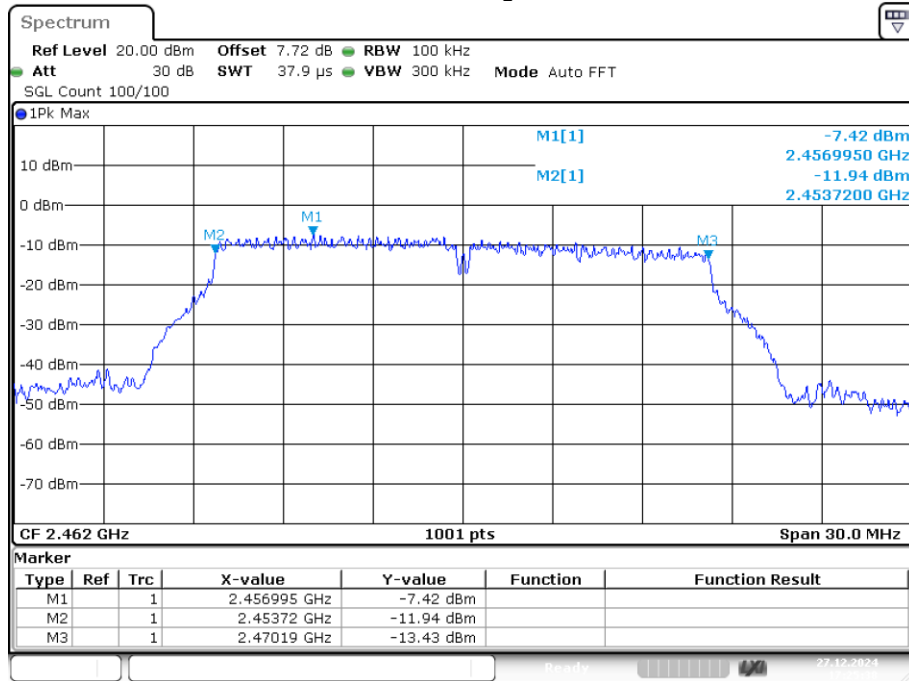


Date: 27.DEC.2024 17:25:38

-6dB Bandwidth NVNT n20 2412MHz Ant1

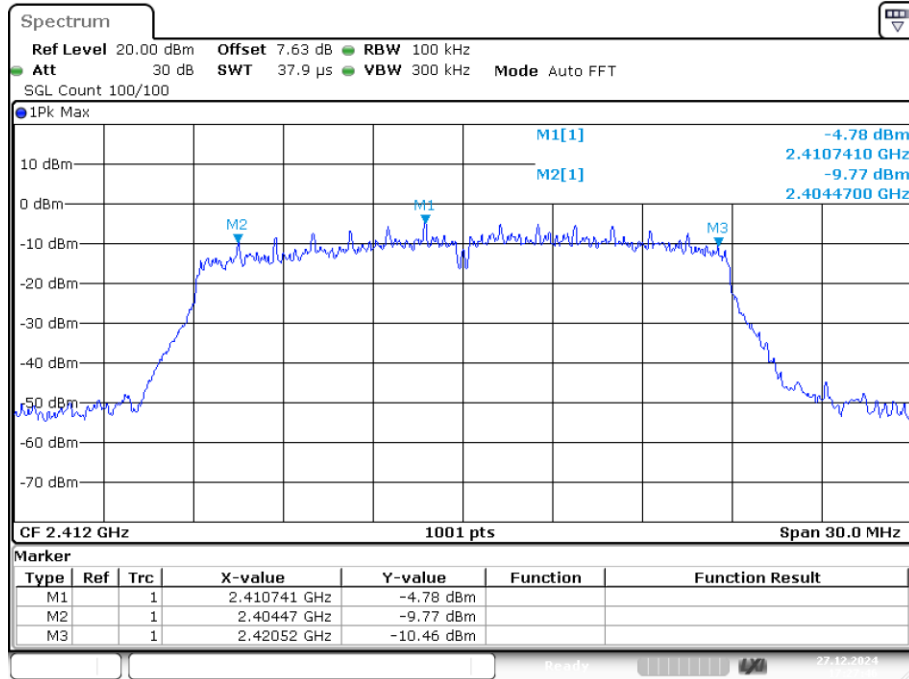


Date: 27.DEC.2024 17:27:46

-6dB Bandwidth NVNT n20 2437MHz Ant1

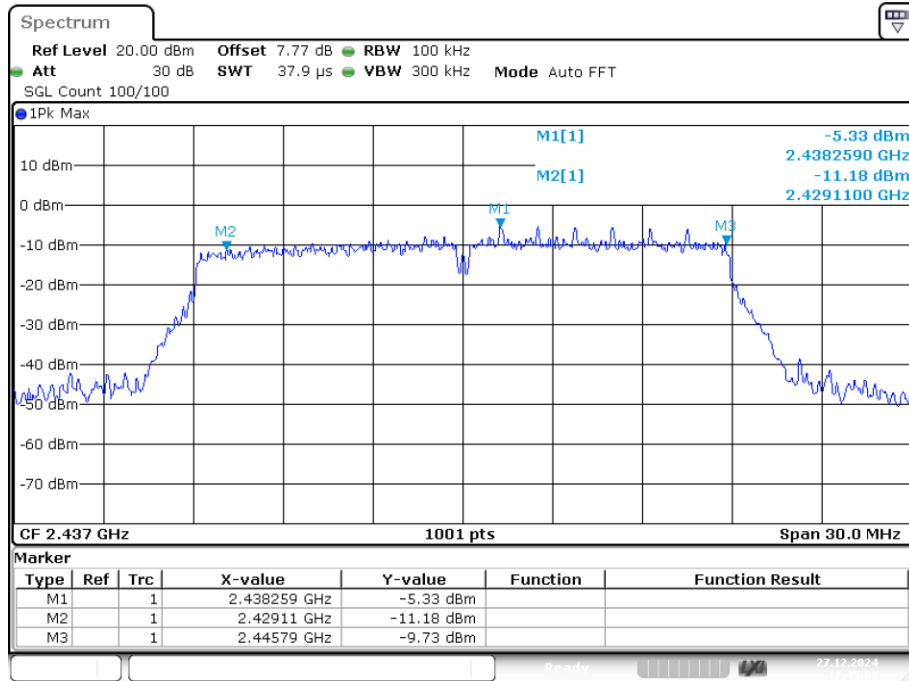

Date: 27.DEC.2024 17:45:04

-6dB Bandwidth NVNT n20 2462MHz Ant1

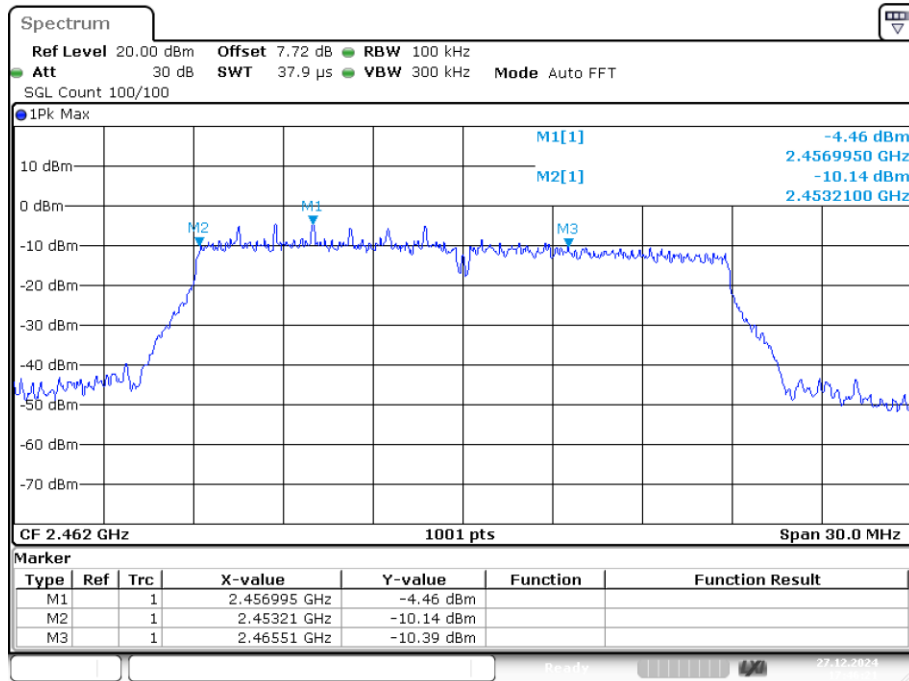


Date: 27.DEC.2024 17:46:21

**Occupied Channel Bandwidth**


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	12.587
NVNT	b	2437	Ant1	13.217
NVNT	b	2462	Ant1	13.457
NVNT	g	2412	Ant1	16.304
NVNT	g	2437	Ant1	16.543
NVNT	g	2462	Ant1	16.573
NVNT	n20	2412	Ant1	17.443
NVNT	n20	2437	Ant1	17.712
NVNT	n20	2462	Ant1	17.862

**OBW NVNT b 2412MHz Ant1**

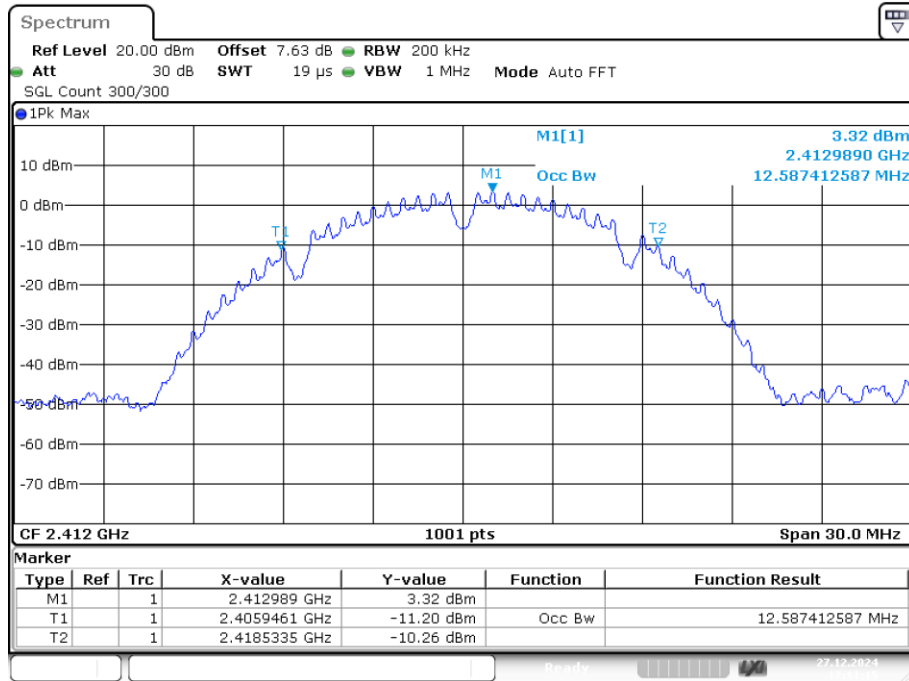


Date: 27.DEC.2024 17:11:15

**OBW NVNT b 2437MHz Ant1**

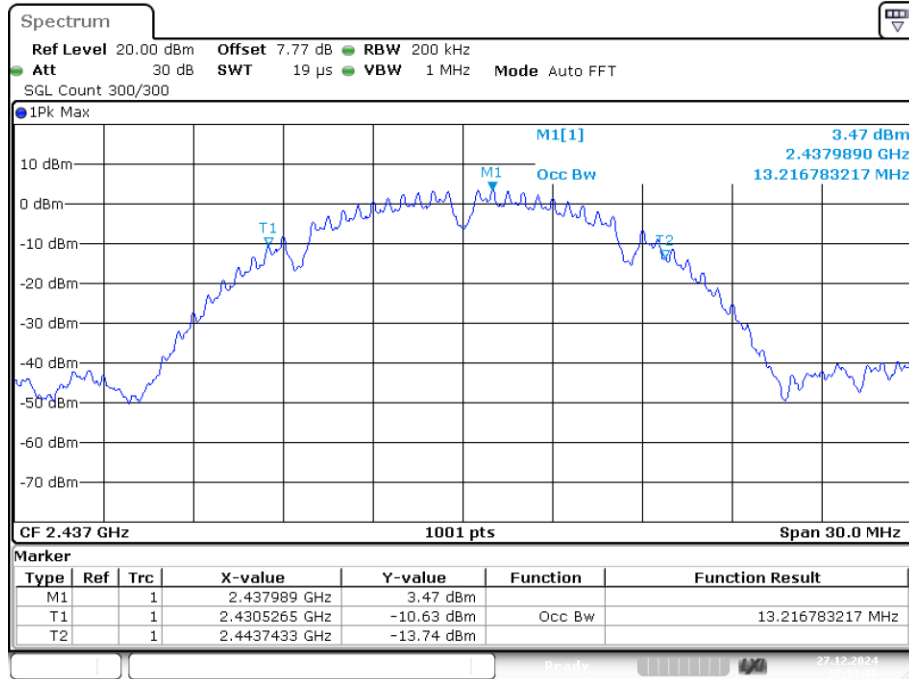

Date: 27.DEC.2024 17:13:36


OBW NVNT b 2462MHz Ant1

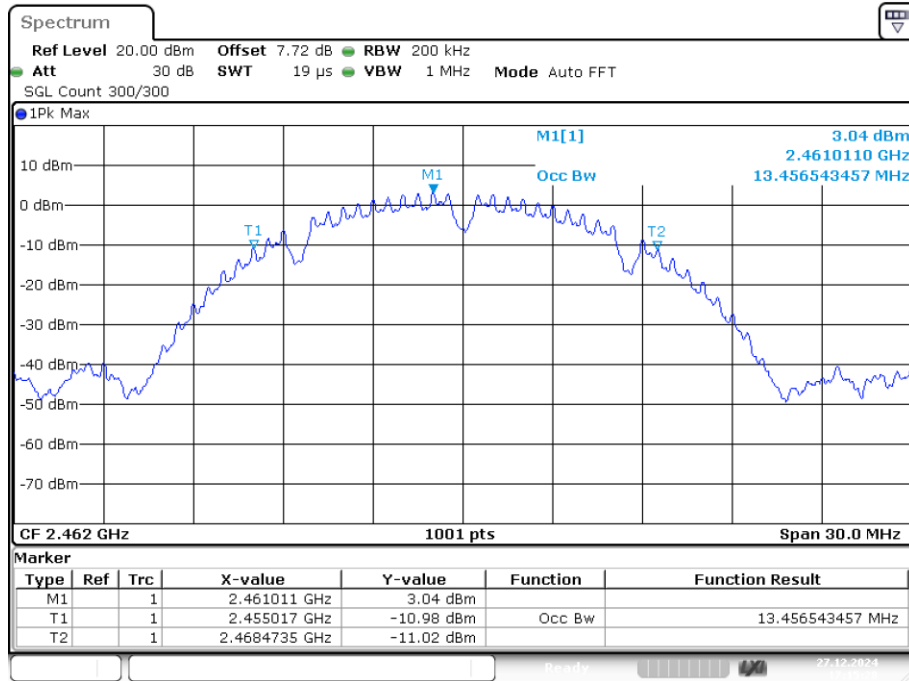

Date: 27.DEC.2024 17:15:28


OBW NVNT g 2412MHz Ant1



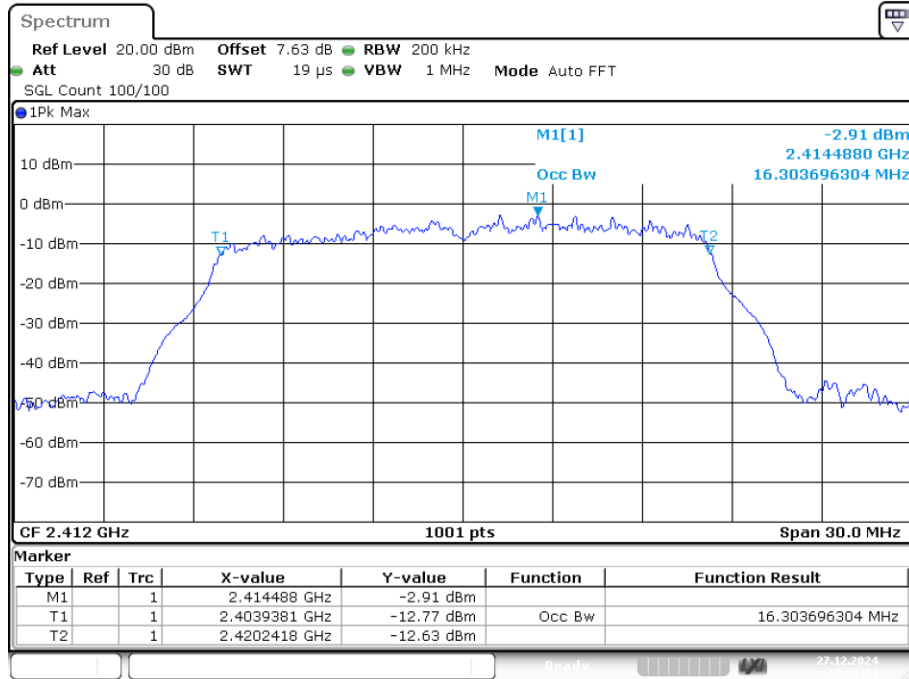


Date: 27.DEC.2024 17:21:31

OBW NVNT g 2437MHz Ant1

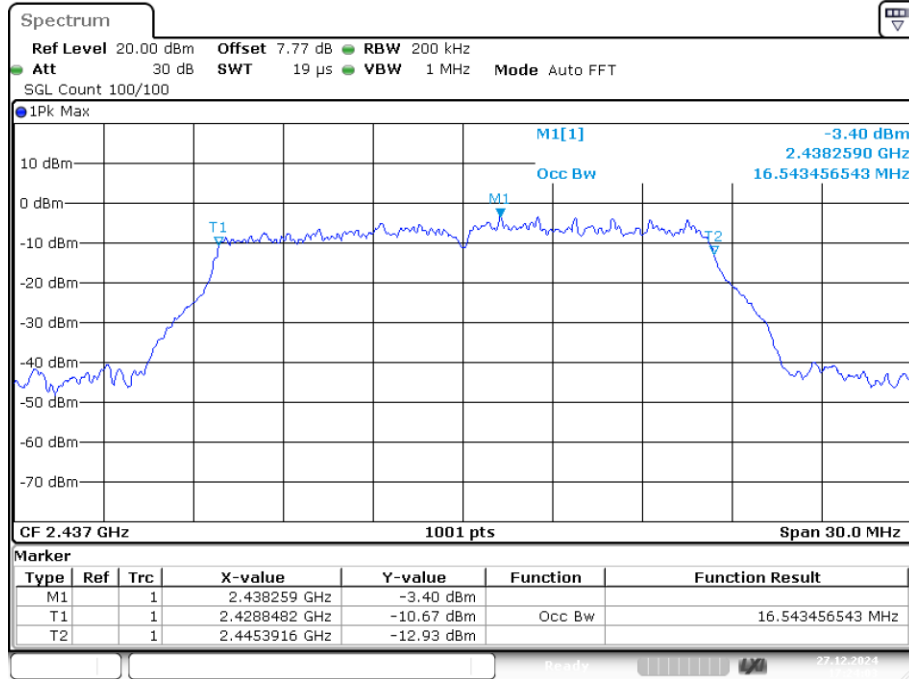


Date: 27.DEC.2024 17:24:02


OBW NVNT g 2462MHz Ant1

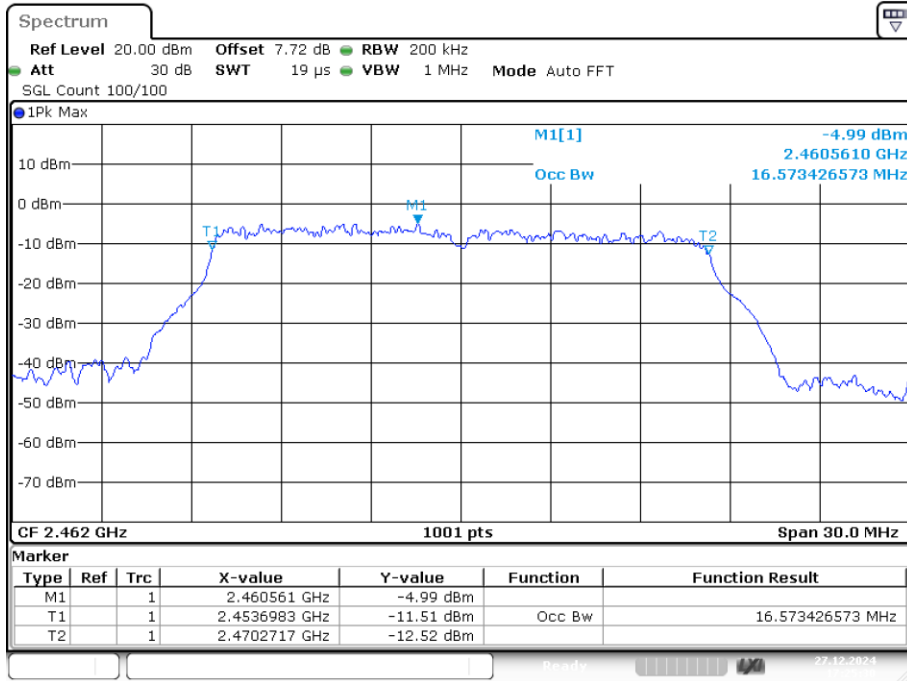

OBW NVNT n20 2412MHz Ant1

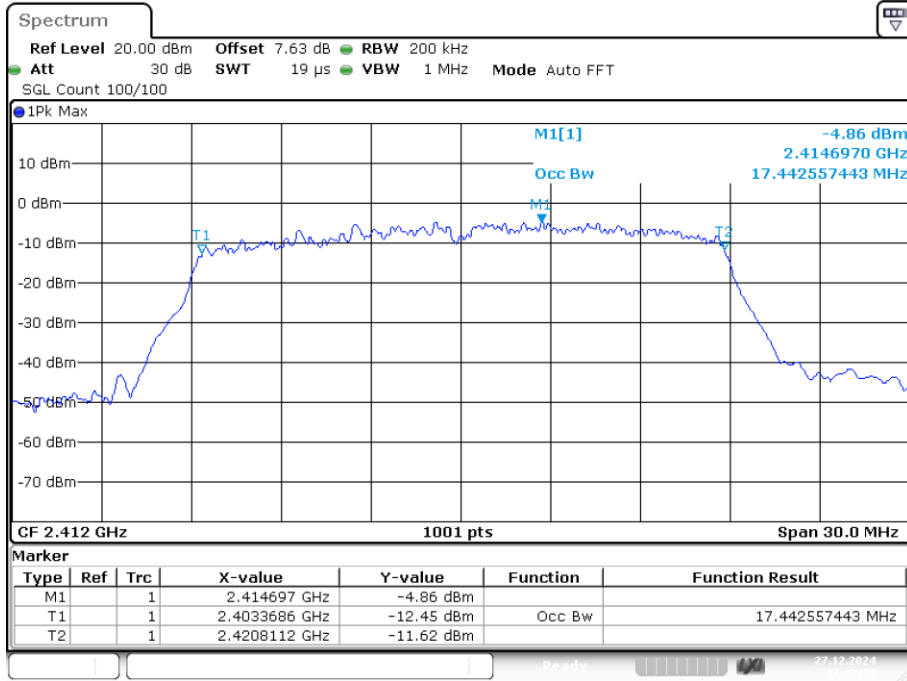


OBW NVNT n20 2437MHz Ant1

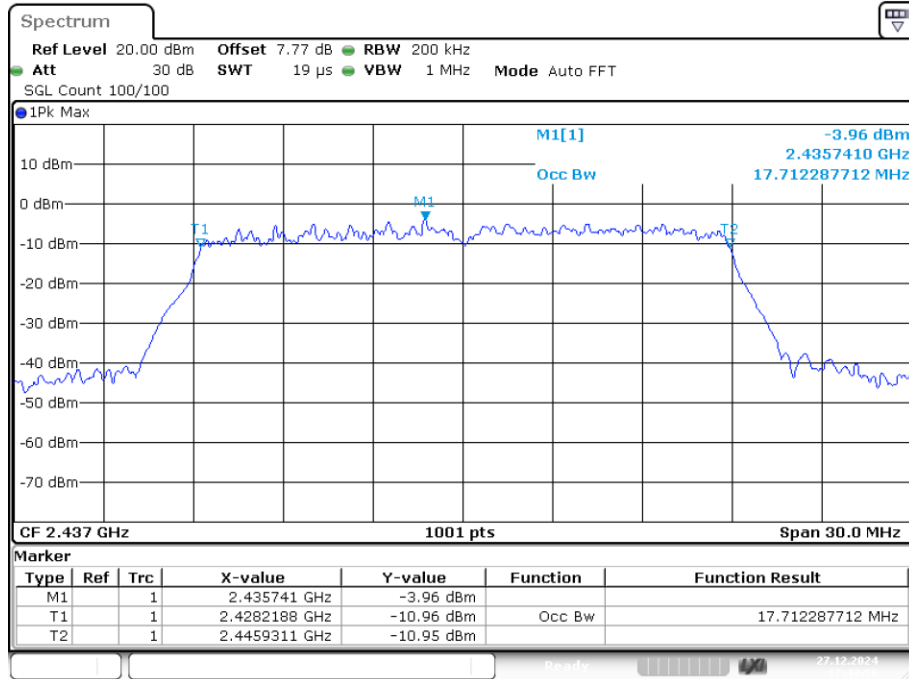

Date: 27.DEC.2024 17:44:55

OBW NVNT n20 2462MHz Ant1

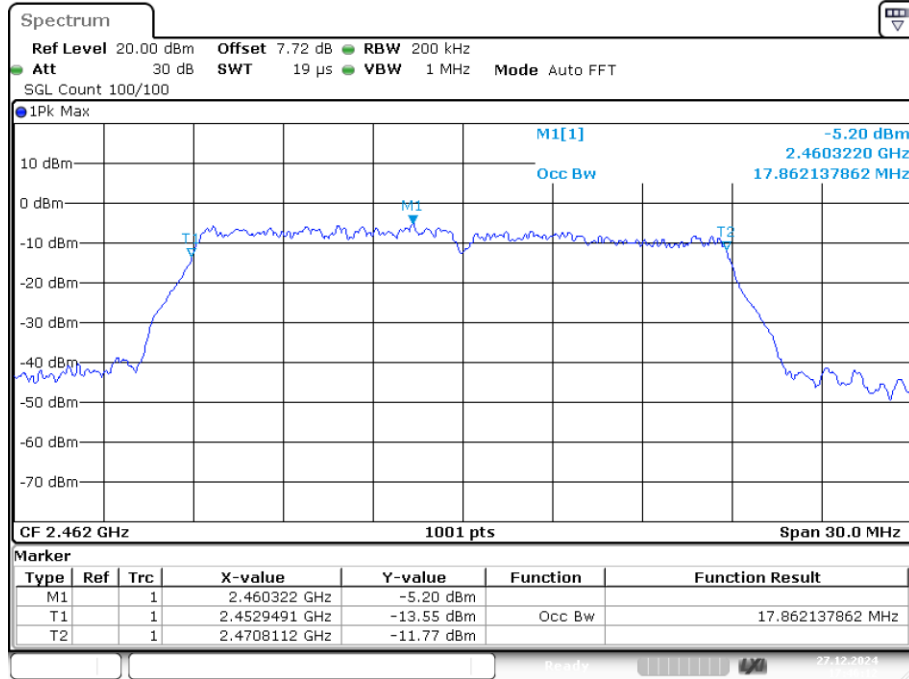

Date: 27.DEC.2024 17:46:12

## **8. BAND EDGE CHECK**

### **8.1. Test limits**

Please refer FCC PART 15: 15.247

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits and RSS-GEN limits.

### **8.2. Test Procedure**

Details see the KDB558074 D01 Meas Guidance v05r02

8.2.1 Put the EUT on a 1.5m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

8.2.2 Check the spurious emissions out of band.

8.2.3 RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 10Hz, RMS detector for AV value.

### **8.3. Test Setup**

Same as 5.2.2.


### **8.4. Test Results**

PASS.


Detailed information please see the following page.

Radiation testing


Test Mode: IEEE 802.11b-Low

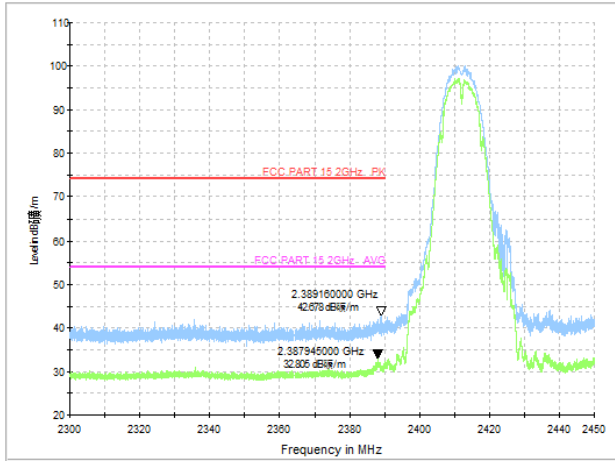


Test Mode: IEEE 802.11b-High

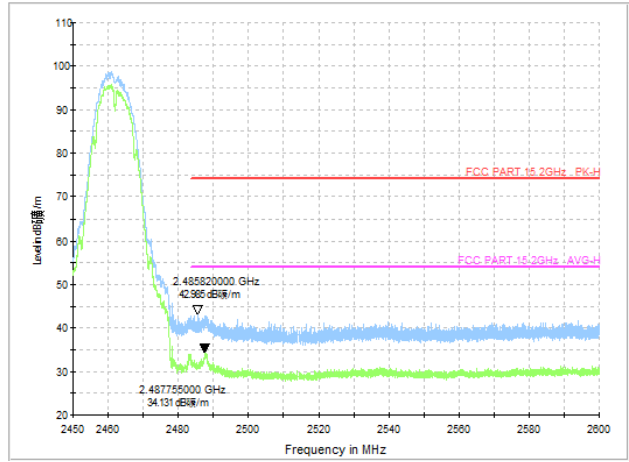


Test Mode: IEEE 802.11g-Low

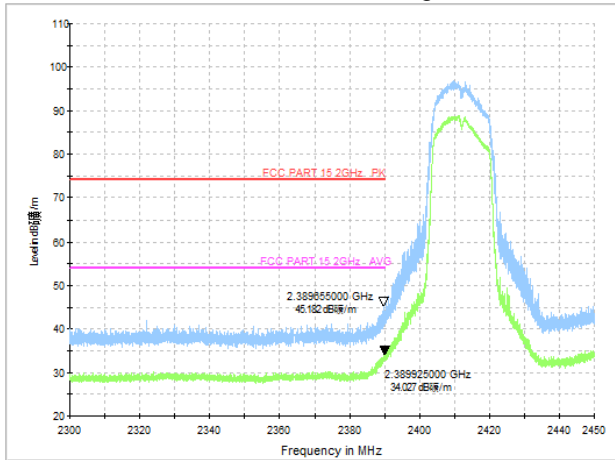


Test Mode: IEEE 802.11g-High

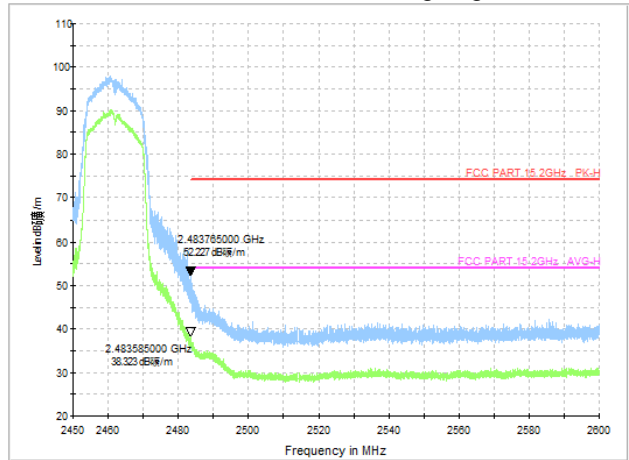

Test Mode: IEEE 802.11n20-Low

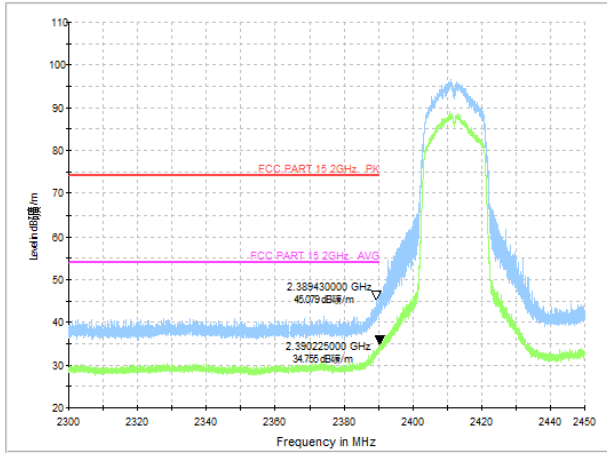


Test Mode: IEEE 802.11n20-High

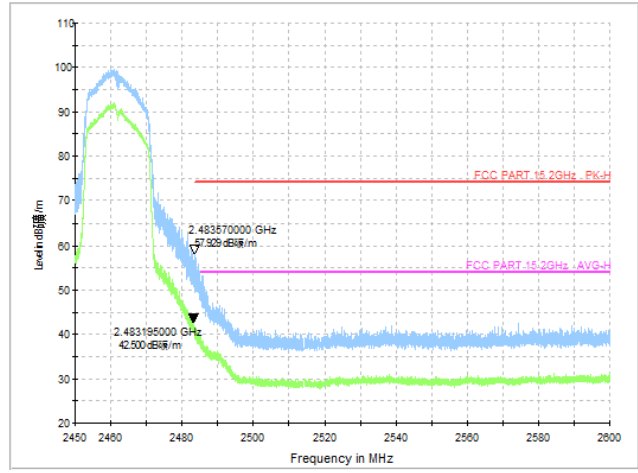


Conduction method testing

Band Edge NVNT b 2412MHz Ant1 Ref

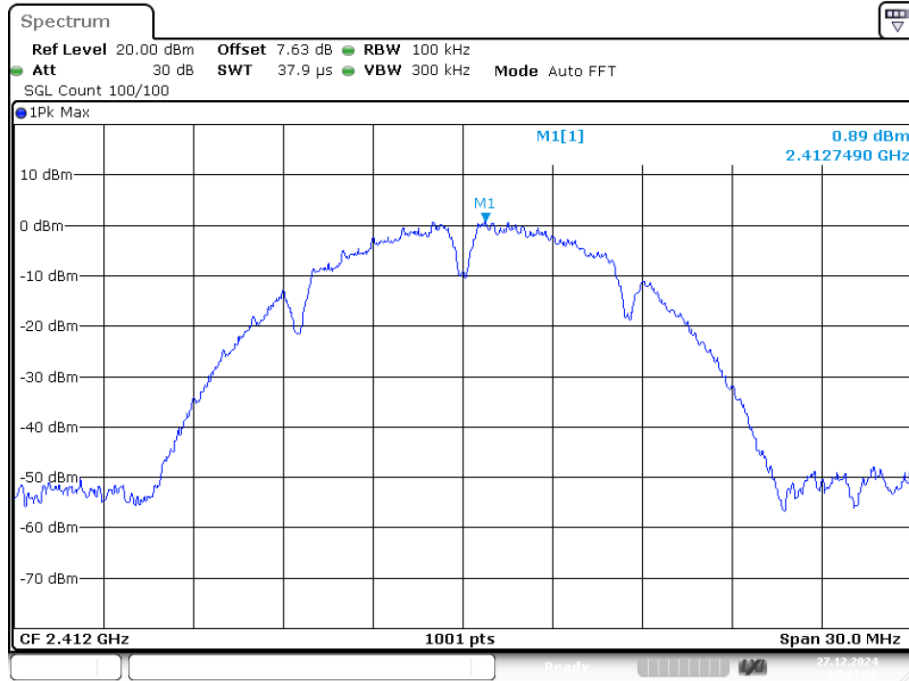


Date: 27.DEC.2024 17:11:51

Band Edge NVNT b 2412MHz Ant1 Emission

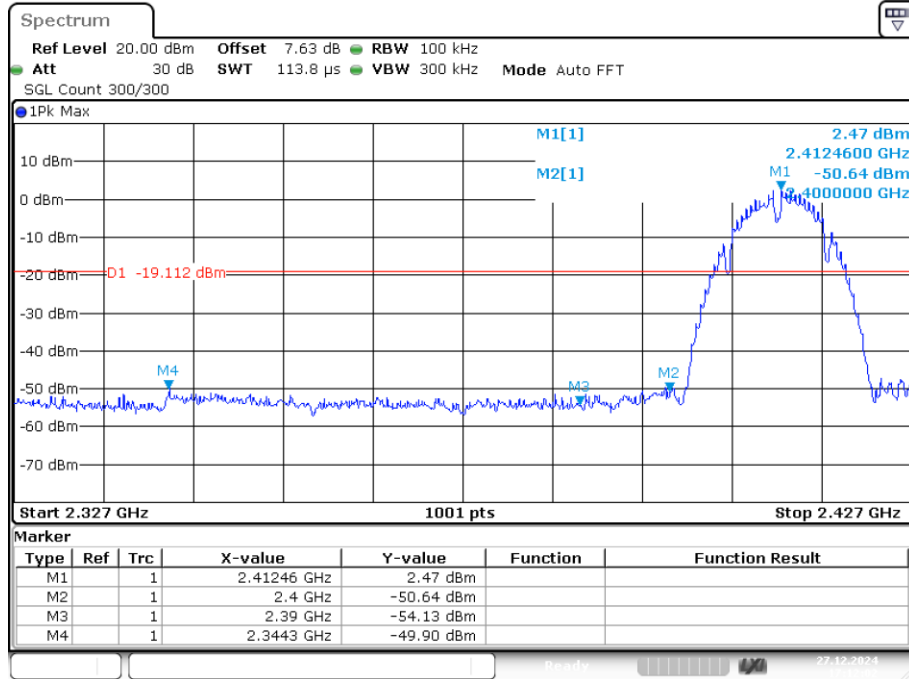


Date: 27.DEC.2024 17:12:02

Band Edge NVNT b 2462MHz Ant1 Ref

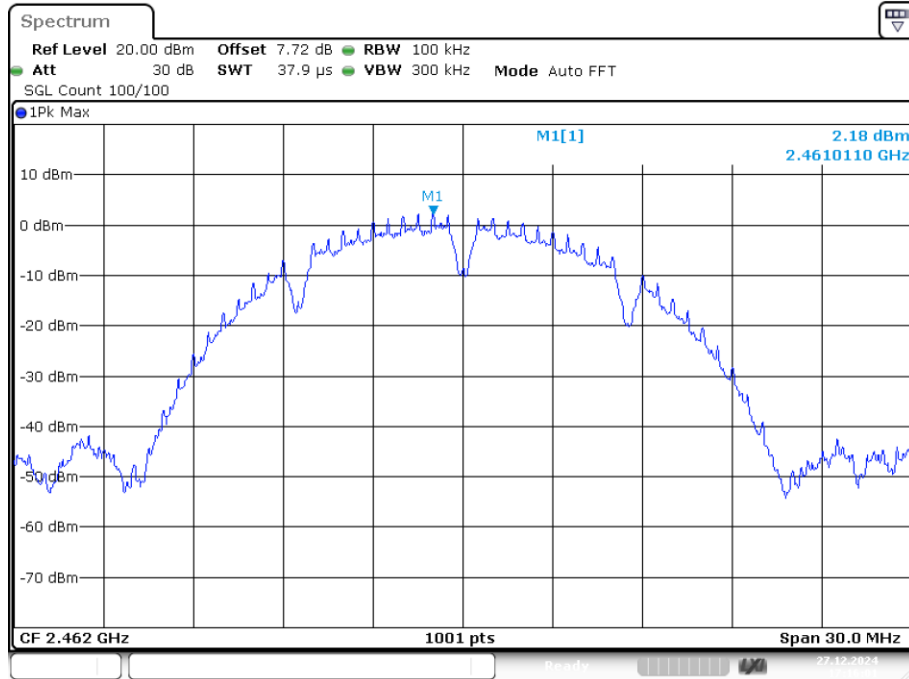


Band Edge NVNT b 2462MHz Ant1 Emission

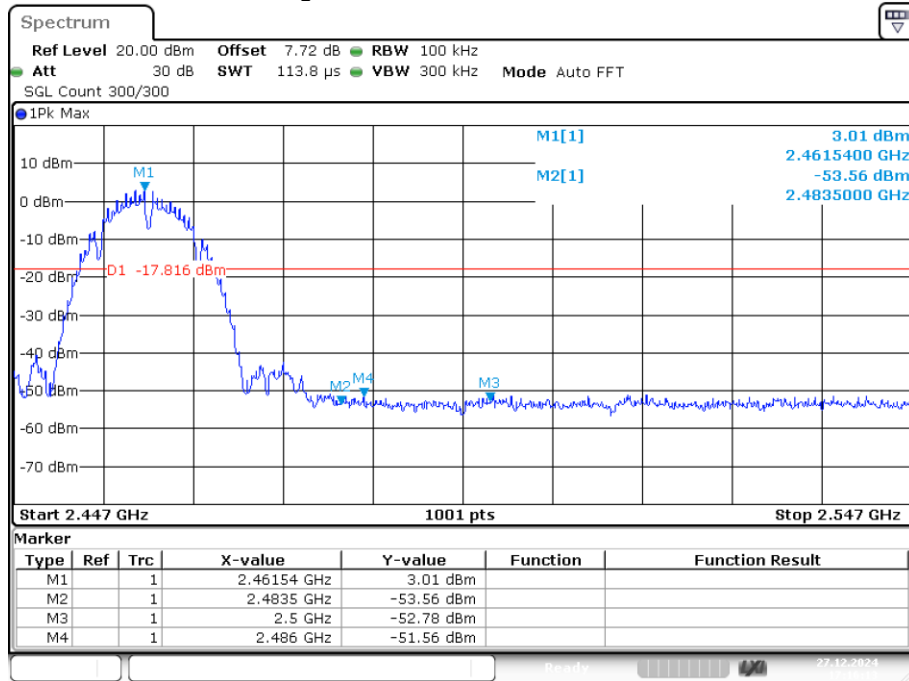


Band Edge NVNT g 2412MHz Ant1 Ref




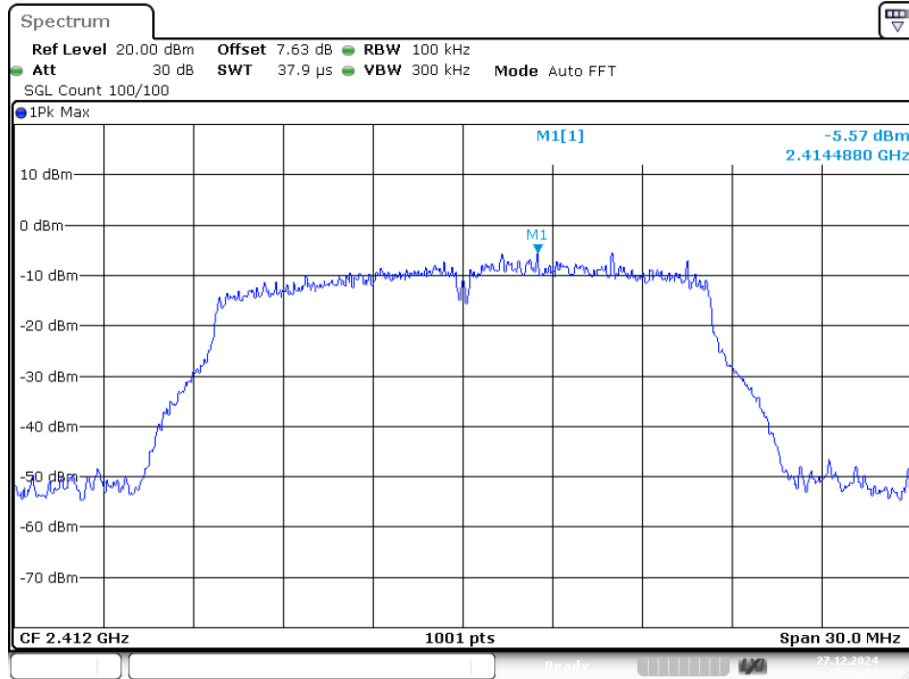

Band Edge NVNT g 2412MHz Ant1 Emission

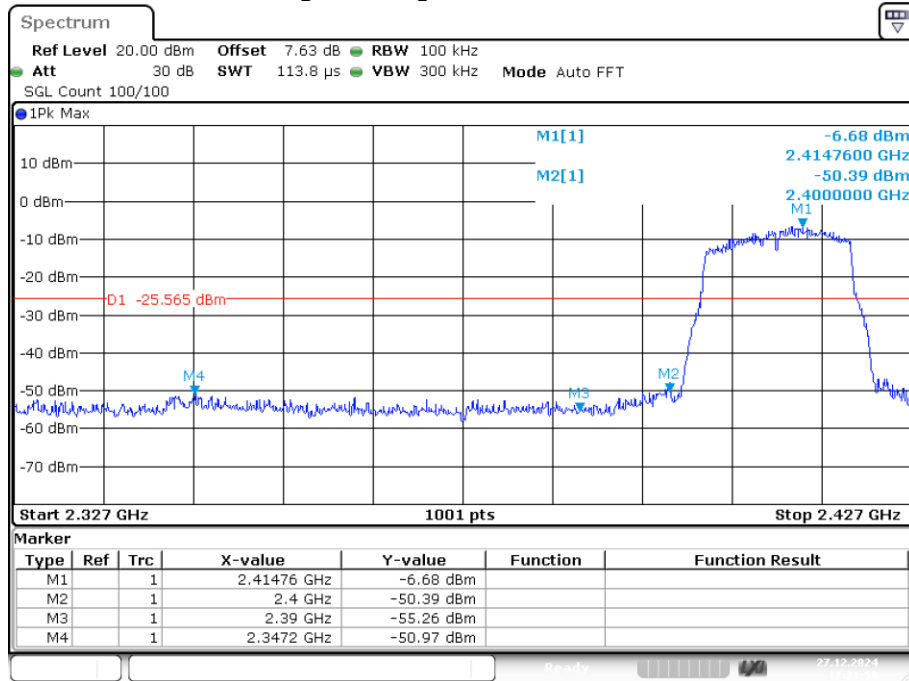


Band Edge NVNT g 2462MHz Ant1 Ref

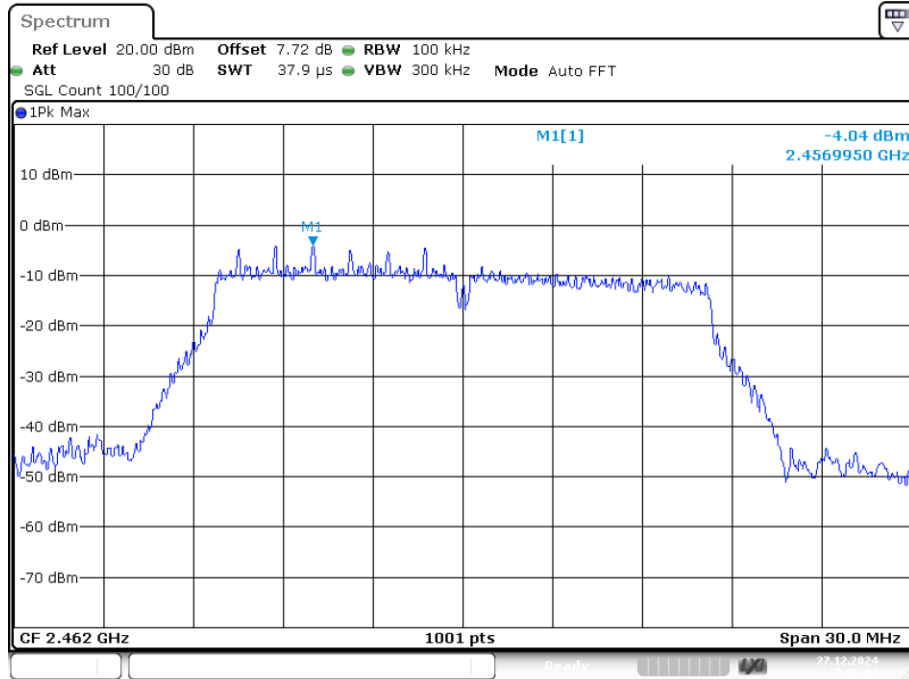


Date: 27.DEC.2024 17:26:01

Band Edge NVNT g 2462MHz Ant1 Emission

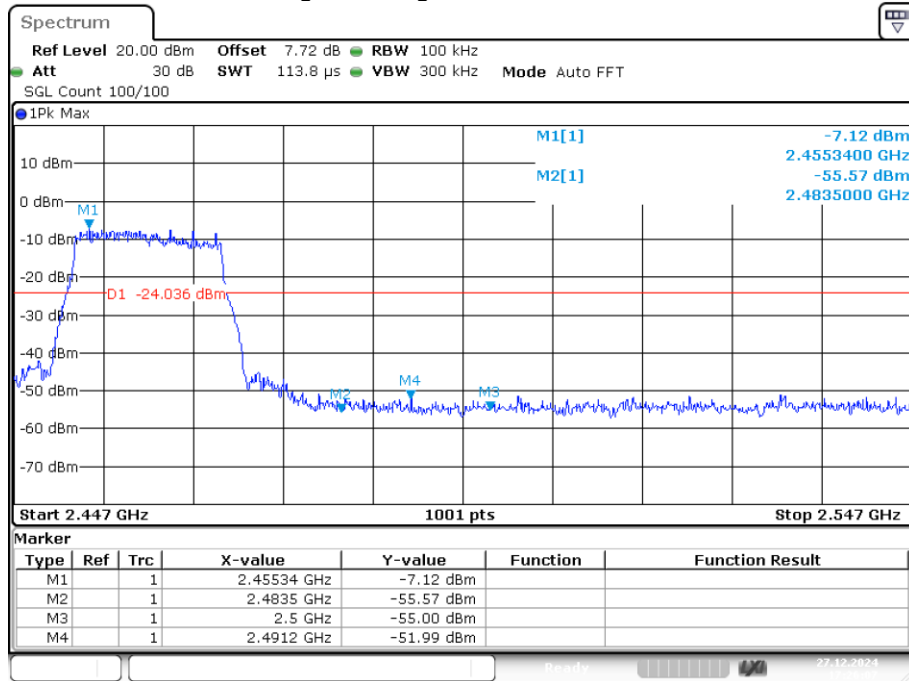


Date: 27.DEC.2024 17:26:07

Band Edge NVNT n20 2412MHz Ant1 Ref

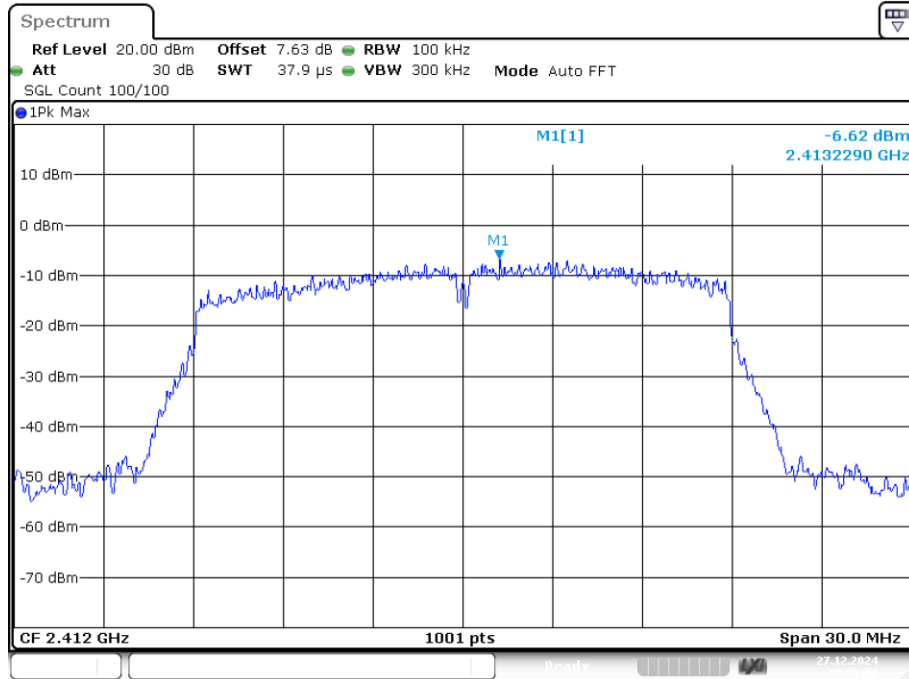


Date: 27.DEC.2024 17:28:08

### Band Edge NVNT n20 2412MHz Ant1 Emission

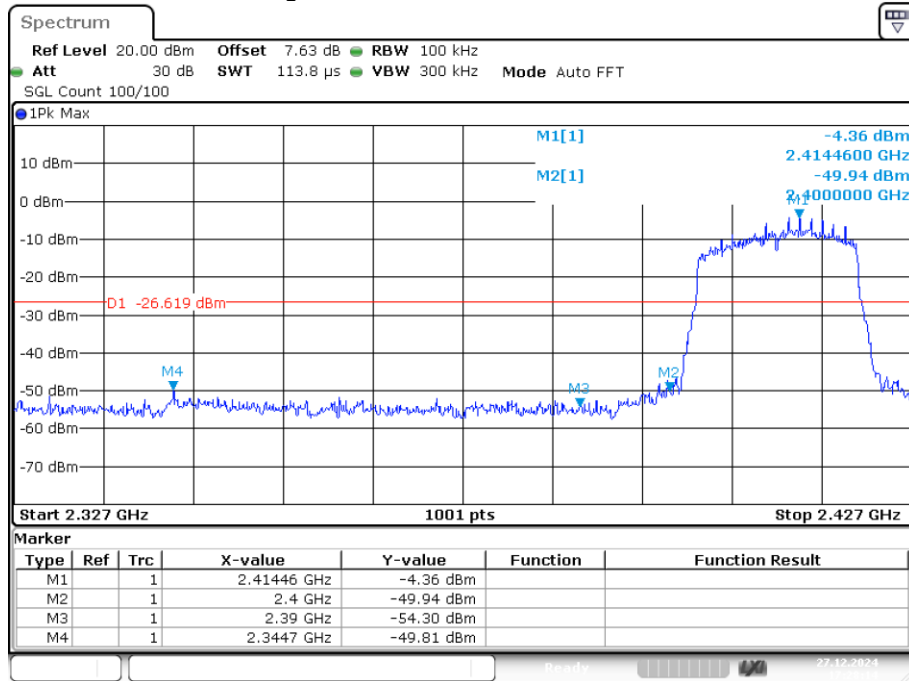


Date: 27.DEC.2024 17:28:14

### Band Edge NVNT n20 2462MHz Ant1 Ref

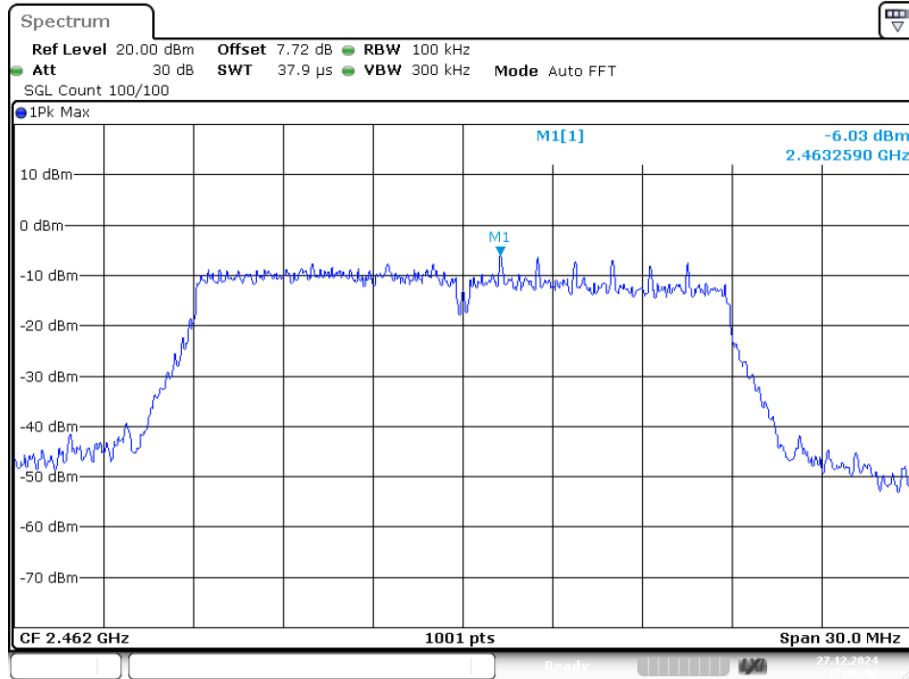

Band Edge NVNT n20 2462MHz Ant1 Emission

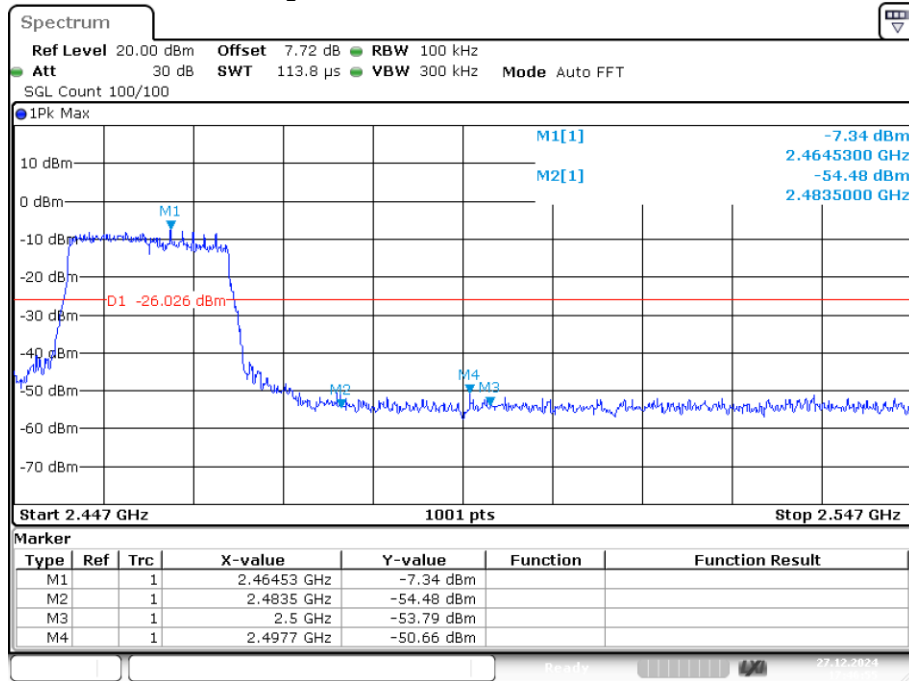

## **9. ANTENNA REQUIREMENT**

### **9.1. Standard Requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **9.2. Antenna Connected Construction**



The antenna connector is unique antenna and no consideration of replacement. Please see EUT photo for details.

### **9.3. Results**


The EUT antenna is Internal Antenna. It complies with the standard requirement.

## 10. TEST SETUP PHOTO

### 10.1. Photo of Radiated Emission test

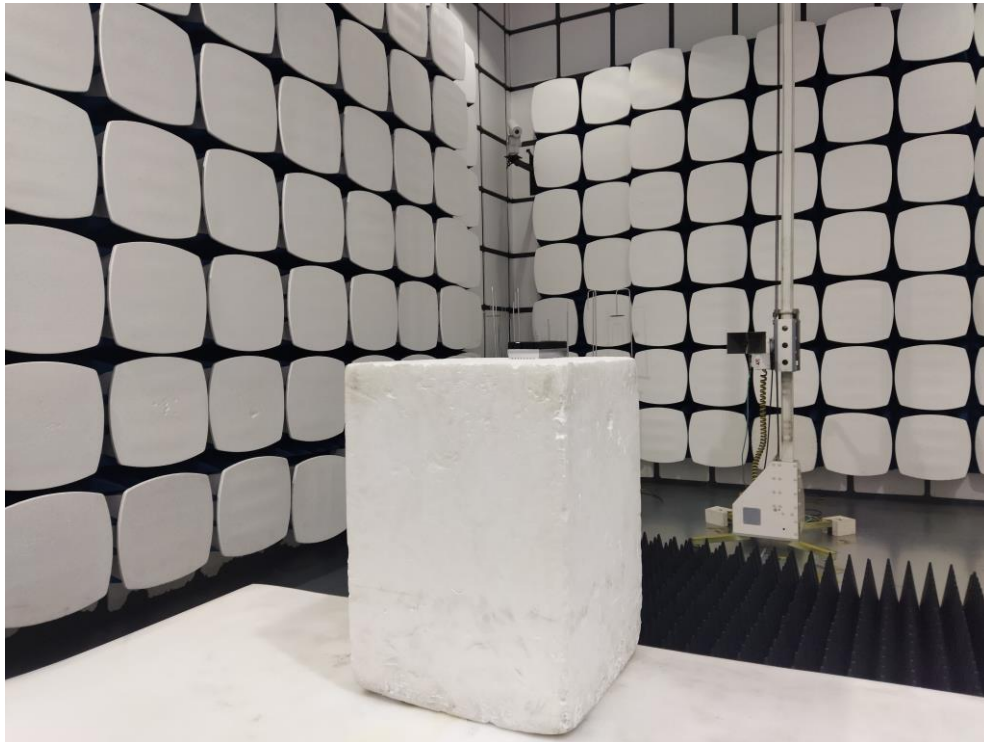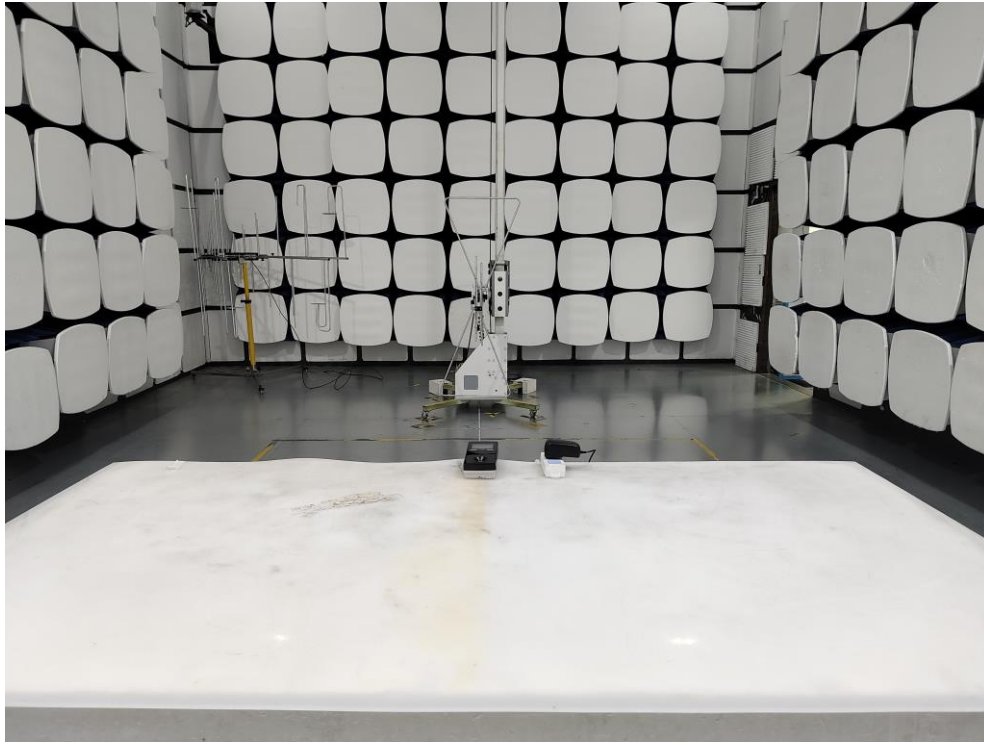

10.2.Photo of Conducted Emission test

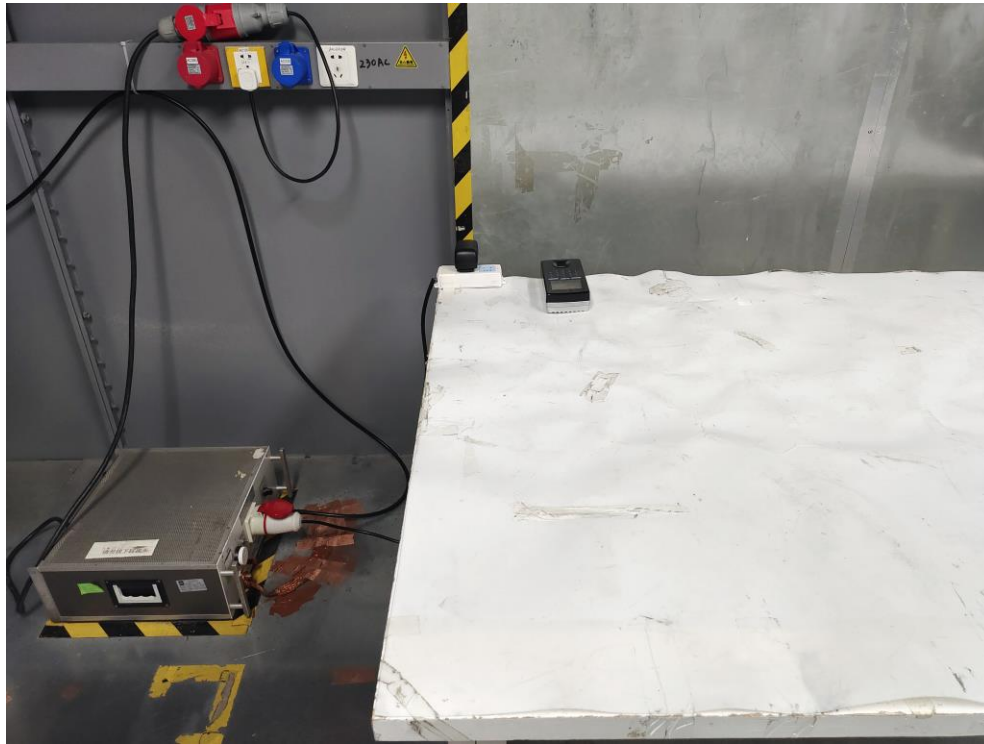

## 11.MODEL LIST

Model List				
A-XK-FLI	A-XK-FLI-C	A-XK-FLI-P	A-XK-FLI-C-P	A-XK-FLI-C-WI4-P
A-XK-FST	A-XK-FST-C	A-XK-FST-P	A-XK-FST-C-P	A-XK-FST-C-WI4-P
A-XK-FSM	A-XK-FSM-C	A-XK-FSM-P	A-XK-FSM-C-P	A-XK-FSM-C-WI4-P
A-XK-FSE	A-XK-FSE-C	A-XK-FSE-P	A-XK-FSE-C-P	A-XK-FSE-C-WI4-P
A-XK-FHp	A-XK-FHp-C	A-XK-FHp-P	A-XK-FHp-C-P	A-XK-FHp-C-WI4-P
A-XK-FSY	A-XK-FSY-C	A-XK-FSY-P	A-XK-FSY-C-P	A-XK-FSY-C-WI4-P
A-XK-FSX	A-XK-FSX-C	A-XK-FSX-P	A-XK-FSX-C-P	A-XK-FSX-C-WI4-P
A-XK-FSV	A-XK-FSV-C	A-XK-FSV-P	A-XK-FSV-C-P	A-XK-FSV-C-WI4-P
A-XK-FSU	A-XK-FSU-C	A-XK-FSU-P	A-XK-FSU-C-P	A-XK-FSU-C-WI4-P
A-XK-P	A-XK-P-C	A-XK-P-P	A-XK-P-C-P	A-XK-P-C-WI4-P
A-XK-ST	A-XK-ST-C	A-XK-ST-P	A-XK-ST-C-P	A-XK-ST-C-WI4-P
A-XK-SM	A-XK-SM-C	A-XK-SM-P	A-XK-SM-C-P	A-XK-SM-C-WI4-P
A-XK-SE	A-XK-SE-C	A-XK-SE-P	A-XK-SE-C-P	A-XK-SE-C-WI4-P
A-XK-Hp	A-XK-Hp-C	A-XK-Hp-P	A-XK-Hp-C-P	A-XK-Hp-C-WI4-P
A-XK-SY	A-XK-SY-C	A-XK-SY-P	A-XK-SY-C-P	A-XK-SY-C-WI4-P
A-XK-BC	A-XK-BC-C	A-XK-BC-P	A-XK-BC-C-P	A-XK-BC-C-WI4-P
A-XK-SIR	A-XK-SIR-C	A-XK-SIR-P	A-XK-SIR-C-P	A-XK-SIR-C-WI4-P
A-XK-SX	A-XK-SX-C	A-XK-SX-P	A-XK-SX-C-P	A-XK-SX-C-WI4-P
A-XK-SV	A-XK-SV-C	A-XK-SV-P	A-XK-SV-C-P	A-XK-SV-C-WI4-P
A-XK-SU	A-XK-SU-C	A-XK-SU-P	A-XK-SU-C-P	A-XK-SU-C-WI4-P
A-XK-FA	A-XK-FA-P	A-XK-FA-WI4-P	A-XK-FA-FSY	A-XK-FA-FSY-WI4-P
A-XK-FA-FLI	A-XK-FA-FLI-P	A-XK-FA-FLI-WI4-P	A-XK-FA-FSX	A-XK-FA-FSX-WI4-P
A-XK-FA-FST	A-XK-FA-FST-P	A-XK-FA-FST-WI4-P	A-XK-FA-FSV	A-XK-FA-FSV-WI4-P
A-XK-FA-FSM	A-XK-FA-FSM-P	A-XK-FA-FSM-WI4-P	A-XK-FA-FSU	A-XK-FA-FSU-WI4-P
A-XK-FA-FSE	A-XK-FA-FSE-P	A-XK-FA-FSE-WI4-P	A-XK-FA-FSY-P	A-XK-FA-FSV-P
A-XK-FA-FHp	A-XK-FA-FHp-P	A-XK-FA-FHp-WI4-P	A-XK-FA-FSX-P	A-XK-FA-FSU-P
AT-XK-FLI	AT-XK-FLI-C	AT-XK-FLI-P	AT-XK-FLI-C-P	AT-XK-FLI-C-WI4-P
AT-XK-FST	AT-XK-FST-C	AT-XK-FST-P	AT-XK-FST-C-P	AT-XK-FST-C-WI4-P
AT-XK-FSM	AT-XK-FSM-C	AT-XK-FSM-P	AT-XK-FSM-C-P	AT-XK-FSM-C-WI4-P
AT-XK-FSE	AT-XK-FSE-C	AT-XK-FSE-P	AT-XK-FSE-C-P	AT-XK-FSE-C-WI4-P
AT-XK-FHp	AT-XK-FHp-C	AT-XK-FHp-P	AT-XK-FHp-C-P	AT-XK-FHp-C-WI4-P
AT-XK-FSY	AT-XK-FSY-C	AT-XK-FSY-P	AT-XK-FSY-C-P	AT-XK-FSY-C-WI4-P
AT-XK-FSX	AT-XK-FSX-C	AT-XK-FSX-P	AT-XK-FSX-C-P	AT-XK-FSX-C-WI4-P
AT-XK-FSV	AT-XK-FSV-C	AT-XK-FSV-P	AT-XK-FSV-C-P	AT-XK-FSV-C-WI4-P
AT-XK-FSU	AT-XK-FSU-C	AT-XK-FSU-P	AT-XK-FSU-C-P	AT-XK-FSU-C-WI4-P
AT-XK-FA-FLI	AT-XK-FA-FLI-P	AT-XK-FA-FLI-WI4-P	AT-XK-ST	AT-XK-ST-C
AT-XK-FA-FST	AT-XK-FA-FST-P	AT-XK-FA-FST-WI4-P	AT-XK-SM	AT-XK-SM-C
AT-XK-FA-FSM	AT-XK-FA-FSM-P	AT-XK-FA-FSM-WI4-P	AT-XK-SE	AT-XK-SE-C
AT-XK-FA-FSE	AT-XK-FA-FSE-P	AT-XK-FA-FSE-WI4-P	AT-XK-Hp	AT-XK-Hp-C
AT-XK-FA-FHp	AT-XK-FA-FHp-P	AT-XK-FA-FHp-WI4-P	AT-XK-SY	AT-XK-SY-C
AT-XK-FA-FSY	AT-XK-FA-FSY-P	AT-XK-FA-FSY-WI4-P	AT-XK-BC	AT-XK-BC-C



AT-XK-FA-FSX	AT-XK-FA-FSX-P	AT-XK-FA-FSX-WI4-P	AT-XK-SIR	AT-XK-SIR-C
AT-XK-FA-FSV	AT-XK-FA-FSV-P	AT-XK-FA-FSV-WI4-P	AT-XK-SX	AT-XK-SX-C
AT-XK-FA-FSU	AT-XK-FA-FSU-P	AT-XK-FA-FSU-WI4-P	AT-XK-SV	AT-XK-SV-C
AT-XK-SU-C-WI4-P	AT-XK-ST-C-P	AT-XK-ST-C-WI4-P	AT-XK-SU	AT-XK-SU-C
AT-XK-SE-C-WI4-P	AT-XK-Hp-C-WI4-P	AT-XK-SY-C-WI4-P	AT-XK-ST-P	AT-XK-SM-C-P
AT-XK-SX-C-WI4-P	AT-XK-SV-C-WI4-P	AT-XK-SIR-C-P	AT-XK-SM-P	AT-XK-SE-C-P
AT-XK-SE-P	AT-XK-SIR-P	AT-XK-Hp-C-P	AT-XK-SV-C-P	AT-XK-SX-C-P
AT-XK-Hp-P	AT-XK-SX-P	AT-XK-SY-C-P	AT-XK-SU-C-P	AT-XK-BC-C-WI4-P
AT-XK-SY-P	AT-XK-SV-P	AT-XK-BC-C-P	AT-XK-SM-C-WI4-P	AT-XK-SIR-C-WI4-P
AT-XK-BC-P	AT-XK-SU-P			

-----END OF REPORT-----