



Test Mode	Antenna	Test Channel (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	6dB BW Limit (MHz)	Test Result
802.11b	ANT 1	2412	10.80	14.439	0.5	Pass
		2437	11.01	14.506	0.5	Pass
		2462	10.66	14.428	0.5	Pass
	ANT 2	2412	10.96	14.468	0.5	Pass
		2437	10.69	14.543	0.5	Pass
		2462	10.64	14.372	0.5	Pass
802.11g	ANT 1	2412	15.39	16.36	0.5	Pass
		2437	15.41	16.337	0.5	Pass
		2462	15.39	16.366	0.5	Pass
	ANT 2	2412	15.37	16.322	0.5	Pass
		2437	15.09	16.368	0.5	Pass
		2462	15.42	16.371	0.5	Pass
802.11n(HT20)	ANT 1	2412	16.33	17.543	0.5	Pass
		2437	16.48	17.605	0.5	Pass
		2462	17.04	17.553	0.5	Pass
	ANT 2	2412	16.23	17.576	0.5	Pass
		2437	17.31	17.603	0.5	Pass
		2462	17.29	17.573	0.5	Pass
802.11n(HT40)	ANT 1	2422	33.90	35.998	0.5	Pass
		2437	35.10	36.086	0.5	Pass
		2452	34.10	35.976	0.5	Pass
	ANT 2	2412	34.97	36.068	0.5	Pass
		2437	35.13	36.059	0.5	Pass
		2462	33.89	36.051	0.5	Pass

ANT1:


6dB Bandwidth:

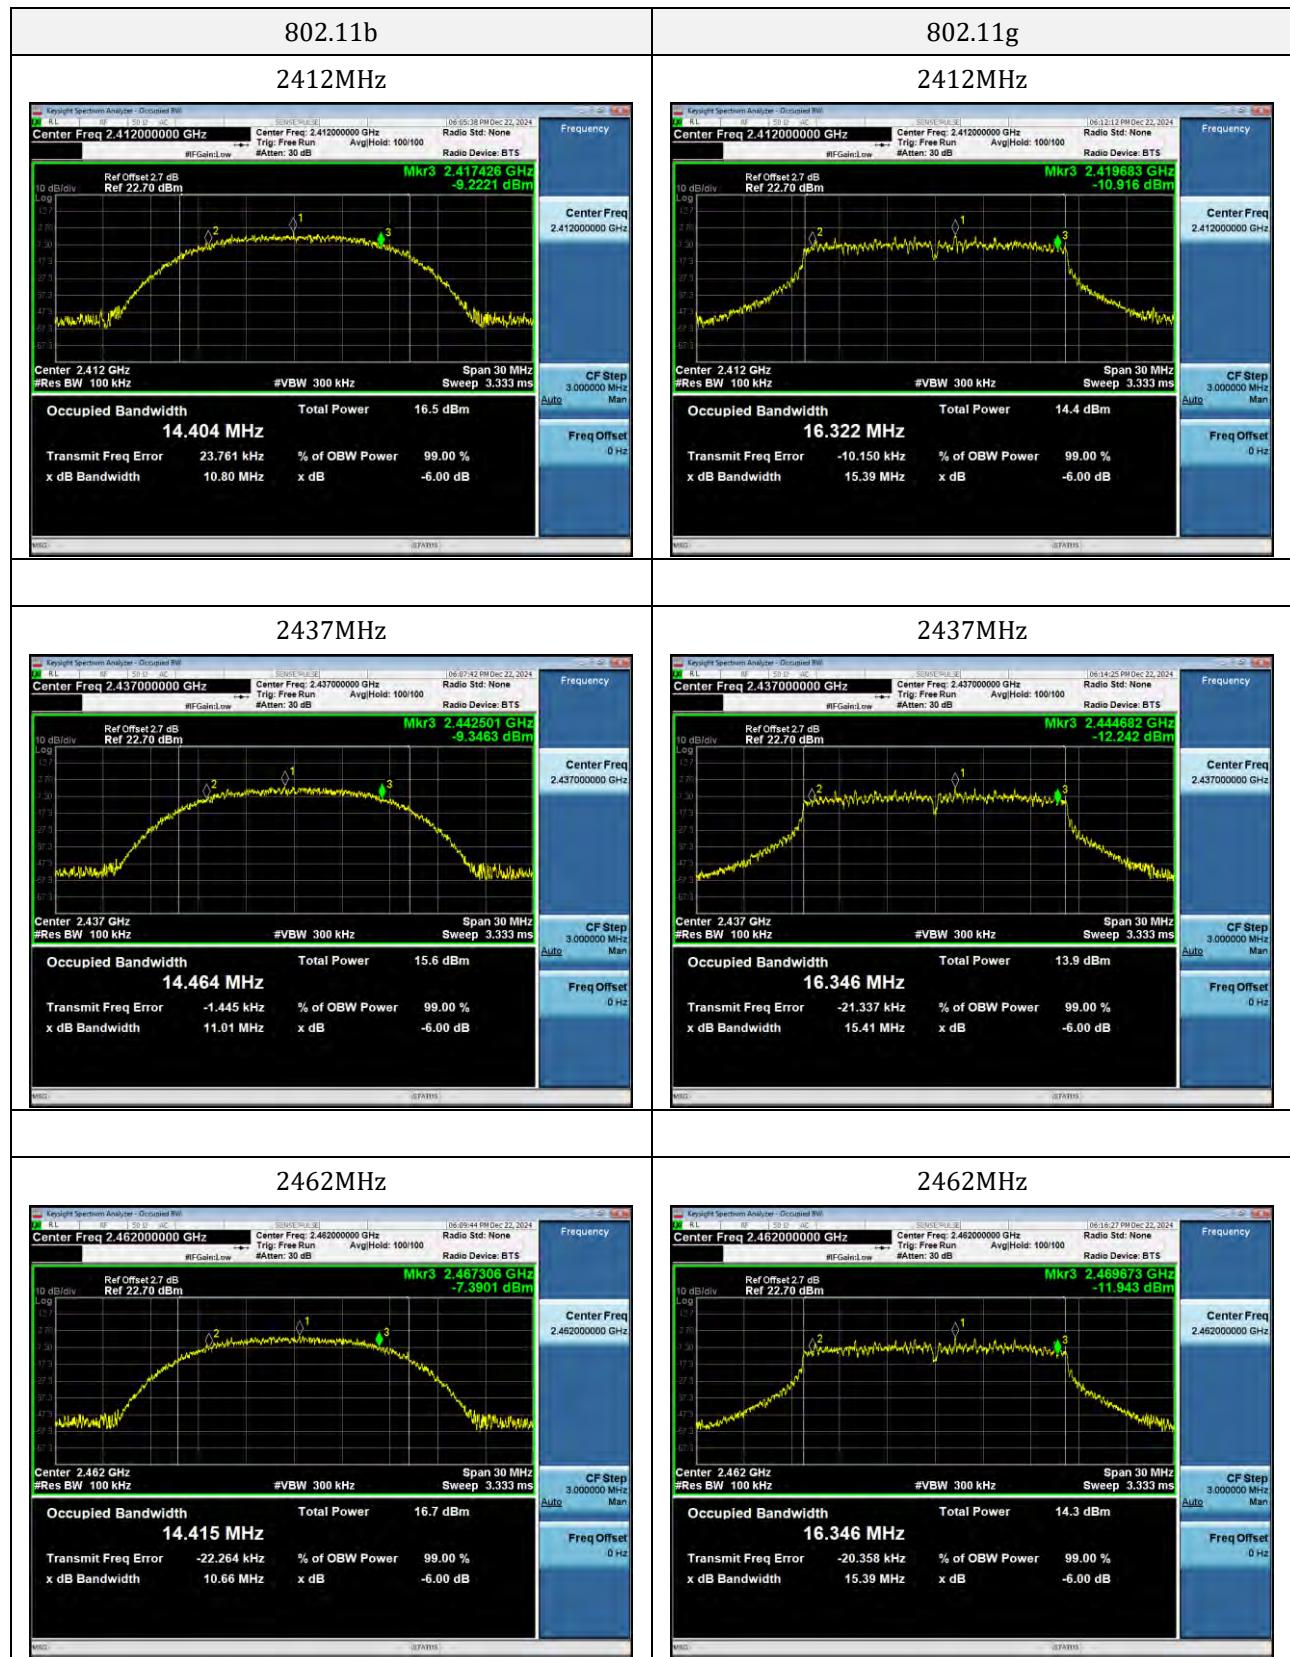


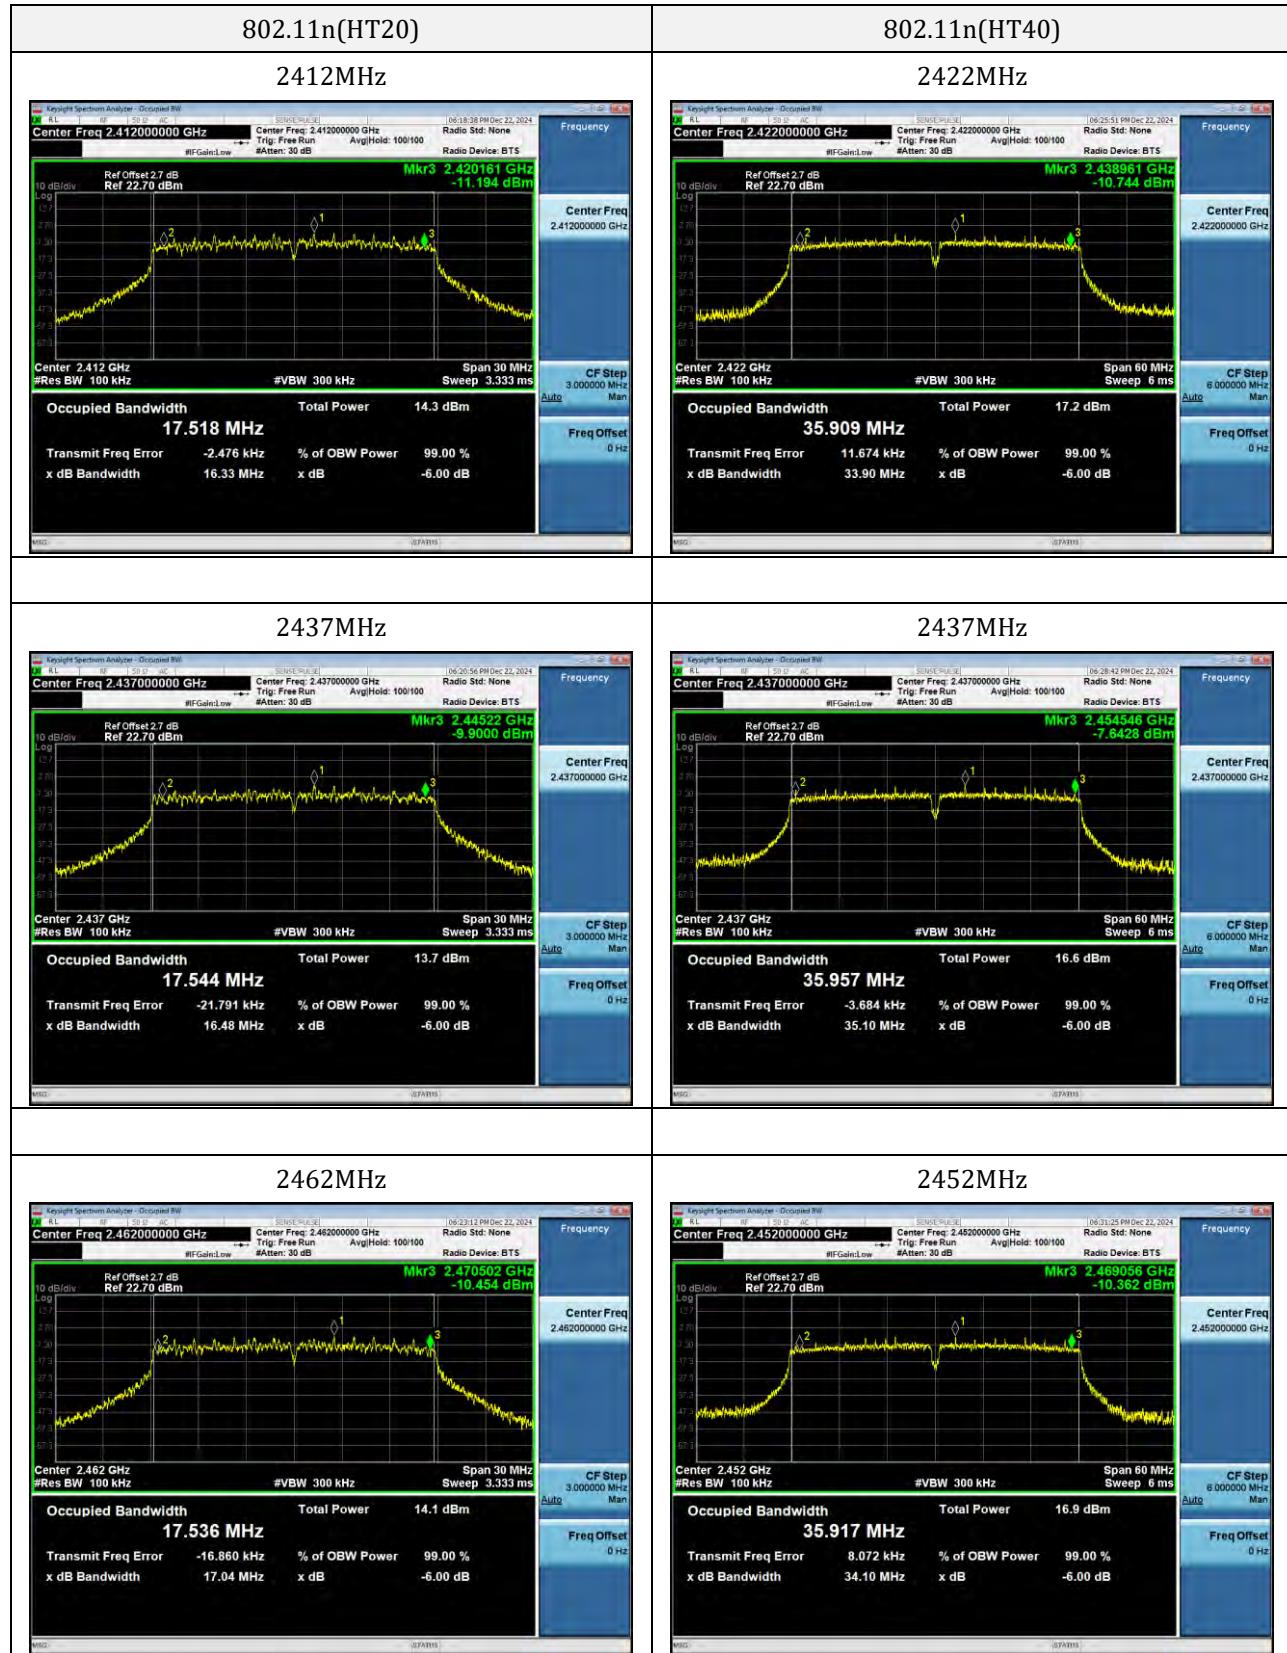

ANT1:


99% Bandwidth:

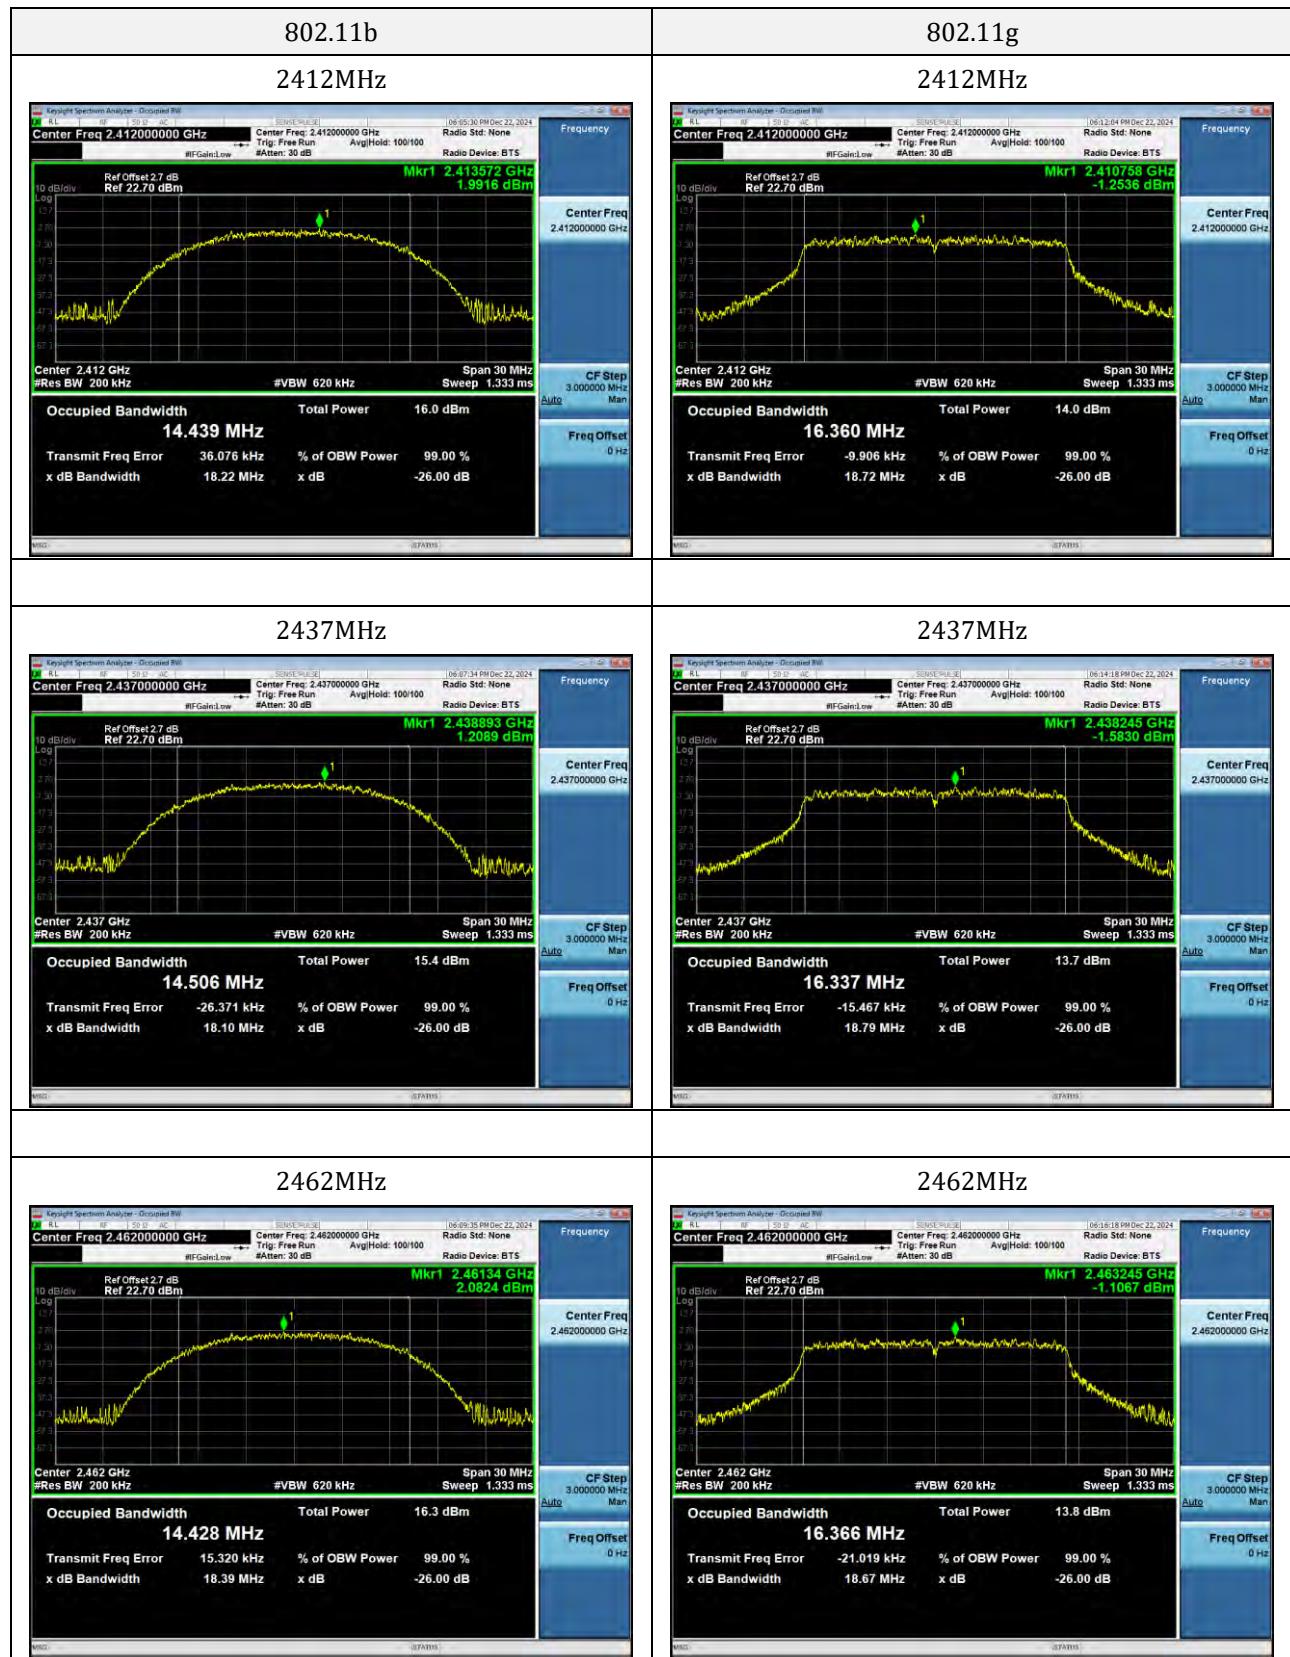


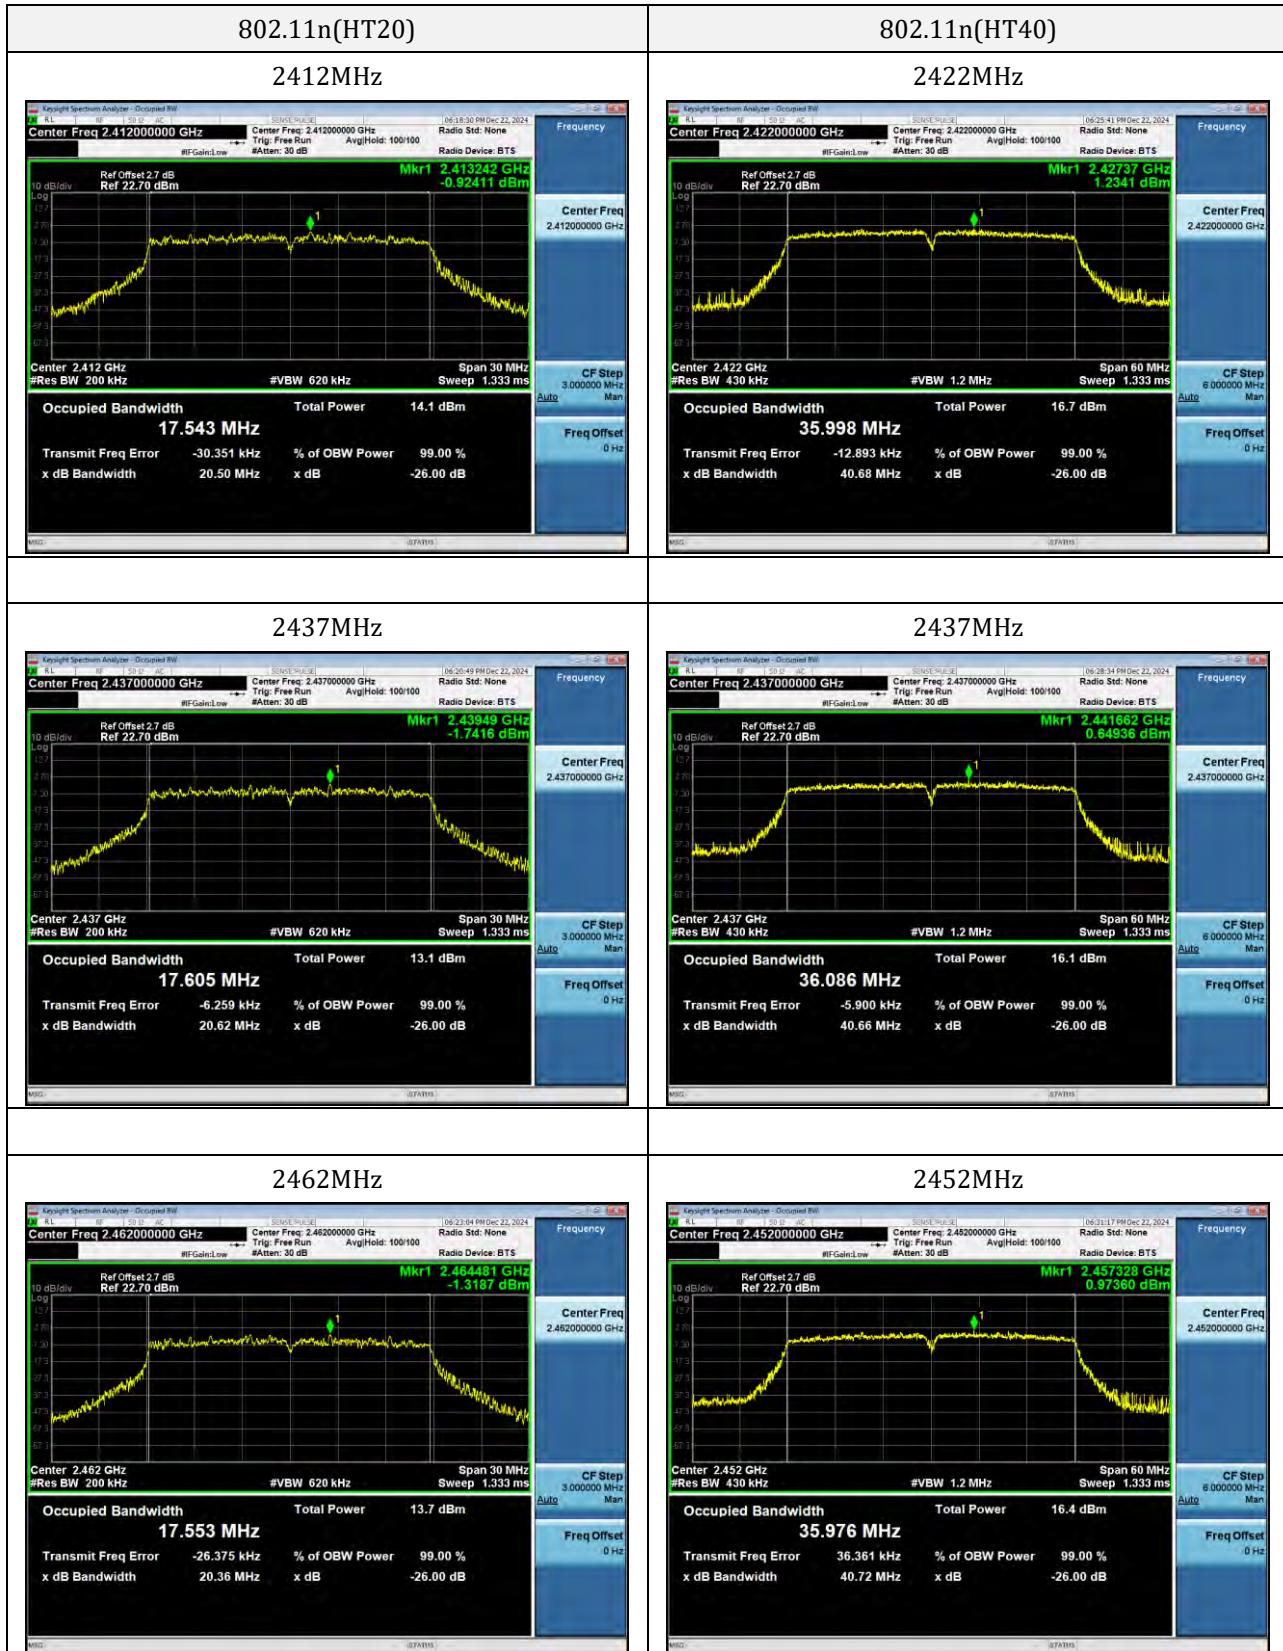

ANT2:


6dB Bandwidth:

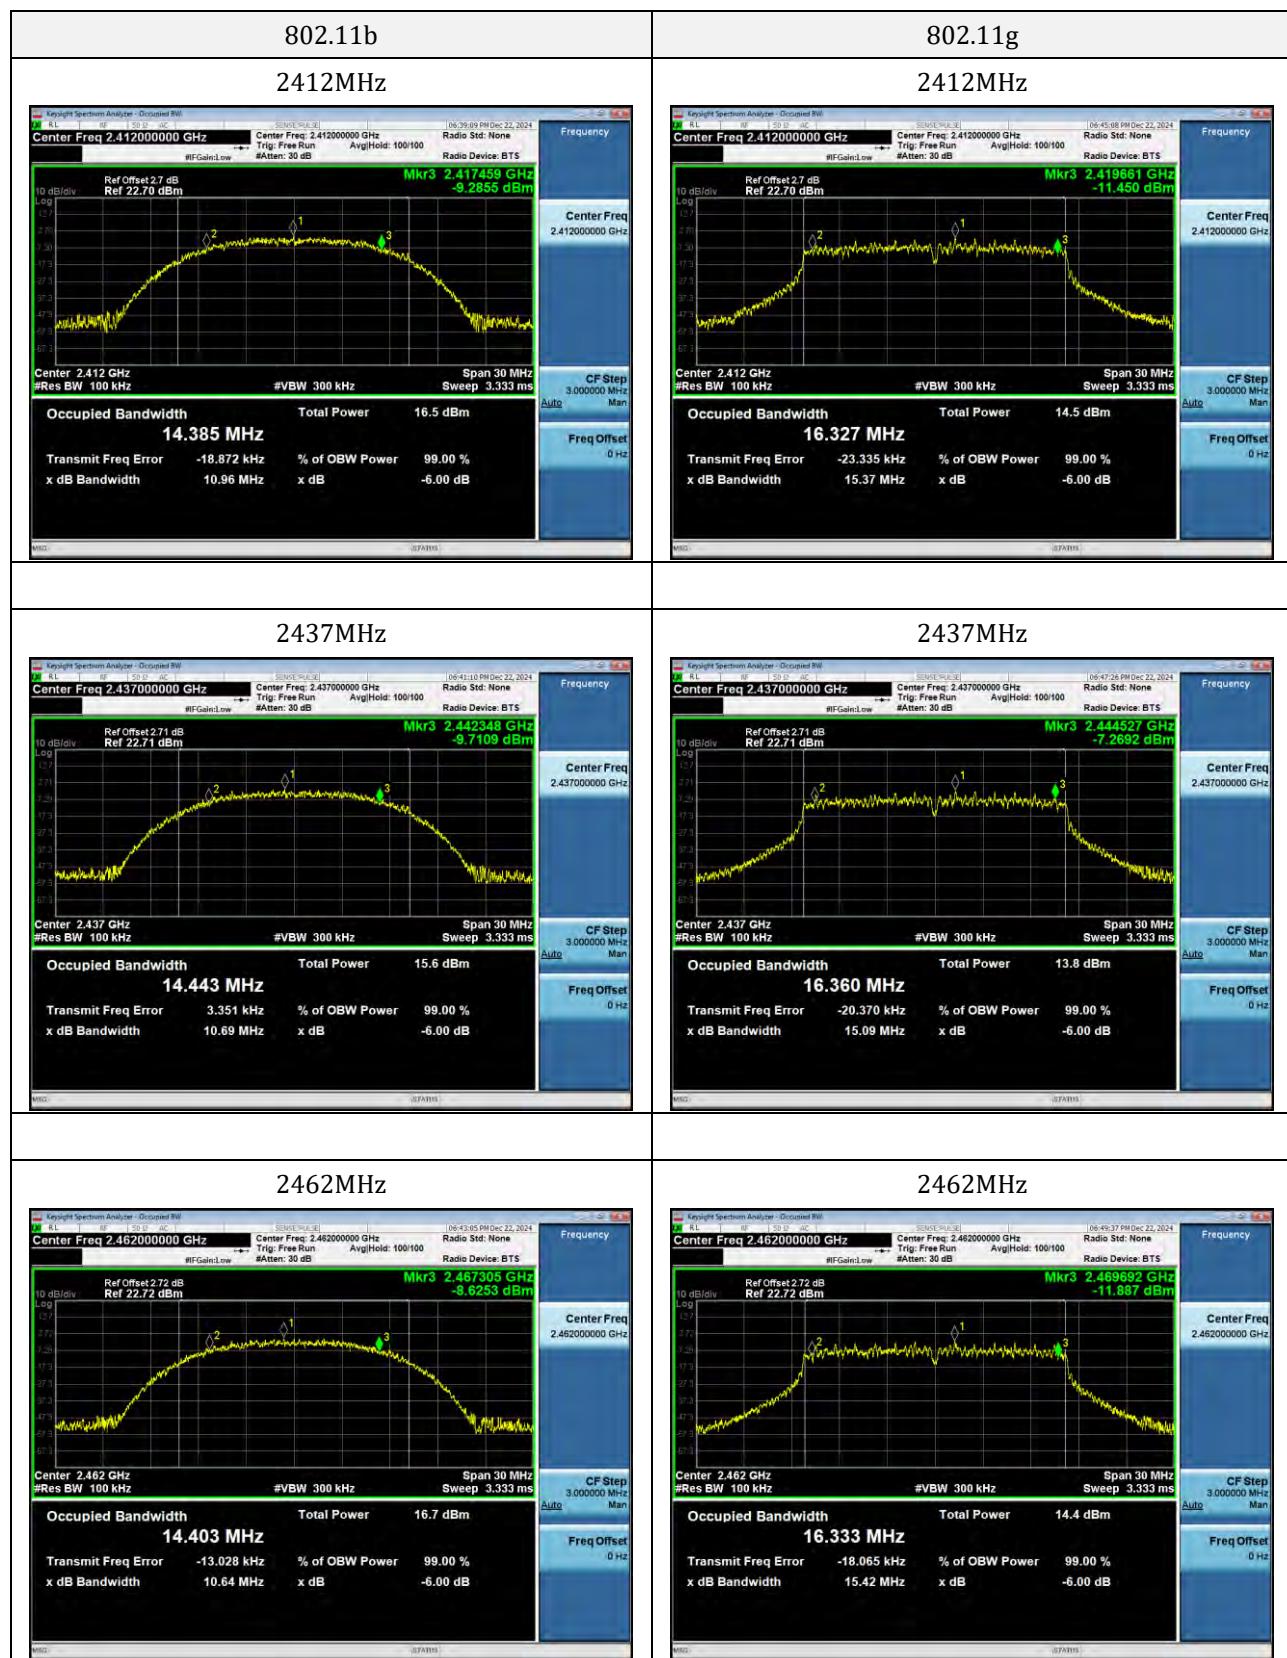


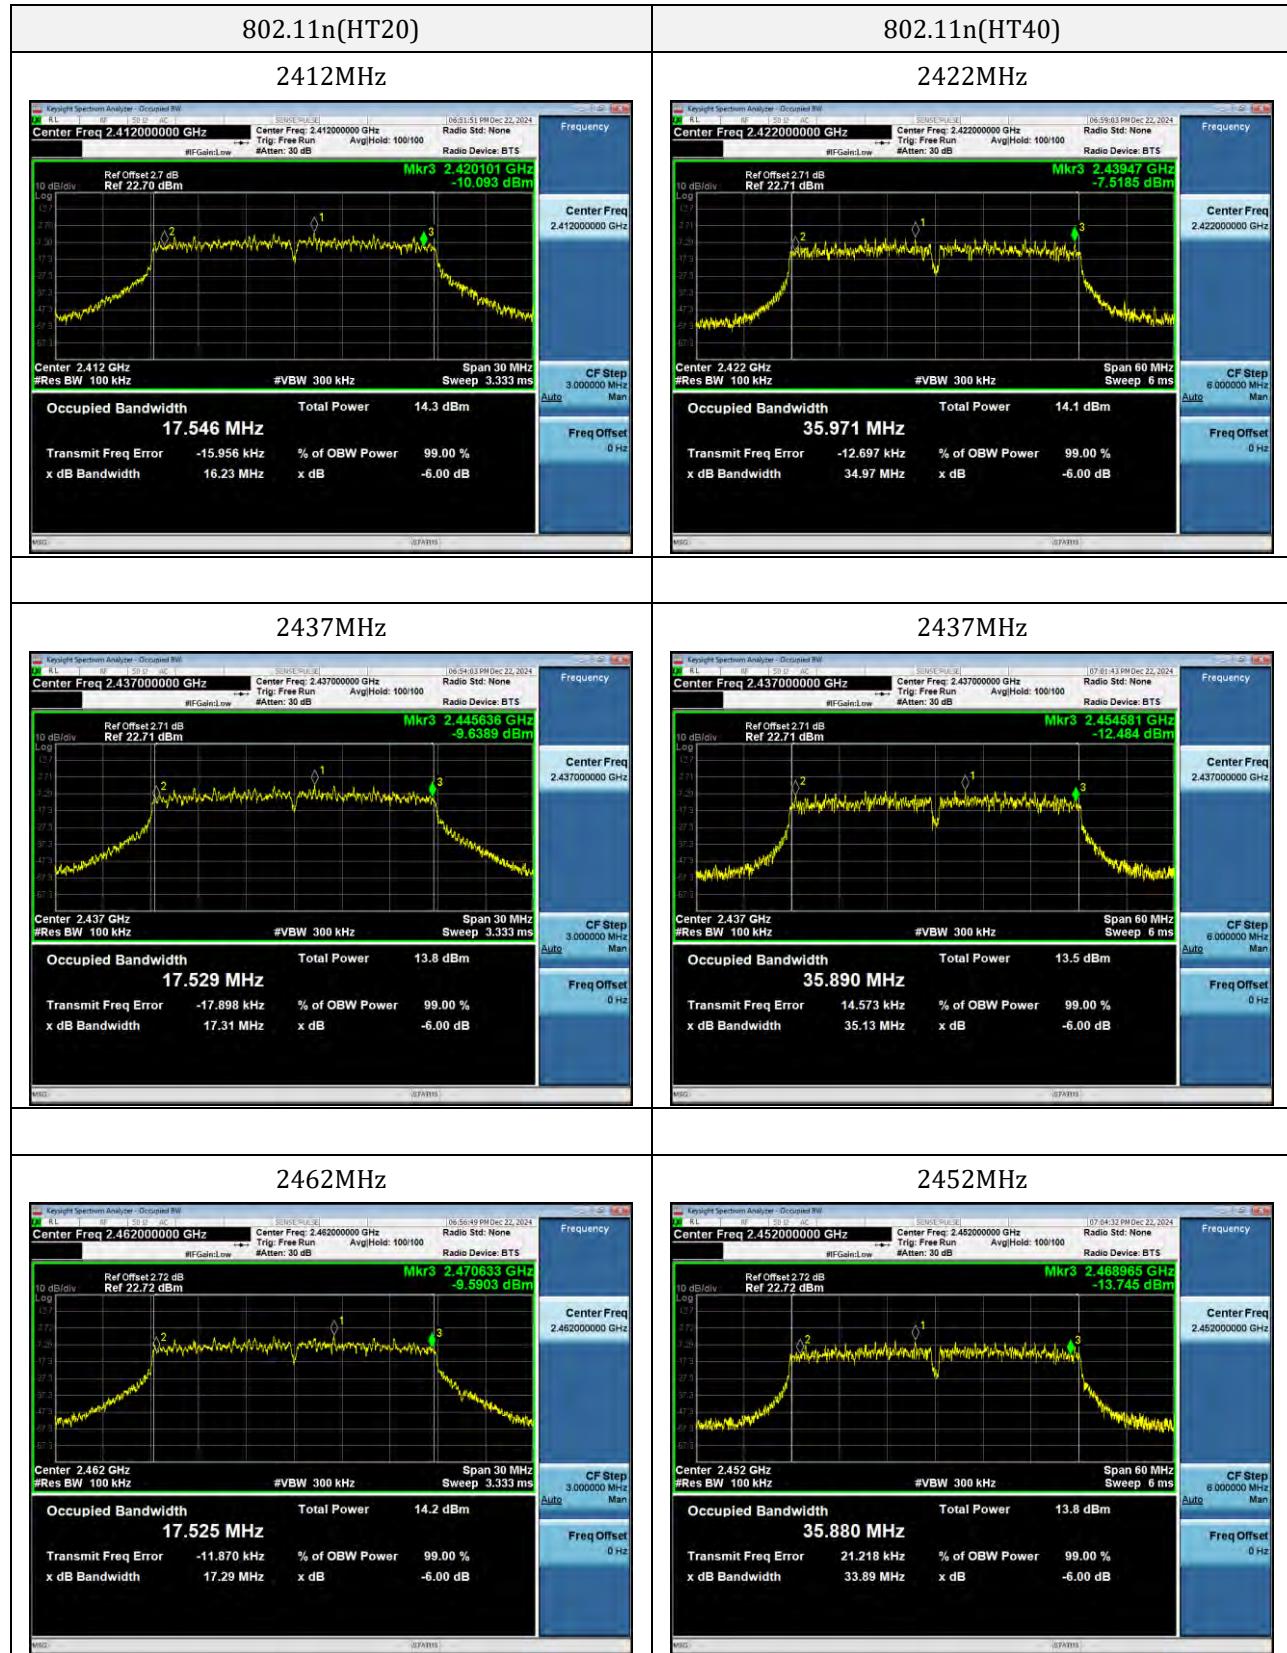

ANT2:

99% Bandwidth:

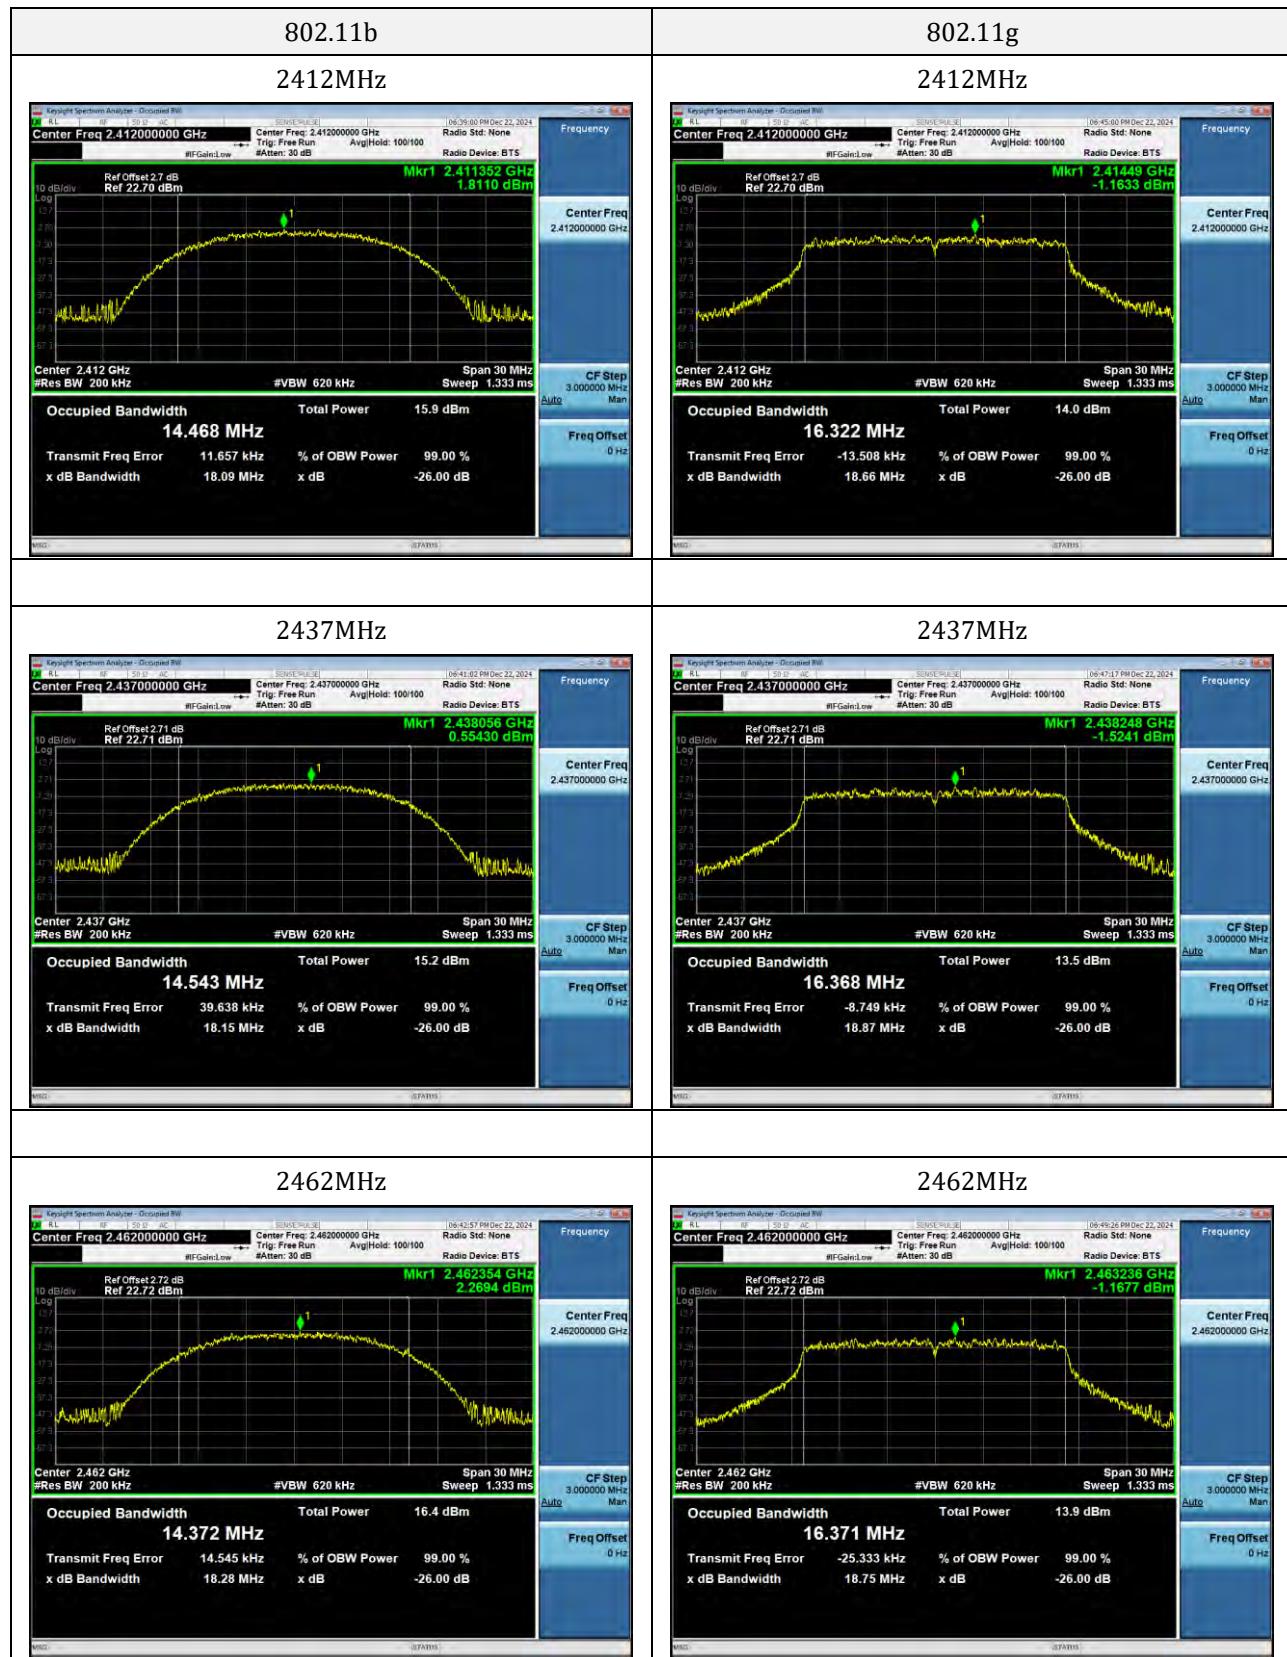

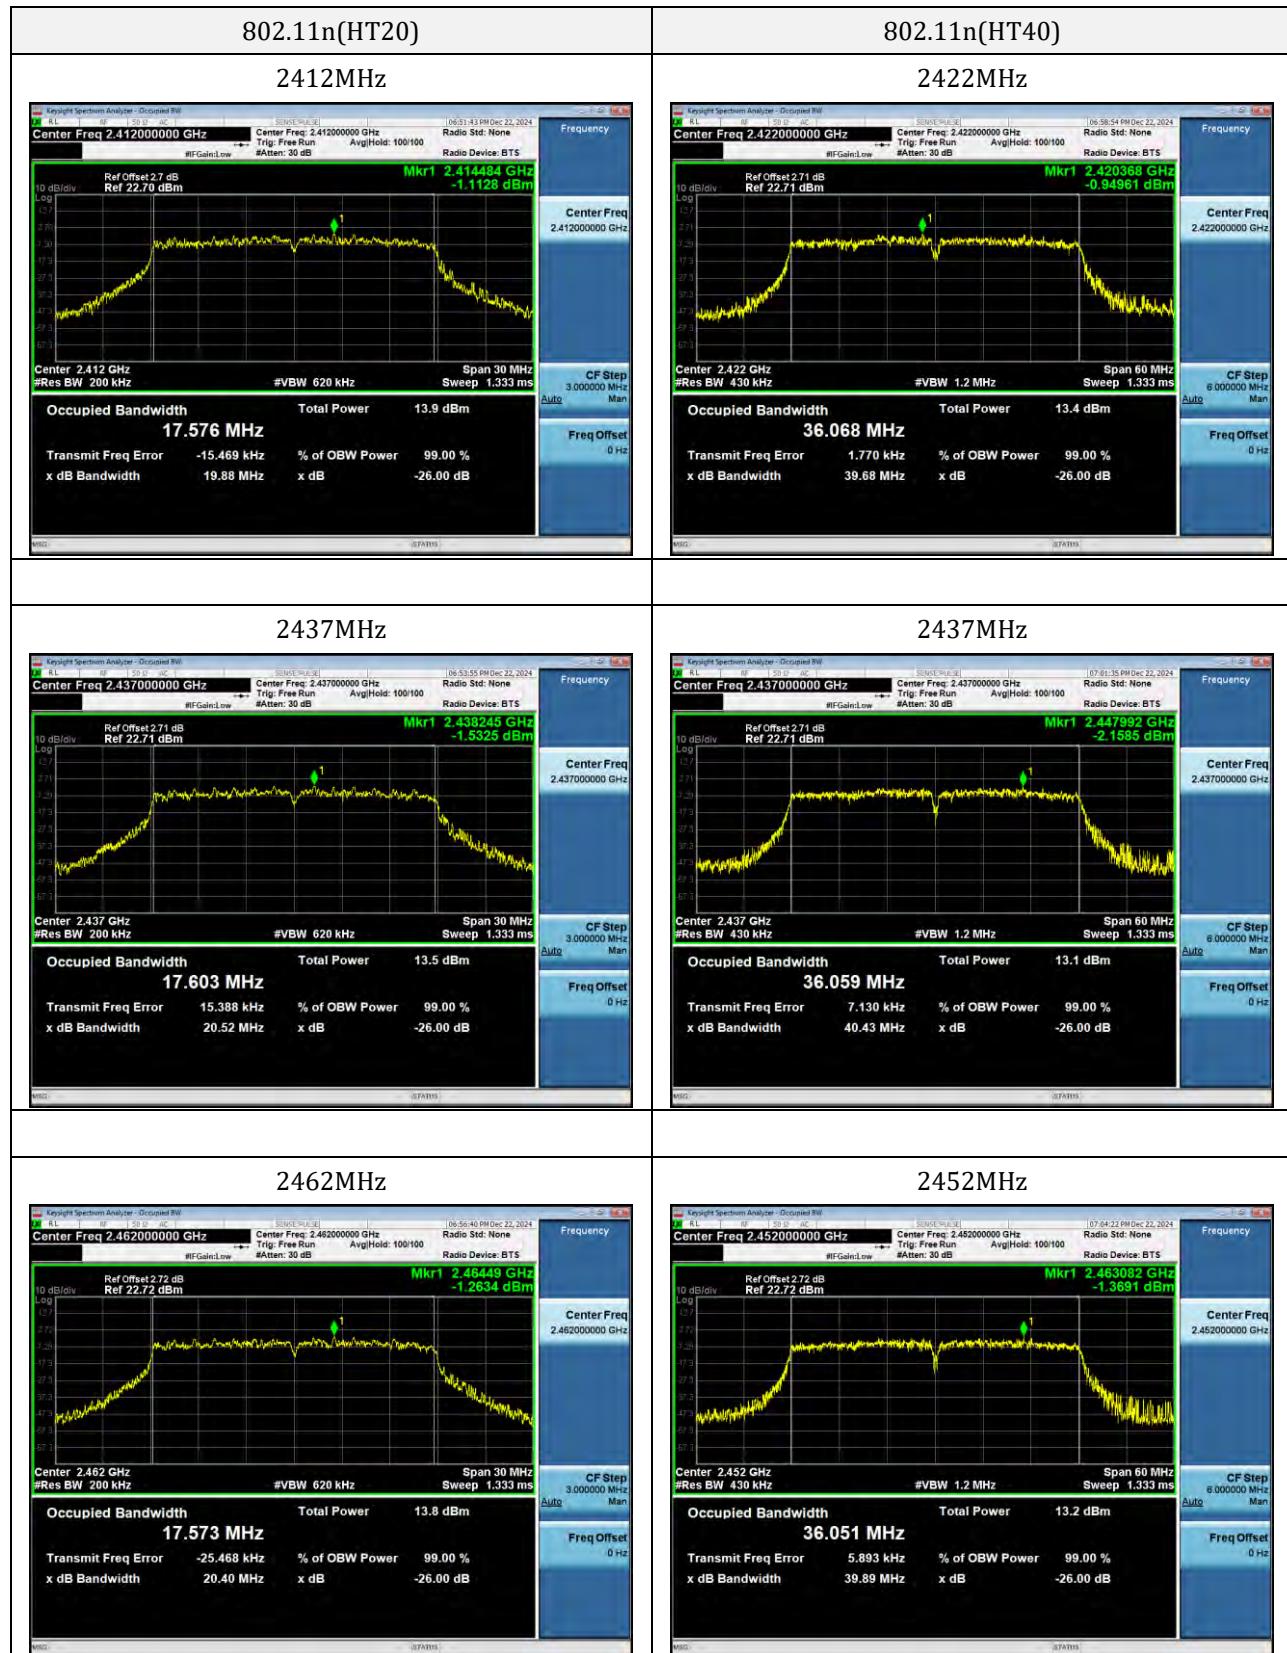

9. Maximum Power Spectral Density

9.1 Standard and Limit

According to FCC 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

9.2 Test Procedure

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 3kHz, VBW = 10kHz, Sweep = Auto, Detector = RMS.
- 4) Measure the highest amplitude appearing on spectral display and mark the value.
- 5) Repeat above procedures until all frequencies measured were complete.



Test Setup Block Diagram

9.3 Test Data and Results

SISO:

Test Mode	Antenna	Test Channel (MHz)	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Test Result
802.11b	ANT 1	2412	-23.22	1.88	-21.34	8	Pass
		2437	-24.4	1.88	-22.52	8	Pass
		2462	-23.1	1.88	-21.22	8	Pass
	ANT 2	2412	-13.38	1.88	-11.5	8	Pass
		2437	-14.11	1.88	-12.23	8	Pass
		2462	-13.1	1.88	-11.22	8	Pass
802.11g	ANT 1	2412	-27.55	5.88	-21.67	8	Pass
		2437	-28.37	5.88	-22.49	8	Pass
		2462	-27.78	5.93	-21.85	8	Pass
	ANT 2	2412	-19.48	5.88	-13.6	8	Pass
		2437	-13.37	5.88	-7.49	8	Pass
		2462	-19.85	5.88	-13.97	8	Pass
802.11n(HT20)	ANT 1	2412	-28.47	6.11	-22.36	8	Pass
		2437	-28.27	6.11	-22.16	8	Pass
		2462	-28.06	6.11	-21.95	8	Pass
	ANT 2	2412	-18.27	6.11	-12.16	8	Pass
		2437	-18.87	6.11	-12.76	8	Pass
		2462	-18.6	6.11	-12.49	8	Pass
802.11n(HT40)	ANT 1	2422	-27.81	2.53	-25.28	8	Pass
		2437	-27.97	2.53	-25.44	8	Pass
		2452	-27.86	2.53	-25.33	8	Pass
	ANT 2	2422	-22.16	7.85	-14.31	8	Pass
		2437	-22.71	7.85	-14.86	8	Pass
		2452	-22.55	7.95	-14.6	8	Pass


Note: Total PSD = Conducted PSD + Duty Factor


MIMO mode:

Test Mode	Antenna	Test Channel (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Test Result
802.11n(HT20)	ANT 1	2412	-18.3	8	Pass
		2437	-18.98	8	Pass
		2462	-18.58	8	Pass
	ANT 2	2412	-23	8	Pass
		2437	-23.58	8	Pass
		2462	-24.25	8	Pass
	Sum	2412	-17.03	8	Pass
		2437	-17.69	8	Pass
		2462	-17.54	8	Pass
802.11n(HT40)	ANT 1	2422	-22.27	8	Pass
		2437	-22.84	8	Pass
		2452	-22.68	8	Pass
	ANT 2	2422	-26.8	8	Pass
		2437	-27.44	8	Pass
		2452	-27.58	8	Pass
	Sum	2422	-20.96	8	Pass
		2437	-21.55	8	Pass
		2452	-21.46	8	Pass


Note: Sum PSD (mW) = Ant.1 PSD (mW) + Ant.2 PSD (mW)


ANT1:

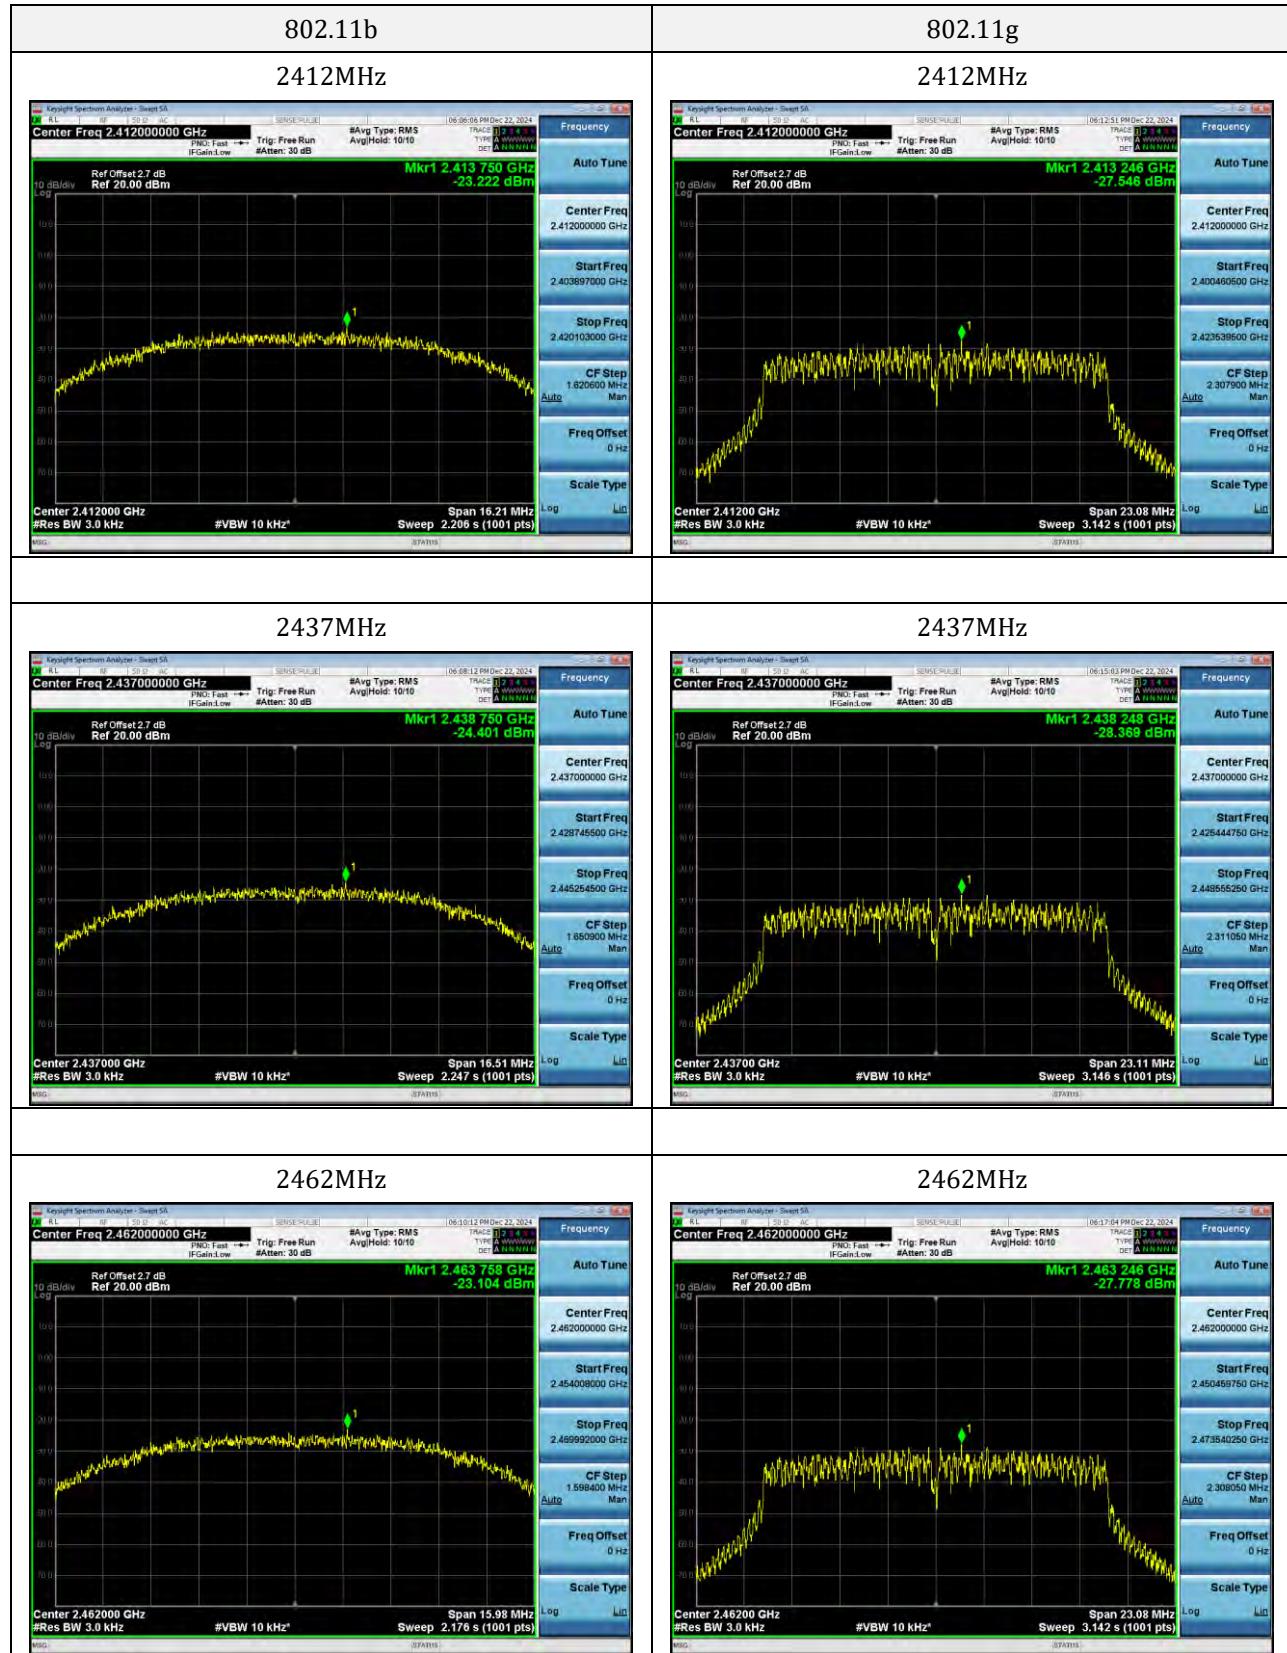

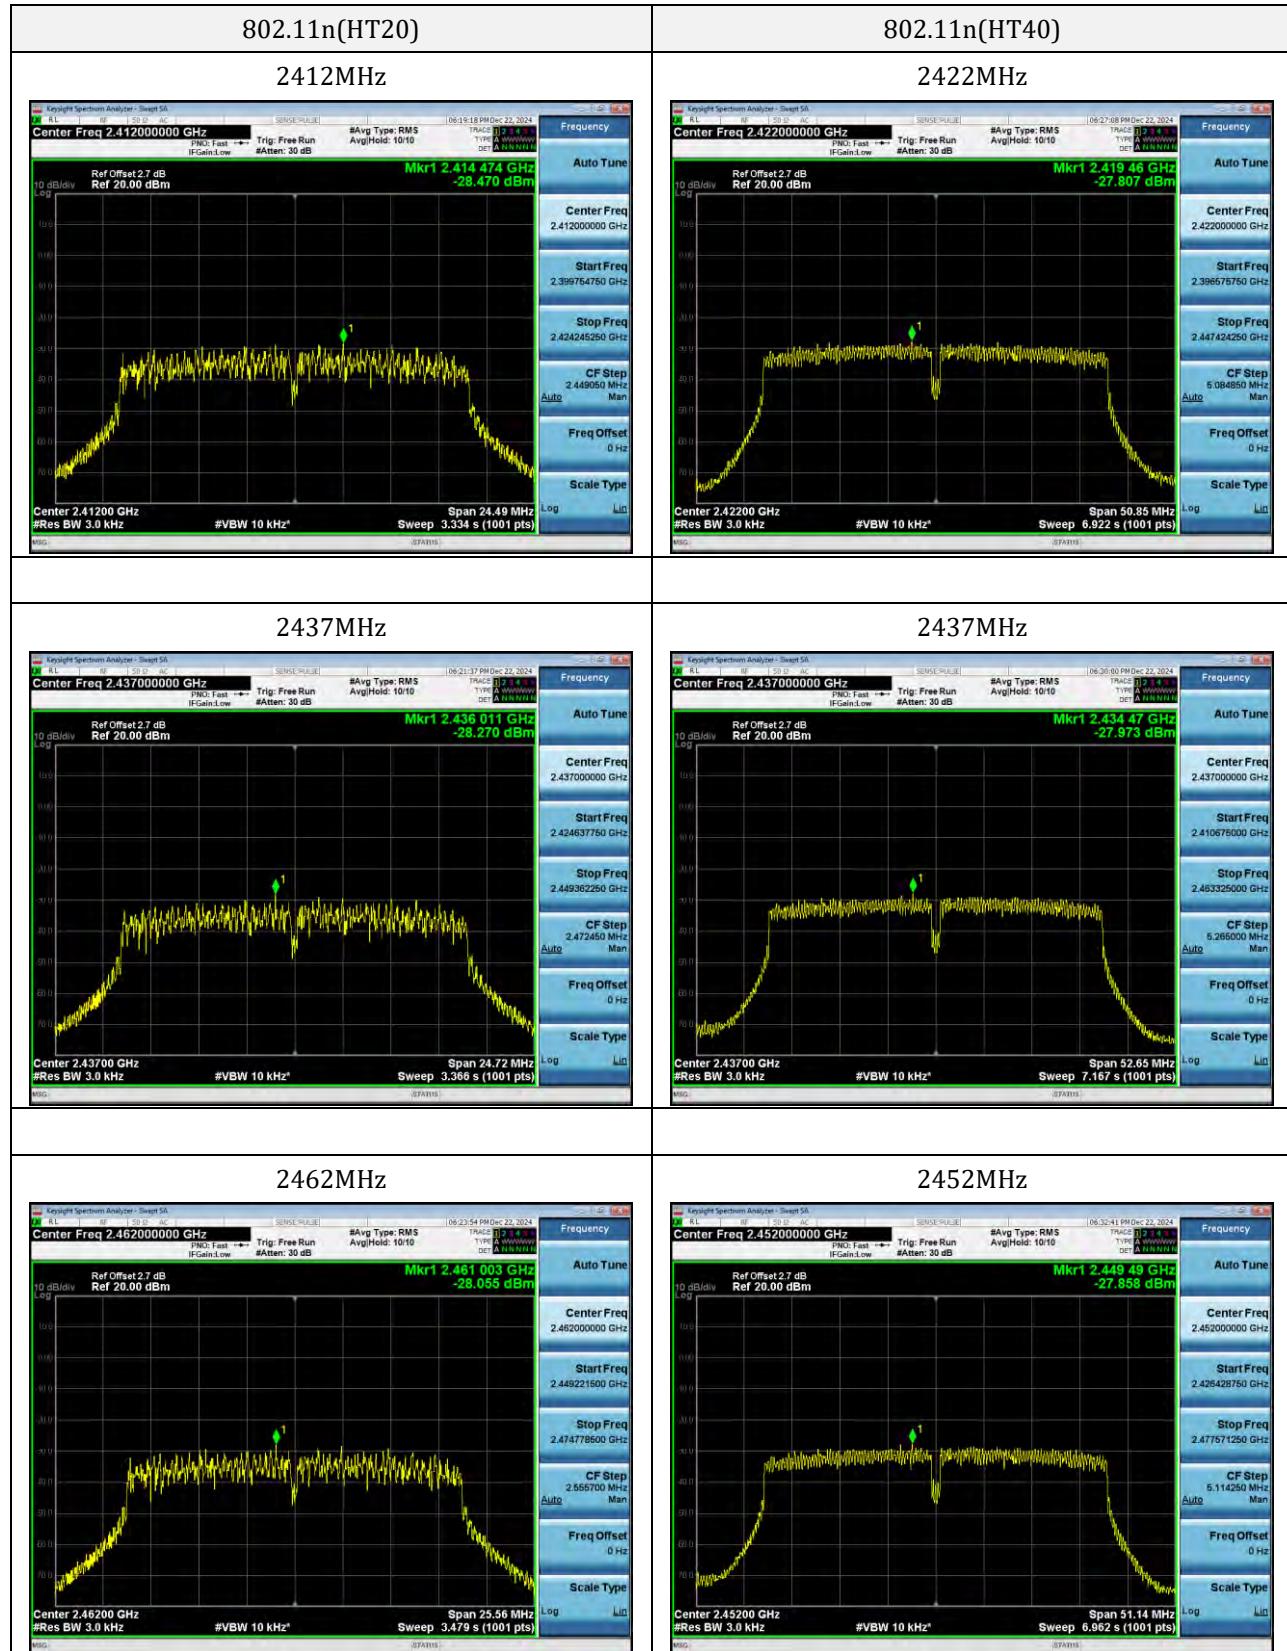



ANT2:

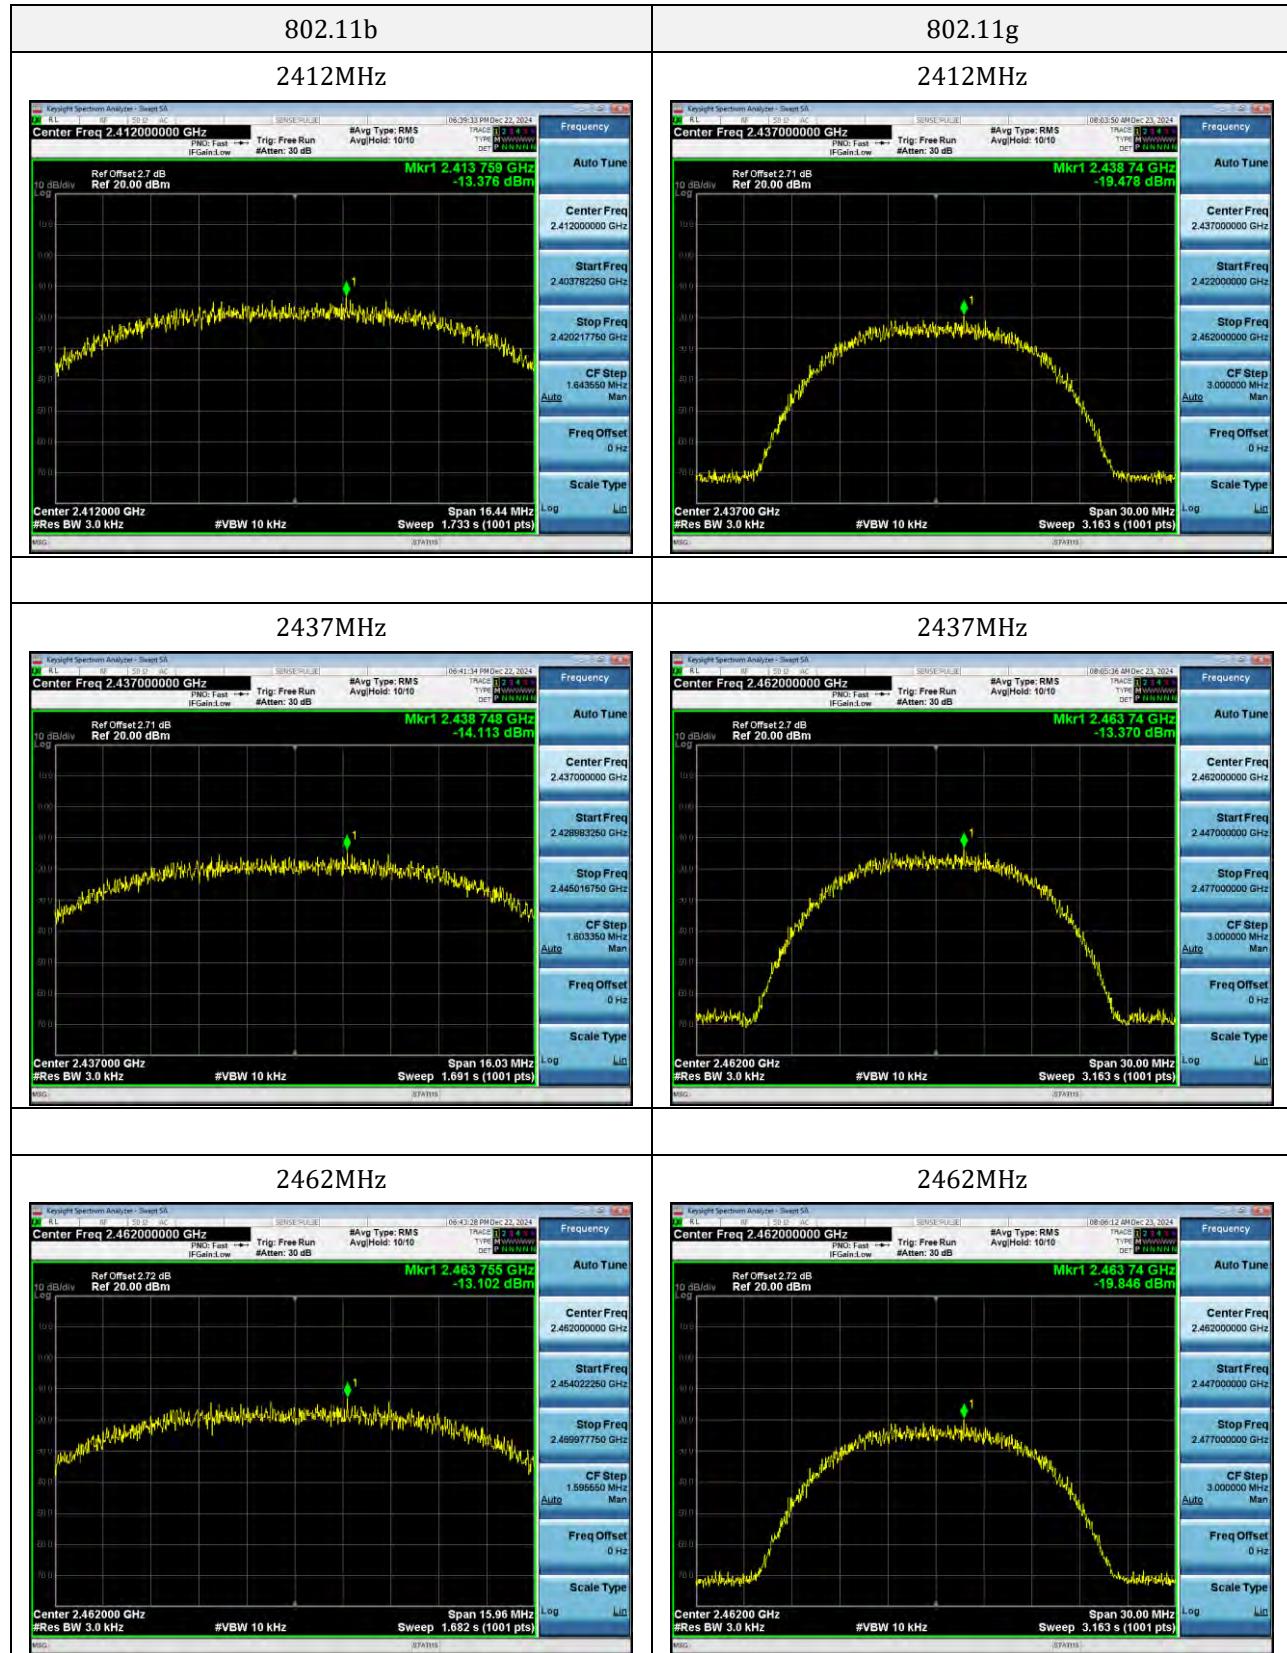

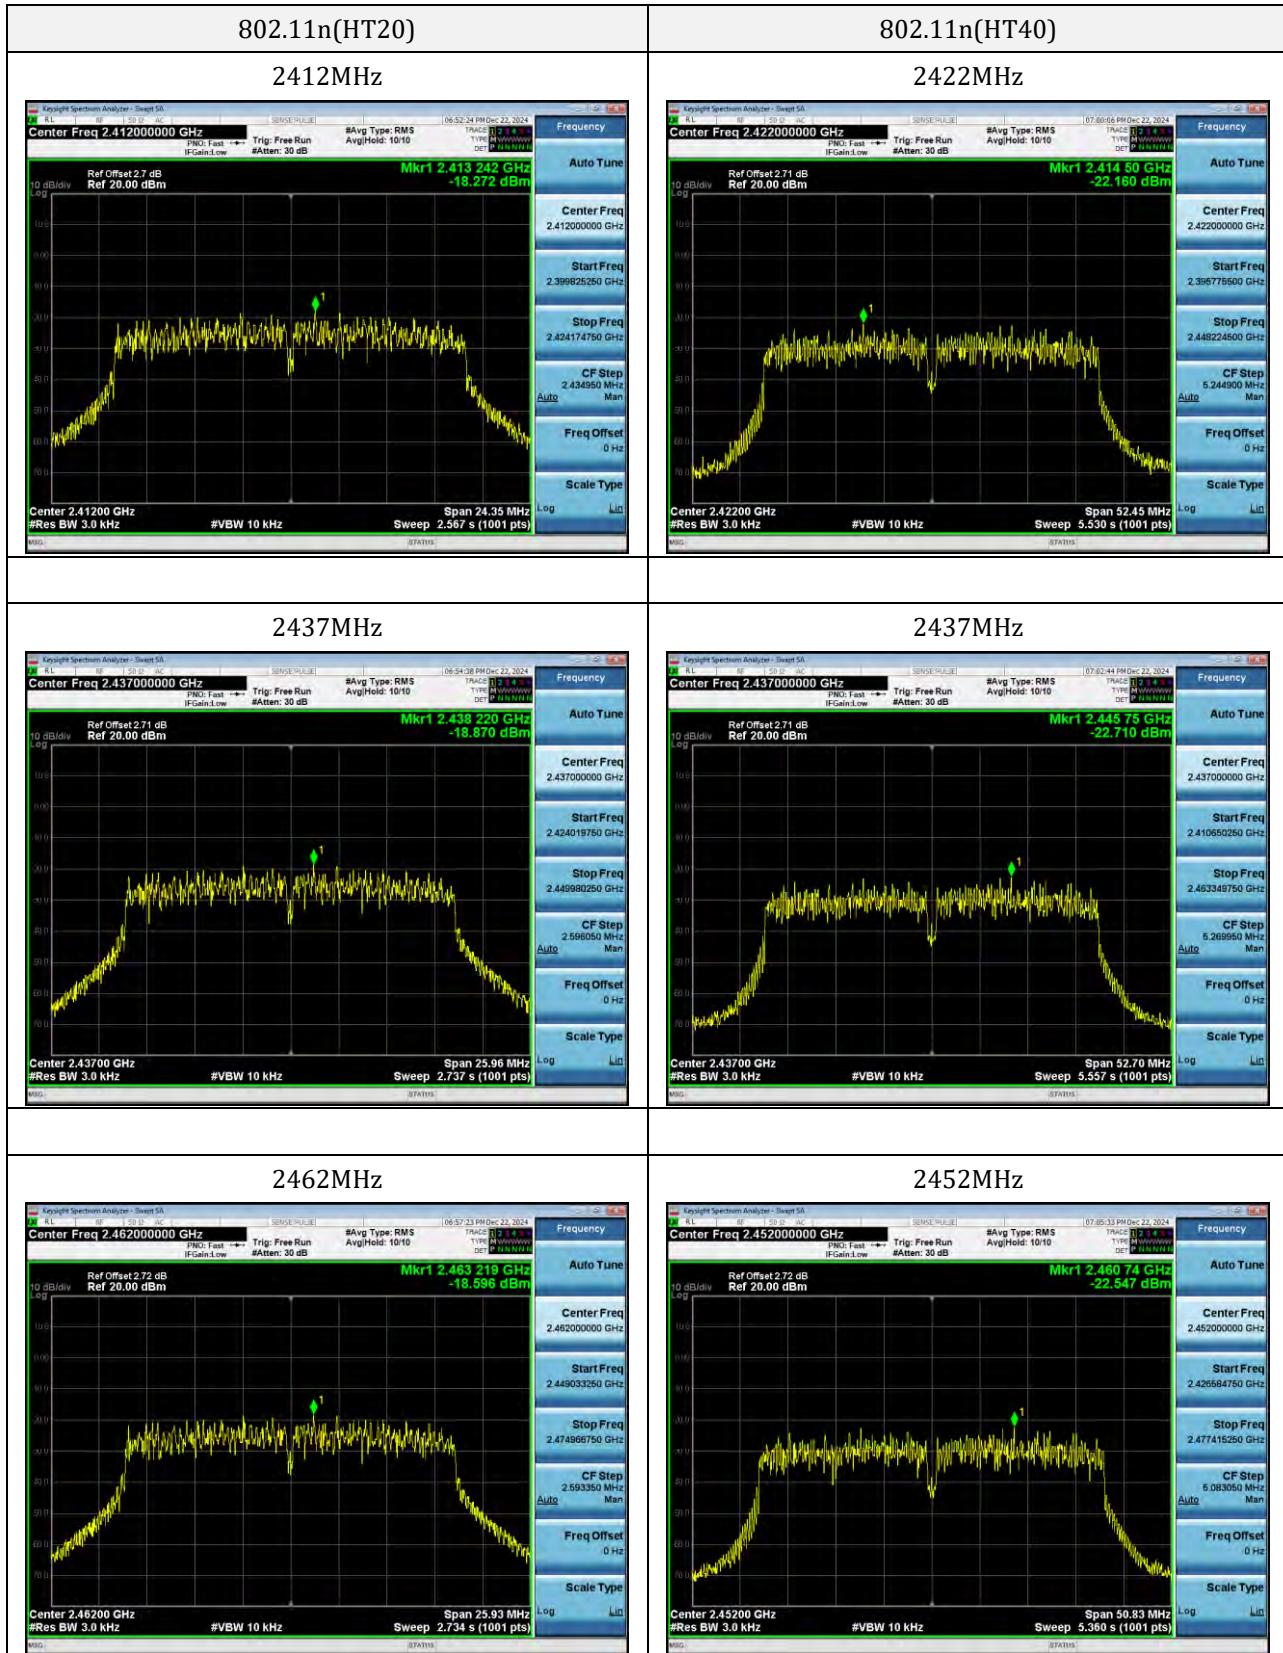

Sum:

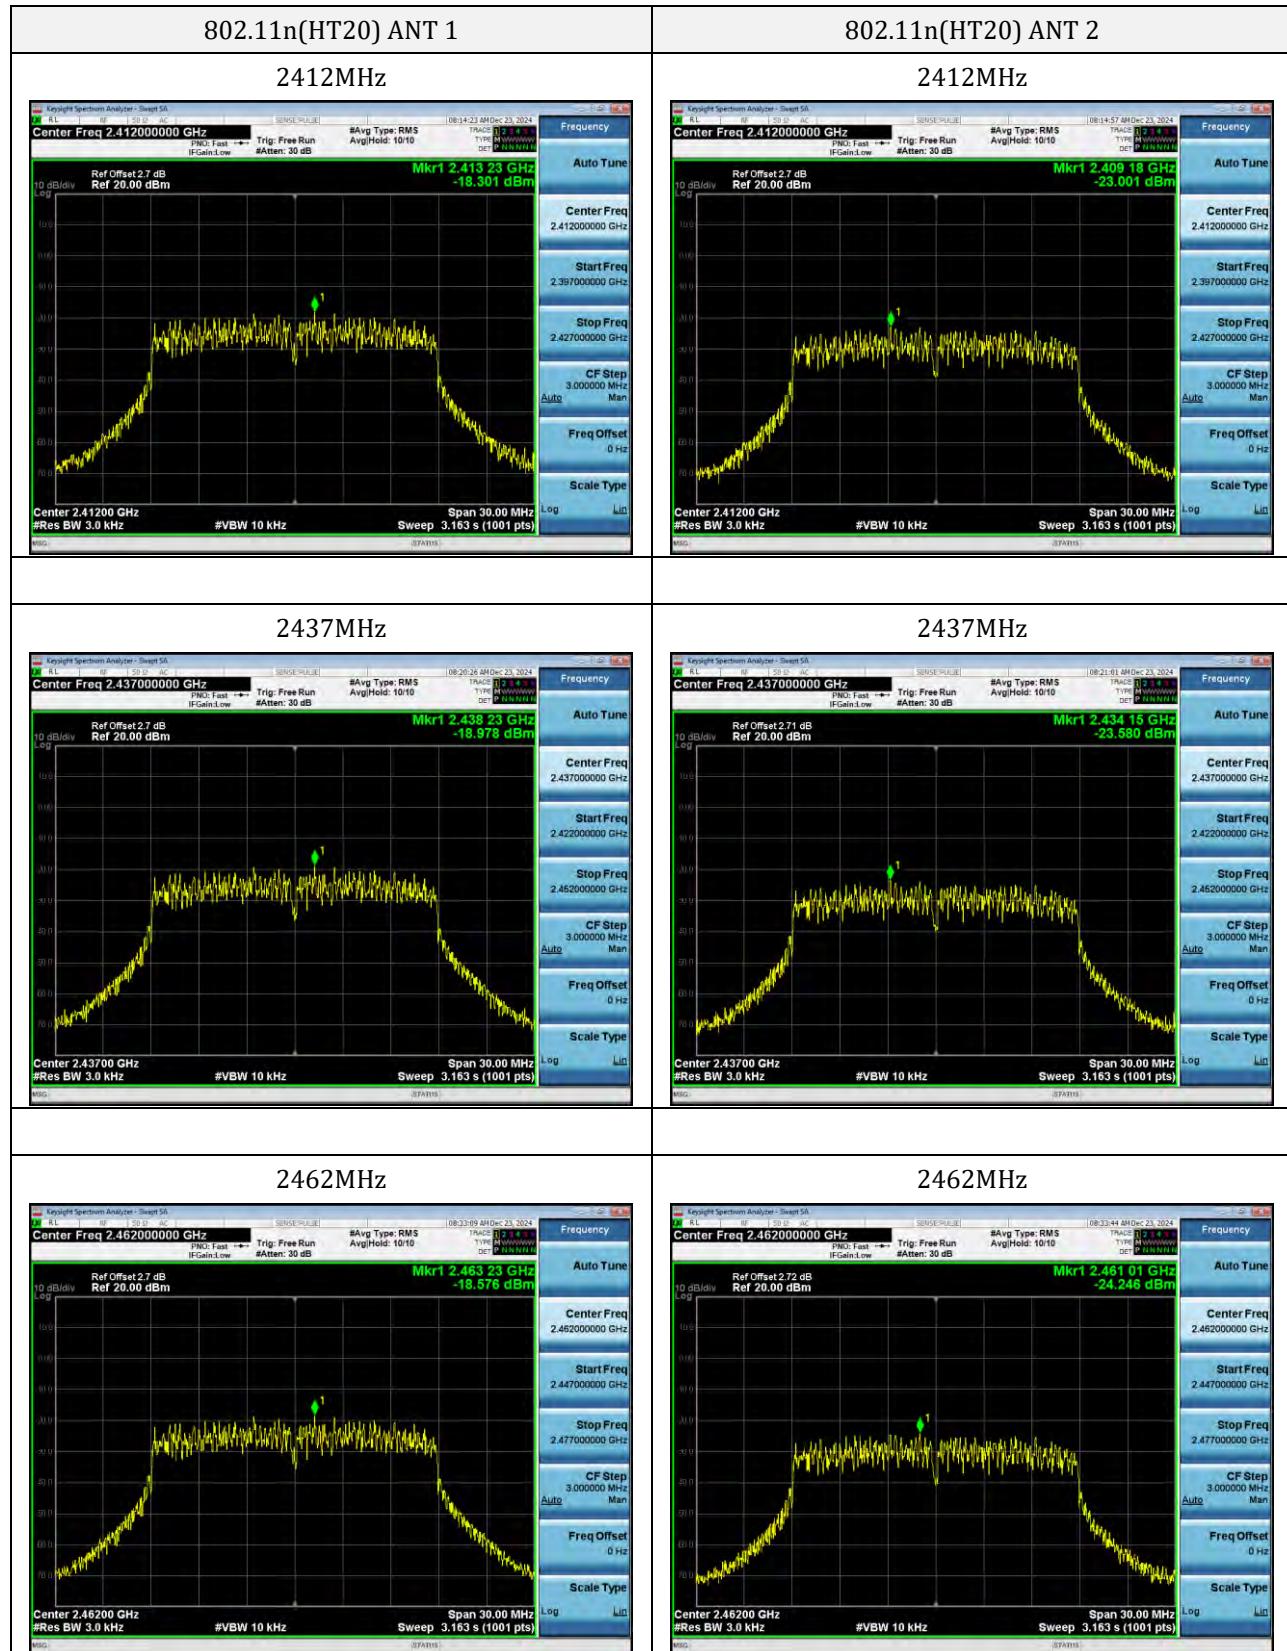

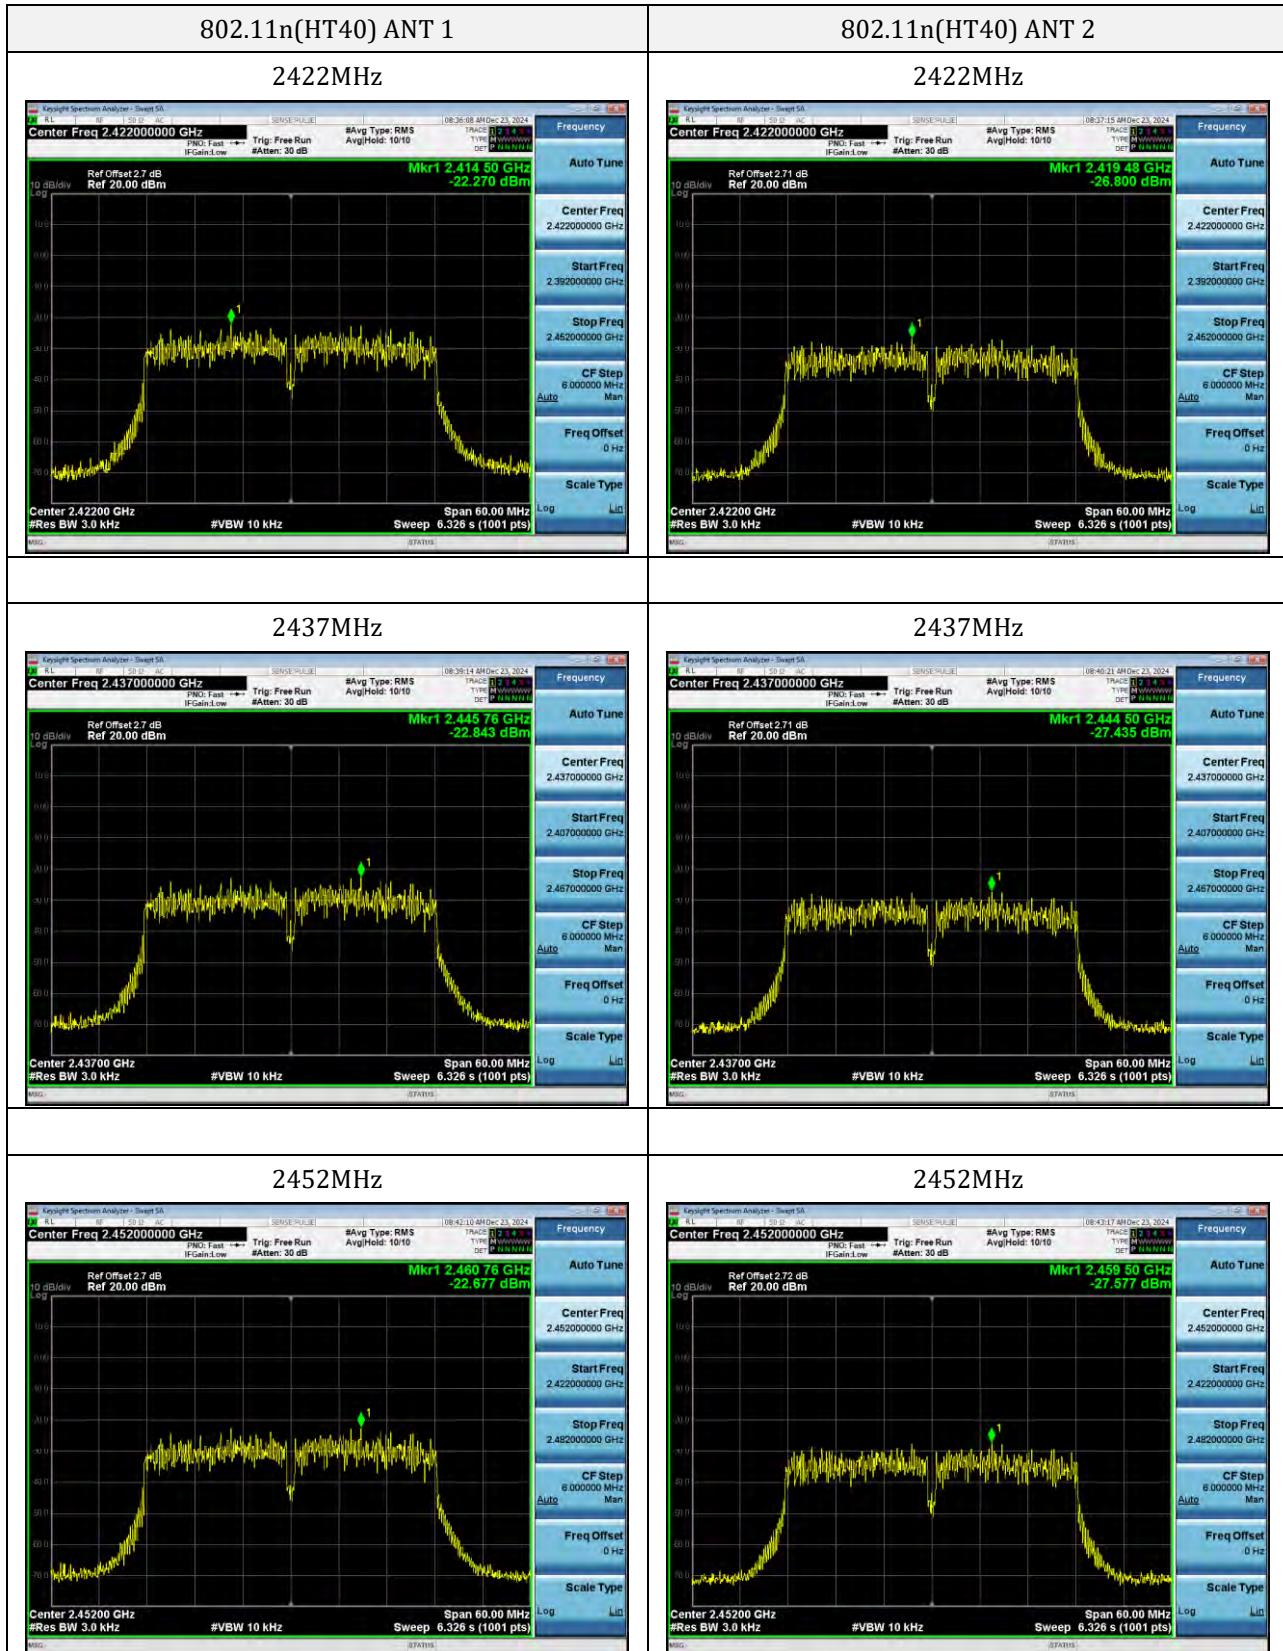

10. Band-edge Emission(Conducted)


10.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

10.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.10.

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 100kHz, VBW = 300kHz, Sweep = Auto, Detector = Peak.
- 4) Measure the highest amplitude appearing on spectral display and set it as a reference level.
- 5) Set a convenient frequency span including 100 kHz bandwidth from band edge.
- 6) Measure the emission and marking the edge frequency.
- 7) Repeat above procedures until all frequencies measured were complete.

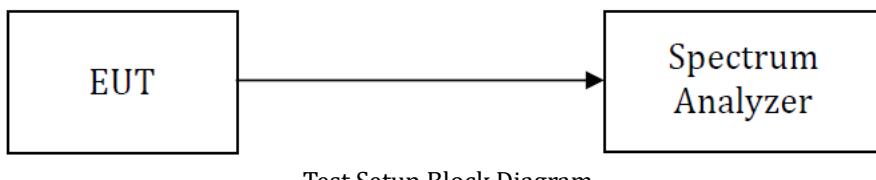



Test Setup Block Diagram


10.3 Test Data and Results

Test Mode	Antenna	Band-edge	Test Channel (MHz)	Max. Value (dBc)	Limit (dBc)	Test Result
802.11b	ANT 1	Lowest	2412	-47.5	-30	Pass
		Highest	2462	-53.86	-30	Pass
	ANT 2	Lowest	2412	-46.66	-20	Pass
		Highest	2462	-53.06	-20	Pass
802.11g	ANT 1	Lowest	2412	-41.77	-30	Pass
		Highest	2462	-49.46	-30	Pass
	ANT 2	Lowest	2412	-40.24	-20	Pass
		Highest	2462	-49.77	-20	Pass
802.11n(HT20)	ANT 1	Lowest	2412	-39.11	-30	Pass
		Highest	2462	-48.88	-30	Pass
	ANT 2	Lowest	2412	-39.6	-20	Pass
		Highest	2462	-52.2	-20	Pass
802.11n(HT40)	ANT 1	Lowest	2422	-41.22	-30	Pass
		Highest	2452	-47.65	-30	Pass
	ANT 2	Lowest	2422	-41.25	-20	Pass
		Highest	2452	-48.01	-20	Pass


ANT1:

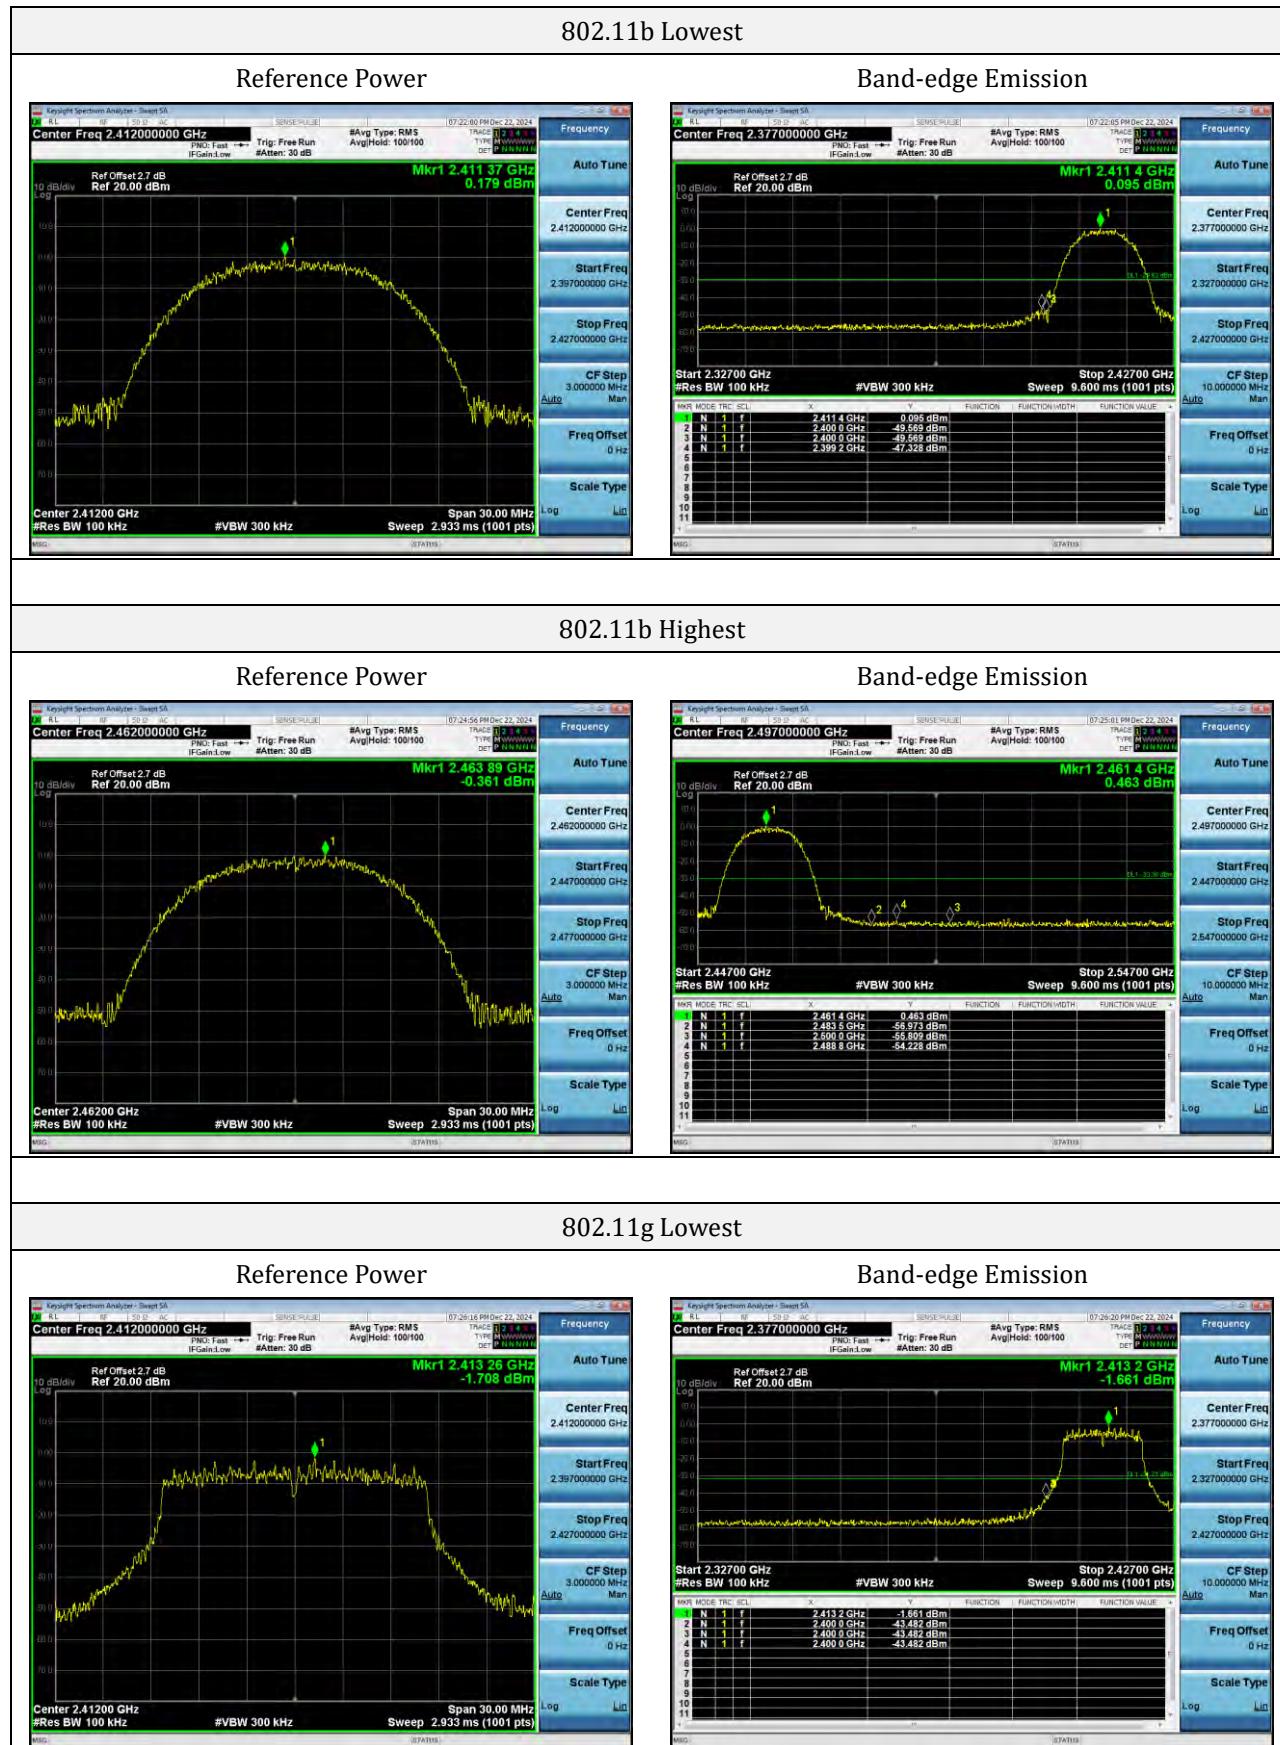

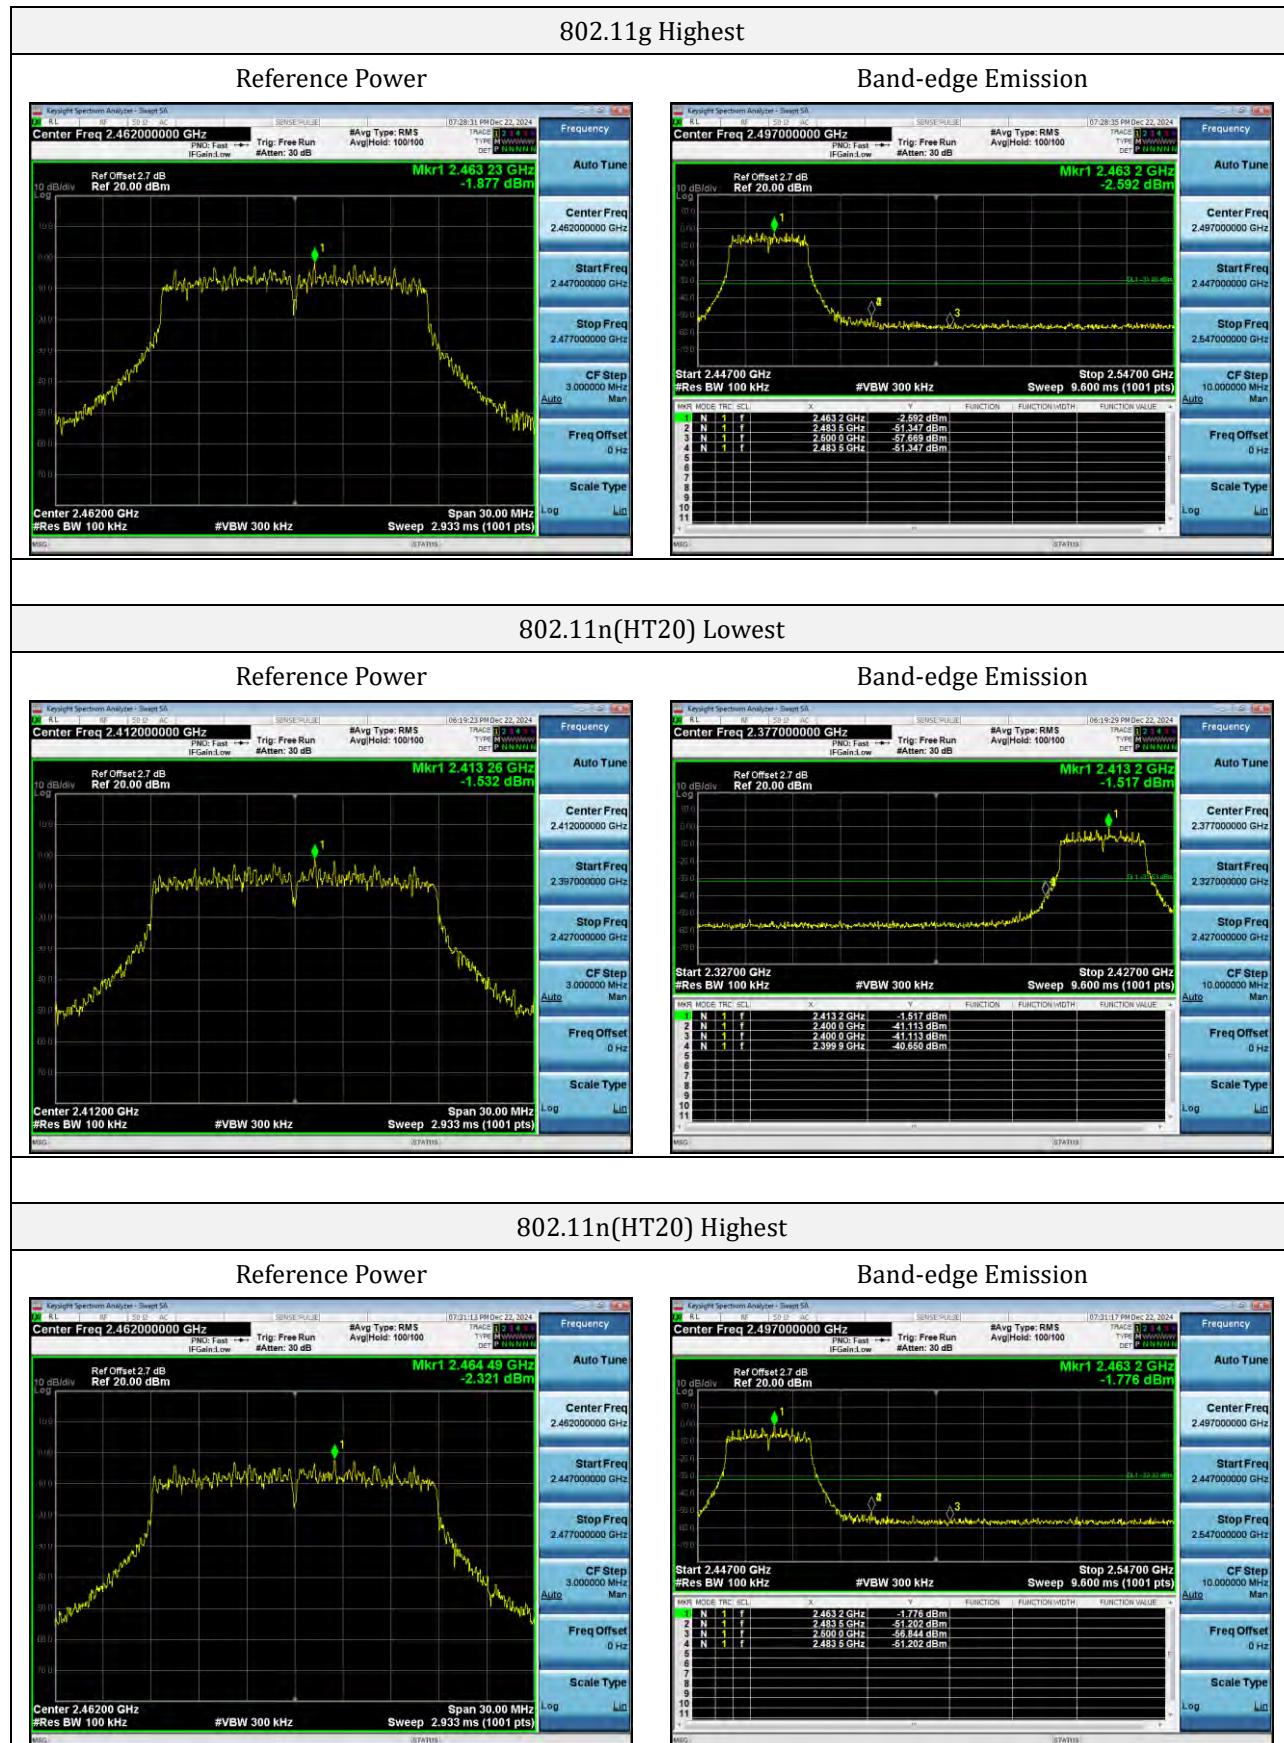


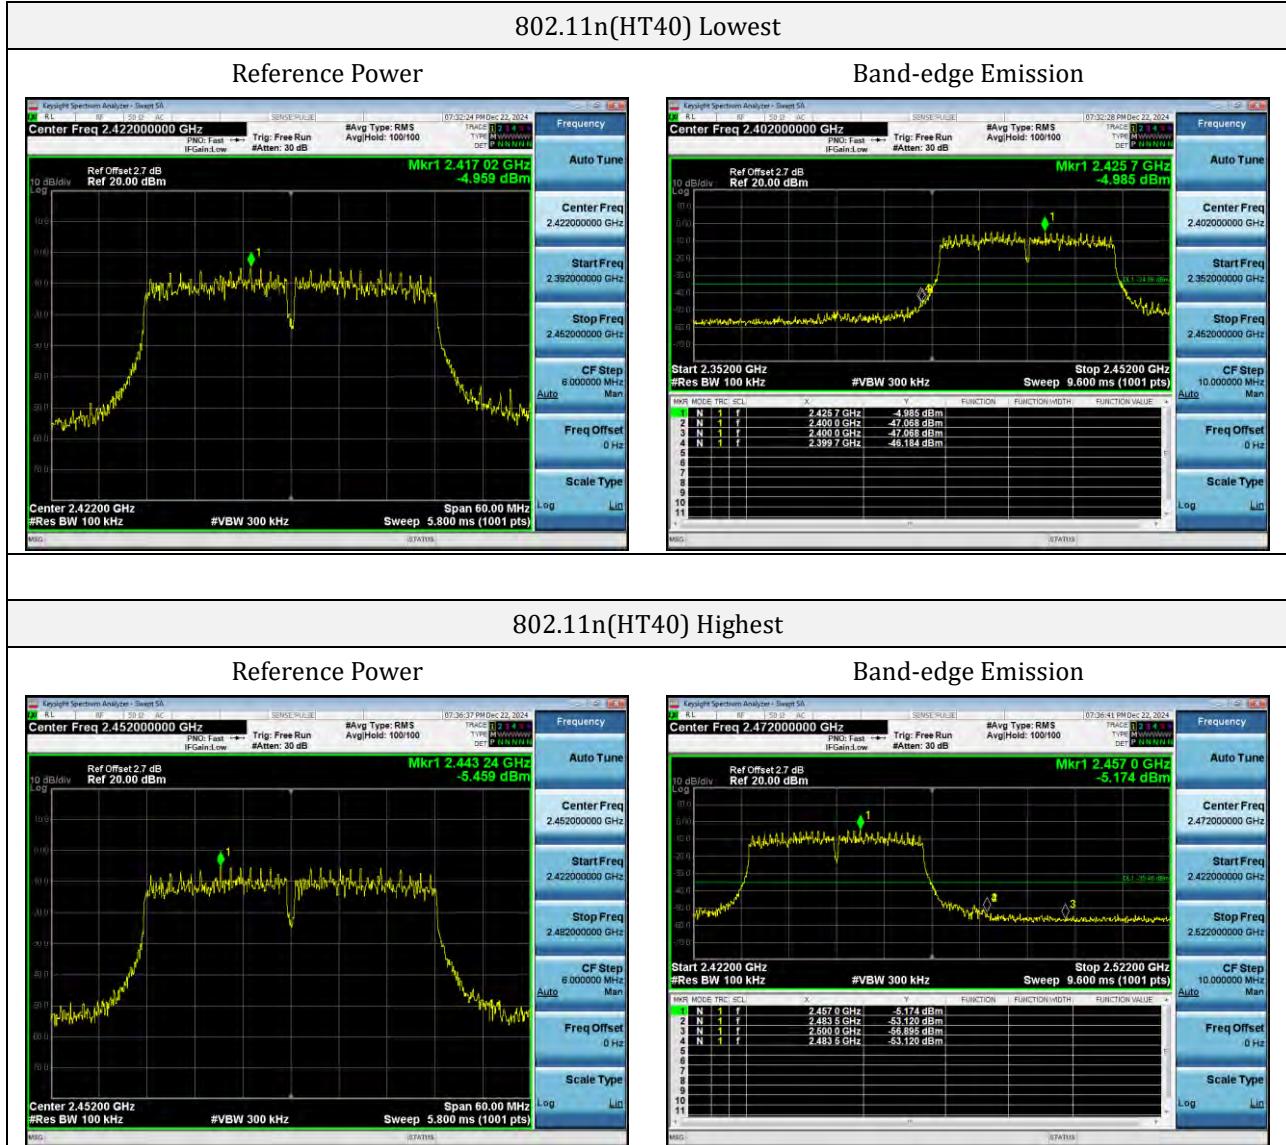

ANT2:

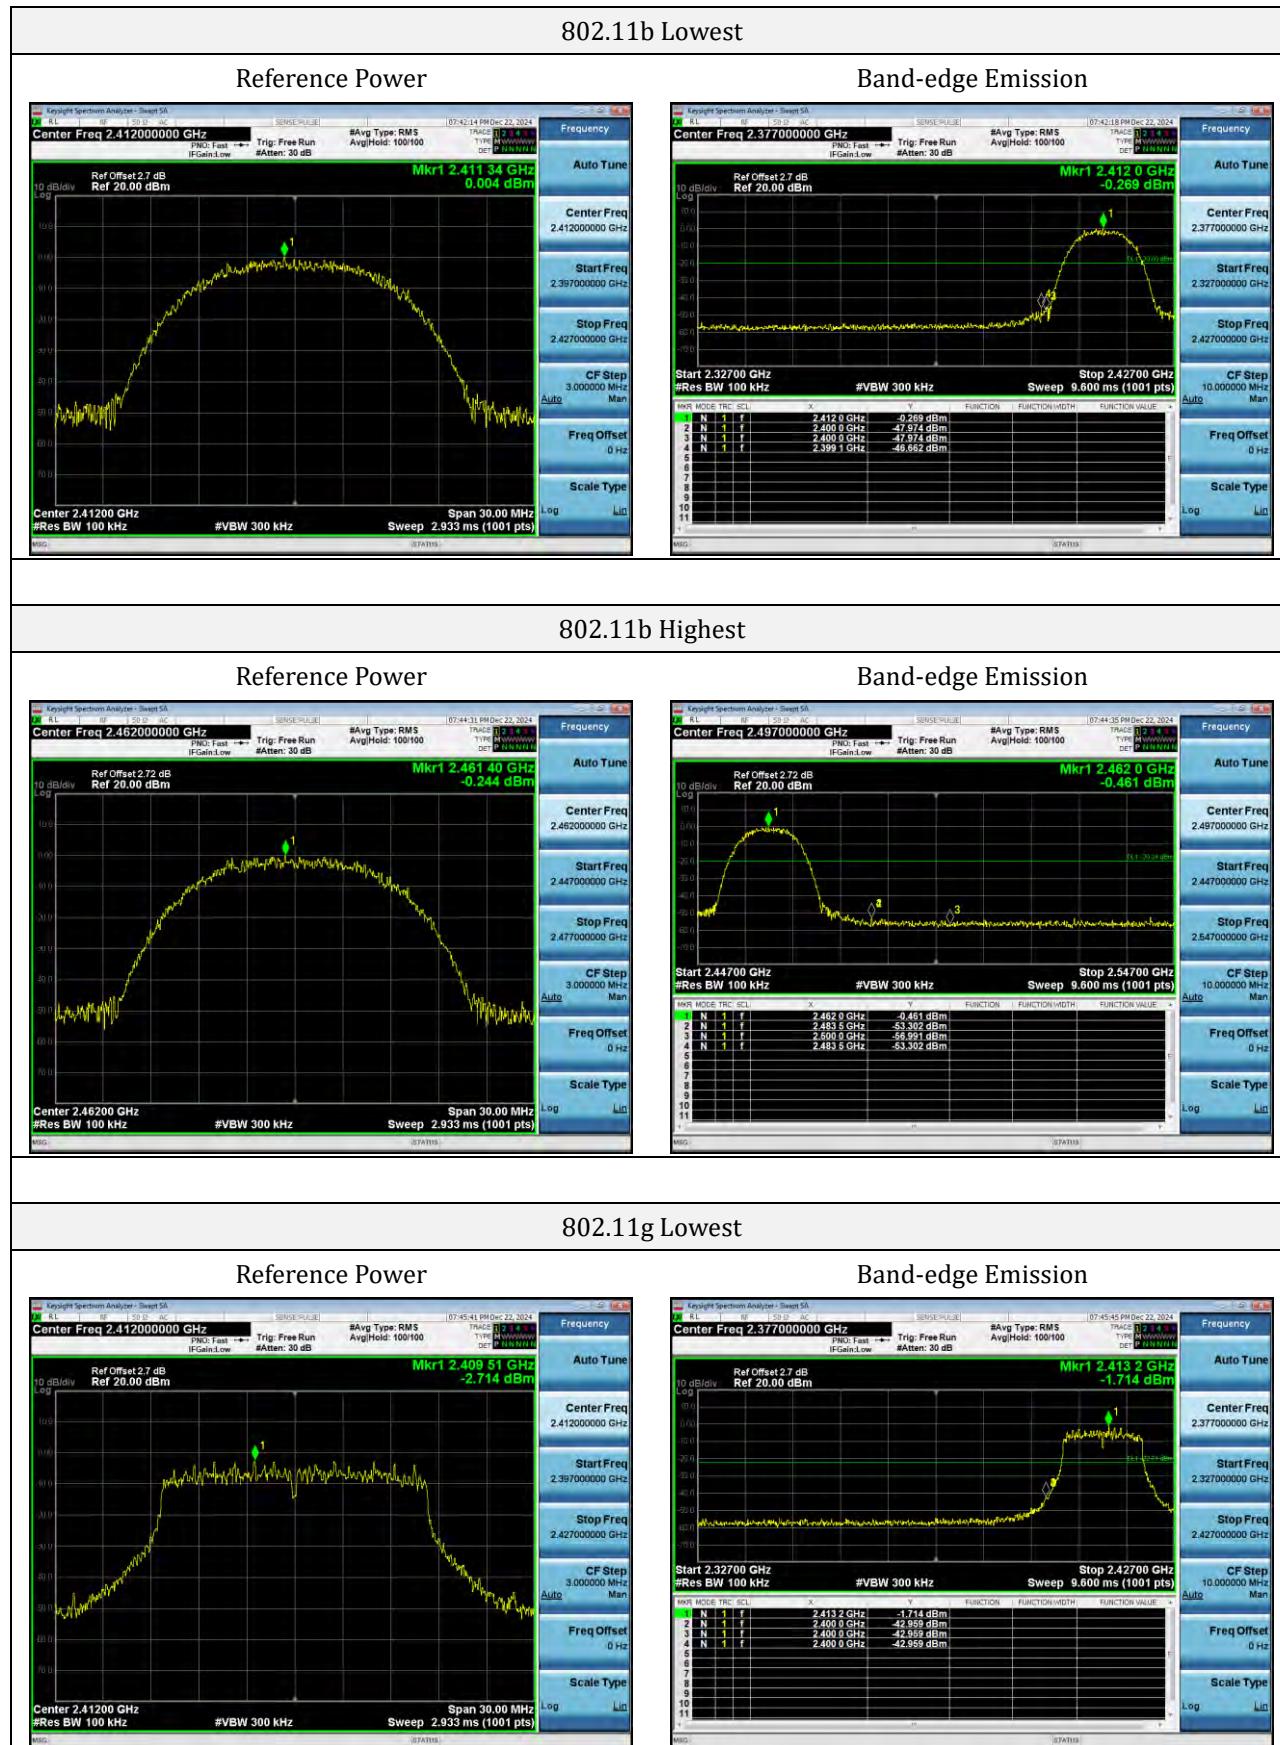



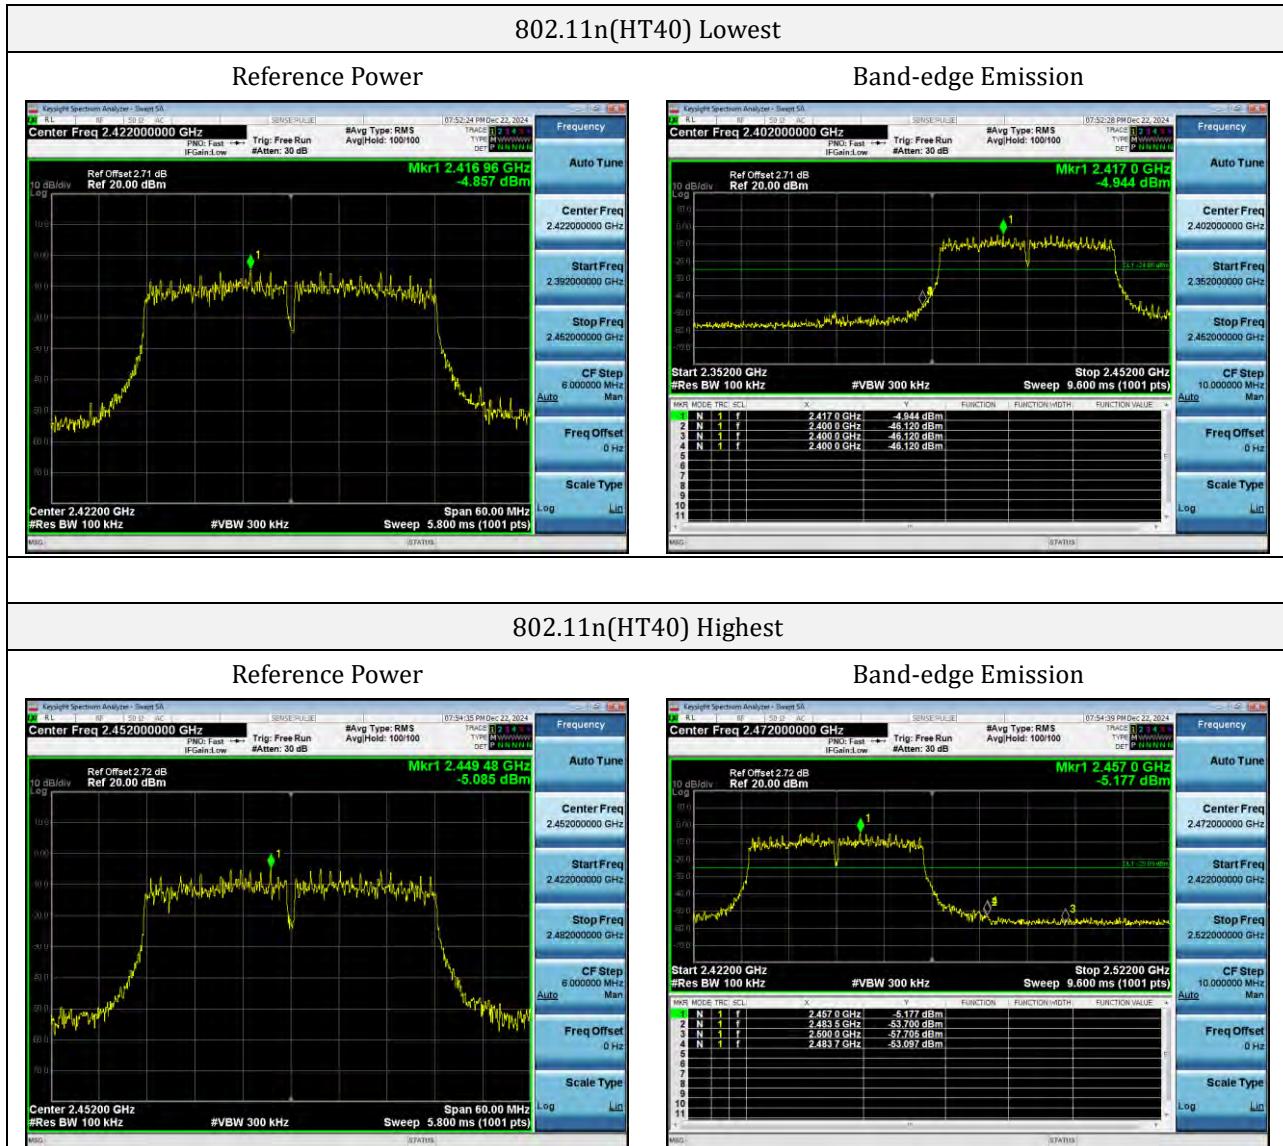

11. Conducted RF Spurious Emissions


11.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

11.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.7.


- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 100kHz, VBW = 300kHz, Sweep = Auto, Detector = Peak.
- 4) Measure the highest amplitude appearing on spectral display and set it as a reference level.
- 5) Measure the spurious emissions with frequency range from 9kHz to 26.5GHz.
- 6) Repeat above procedures until all measured frequencies were complete.

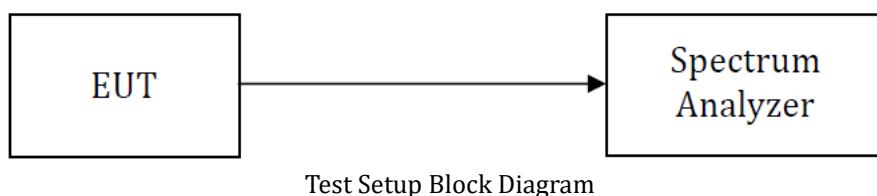


11.3 Test Data and Results

Note: The measurement frequency range is from 9kHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions measurement data.


ANT1:

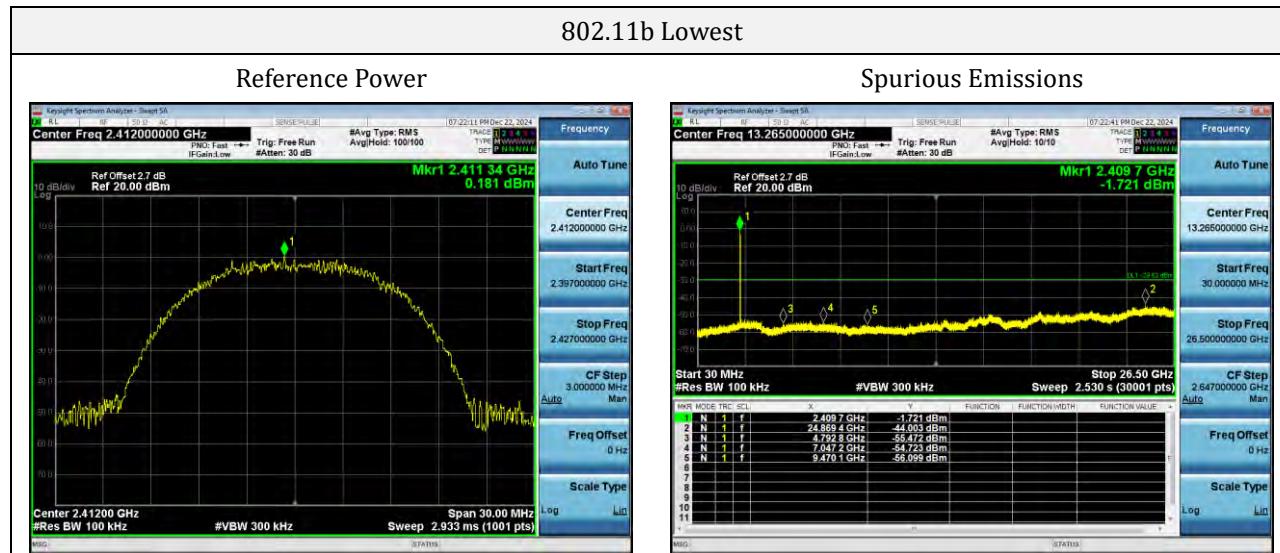



802.11b Middle

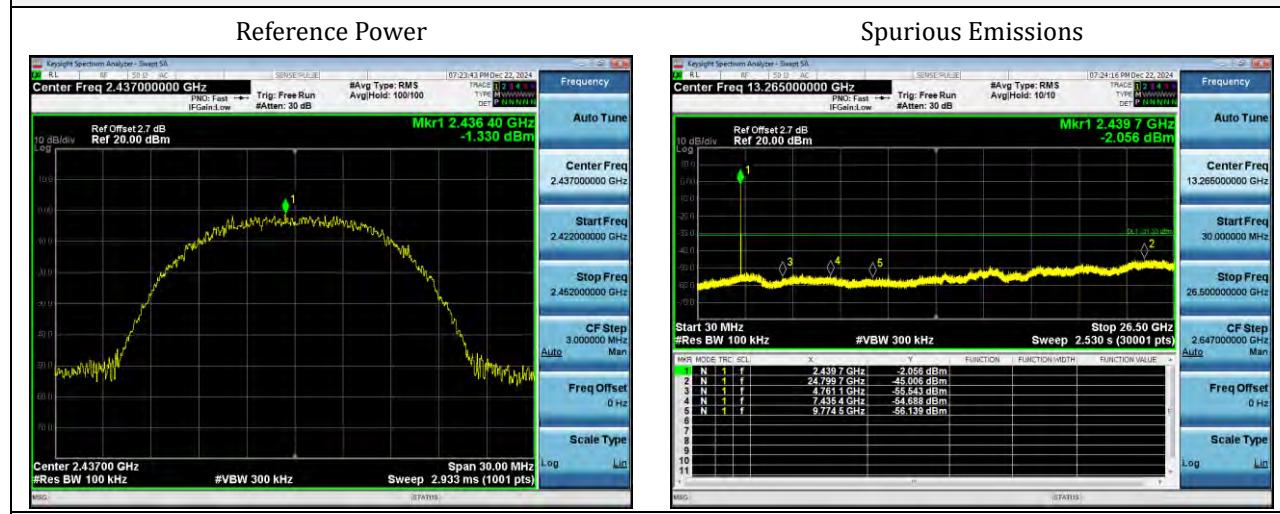


802.11b Highest

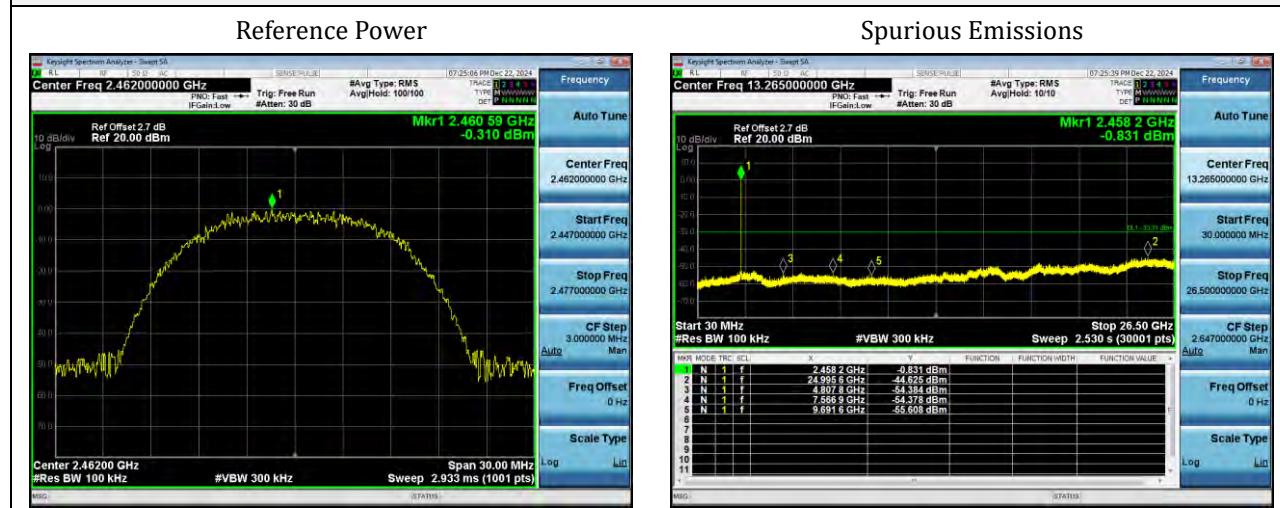


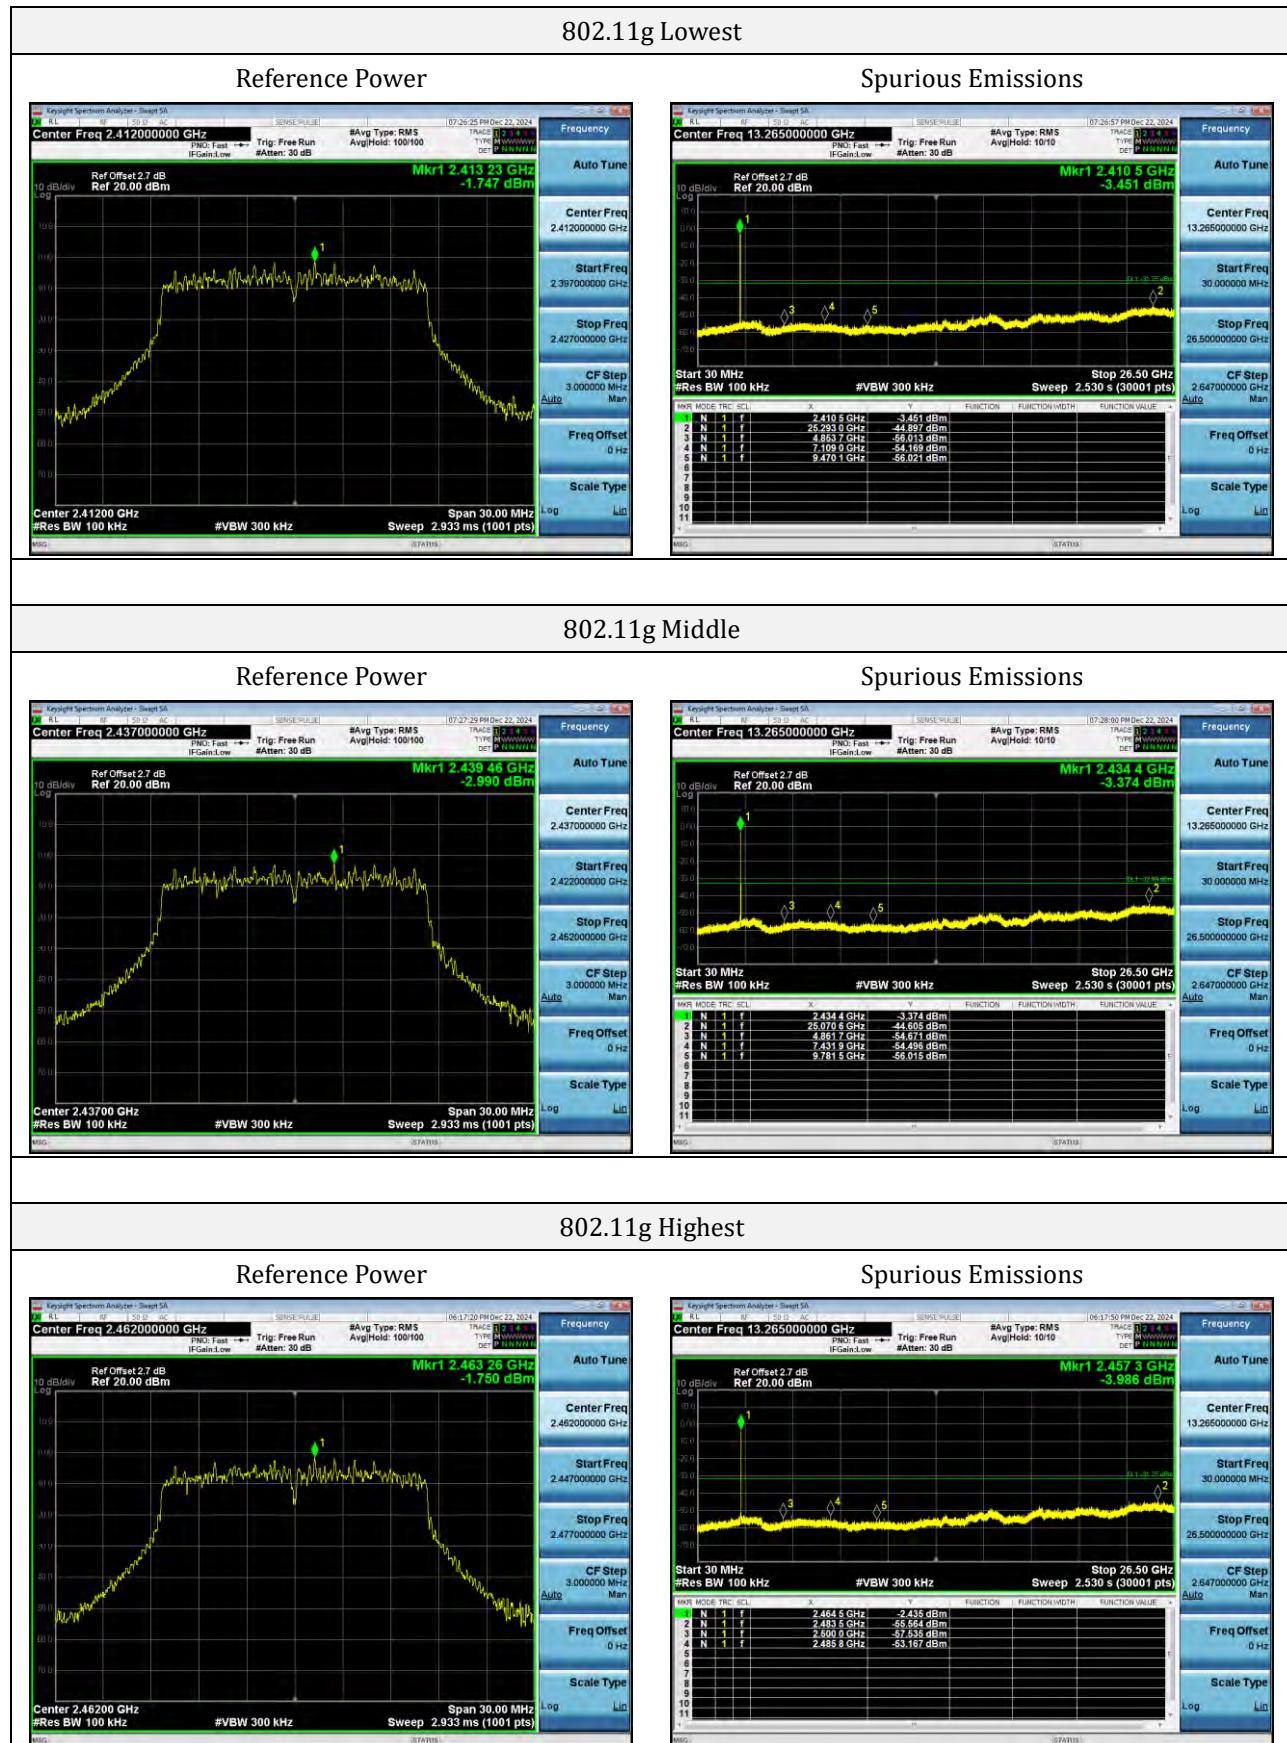


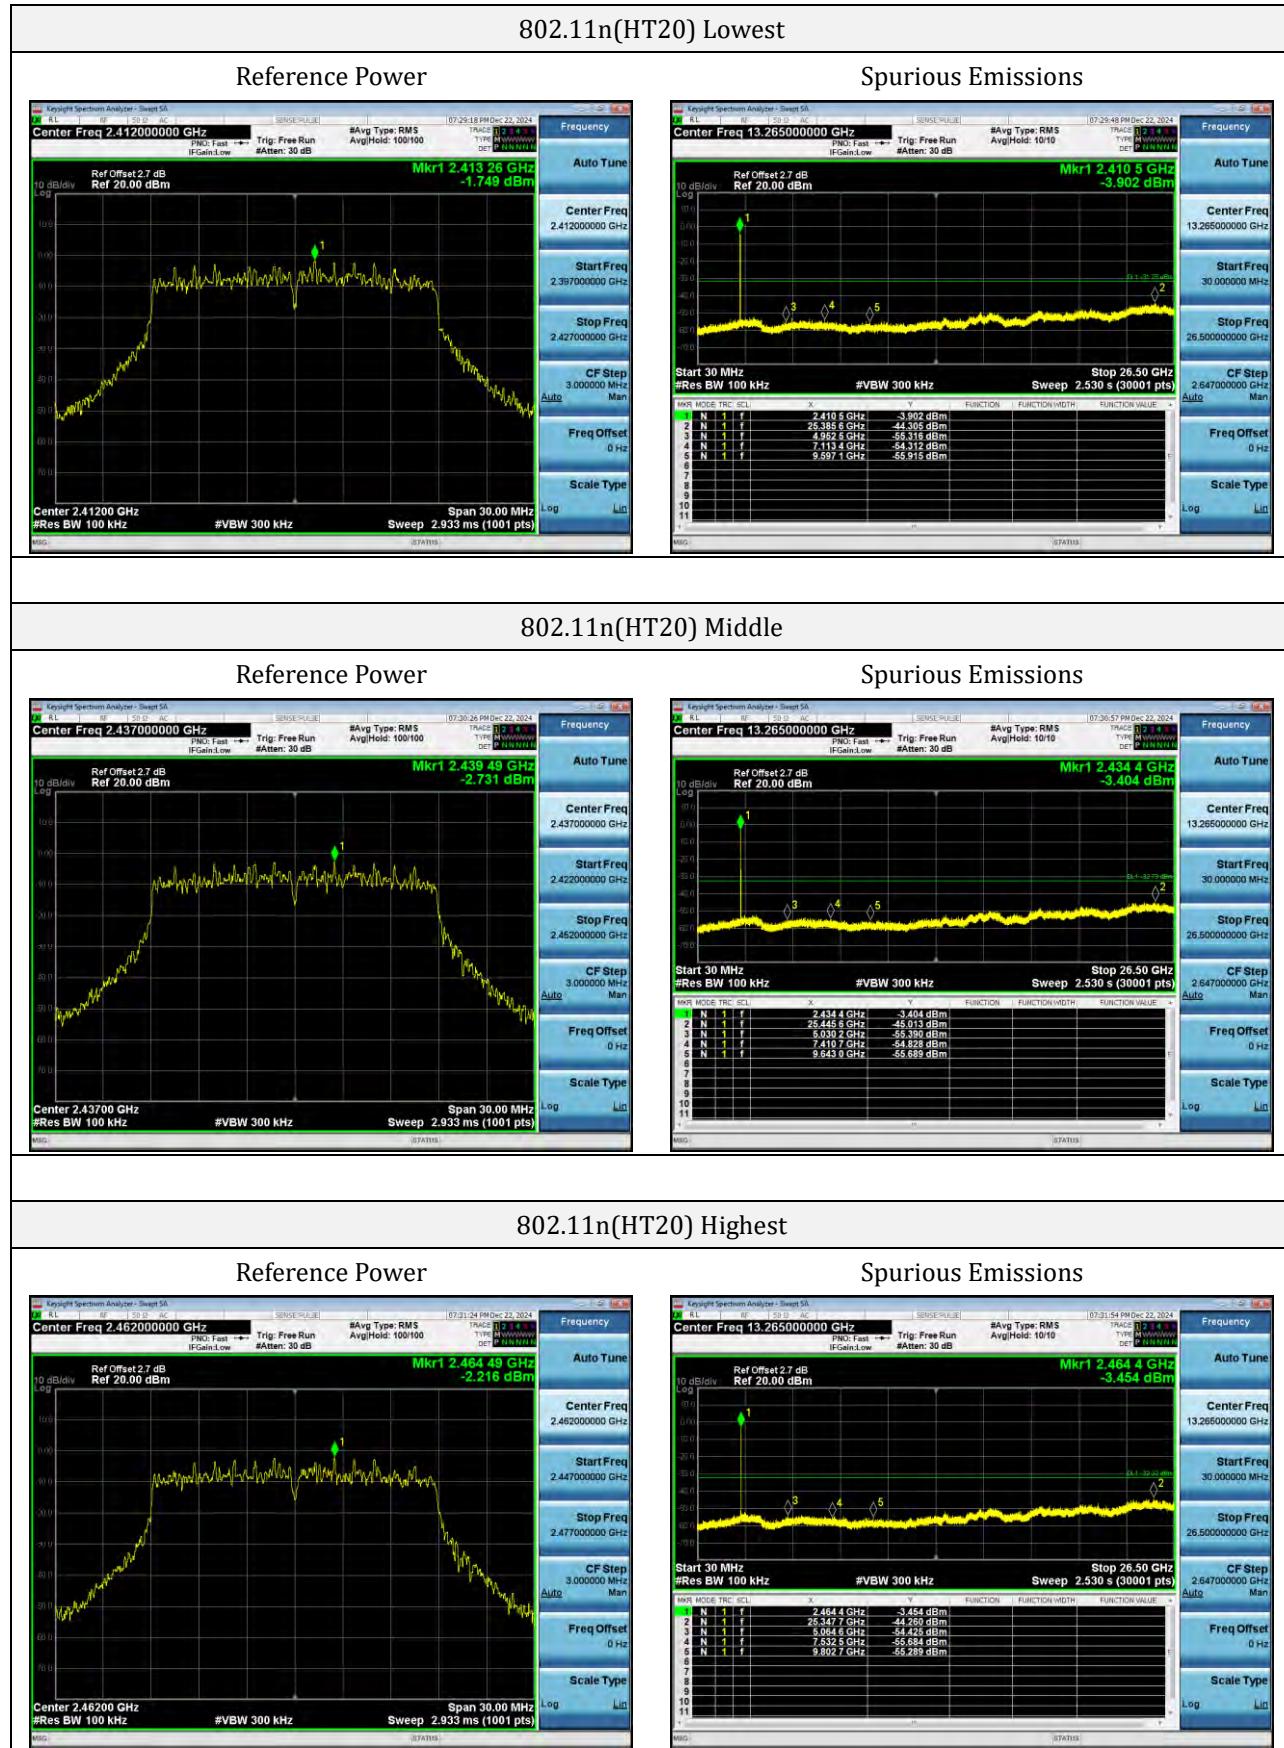


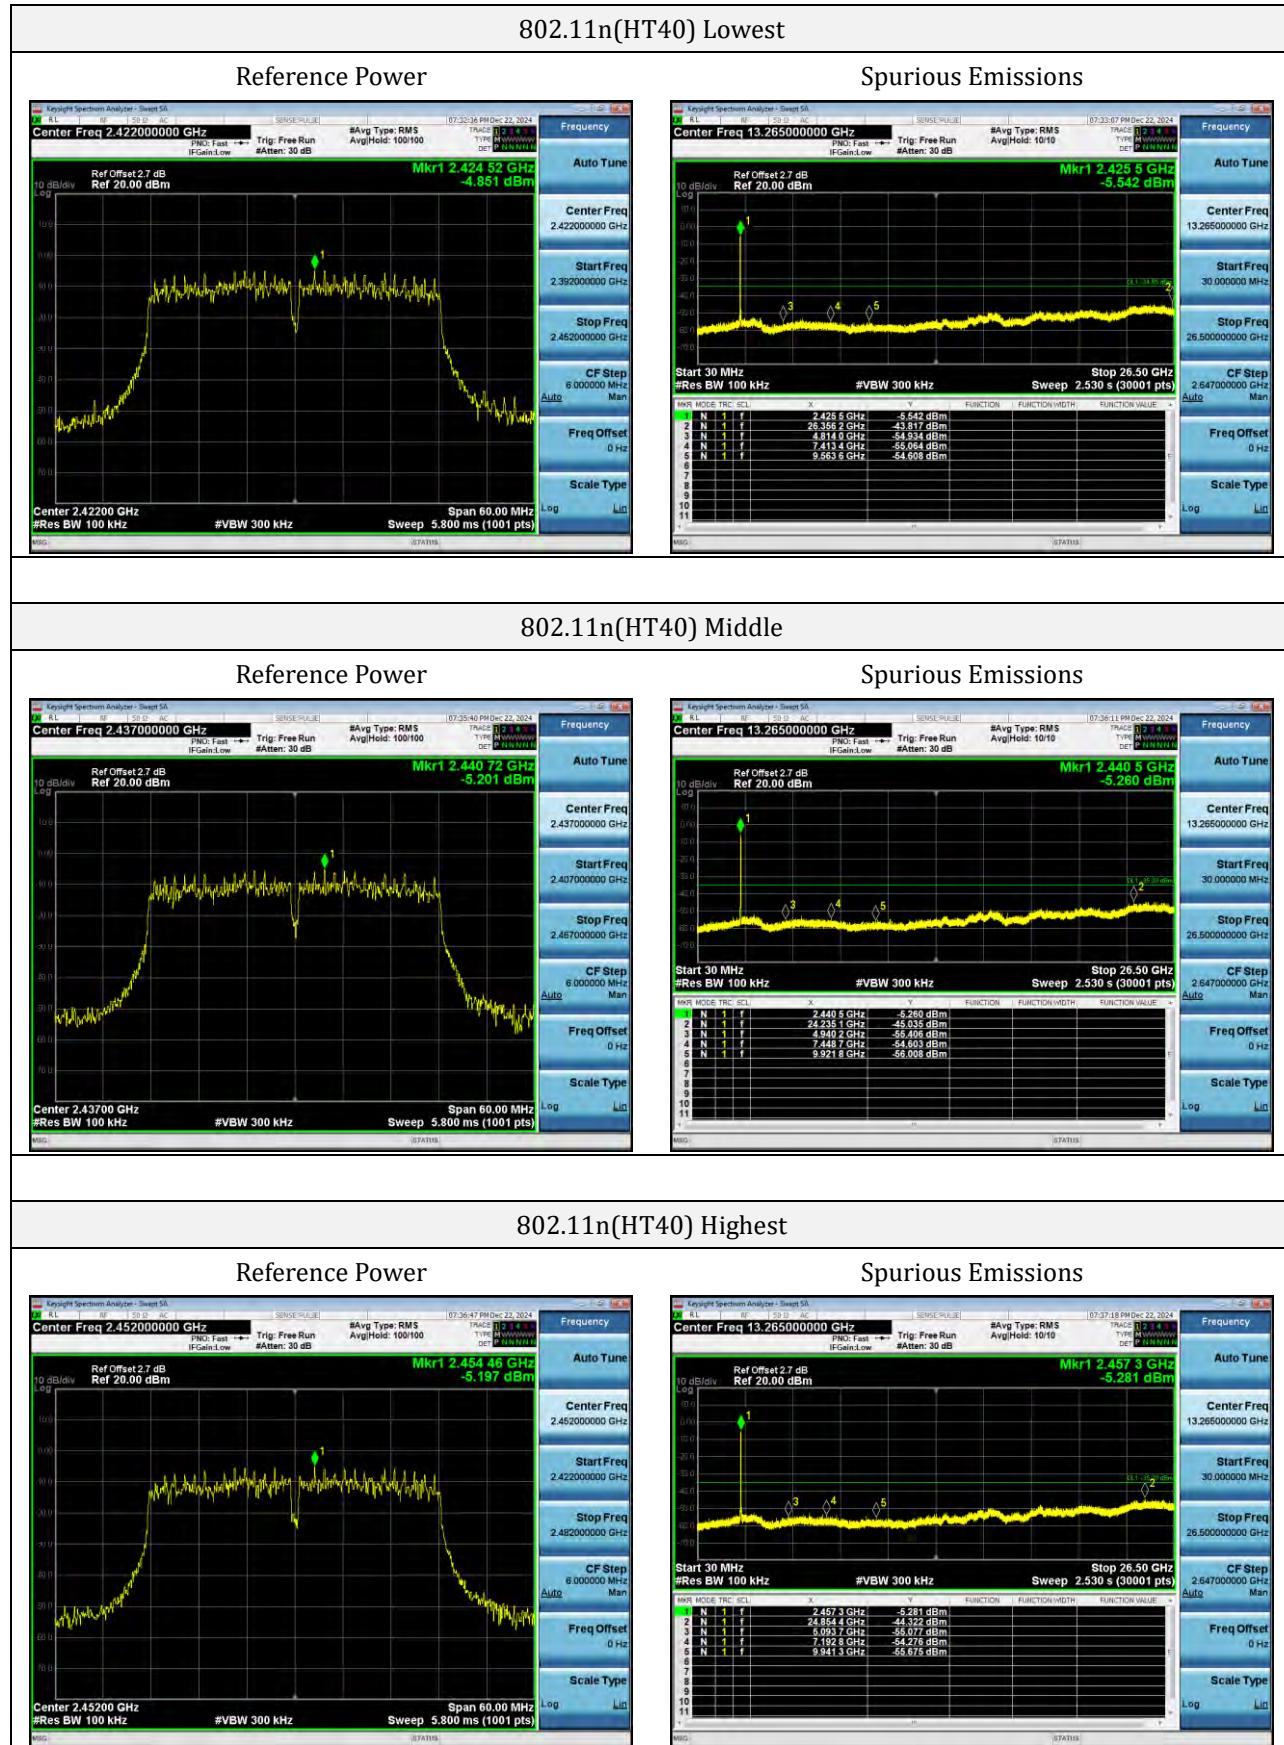


ANT2:

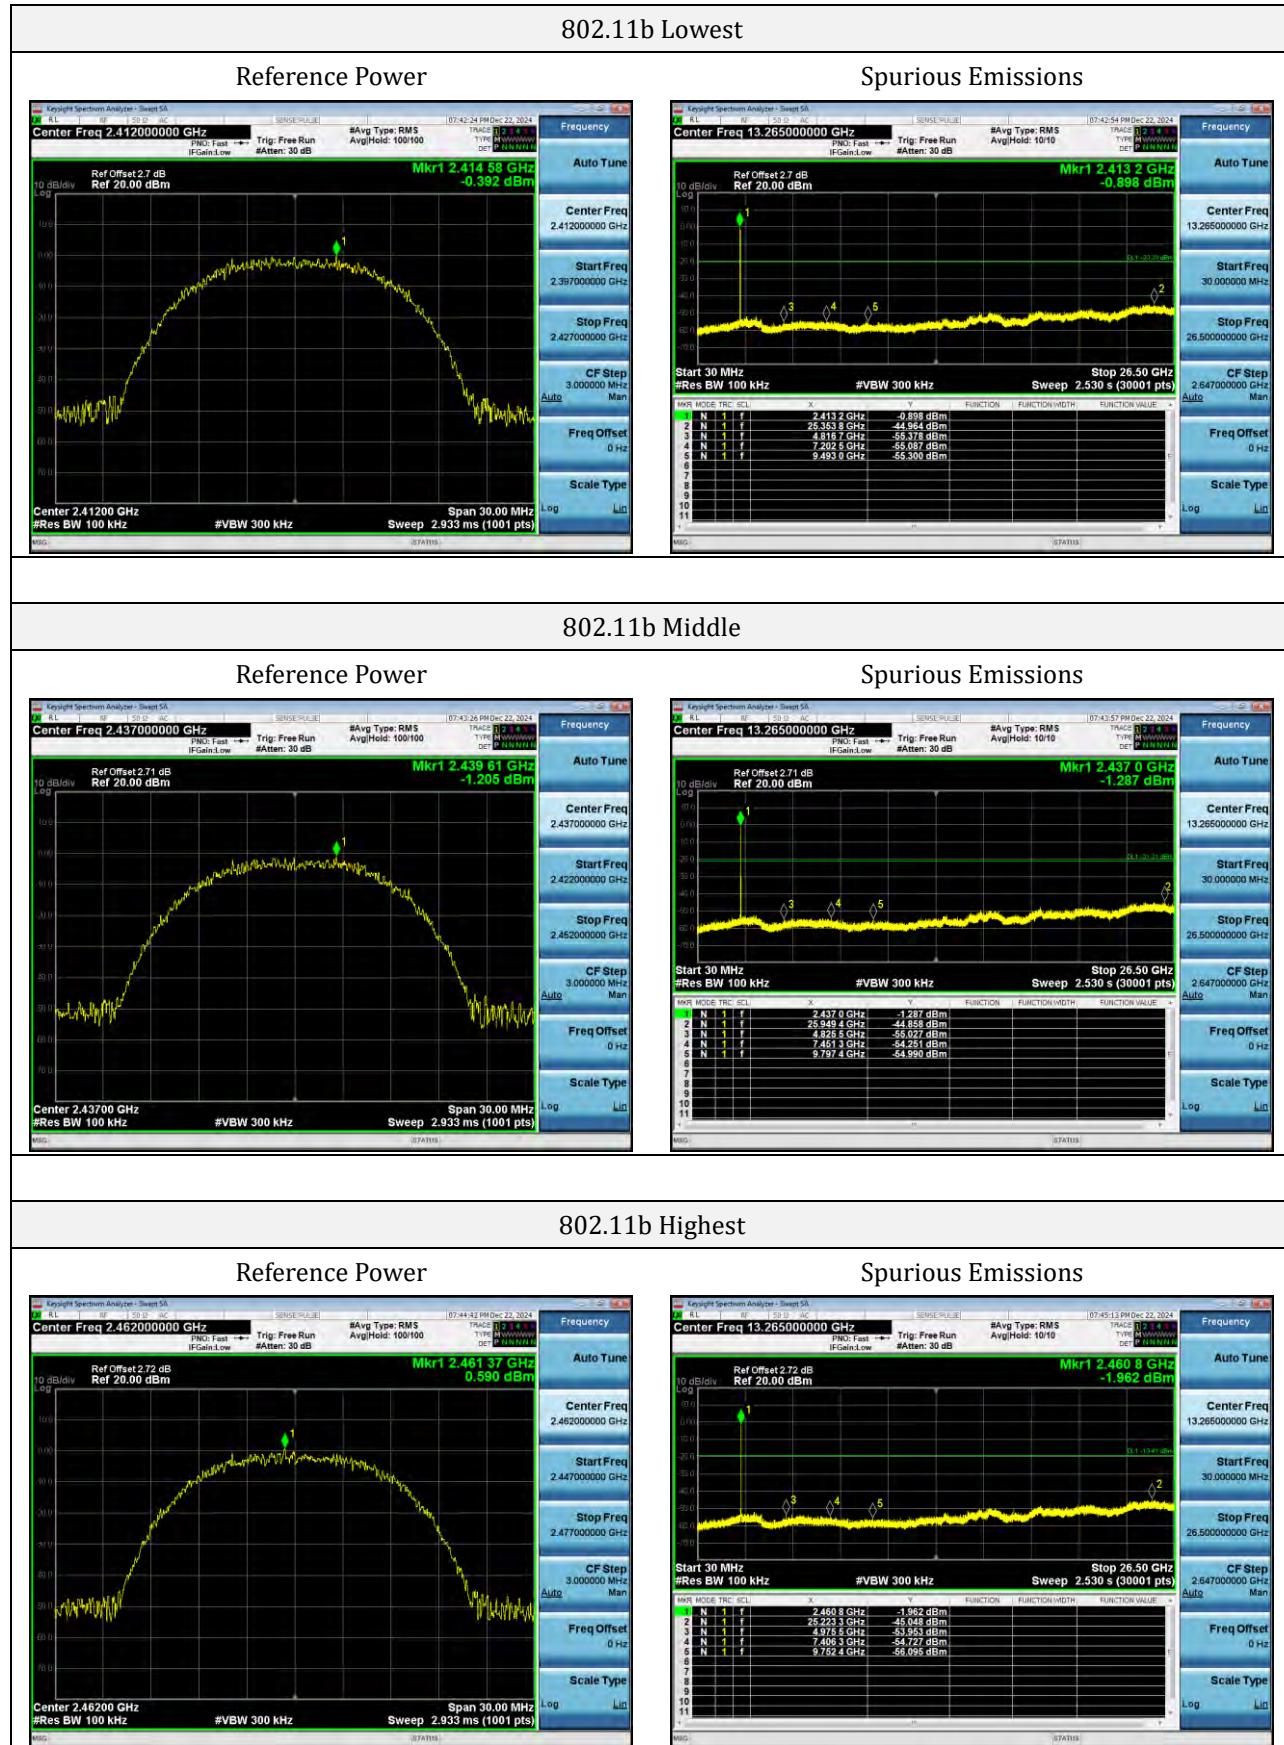

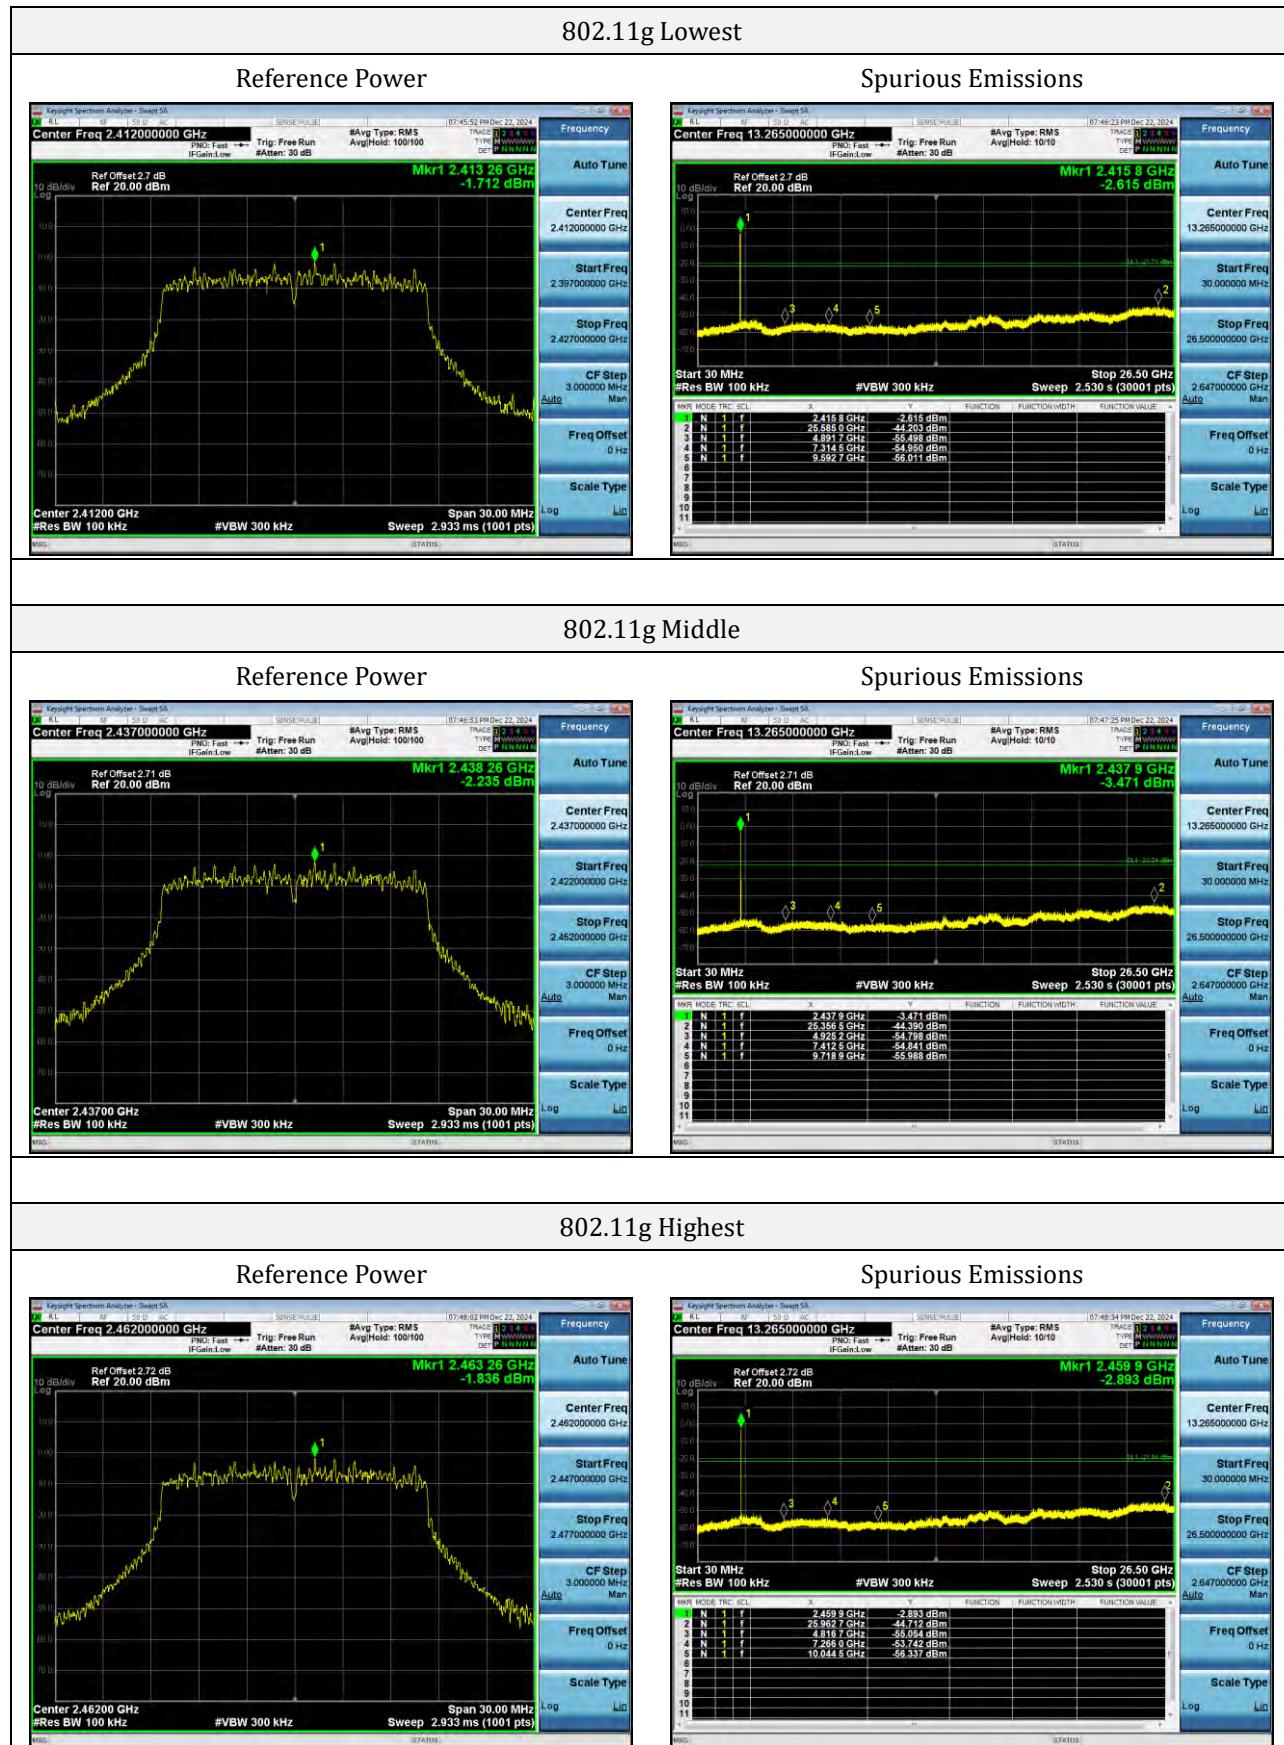

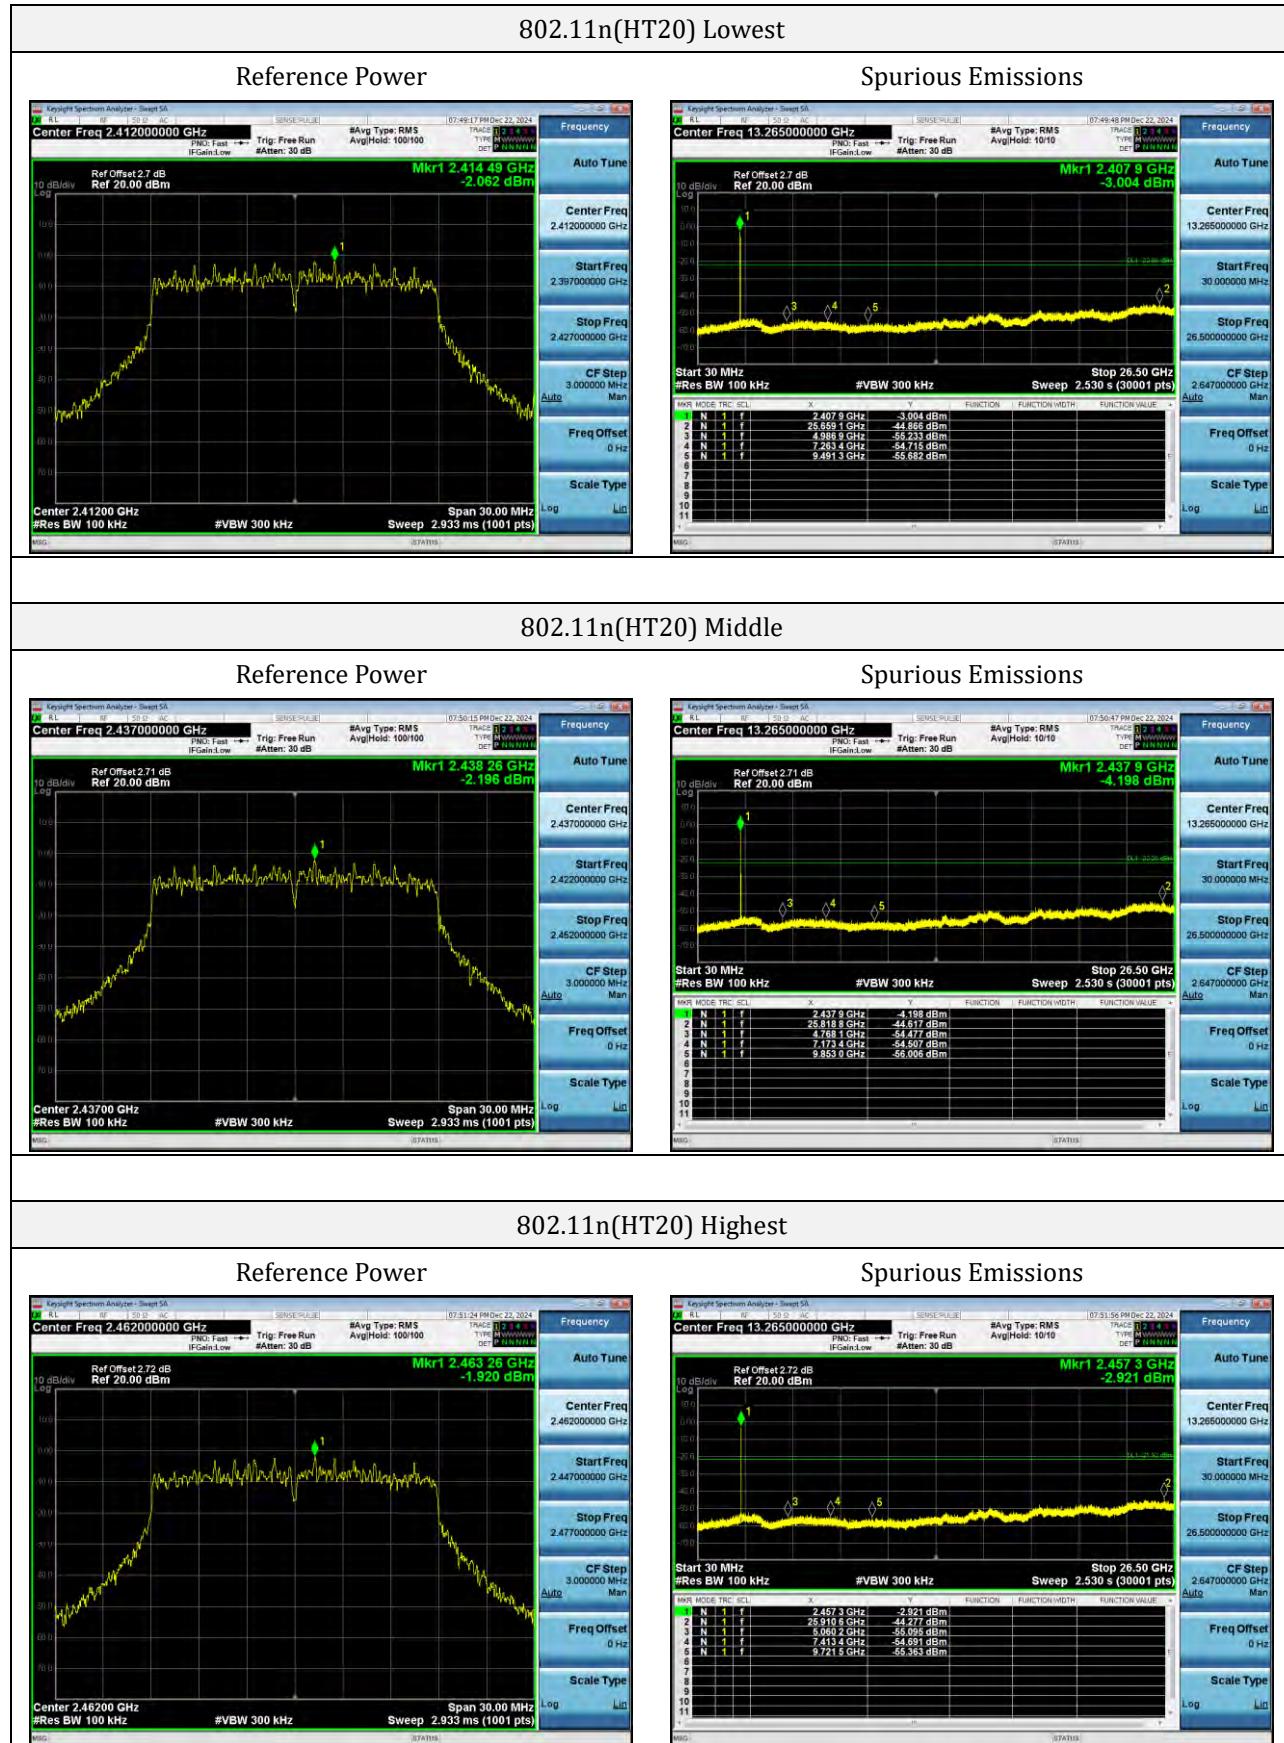

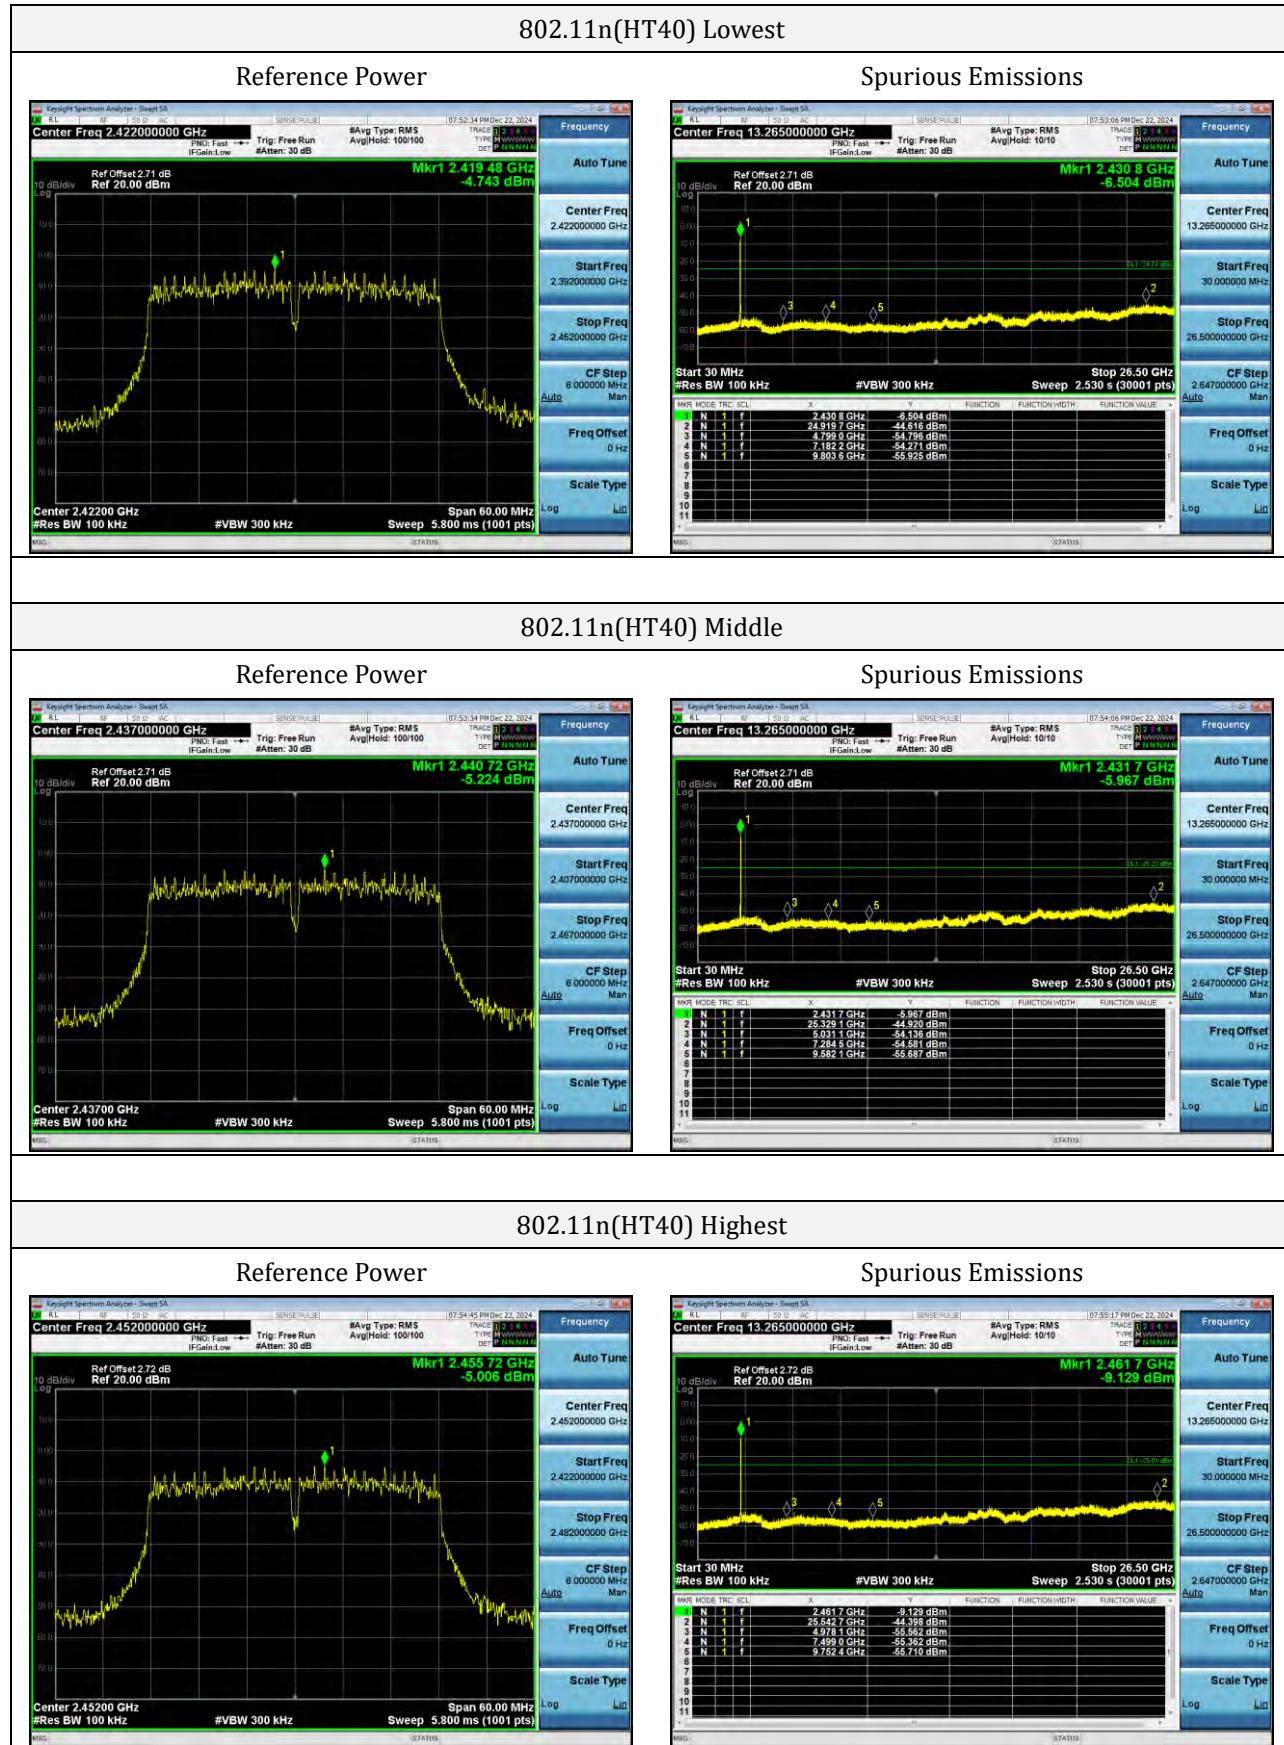

***** END OF REPORT *****