

**CFR 47 FCC PART 15 SUBPART E**

**TEST REPORT**

*For*

**Smart Projector**

**MODEL NUMBER: A5 Pro, P1, P1 PRO, P1 Max, P2, P2 PRO, P2 Max, P3, P3 PRO, P3 Max, P5, P5 PRO, P5 Max, P6, P6 PRO, P6 Max, P7, P7 PRO, P7 Max, P8, P8 PRO, P8 Max, P9, P9 PRO, P9 Max, P10, P10 PRO, P10 Max, P11, P11 PRO, P11 Max, P12, P12 PRO, P12 Max, P20, P20 PRO, P20 Max, P30, P30 PRO, P30 Max, P60, P60 Pro, P60 Max, P100, P100 Pro, P100 Max. A10 PRO, N1, N1 PRO, N1 Max, N2, N2 PRO, N2 Max, N3, N3 PRO, N3 Max, N5, N5 PRO, N5 Max, N6, N6 PRO, N6 Max, N7, N7 PRO, N7 Max, N8, N8 PRO, N8 Max, N9, N9 PRO, N9 Max, N10, N10 PRO, N10 Max, N11, N11 PRO, N11 Max, N12, N12 PRO, N12 Max, N20, N20 PRO, N20 Max, N30, N30 PRO, N30 Max, N60, N60 Pro, N60 Max, N100, N100 Pro, A10, PDA10B**

**REPORT NUMBER: E04A25041547F00304**

**ISSUE DATE: June 28, 2025**

**FCC ID: 2BM4Z-A5PRO**

*Prepared for*

**Shenzhen Dongying Optoelectronics Co., Ltd.**

**3rd Floor, Building 2, No. 42, Di Tang Road, Shajing Street, Shasan Community, Baoan District, Shenzhen Guangdong Province, China**

*Prepared by*

**Guangdong Global Testing Technology Co., Ltd.**

**Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park, Dongguan city, Guangdong, People's Republic of China, 523808**

**This report is based on a single evaluation of the submitted sample(s) of the above mentioned product, it does not imply an assessment of the production of the products.**

**This report shall not be reproduced, except in full, without the written approval of  
Guangdong Global Testing Technology Co., Ltd.**

## Revision History

Rev.	Issue Date	Revisions	Revised By
V0	June 28, 2025	Initial Issue	

### Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
ON TIME AND DUTY CYCLE	ANSI C63.10-2013, Clause 12.2	None; for reporting purposes only.	Pass
6dB AND 26dB EMISSION BANDWIDTH	KDB 789033 D02 v02r01 Section C.1	FCC Part 15.407 (a)(2)(5)	Pass
CONDUCTED OUTPUT POWER	KDB 789033 D02 v02r01 Section E.3.a (Method PM)	FCC Part 15.407 (a)(1)(2)(3)	Pass
POWER SPECTRAL DENSITY	KDB 789033 D02 v02r01 Section F	FCC Part 15.407 (a)(1)(2)(3)	Pass
AC POWER LINE CONDUCTION EMISSION	ANSI C63.10-2013, Clause 6.2.	FCC 15.207, RSS-GEN Clause 8.8	Pass
RADIATED EMISSIONS AND BAND EDGE MEASUREMENT	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	FCC Part 15.407 (b)(1)(2)(3)(4)(6), FCC Part 15.209/205	Pass
FREQUENCY STABILITY		FCC 15.407 (g)	Pass
DYNAMIC FREQUENCY SELECTION (SLAVE)	KDB 905462 D03 Client Without DFS New Rules v01r02	FCC Part 15.407 (h)	N/A
DYNAMIC FREQUENCY SELECTION (MASTER)	KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02	FCC Part 15.407 (h)	Pass
ANTENNA REQUIREMENT	N/A	FCC Part 15.203, FCC Part 15.407(a)(1) (2)	Pass

Note:

1. N/A: In this whole report not applicable.

\*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART E> when <Accuracy Method> decision rule is applied.

## CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>5</b>
<b>2. TEST METHODOLOGY.....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY .....</i>	<i>8</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>9</i>
5.2. <i>CHANNEL LIST .....</i>	<i>11</i>
5.3. <i>MAXIMUM CONDUCTED POWER.....</i>	<i>12</i>
5.4. <i>THE WORSE CASE POWER SETTING PARAMETER .....</i>	<i>13</i>
5.5. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>15</i>
5.6. <i>SUPPORT UNITS FOR SYSTEM TEST.....</i>	<i>16</i>
5.7. <i>SETUP DIAGRAM .....</i>	<i>16</i>
<b>6. MEASURING EQUIPMENT AND SOFTWARE USED.....</b>	<b>17</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>19</b>
7.1. <i>ON TIME AND DUTY CYCLE .....</i>	<i>19</i>
7.2. <i>6dB AND 26dB EMISSION BANDWIDTH.....</i>	<i>20</i>
7.3. <i>CONDUCTED OUTPUT POWER.....</i>	<i>22</i>
7.4. <i>POWER SPECTRAL DENSITY .....</i>	<i>24</i>
7.5. <i>FREQUENCY STABILITY.....</i>	<i>26</i>
7.6. <i>DYNAMIC FREQUENCY SELECTION (SLAVE) .....</i>	<i>28</i>
7.7. <i>DYNAMIC FREQUENCY SELECTION (MASTER) .....</i>	<i>31</i>
<b>8. RADIATED TEST RESULTS .....</b>	<b>35</b>
8.1. <i>RADIATED EMISSIONS AND BAND EDGE MEASUREMENT .....</i>	<i>40</i>
<b>9. AC POWER LINE CONDUCTION EMISSION .....</b>	<b>66</b>
<b>10. ANTENNA REQUIREMENT .....</b>	<b>69</b>
<b>11. TEST DATA - Appendix D .....</b>	<b>70</b>

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Shenzhen Dongying Optoelectronics Co., Ltd.  
Address: 3rd Floor, Building 2, No. 42, Di Tang Road, Shajing Street, Shasan Community, Baoan District, Shenzhen Guangdong Province, China

### Manufacturer Information

Company Name: Shenzhen Dongying Optoelectronics Co., Ltd.  
Address: 3rd Floor, Building 2, No. 42, Di Tang Road, Shajing Street, Shasan Community, Baoan District, Shenzhen Guangdong Province, China

### EUT Information

Product Description: Smart Projector  
Model: A5 Pro, A10 PRO  
Series Model: P1, P1 PRO, P1 Max, P2, P2 PRO, P2 Max, P3, P3 PRO, P3 Max, P5, P5 PRO, P5 Max, P6, P6 PRO, P6 Max, P7, P7 PRO, P7 Max, P8, P8 PRO, P8 Max, P9, P9 PRO, P9 Max, P10, P10 PRO, P10 Max, P11, P11 PRO, P11 Max, P12, P12 PRO, P12 Max, P20, P20 PRO, P20 Max, P30, P30 PRO, P30 Max, P60, P60 Pro, P60 Max, P100, P100 Pro, P100 Max. N1, N1 PRO, N1 Max, N2, N2 PRO, N2 Max, N3, N3 PRO, N3 Max, N5, N5 PRO, N5 Max, N6, N6 PRO, N6 Max, N7, N7 PRO, N7 Max, N8, N8 PRO, N8 Max, N9, N9 PRO, N9 Max, N10, N10 PRO, N10 Max, N11, N11 PRO, N11 Max, N12, N12 PRO, N12 Max, N20, N20 PRO, N20 Max, N30, N30 PRO, N30 Max, N60, N60 Pro, N60 Max, N100, N100 Pro, A10, PDA10B  
Brand: N/A  
Sample Received Date: June 04, 2025  
Sample Status: Normal  
Sample ID: A25041547 003  
Date of Tested: June 04, 2025 to June 23, 2025

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART E	Pass

Prepared By:

*Poal Chen*

\_\_\_\_\_  
Poal Chen

Project Engineer

Checked By:

*Alan He*

\_\_\_\_\_  
Alan He

Laboratory Leader

Approved By:

*Shawn Wen*

\_\_\_\_\_  
Shawn Wen  
Laboratory Manager



## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART E

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 6947.01)</b> Guangdong Global Testing Technology Co., Ltd. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1343)</b> Guangdong Global Testing Technology Co., Ltd. has been recognized to perform compliance testing on equipment subject to Supplier's Declaration of Conformity (SDoC) and Certification rules</p> <p><b>ISED (Company No.: 30714)</b> Guangdong Global Testing Technology Co., Ltd. has been registered and fully described in a report filed with ISED. The Company Number is 30714 and the test lab Conformity Assessment Body Identifier (CABID) is CN0148.</p>
---------------------------	--

Note: All tests measurement facilities use to collect the measurement data are located at  
Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park, Dongguan city,  
Guangdong, People's Republic of China, 523808

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Items	k	Uncertainty
Emission Bandwidth	1.96	±9.0 PPM
Conduct Output Power	1.96	± 1.12 dB
Power Spectral Density	1.96	± 2.1 dB
Conducted Spurious Emission	1.96	9 kHz-30 MHz: ± 0.95 dB 30 MHz-1 GHz: ± 1.5 dB 1GHz-12.75GHz: ± 1.8 dB 12.75 GHz-26.5 GHz: ± 2.1dB 26.5 GHz-40 GHz: ± 2.6 dB
Frequency Stability	1.96	±9.0 PPM

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

Test Item	Frequency Range	k	U(dB)
Conducted emissions from the AC mains power ports (AMN)	150 kHz ~ 30 MHz	2	3.37
Radiated emissions	9 kHz ~ 30 MHz	2	4.16
Radiated emissions	30 MHz ~ 1 GHz	2	3.79
Radiated emissions	1 GHz ~ 18 GHz	2	5.62
Radiated emissions	18 GHz ~ 40 GHz	2	5.54

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	Smart Projector	
Model	A5 Pro, A10 PRO	
Series Model	P1, P1 PRO, P1 Max, P2, P2 PRO, P2 Max, P3, P3 PRO, P3 Max, P5, P5 PRO, P5 Max, P6, P6 PRO, P6 Max, P7, P7 PRO, P7 Max, P8, P8 PRO, P8 Max, P9, P9 PRO, P9 Max, P10, P10 PRO, P10 Max, P11, P11 PRO, P11 Max, P12, P12 PRO, P12 Max, P20, P20 PRO, P20 Max, P30, P30 PRO, P30 Max, P60, P60 Pro, P60 Max, P100, P100 Pro, P100 Max, N1, N1 PRO, N1 Max, N2, N2 PRO, N2 Max, N3, N3 PRO, N3 Max, N5, N5 PRO, N5 Max, N6, N6 PRO, N6 Max, N7, N7 PRO, N7 Max, N8, N8 PRO, N8 Max, N9, N9 PRO, N9 Max, N10, N10 PRO, N10 Max, N11, N11 PRO, N11 Max, N12, N12 PRO, N12 Max, N20, N20 PRO, N20 Max, N30, N30 PRO, N30 Max, N60, N60 Pro, N60 Max, N100, N100 Pro, A10, PDA10B	
Model Difference	The differences between A5 Pro and A10 PRO are as follows: (1) The appearance of the stands is different. The stand of A5 Pro has a speaker. (2) The parameters of the speakers are not the same. (3) The positions of the buttons are not the same.	
Hardware Version	V1.0	
Software Version	V1.0	
Ratings	100-240V~; 50/60Hz, 1.0A	
Power Supply	AC	120VAC/60Hz

Frequency Band:	5150 MHz to 5250 MHz (U-NII-1) 5250 MHz to 5350 MHz (U-NII-2A) 5470 MHz to 5725 MHz (U-NII-2C) 5725 MHz to 5850 MHz (U-NII-3)
Frequency Range:	5180 MHz to 5240 MHz 5260 MHz to 5320 MHz 5500 MHz to 5700 MHz 5745 MHz to 5825 MHz
Support Standards:	IEEE 802.11a/n/ac/ax
TPC Function:	Support
DFS Operational mode:	Master
Type of Modulation:	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Channel Spacing:	IEEE 802.11a/n HT20/ac VHT20/ax HE20: 20 MHz IEEE 802.11n HT40/ac VHT40/ax HE40: 40 MHz
Data Rate:	IEEE 802.11a: Up to 54 Mbps IEEE 802.11n HT20: Up to MCS15

	IEEE 802.11n HT40: Up to MCS15 IEEE 802.11ac VHT20: Up to MCS9 IEEE 802.11ac VHT40: Up to MCS9 IEEE 802.11ax HE20: Up to MCS11 IEEE 802.11ax HE40: Up to MCS11
Number of Channels:	5150 MHz to 5250 MHz: 4 for IEEE 802.11a/n HT20/ac VHT20/ax HE20 2 for IEEE 802.11n HT40/ac VHT40/ax HE40 5250 MHz to 5350 MHz: 4 for IEEE 802.11a/n HT20/ac VHT20/ax HE20 2 for IEEE 802.11n HT40/ac VHT40/ax HE40 5725 MHz to 5850 MHz: 5 for IEEE 802.11a/n HT20/ac VHT20/ax HE20 2 for IEEE 802.11n HT40/ac VHT40/ax HE40
Maximum conducted output power: (U-NII-1)	U-NII-1 IEEE 802.11a: 12.94 dBm IEEE 802.11n HT20: 12.11 dBm IEEE 802.11n HT40: 12.12 dBm IEEE 802.11ac VHT20: 12.11 dBm IEEE 802.11ac VHT40: 12.05 dBm IEEE 802.11ax HE20: 12.06 dBm IEEE 802.11ax HE40: 12.08 dBm U-NII-2A IEEE 802.11a: 13.06 dBm IEEE 802.11n HT20: 12.24 dBm IEEE 802.11n HT40: 12.08 dBm IEEE 802.11ac VHT20: 12.25 dBm IEEE 802.11ac VHT40: 12.08 dBm IEEE 802.11ax HE20: 12.23 dBm IEEE 802.11ax HE40: 12.1 dBm U-NII-2C IEEE 802.11a: 12.83 dBm IEEE 802.11n HT20: 11.95 dBm IEEE 802.11n HT40: 12.13 dBm IEEE 802.11ac VHT20: 11.93 dBm IEEE 802.11ac VHT40: 12.1 dBm IEEE 802.11ax HE20: 11.95 dBm IEEE 802.11ax HE40: 12.19 dBm U-NII-3 IEEE 802.11a: 12.16 dBm IEEE 802.11n HT20: 12.28 dBm IEEE 802.11n HT40: 11.96 dBm IEEE 802.11ac VHT20: 12.22 dBm IEEE 802.11ac VHT40: 11.97 dBm IEEE 802.11ax HE20: 12.22 dBm IEEE 802.11ax HE40: 11.91 dBm
Antenna Type:	Internal antenna
Antenna Gain:	3.27dBi
Normal Test Voltage:	120VAC/60Hz
EUT Test software:	SecureCRT.exe
Note:	The Antenna Gain was provided by customer, and this information may affect the validity of the results, customer should be responsible for this.

## 5.2. CHANNEL LIST

U-NII-1 (For Bandwidth = 20 MHz)		U-NII-1 (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220		
48	5240		

U-NII-2A (For Bandwidth = 20 MHz)		U-NII-2A (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270
56	5280	62	5310
60	5300		
64	5320		

U-NII-2C (For Bandwidth = 20 MHz)		U-NII-2C (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510
104	5520	110	5550
108	5540	118	5590
112	5560	126	5630
116	5580	134	5670
120	5600	142	5710
124	5620		
128	5640		
132	5660		
136	5680		
140	5700		
144	5720		

U-NII-3 (For Bandwidth=20MHz)		U-NII-3 (For Bandwidth=40MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755
153	5765	159	5795
157	5785		
161	5805		
165	5825		

### 5.3. MAXIMUM CONDUCTED POWER

#### U-NII-1 BAND

IEEE Std. 802.11	Frequency (MHz)	Maximum Conducted Power (dBm)	Max EIRP (dBm)
a	5150 ~ 5250	12.94	/
n HT20		12.11	/
n HT40		12.12	/
ac VHT20		12.11	/
ac VHT40		12.05	/
ax HE20		12.06	/
ax HE40		12.08	/

#### U-NII-2A BAND

IEEE Std. 802.11	Frequency (MHz)	Maximum Conducted Power (dBm)	Max EIRP (dBm)
a	5250 ~ 5350	13.06	/
n HT20		12.24	/
n HT40		12.08	/
ac VHT20		12.25	/
ac VHT40		12.08	/
ax HE20		12.23	/
ax HE40		12.1	/

#### U-NII-2C BAND

IEEE Std. 802.11	Frequency (MHz)	Maximum Conducted Power (dBm)	Max EIRP (dBm)
a	5470 ~ 5725	12.83	/
n HT20		11.95	/
n HT40		12.13	/
ac VHT20		11.93	/
ac VHT40		12.1	/
ax HE20		11.95	/
ax HE40		12.19	/

#### U-NII-3 BAND

IEEE Std. 802.11	Frequency (MHz)	Maximum Conducted Power (dBm)	Max EIRP (dBm)
a	5725 ~ 5850	12.16	/
n HT20		12.28	/
n HT40		11.96	/
ac VHT20		12.22	/
ac VHT40		11.97	/
ax HE20		12.22	/
ax HE40		11.91	/

## 5.4. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter		
Test Software	SecureCRT.exe	

U-NII-1

Mode	Rate	Channel	Soft set value
			ANT 1
11a	6M	36	16
		40	16
		48	16
11n HT20	MCS0	36	14
		40	14
		48	14
11n HT40	MCS0	38	14
		46	14
11ac VHT20	MCS0	36	14
		40	14
		48	14
11ac VHT40	MCS0	38	14
		46	14
11ax HE20	MCS0	36	14
		40	14
		48	14
11ax HE40	MCS0	38	14
		46	14

U-NII-2A

Mode	Rate	Channel	Soft set value
			ANT 1
11a	6M	52	16
		56	16
		64	16
11n HT20	MCS0	52	14
		56	14
		64	14
11n HT40	MCS0	54	14
		62	14
11ac VHT20	MCS0	52	14
		56	14
		64	14
11ac VHT40	MCS0	54	14
		62	14
11ax HE20	MCS0	52	14
		56	14
		64	14
11ax HE40	MCS0	54	14
		62	14

## U-NII-2C

Mode	Rate	Channel	Soft set value	
			ANT 1	
11a	6M	100	16	
		120	15	
		140	15	
11n HT20	MCS0	100	14	
		120	17	
		140	17	
11n HT40	MCS0	102	14	
		118	17	
		134	17	
11ac VHT20	MCS0	100	14	
		120	17	
		140	17	
11ac VHT40	MCS0	102	14	
		118	17	
		134	17	
11ax HE20	MCS0	100	14	
		120	17	
		140	17	
11ax HE40	MCS0	102	14	
		118	17	
		134	17	

## U-NII-3

Mode	Rate	Channel	Soft set value	
			ANT1	
11a	6M	149	18	
		157	18	
		165	18	
11n HT20	MCS0	149	17	
		157	17	
		165	17	
11n HT40	MCS0	151	18	
		159	18	
		149	17	
11ac VHT20	MCS0	157	17	
		165	17	
		151	18	
11ac VHT40	MCS0	159	18	
		149	17	
		157	17	
11ax HE20	MCS0	165	17	
		151	18	
		159	18	
11ax HE40	MCS0	149	17	
		157	17	
		165	17	

## THE WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.4.

Worst case Data Rates declared by the customer:

802.11a 20 mode: 6 Mbps  
 802.11n HT20 mode: MCS24  
 802.11n HT40 mode: MCS24  
 802.11ac VHT20 mode: MCS0  
 802.11ac VHT40 mode: MCS0  
 802.11ax HE20 mode: MCS0  
 802.11ax HE40 mode: MCS0

### 5.5. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna No.	Frequency Band	Antenna Type	Max Antenna Gain (dBi)
1	5150-5850	Internal Antenna	3.27

IEE Std. 802.11	Transmit and Receive Mode	Description
802.11a	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
802.11n HT20	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
802.11n HT40	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
802.11ac VHT20	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
802.11ac VHT40	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
802.11ax HE20	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
8802.11ax HE40	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.

## 5.6. SUPPORT UNITS FOR SYSTEM TEST

The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	PC	Lenovo	B4650-D002	M90601U3	GTG Support

The following cables were used to form a representative test configuration during the tests.

Item	Type of cable	Shielded Type	Ferrite Core	Length
C-1	USB cable	Shielded	without ferrite	1.0 m

## 5.7. SETUP DIAGRAM

Radiated emissions:



## 6. MEASURING EQUIPMENT AND SOFTWARE USED

Test Equipment of Conducted RF					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSV40	102257	2024/09/14	2025/09/13
Spectrum Analyzer	KEYSIGHT	N9020A	MY51285127	2024/09/14	2025/09/13
EXG Analog Signal Generator	KEYSIGHT	N5173B	MY61253075	2024/09/14	2025/09/13
Vector Signal Generator	Rohde & Schwarz	SMM100A	101899	2024/09/14	2025/09/13
RF Control box	MWRF-test	MW100-RFCB	MW220926GTG	2024/09/14	2025/09/13
Wideband Radio Communication Tester	Rohde & Schwarz	CMW270	102792	2024/09/14	2025/09/13
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	103235	2024/09/14	2025/09/13
temperature humidity chamber	Espec	SH-241	SH-241-2014	2024/09/14	2025/09/13
RF Test Software	MWRF-test	MTS8310E (Ver. V2/0)	N/A	N/A	N/A

Test Equipment of Radiated emissions below 1GHz					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
3m Semi-anechoic Chamber	ETS	9m*6m*6m	Q2146	2022/08/30	2025/08/29
EMI Test Receiver	Rohde & Schwarz	ESCI3	101409	2024/09/14	2025/09/13
Spectrum Analyzer	KEYSIGHT	N9020A	MY51283932	2024/09/14	2025/09/13
Pre-Amplifier	HzEMC	HPA-9K0130	HYPA21001	2024/09/14	2025/09/13
Biconilog Antenna	Schwarzbeck	VULB 9168	01315	2022/10/10	2025/10/09
Biconilog Antenna	ETS	3142E	00243651	2025/02/22	2028/02/21
Loop Antenna	ETS	6502	00243668	2025/02/22	2028/02/21
Test Software	Farad	EZ-EMC (Ver.FA-03A2 RE)	N/A	N/A	N/A

Test Equipment of Radiated emissions above 1GHz					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
3m Semi-anechoic Chamber	ETS	9m*6m*6m	Q2149	2022/08/30	2025/08/29
Spectrum Analyzer	Rohde & Schwarz	FSV40	101413	2024/09/14	2025/09/13
Spectrum Analyzer	KEYSIGHT	N9020A	MY51283932	2024/09/14	2025/09/13
Pre-Amplifier	HzEMC	HPA-1G1850	HYPA21003	2024/09/14	2025/09/13
Horn antenna	ETS	3117	00246069	2025/02/22	2028/02/21
Pre-Amplifier	HzEMC	HPA-184057	HYPA21004	2024/09/14	2025/09/13

Horn antenna	ETS	3116C	00246265	2025/02/22	2028/02/21
Test Software	Farad	EZ-EMC (Ver.FA-03A2 RE+)	N/A	N/A	N/A

Test Equipment of Conducted emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Shielded Room	CHENG YU	8m*5m*4m	N/A	2022/10/29	2025/10/28
EMI Test Receiver	Rohde & Schwarz	ESR3	102647	2024/09/14	2025/09/13
LISN/AMN	Rohde & Schwarz	ENV216	102843	2024/09/14	2025/09/13
NNLK 8129 RC	Schwarzbeck	NNLK 8129 RC	5046	2024/09/14	2025/09/13
Test Software	Farad	EZ-EMC (Ver. EMC-con-3A1 1+)	N/A	N/A	N/A

## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE

#### LIMITS


None; for reporting purposes only.

#### TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.B.

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set  $RBW \geq EBW$  if possible; otherwise, set  $RBW$  to the largest available value. Set  $VBW \geq RBW$ . Set detector = peak or average. The zero-span measurement method shall not be used unless both  $RBW$  and  $VBW$  are  $> 50/T$ , where  $T$  is defined in II.B.1.a), and the number of sweep points across duration  $T$  exceeds 100. (For example, if  $VBW$  and/or  $RBW$  are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	53%
Atmosphere Pressure	101kPa		

#### TEST RESULTS

Please refer to section "Test Data" - Appendix D

## 7.2. 6DB AND 26DB EMISSION BANDWIDTH

### LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
26 dB Emission Bandwidth	For reporting purposes only.	5150 ~ 5250
26 dB Emission Bandwidth	For reporting purposes only.	5250 ~ 5350
26 dB Emission Bandwidth	For reporting purposes only.	5470 ~ 5725
6 dB Emission Bandwidth	The minimum 6 dB emission bandwidth shall be 500 kHz.	5725 ~ 5850

### TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.C1. for 26 dB Emission Bandwidth; section II.C2. for 6 dB Emission Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Emission Bandwidth: RBW=100 kHz For 26 dB Emission bandwidth: approximately 1 % of the EBW.
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 26 dB Bandwidth: $> 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6/26 dB relative to the maximum level measured in the fundamental emission.

### **Calculation for 26 dB Bandwidth of UNII-2C Straddle Channel:**

For Example: Fundamental frequency: 5720 MHz

26 dB BW: 20.00 MHz

FL: 5710.16 MHz

FH: 5730.16 MHz

Turning Frequency: 5725 MHz

26 dB Bandwidth of UNII-2C Band Portion =  $5725 - 5710.16 = 14.84$  MHz

### **Calculation for 6dB Bandwidth of UNII-3 Straddle Channel:**

For Example: Fundamental frequency: 5720 MHz

6 dB BW: 16.44 MHz


FL: 5711.76 MHz

FH: 5728.2 MHz

Turning Frequency: 5725 MHz

6 dB Bandwidth of UNII-3 band Portion =  $5728.2 - 5725 = 3.2$  MHz

### **TEST SETUP**



### **TEST ENVIRONMENT**

Temperature	25.2°C	Relative Humidity	53%
Atmosphere Pressure	101kPa		

### **TEST RESULTS**

Please refer to section "Test Data" - Appendix D

### 7.3. CONDUCTED OUTPUT POWER

#### LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	<input type="checkbox"/> Outdoor Access Point: 1 W (30 dBm) <input checked="" type="checkbox"/> Indoor Access Point: 1 W (30 dBm) <input type="checkbox"/> Fixed Point-To-Point Access Points: 1 W (30 dBm) <input type="checkbox"/> Client Devices: 250 mW (24 dBm)	5150 ~ 5250
	Shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.	5250 ~ 5350 5470 ~ 5725
	Shall not exceed 1 Watt (30 dBm).	5725 ~ 5850

#### Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.E.

#### **Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep):**

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW  $\geq$  3 MHz.
- (iv) Number of points in sweep  $\geq 2 \times$  span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle  $< 98\%$ , use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98\%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- (viii) Trace average at least 100 traces in power averaging (rms) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

#### **Method PM (Measurement using an RF average power meter):**

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
  - a. The EUT is configured to transmit continuously or to transmit with a constant duty cycle.

b. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.

c. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

(ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.

(iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.


(iv) Adjust the measurement in dBm by adding  $10 \log (1/x)$  where x is the duty cycle (e.g.,  $10 \log (1/0.25)$  if the duty cycle is 25 %).

**Method PM-G (Measurement using a gated RF average power meter):**

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power was measured using spectrum analyzer.

**TEST SETUP**



**TEST ENVIRONMENT**

Temperature	25.2°C	Relative Humidity	53%
Atmosphere Pressure	101kPa		

**TEST RESULTS**

Please refer to section "Test Data" - Appendix D

## 7.4. POWER SPECTRAL DENSITY

### LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	<input type="checkbox"/> Outdoor Access Point: 17 dBm/MHz <input checked="" type="checkbox"/> Indoor Access Point: 17 dBm/MHz <input type="checkbox"/> Fixed Point-To-Point Access Points: 17 dBm/MHz <input type="checkbox"/> Client Devices: 11 dBm/MHz	5150 ~ 5250
	11 dBm/MHz	5250 ~ 5350 5470 ~ 5725
	30 dBm/500kHz	5725 ~ 5850

### Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.F.

Connect the EUT to the spectrum analyser and use the following settings:

For U-NII-1, U-NII-2A and U-NII-2C band:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	1 MHz
VBW	$\geq 3 \times$ RBW
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto


For U-NII-3:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	500 kHz
VBW	$\geq 3 \times$ RBW
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

Allow trace to fully stabilize and Use the peak search function on the instrument to find the peak of the spectrum and record its value.

Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the peak of the spectrum, the result is the Maximum PSD over 1 MHz / 500 kHz reference bandwidth.

### TEST SETUP



### TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	53%
Atmosphere Pressure	101kPa		

### TEST RESULTS

Please refer to section "Test Data" - Appendix D

## 7.5. FREQUENCY STABILITY

### LIMITS

The frequency of the carrier signal shall be maintained within band of operation.

### TEST PROCEDURE

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between 0 °C ~ 40 °C (declared by customer).
2. The temperature was incremented by 10 °C intervals and the unit allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	10 kHz
VBW	$\geq 3 \times$ RBW
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

4. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup, and at 2 minutes, 5minutes, and 10 minutes after the EUT is energized.

5. Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

### TEST SETUP

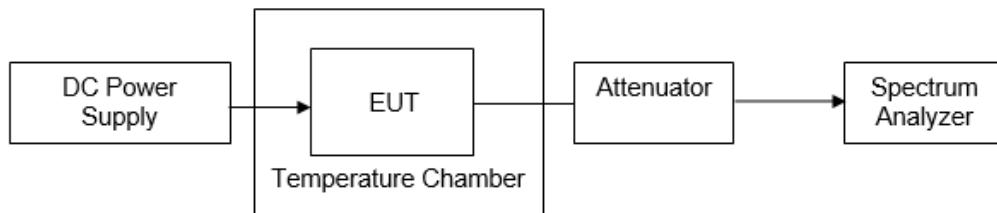

### TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	53%
Atmosphere Pressure	101kPa		

**TEST RESULTS**

Please refer to section "Test Data" - Appendix D

## 7.6. DYNAMIC FREQUENCY SELECTION (SLAVE)

### LIMITS

#### (1) DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.  
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.  
 Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

#### (2) DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.  
 Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.  
 Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

## APPLICABILITY OF DFS REQUIREMENTS

A U-NII network will employ a DFS function to detect signals from radar systems and to avoid co-channel operation with these systems. This applies to the 5250-5350 MHz and/or 5470-5725 MHz bands.

Within the context of the operation of the DFS function, a U-NII device will operate in either Master Mode or Client Mode. U-NII devices operating in Client Mode can only operate in a network controlled by a U-NII device operating in Master Mode.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	<input type="checkbox"/> Master	<input checked="" type="checkbox"/> Client Without Radar Detection	<input type="checkbox"/> Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	<input type="checkbox"/> Master Device or Client with Radar Detection	<input checked="" type="checkbox"/> Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	<input type="checkbox"/> Master Device or Client with Radar Detection	<input checked="" type="checkbox"/> Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

## PARAMETERS OF RADAR TEST WAVEFORMS


This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A	Roundup $\left\lceil \left( \frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\rceil$	60%	30
		Test B			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. Test aggregate is average of the percentage of successful detections of short pulse radar types 1-4.

## TEST SETUP

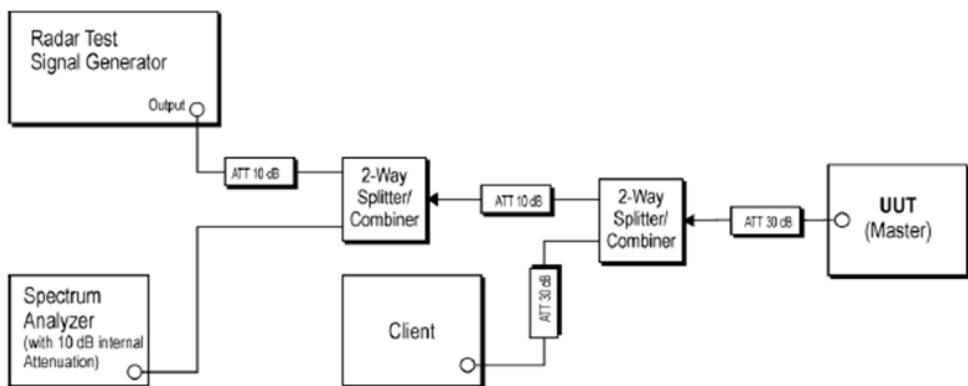

## TEST ENVIRONMENT

Temperature	/	Relative Humidity	/
Atmosphere Pressure	/		

## TEST RESULTS

N/A.

## 7.7. DYNAMIC FREQUENCY SELECTION (MASTER)

### LIMITS

#### (3) DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.  
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.  
 Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

#### (4) DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.  
 Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.  
 Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

## APPLICABILITY OF DFS REQUIREMENTS

A U-NII network will employ a DFS function to detect signals from radar systems and to avoid co-channel operation with these systems. This applies to the 5250-5350 MHz and/or 5470-5725 MHz bands.

Within the context of the operation of the DFS function, a U-NII device will operate in either Master Mode or Client Mode. U-NII devices operating in Client Mode can only operate in a network controlled by a U-NII device operating in Master Mode.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	<input checked="" type="checkbox"/> Master	<input type="checkbox"/> Client Without Radar Detection	<input type="checkbox"/> Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	<input checked="" type="checkbox"/> Master Device or Client with Radar Detection	<input type="checkbox"/> Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	<input checked="" type="checkbox"/> Master Device or Client with Radar Detection	<input type="checkbox"/> Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

## PARAMETERS OF RADAR TEST WAVEFORMS


This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A	Roundup $\left\lceil \left( \frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\rceil$	60%	30
		Test B			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. Test aggregate is average of the percentage of successful detections of short pulse radar types 1-4.

## TEST SETUP

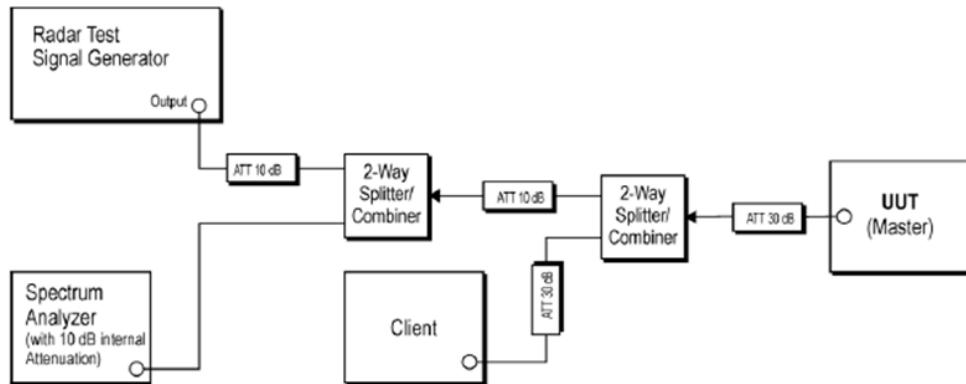

## TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	53%
Atmosphere Pressure	101kPa		

**TEST RESULTS**

Please refer to section "Test Data" - Appendix D

## 8. RADIATED TEST RESULTS

### LIMITS

Refer to CFR 47 FCC §15.205, §15.209 and §15.407 (b).

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

Limits of unwanted/undesirable emission out of the restricted bands refer to CFR 47 FCC §15.407 (b).

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1GHz)		
Frequency Range (MHz)	EIRP Limit	Field Strength Limit (dB <sub>u</sub> V/m) at 3 m
5150~5250 MHz	PK: -27 (dB <sub>m</sub> /MHz)	PK:68.2(dB <sub>u</sub> V/m)
5250~5350 MHz		
5470~5725 MHz		
5725~5850 MHz	PK: -27 (dB <sub>m</sub> /MHz) *1 PK: 10 (dB <sub>m</sub> /MHz) *2 PK: 15.6 (dB <sub>m</sub> /MHz) *3 PK: 27 (dB <sub>m</sub> /MHz) *4	PK: 68.2(dB <sub>u</sub> V/m) *1 PK: 105.2 (dB <sub>u</sub> V/m) *2 PK: 110.8(dB <sub>u</sub> V/m) *3 PK: 122.2 (dB <sub>u</sub> V/m) *4

Note:

\*1 beyond 75 MHz or more above of the band edge.

\*2 below the band edge increasing linearly to 10 dB<sub>m</sub>/MHz at 25 MHz above.

\*3 below the band edge increasing linearly to a level of 15.6 dB<sub>m</sub>/MHz at 5 MHz above.

\*4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dB<sub>m</sub>/MHz at the band edge.

## TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made

to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

8. measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, W dB, to the limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.


3. The EUT was placed on a turntable with 1.5 m above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.


6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.


X axis, Y axis, Z axis positions:

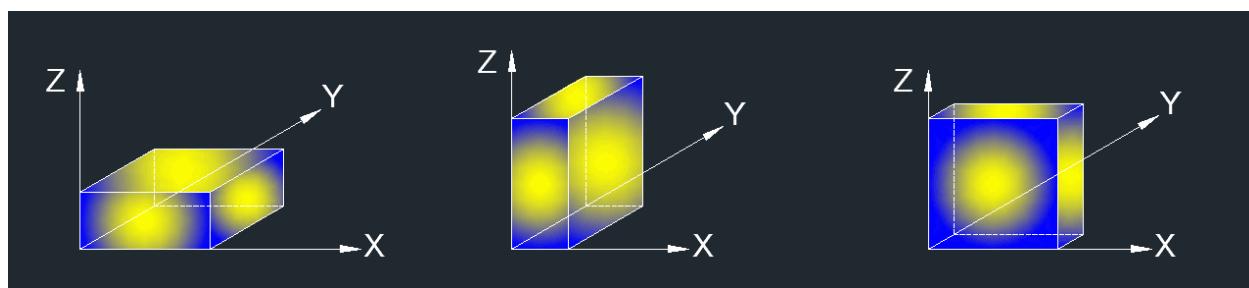

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

## TEST SETUP

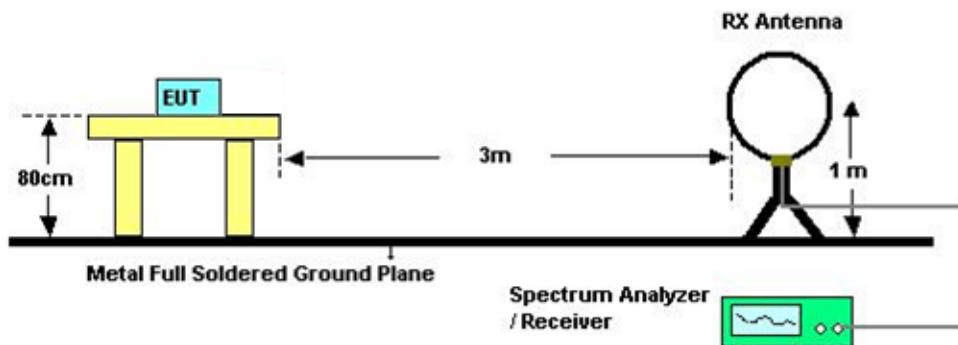

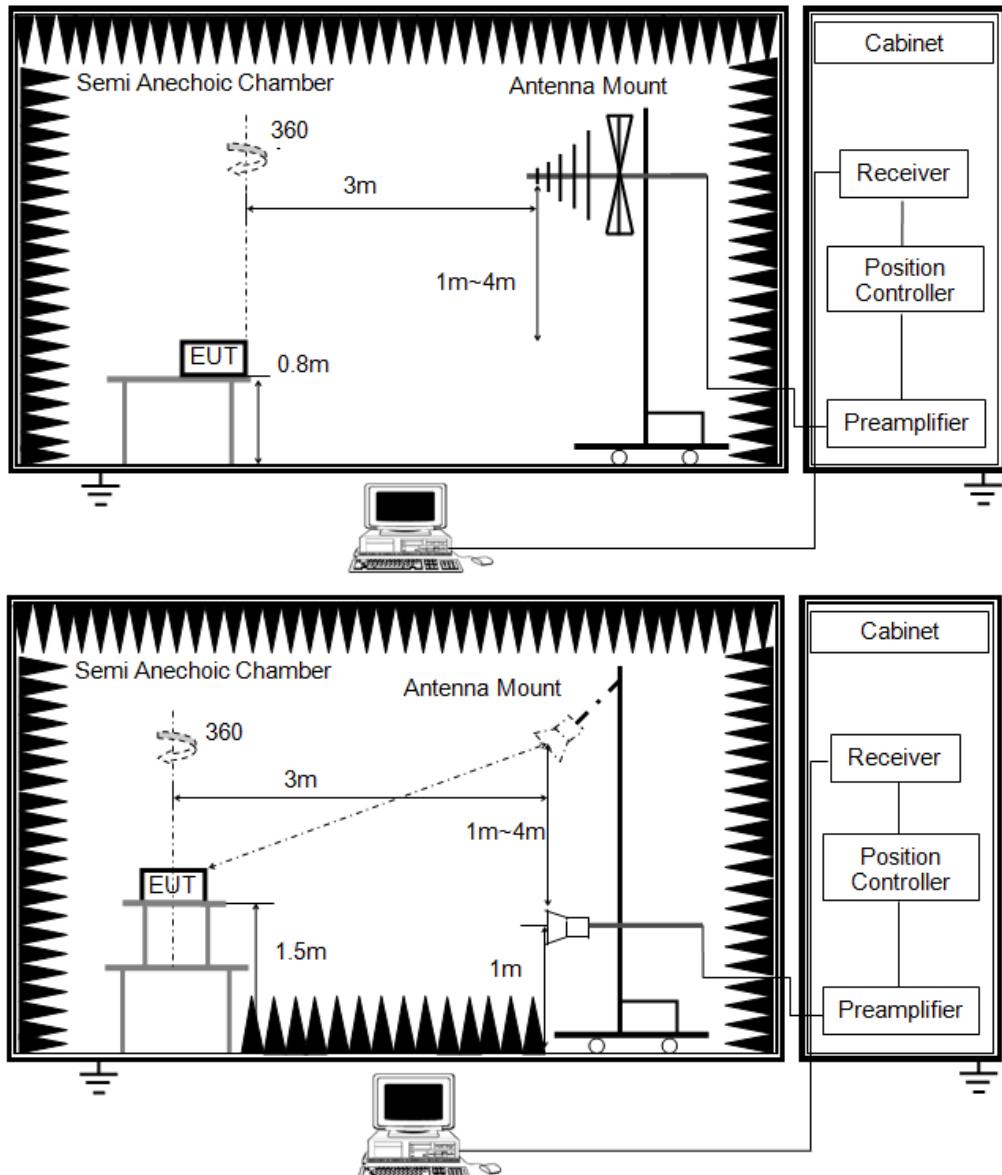

### TEST ENVIRONMENT

Temperature	22.3°C	Relative Humidity	53%
Atmosphere Pressure	101kPa		

### TEST RESULTS


## 8.1. RADIATED EMISSIONS AND BAND EDGE MEASUREMENT

Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)

All modes have been tested and the worst result as bellow:

Model: A5 Pro


Mode:	A-5260
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

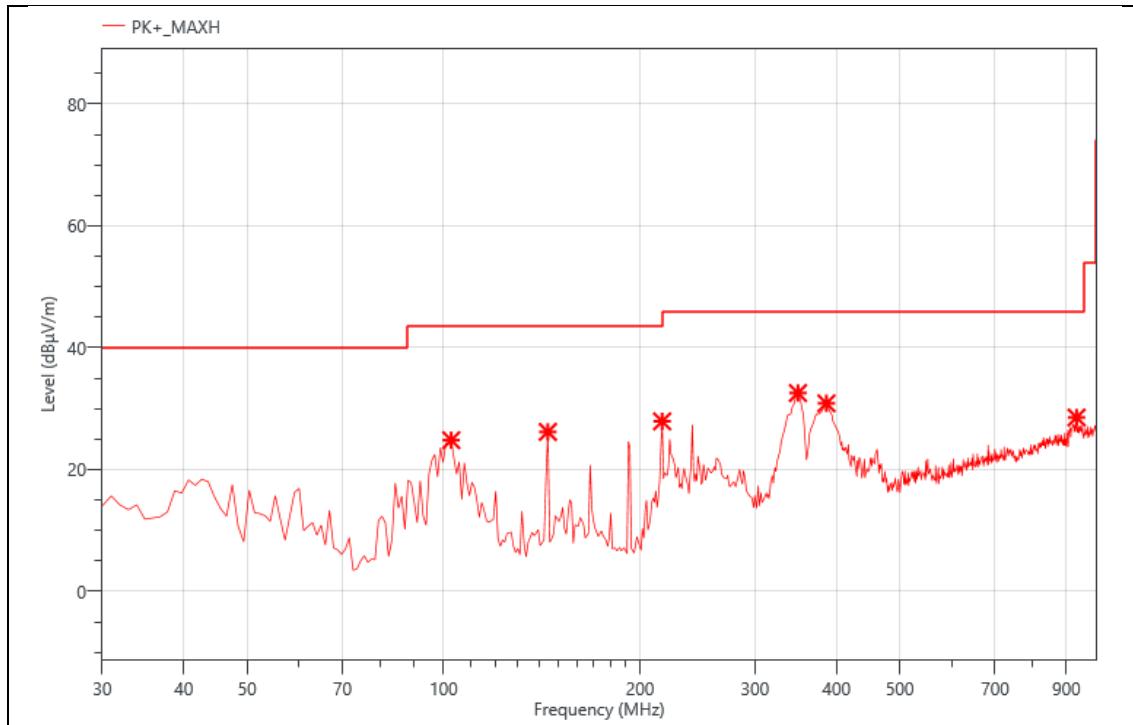

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	102.750	48.67	-23.84	24.83	43.50	18.67	PK+	H
2	144.460	49.14	-22.95	26.19	43.50	17.31	PK+	H
3	216.240	48.65	-20.73	27.92	46.00	18.08	PK+	H
4	349.130	48.83	-16.26	32.57	46.00	13.43	PK+	H
5	385.990	45.12	-14.24	30.88	46.00	15.12	PK+	H
6	933.070	30.72	-2.17	28.55	46.00	17.45	PK+	H

Mode:	A-5260
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

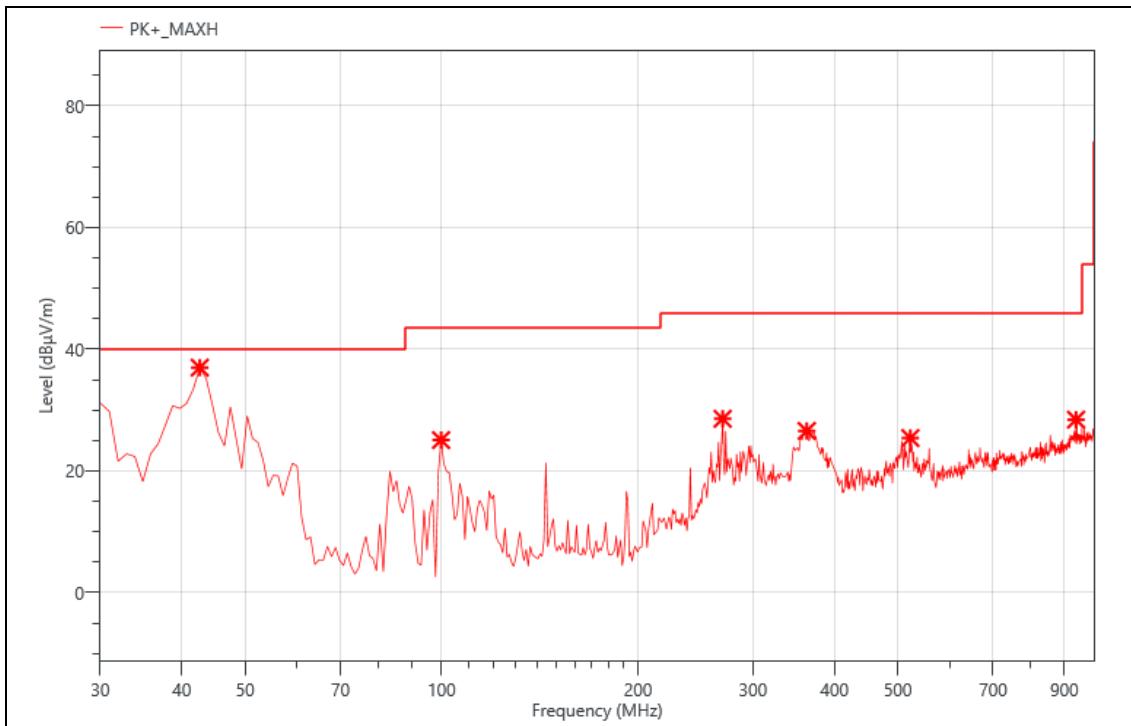


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.
1	42.610	58.47	-21.48	36.99	40.00	3.01	PK+	V
2	99.840	49.13	-24.05	25.08	43.50	18.42	PK+	V
3	269.590	47.03	-18.45	28.58	46.00	17.42	PK+	V
4	362.710	42.18	-15.6	26.58	46.00	19.42	PK+	V
5	522.760	36.18	-10.77	25.41	46.00	20.59	PK+	V
6	937.920	30.57	-2.13	28.44	46.00	17.56	PK+	V


## Model: A10 PRO

Mode:	A-5180
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/19
T/A/P	22.3°C/53%/101Kpa

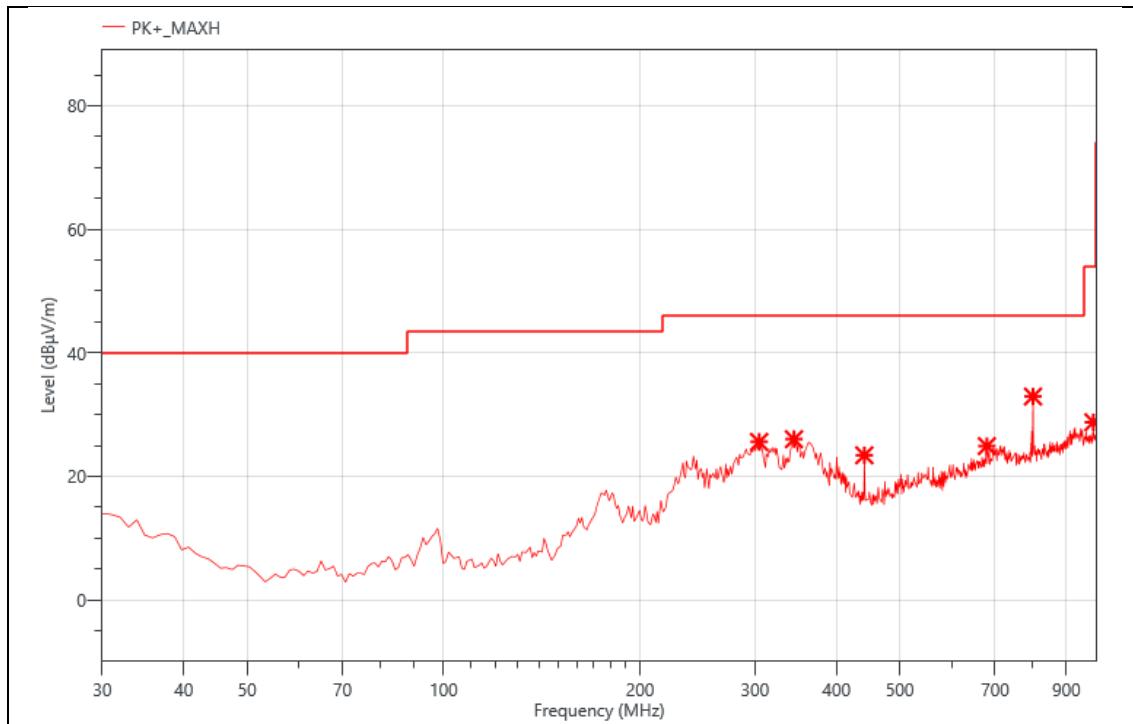**Critical\_Freqs**

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.
1	304.510	43.97	-18.39	25.58	46.00	20.42	PK+	H
2	344.280	42.50	-16.48	26.02	46.00	19.98	PK+	H
3	441.280	37.45	-14.05	23.40	46.00	22.60	PK+	H
4	679.900	32.11	-7.22	24.89	46.00	21.11	PK+	H
5	800.180	38.68	-5.76	32.92	46.00	13.08	PK+	H
6	990.300	31.31	-2.55	28.76	53.90	25.14	PK+	H

Mode:	A-5180
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/19
T/A/P	22.3°C/53%/101Kpa

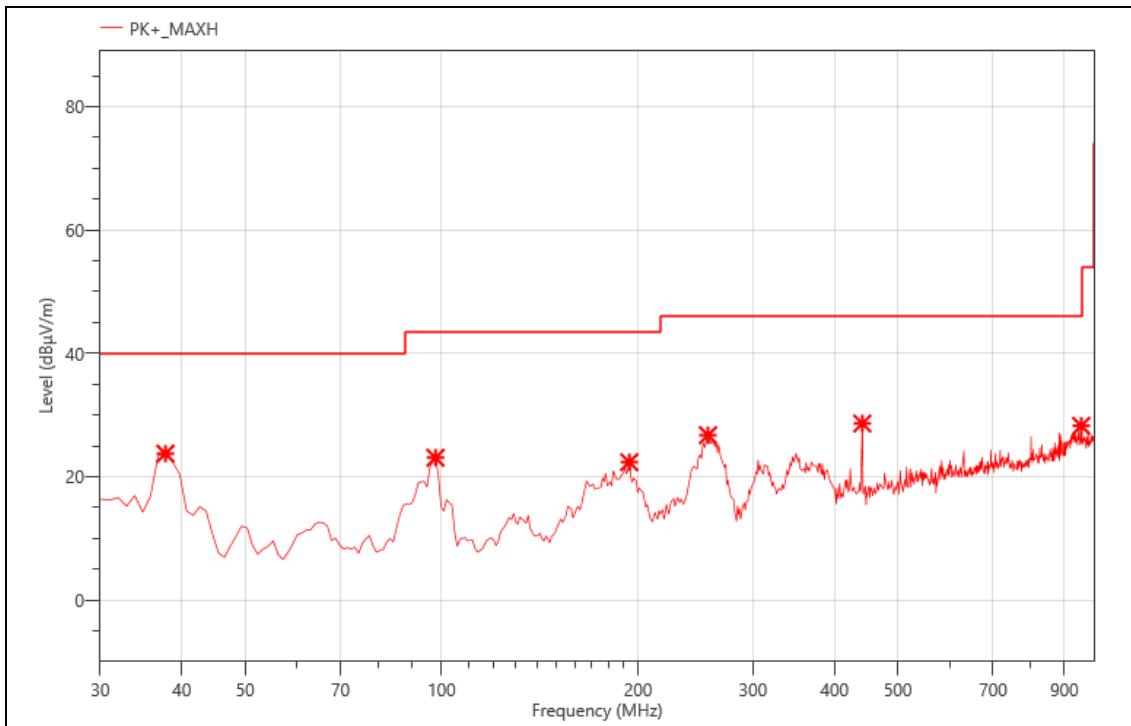

### Critical\_Freqs


No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.
1	37.760	42.59	-18.85	23.74	40.00	16.26	PK+	V
2	97.900	47.36	-24.29	23.07	43.50	20.43	PK+	V
3	193.930	44.84	-22.49	22.35	43.50	21.15	PK+	V
4	256.010	45.23	-18.5	26.73	46.00	19.27	PK+	V
5	441.280	42.67	-14.05	28.62	46.00	17.38	PK+	V
6	955.380	30.78	-2.53	28.25	46.00	17.75	PK+	V

## Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

All modes have been tested and the worst result as bellow:


Model: A5 Pro

Mode:	A-5260
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/18
T/A/P	22.3°C/53%/101Kpa

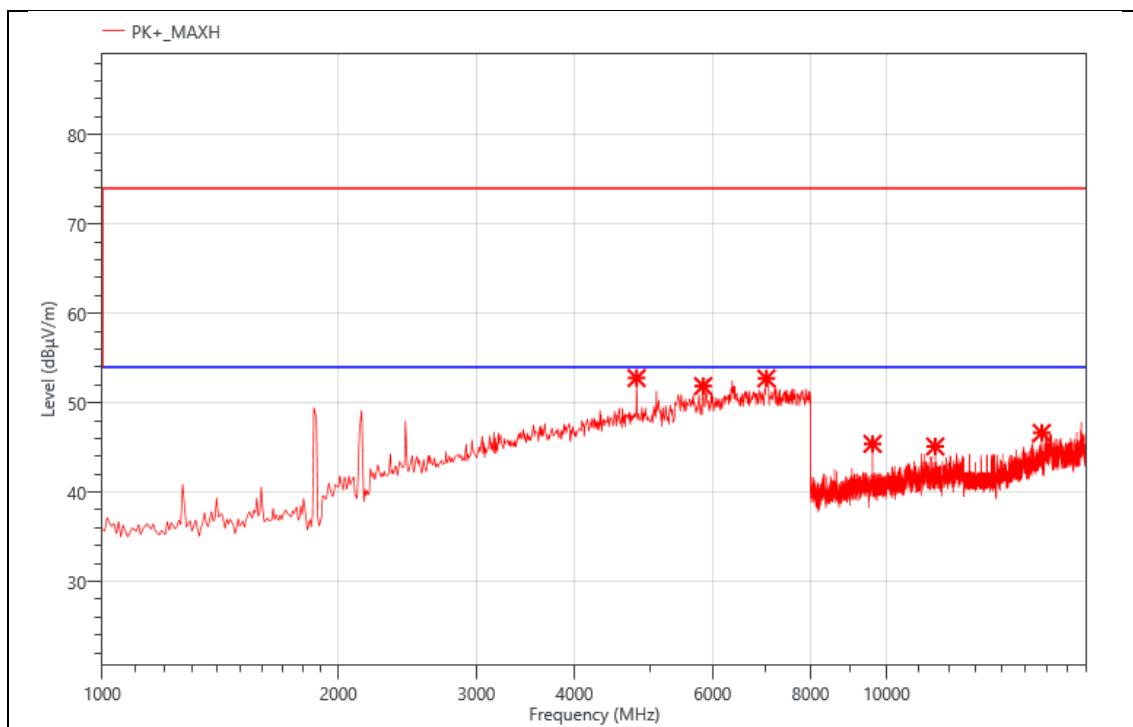**Critical\_Freqs**

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.
1	4801.000	54.94	-2.18	52.76	74.00	21.24	PK+	V
2	5837.000	52.96	-1.09	51.87	74.00	22.13	PK+	V
3	7027.000	43.30	9.42	52.72	74.00	21.28	PK+	V
4	9597.000	51.92	-6.53	45.39	74.00	28.61	PK+	V
5	11537.000	49.69	-4.58	45.11	74.00	28.89	PK+	V
6	15771.000	48.81	-2.18	46.63	74.00	27.37	PK+	V


Mode:	A-5260
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/18
T/A/P	22.3°C/53%/101Kpa

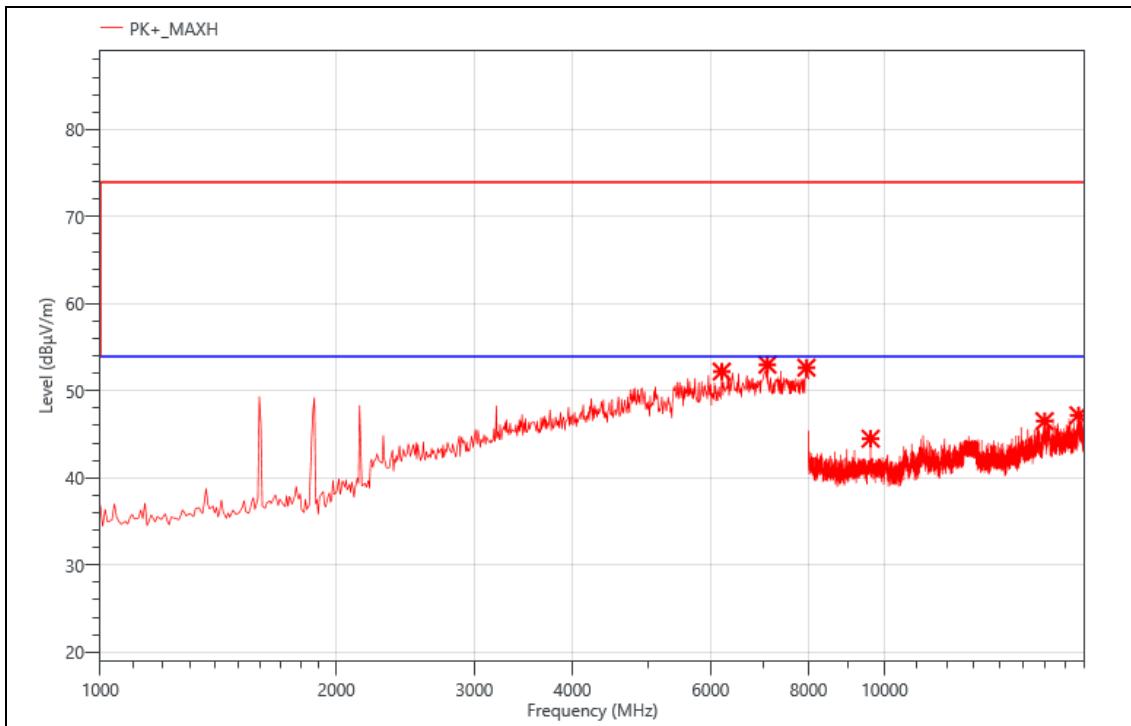

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.
1	6201.000	50.76	1.45	52.21	74.00	21.79	PK+	H
2	7090.000	43.40	9.59	52.99	74.00	21.01	PK+	H
3	7951.000	35.09	17.57	52.66	74.00	21.34	PK+	H
4	9598.000	51.04	-6.54	44.50	74.00	29.50	PK+	H
5	15998.000	48.35	-1.83	46.52	74.00	27.48	PK+	H
6	17673.000	47.58	-0.39	47.19	74.00	26.81	PK+	H


Mode:	A-5280
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/18
T/A/P	22.3°C/53%/101Kpa

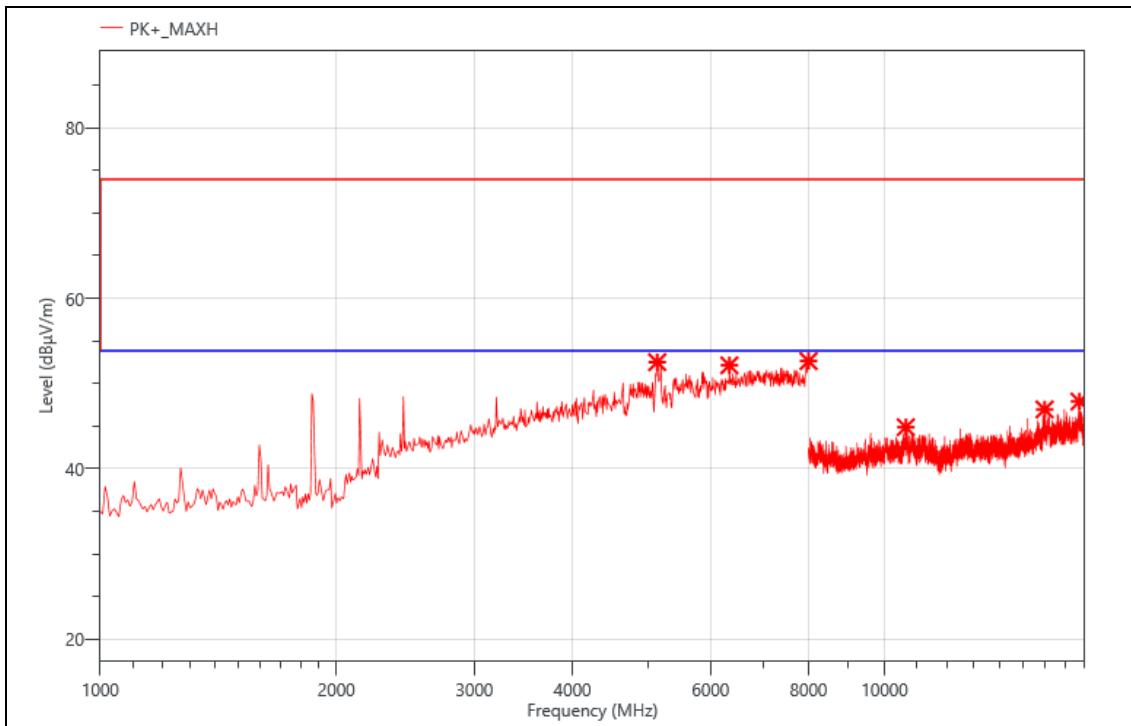

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.
1	5130.000	52.83	-0.33	52.50	74.00	21.50	PK+	V
2	6341.000	48.86	3.27	52.13	74.00	21.87	PK+	V
3	8000.000	36.21	16.42	52.63	74.00	21.37	PK+	V
4	10645.000	49.22	-4.35	44.87	74.00	29.13	PK+	V
5	15998.000	48.79	-1.83	46.96	74.00	27.04	PK+	V
6	17722.000	48.55	-0.67	47.88	74.00	26.12	PK+	V

Mode:	A-5280
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/18
T/A/P	22.3°C/53%/101Kpa

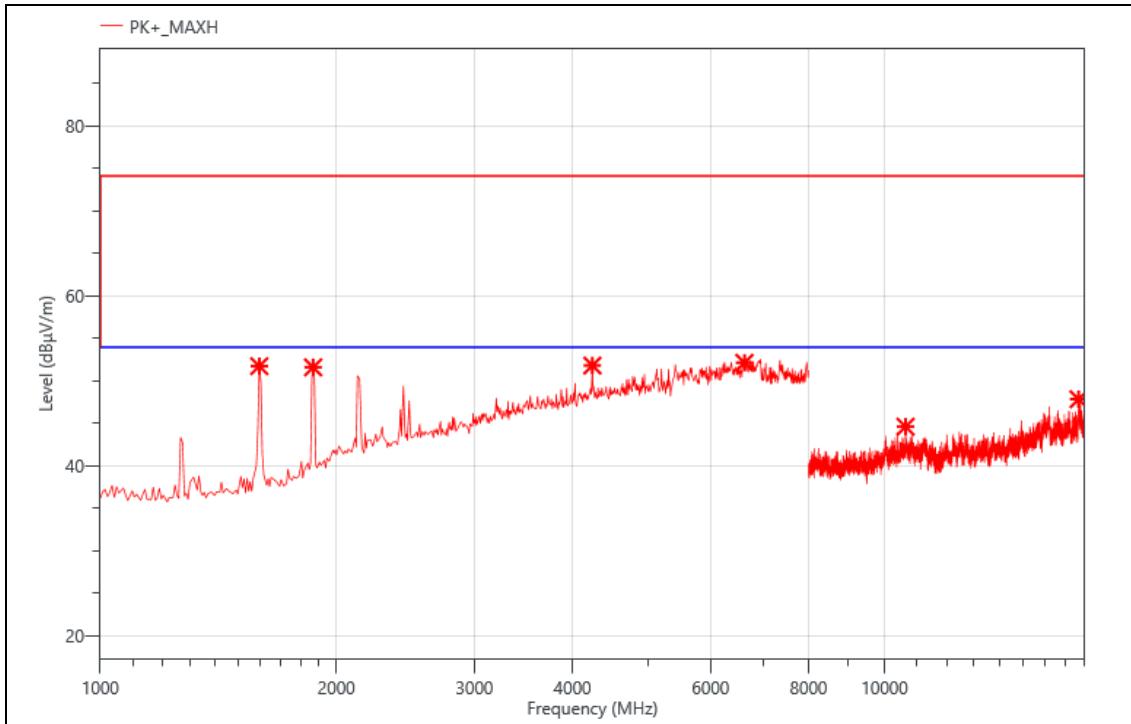


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1595.000	64.22	-12.53	51.69	74.00	22.31	PK+	H
2	1868.000	61.62	-10.07	51.55	74.00	22.45	PK+	H
3	4241.000	54.85	-3.09	51.76	74.00	22.24	PK+	H
4	6628.000	45.31	6.78	52.09	74.00	21.91	PK+	H
5	10637.000	48.90	-4.34	44.56	74.00	29.44	PK+	H
6	17676.000	48.19	-0.39	47.80	74.00	26.20	PK+	H

### Final\_Result

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	4801.000	54.61	-2.18	52.43	53.90	1.47	AVG	H	PASS


Mode:	A-5320
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/18
T/A/P	22.3°C/53%/101Kpa

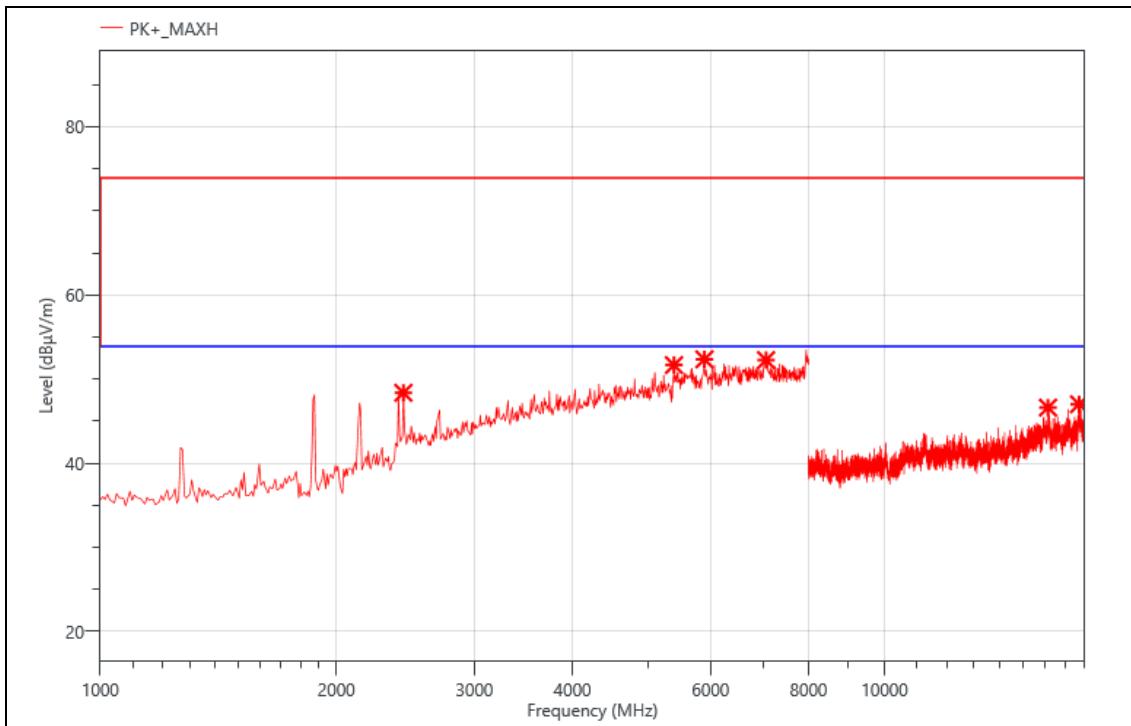

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.
1	2435.000	56.88	-8.51	48.37	74.00	25.63	PK+	H
2	5389.000	51.74	-0.07	51.67	74.00	22.33	PK+	H
3	5893.000	52.14	0.21	52.35	74.00	21.65	PK+	H
4	7062.000	42.11	10.15	52.26	74.00	21.74	PK+	H
5	16156.000	46.84	-0.23	46.61	74.00	27.39	PK+	H
6	17701.000	47.43	-0.43	47.00	74.00	27.00	PK+	H

Mode:	A-5320
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/18
T/A/P	22.3°C/53%/101Kpa

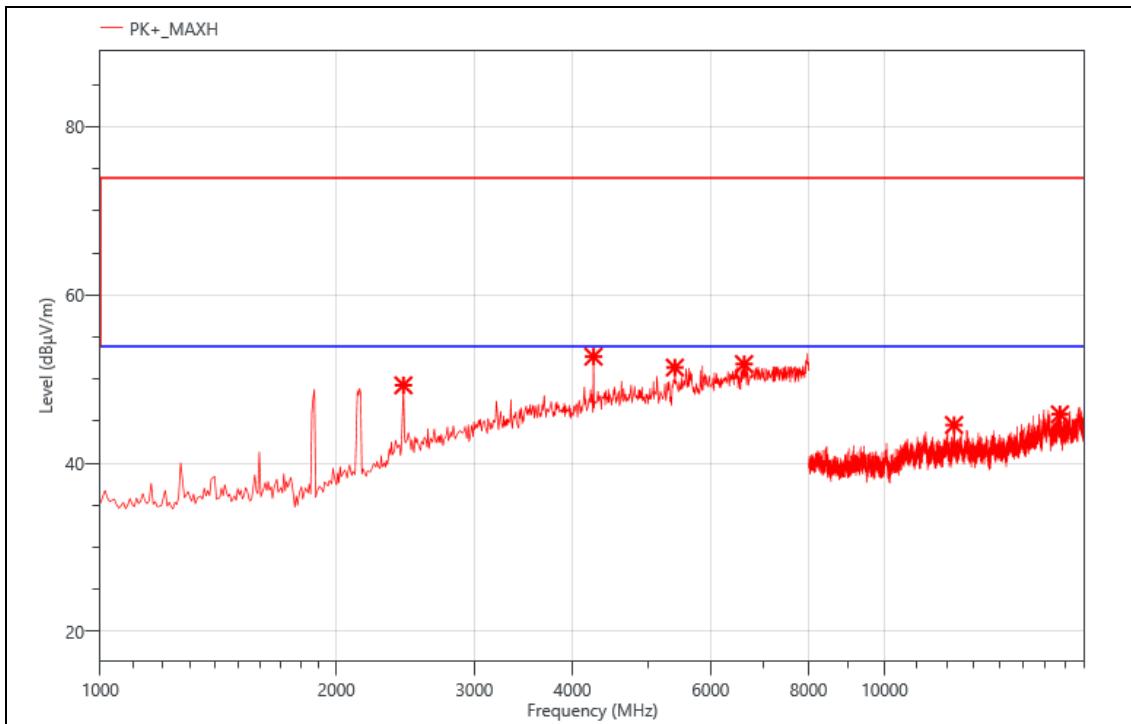

### Critical\_Freqs


No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.
1	2435.000	57.77	-8.51	49.26	74.00	24.74	PK+	V
2	4255.000	55.86	-3.19	52.67	74.00	21.33	PK+	V
3	5403.000	51.43	-0.06	51.37	74.00	22.63	PK+	V
4	6621.000	45.09	6.7	51.79	74.00	22.21	PK+	V
5	12263.000	48.64	-4.1	44.54	74.00	29.46	PK+	V
6	16733.000	47.66	-1.85	45.81	74.00	28.19	PK+	V

**Band Edge**

All modes have been tested and the worst result as bellow:

Model: A5 Pro

Mode:	A-5180
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

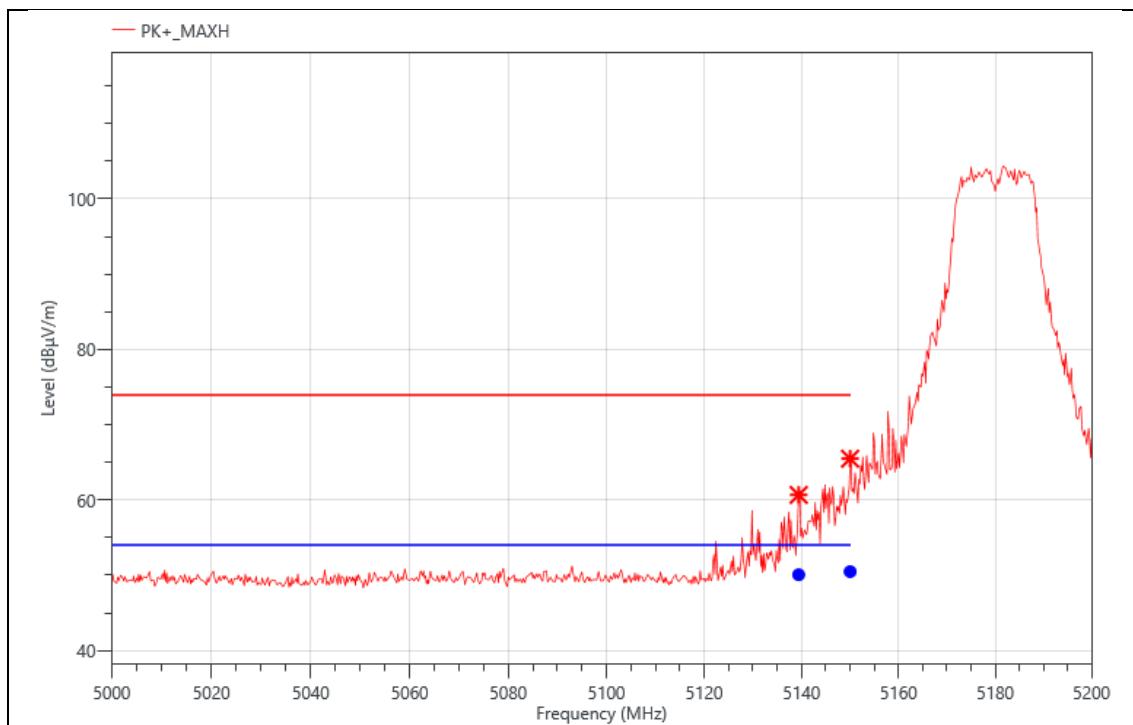
**Critical\_Freqs**

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	5139.400	32.11	28.56	60.67	74.00	13.33	PK+	H
2	5150.000	37.03	28.45	65.48	74.00	8.52	PK+	H

**Final\_Result**

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	5139.400	21.51	28.56	50.07	54.00	3.93	AVG	H	PASS
2	5150.000	22.03	28.45	50.48	54.00	3.52	AVG	H	PASS

Mode:	A-5180
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

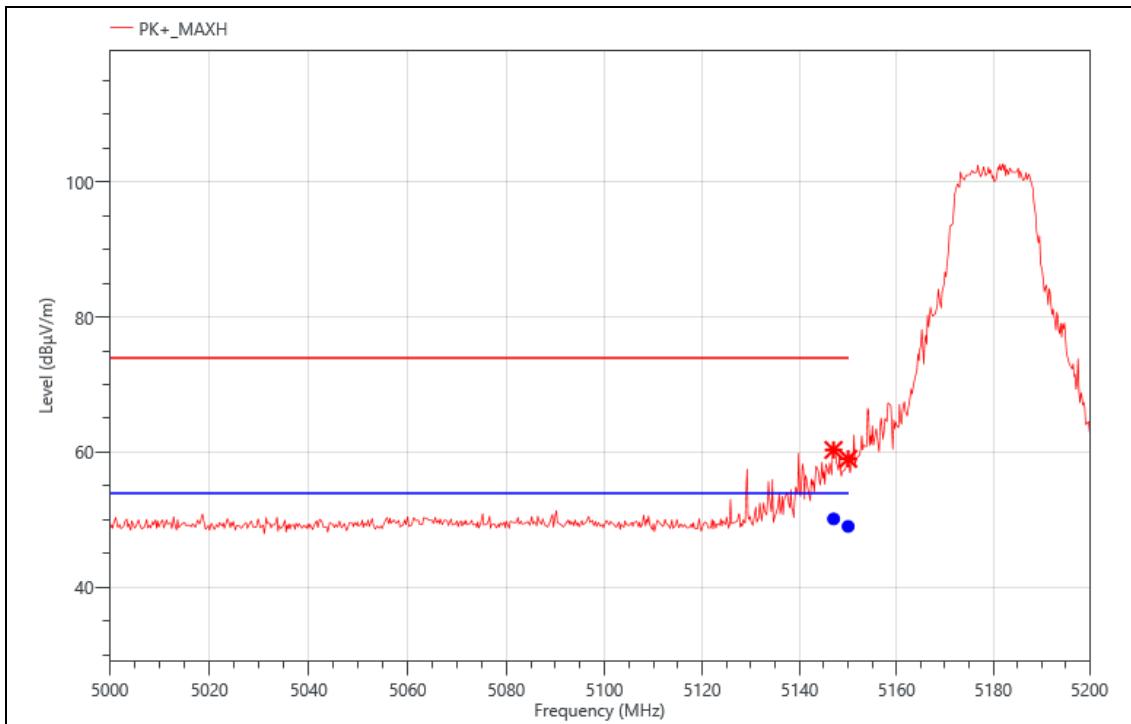


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	5147.000	31.85	28.49	60.34	74.00	13.66	PK+	V
2	5150.000	30.58	28.45	59.03	74.00	14.97	PK+	V

### Final\_Result

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	5147.000	21.65	28.49	50.14	54.00	3.86	AVG	V	PASS
2	5150.000	20.58	28.45	49.03	54.00	4.97	AVG	V	PASS

Mode:	A-5500
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

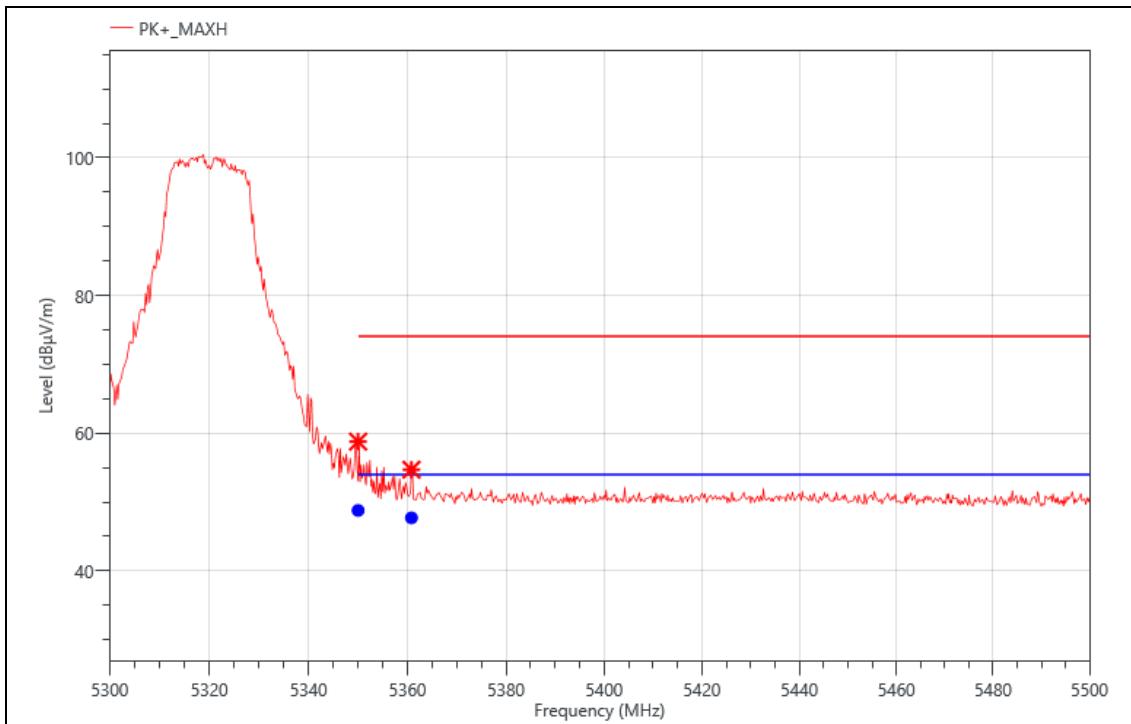


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	5350.000	29.79	28.99	58.78	74.00	15.22	PK+	V
2	5360.800	25.48	29.22	54.70	74.00	19.30	PK+	V

### Final\_Result

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.	Verdict
1	5350.000	19.79	28.99	48.78	54.00	5.22	AVG	V	PASS
2	5360.800	18.48	29.22	47.70	54.00	6.30	AVG	V	PASS

Mode:	A-5500
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

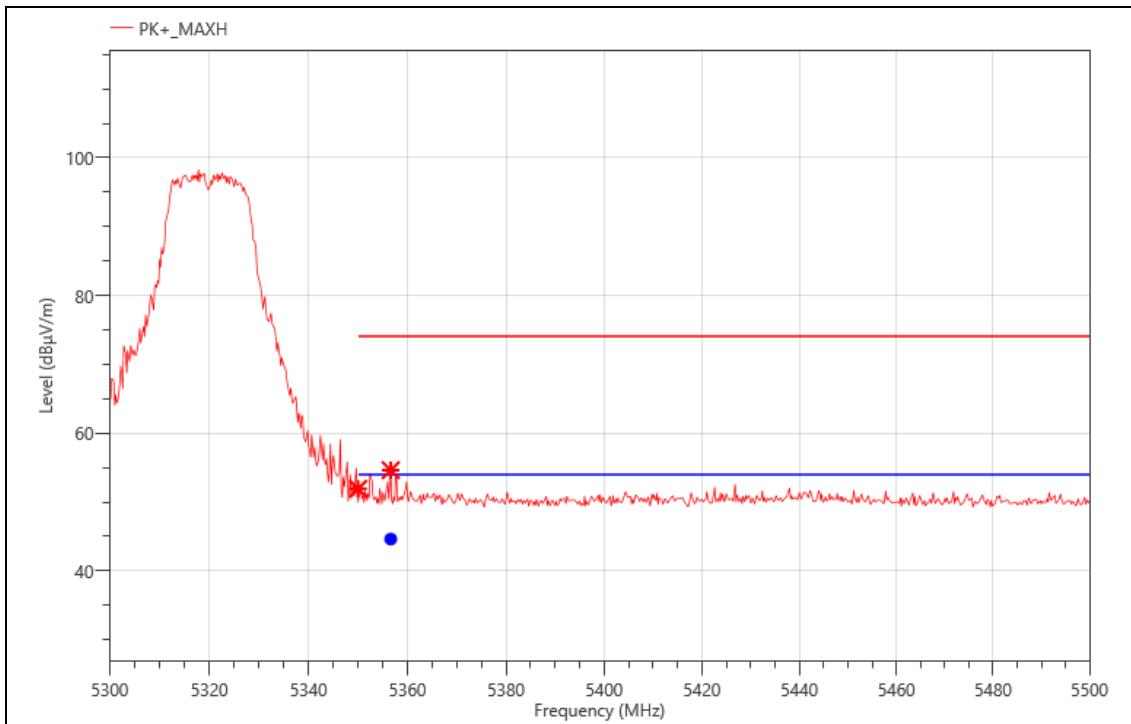


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	5350.000	22.93	28.99	51.92	74.00	22.08	PK+	H
2	5356.600	25.49	29.13	54.62	74.00	19.38	PK+	H

### Final\_Result

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.	Verdict
1	5356.600	15.49	29.13	44.62	54.00	9.38	AVG	H	PASS

Mode:	AX40-5190
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

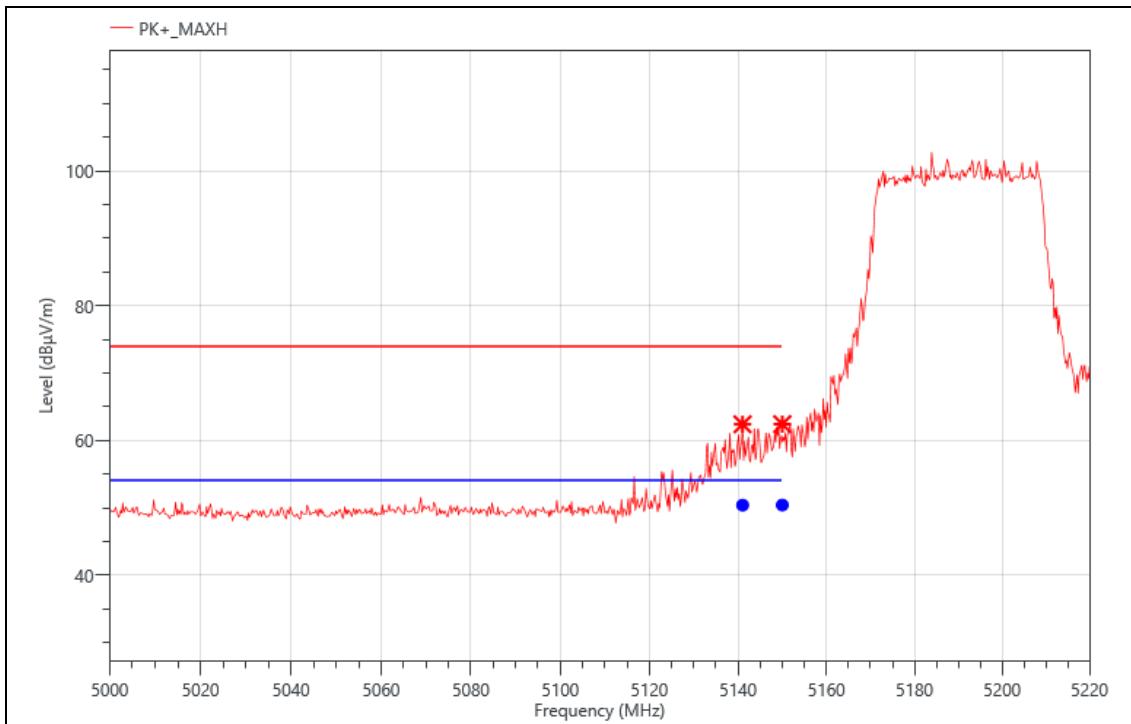


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	5141.020	33.83	28.56	62.39	74.00	11.61	PK+	H
2	5150.000	33.96	28.45	62.41	74.00	11.59	PK+	H

### Final\_Result

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	5141.020	21.83	28.56	50.39	54.00	3.61	AVG	H	PASS
2	5150.000	21.96	28.45	50.41	54.00	3.59	AVG	H	PASS

Mode:	AX40-5190
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

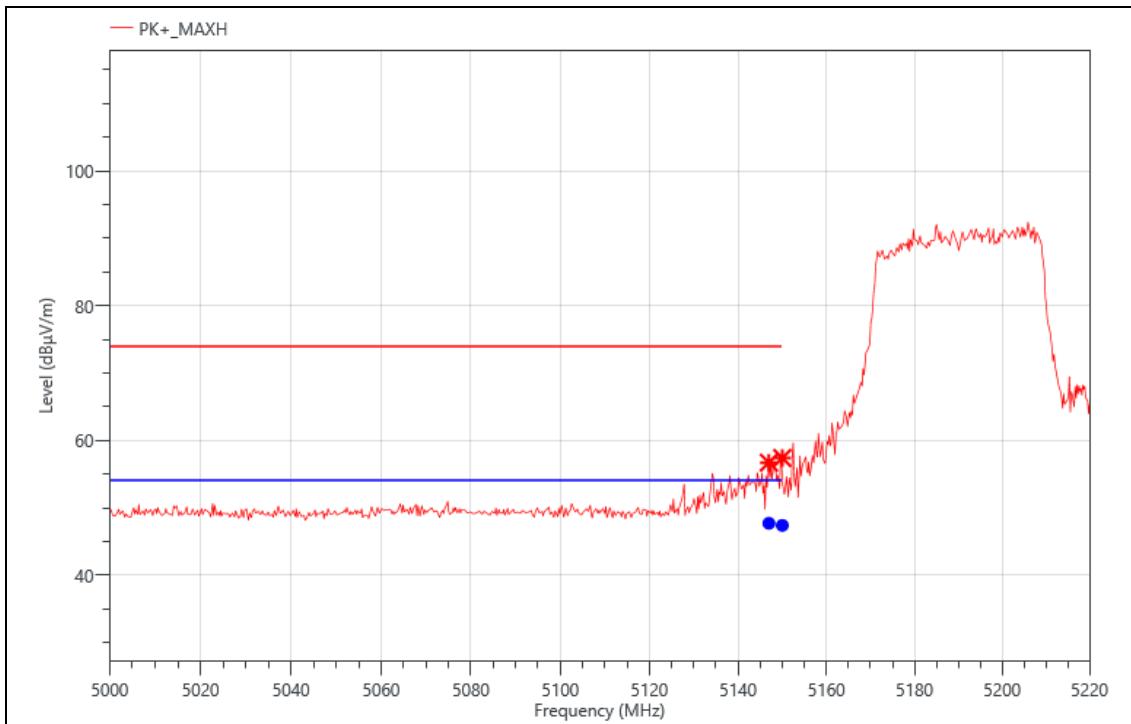


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.
1	5146.960	28.21	28.49	56.70	74.00	17.30	PK+	V
2	5150.000	28.94	28.45	57.39	74.00	16.61	PK+	V

### Final\_Result

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Verdict
1	5146.960	19.21	28.49	47.70	54.00	6.30	AVG	V	PASS
2	5150.000	18.94	28.45	47.39	54.00	6.61	AVG	V	PASS

Mode:	AX40-5310
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

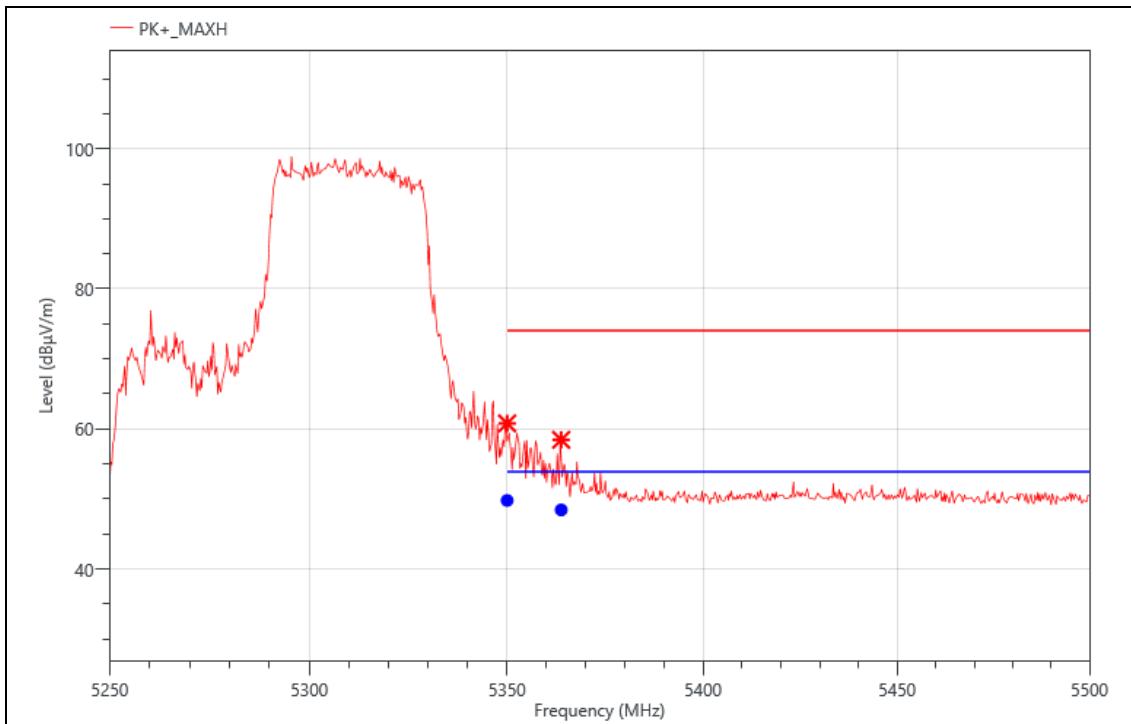


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	5350.000	31.81	28.99	60.80	74.00	13.20	PK+	V
2	5363.750	29.16	29.29	58.45	74.00	15.55	PK+	V

### Final\_Result

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.	Verdict
1	5350.000	20.81	28.99	49.80	54.00	4.20	AVG	V	PASS
2	5363.750	19.16	29.29	48.45	54.00	5.55	AVG	V	PASS

Mode:	AX40-5310
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

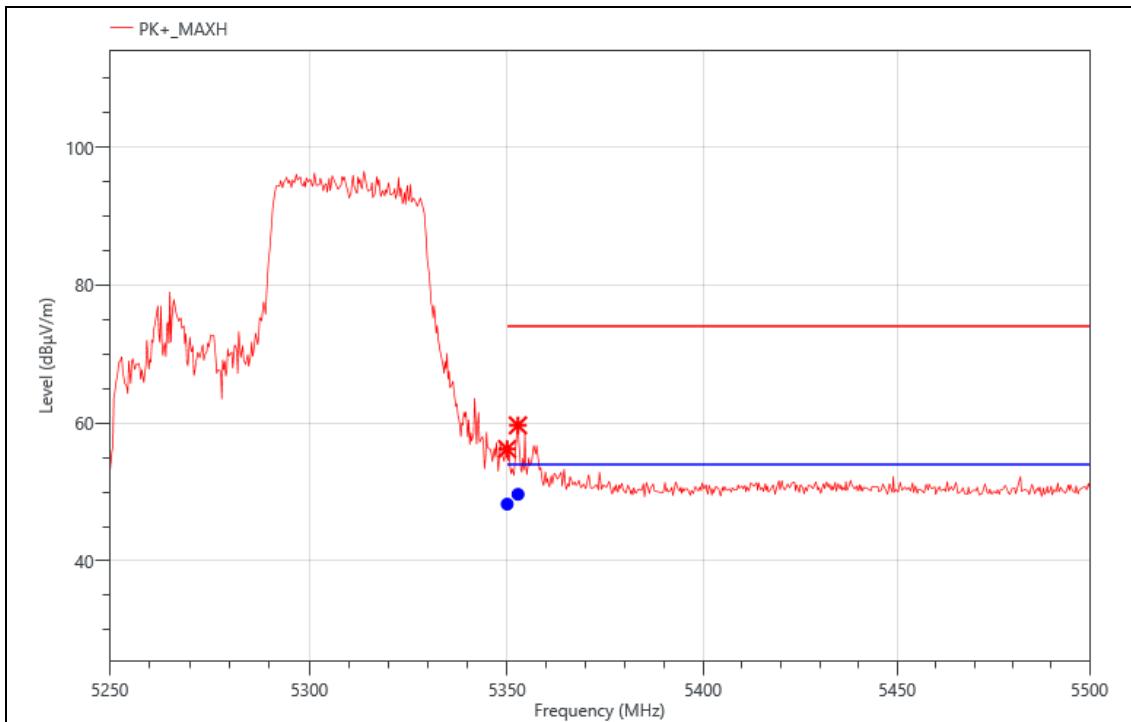


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	5350.000	27.25	28.99	56.24	74.00	17.76	PK+	H
2	5352.750	30.62	29.05	59.67	74.00	14.33	PK+	H

### Final\_Result

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.	Verdict
1	5350.000	19.25	28.99	48.24	54.00	5.76	AVG	H	PASS
2	5352.750	20.62	29.05	49.67	54.00	4.33	AVG	H	PASS

Mode:	A-5500
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

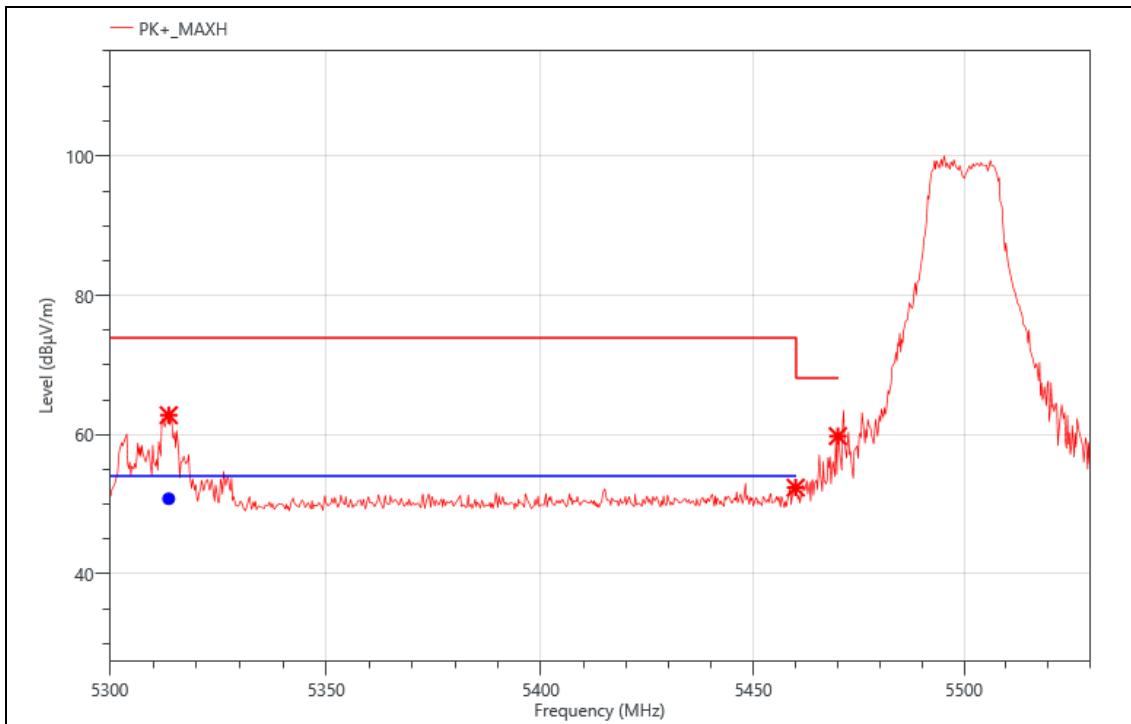


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.
1	5313.570	33.86	28.94	62.80	74.00	11.20	PK+	H
2	5460.000	23.26	29.14	52.40	68.20	15.80	PK+	H
3	5470.000	30.74	29.05	59.79	68.20	8.41	PK+	H

### Final\_Result

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Verdict
1	5313.570	21.86	28.94	50.80	54.00	3.20	AVG	H	PASS


Mode:	A-5500
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

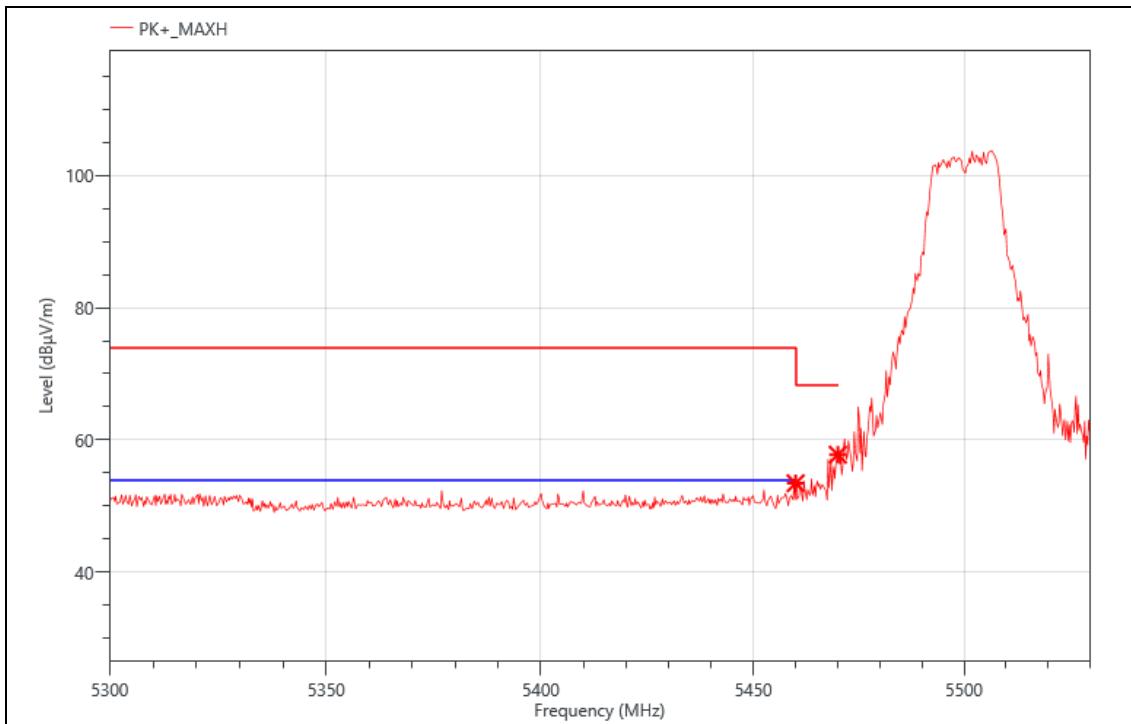

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.
1	5460.000	24.33	29.14	53.47	68.20	14.73	PK+	V
2	5470.000	28.73	29.05	57.78	68.20	10.42	PK+	V


Mode:	AX40-5510
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

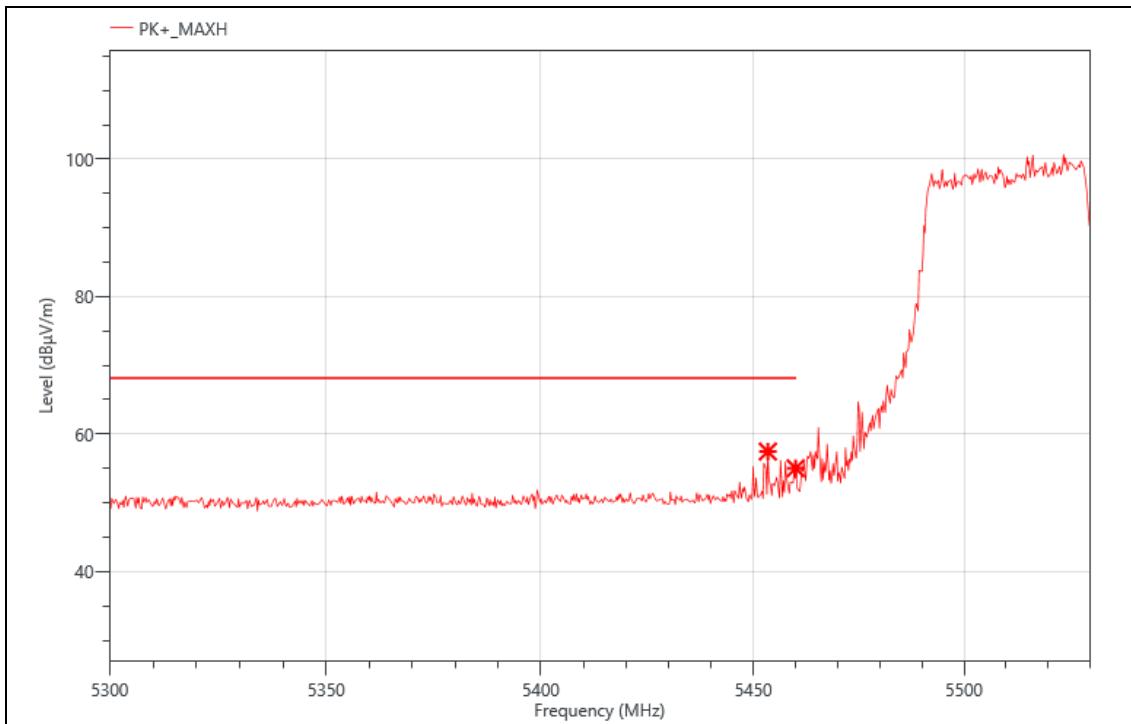

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.
1	5453.410	28.22	29.24	57.46	68.20	10.74	PK+	V
2	5460.000	25.88	29.14	55.02	68.20	13.18	PK+	V


Mode:	AX40-5510
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

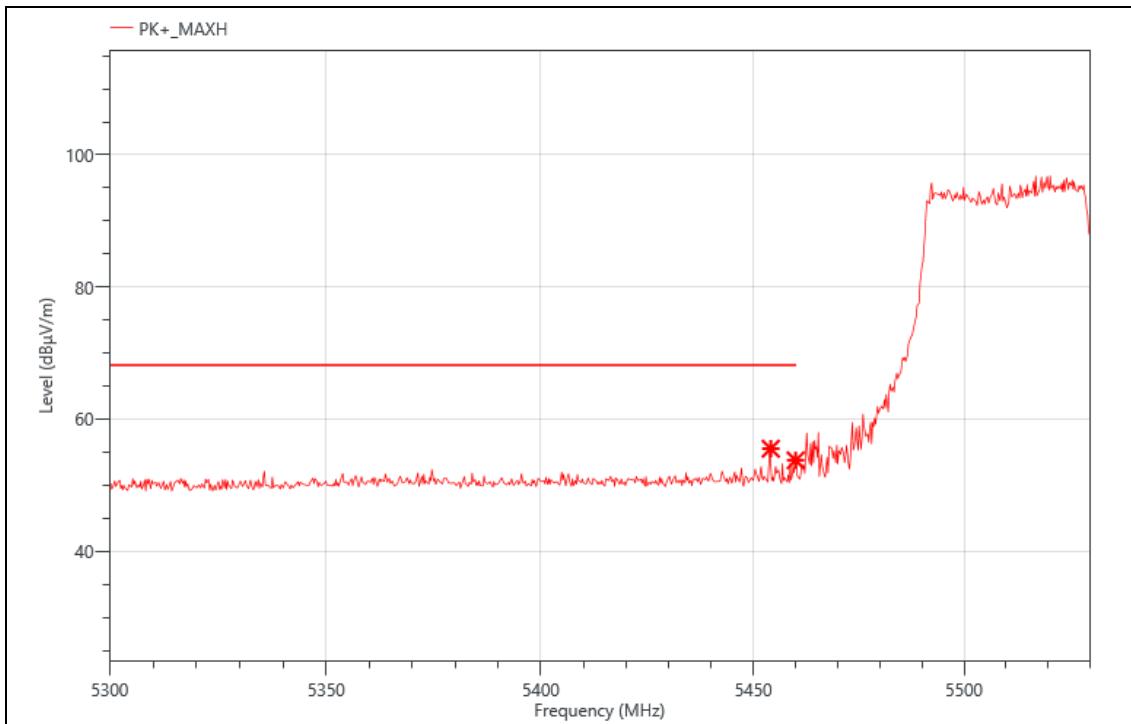

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	5454.100	26.30	29.23	55.53	68.20	12.67	PK+	H
2	5460.000	24.62	29.14	53.76	68.20	14.44	PK+	H


Mode:	N20-5745
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

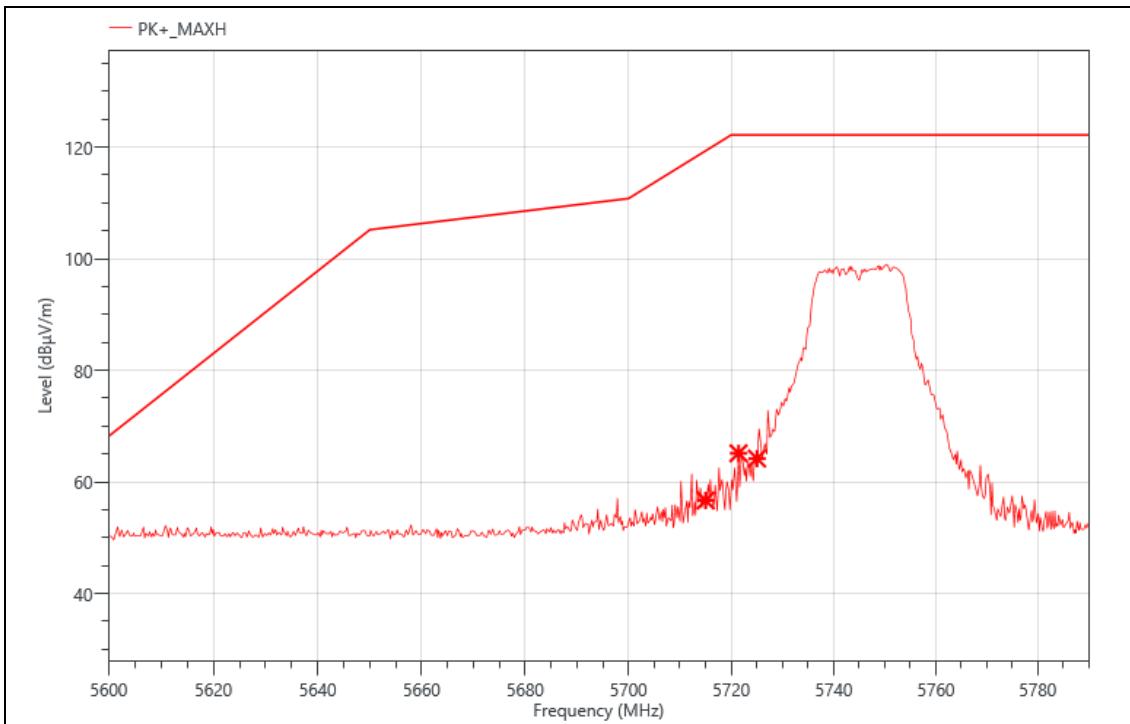

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	5715.000	27.35	29.32	56.67	119.35	62.68	PK+	H
2	5721.410	35.87	29.27	65.14	122.20	57.06	PK+	H
3	5725.000	34.96	29.24	64.20	122.20	58.00	PK+	H


Mode:	N20-5745
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

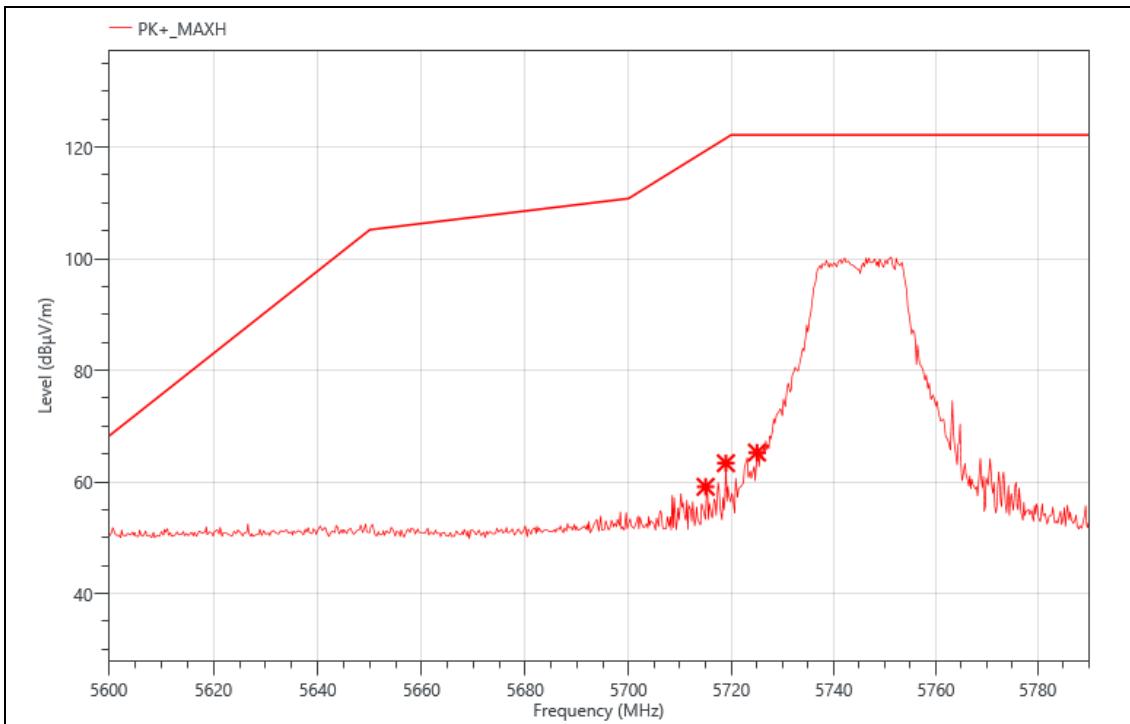

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	5715.000	29.81	29.32	59.13	119.35	60.22	PK+	V
2	5718.940	34.07	29.29	63.36	121.60	58.24	PK+	V
3	5725.000	36.03	29.24	65.27	122.20	56.93	PK+	V


Mode:	N20-5825
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

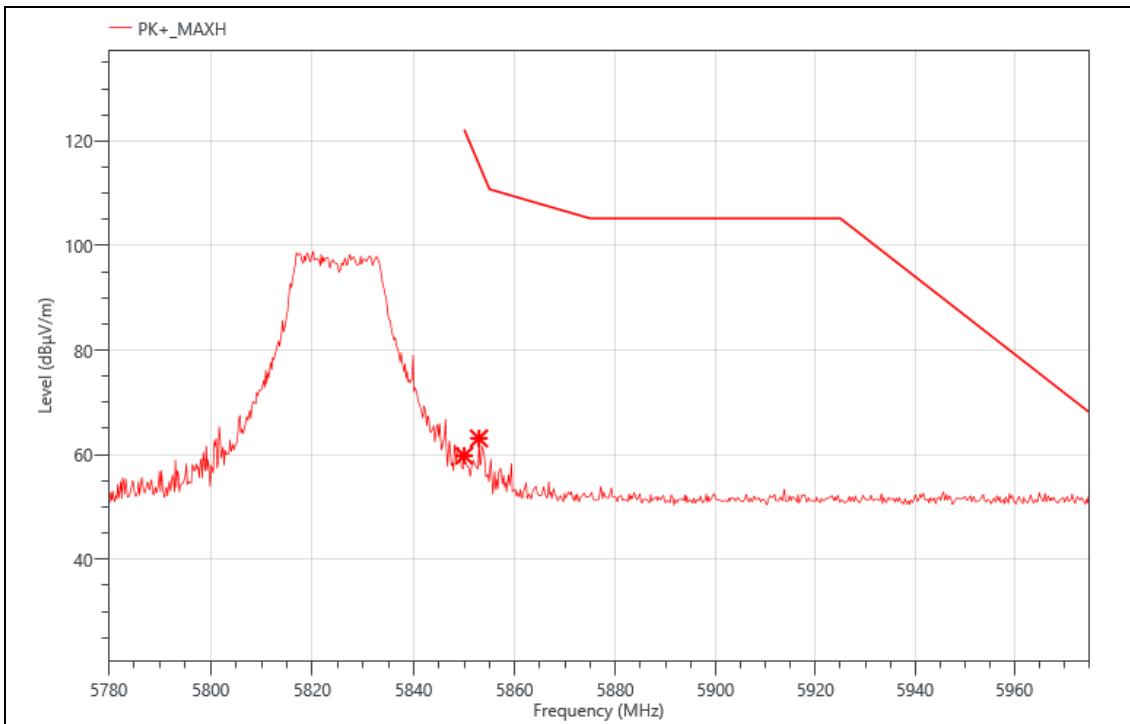

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.
1	5850.000	30.48	29.32	59.80	122.20	62.40	PK+	V
2	5852.930	33.76	29.35	63.11	115.52	52.41	PK+	V

Mode:	N20-5825
Power:	AC 120V/60HZ
TE:	Berny
Date	2025/06/09
T/A/P	22.3°C/53%/101Kpa

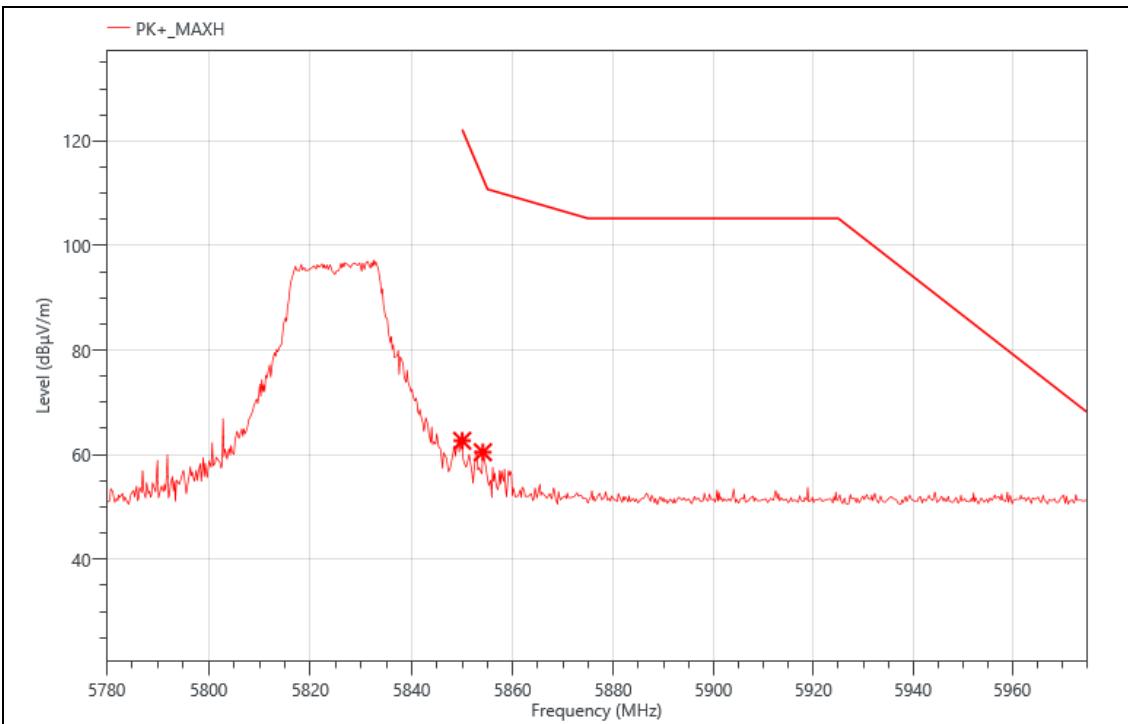

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Corr. (dB)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.
1	5850.000	33.33	29.32	62.65	122.20	59.55	PK+	H
2	5854.100	31.10	29.36	60.46	112.85	52.39	PK+	H

## 9. AC POWER LINE CONDUCTION EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST SETUP

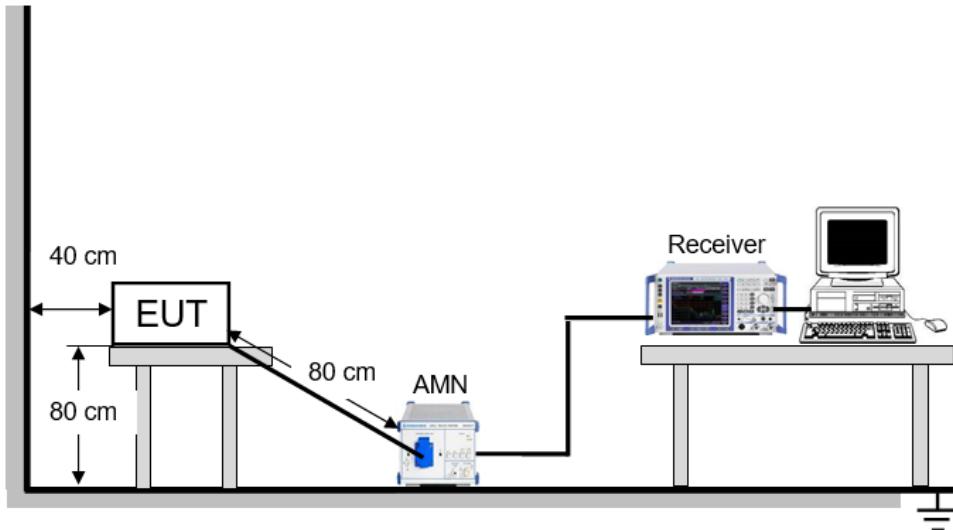

### TEST ENVIRONMENT


Temperature	23.4°C	Relative Humidity	54%
Atmosphere Pressure	101kPa		

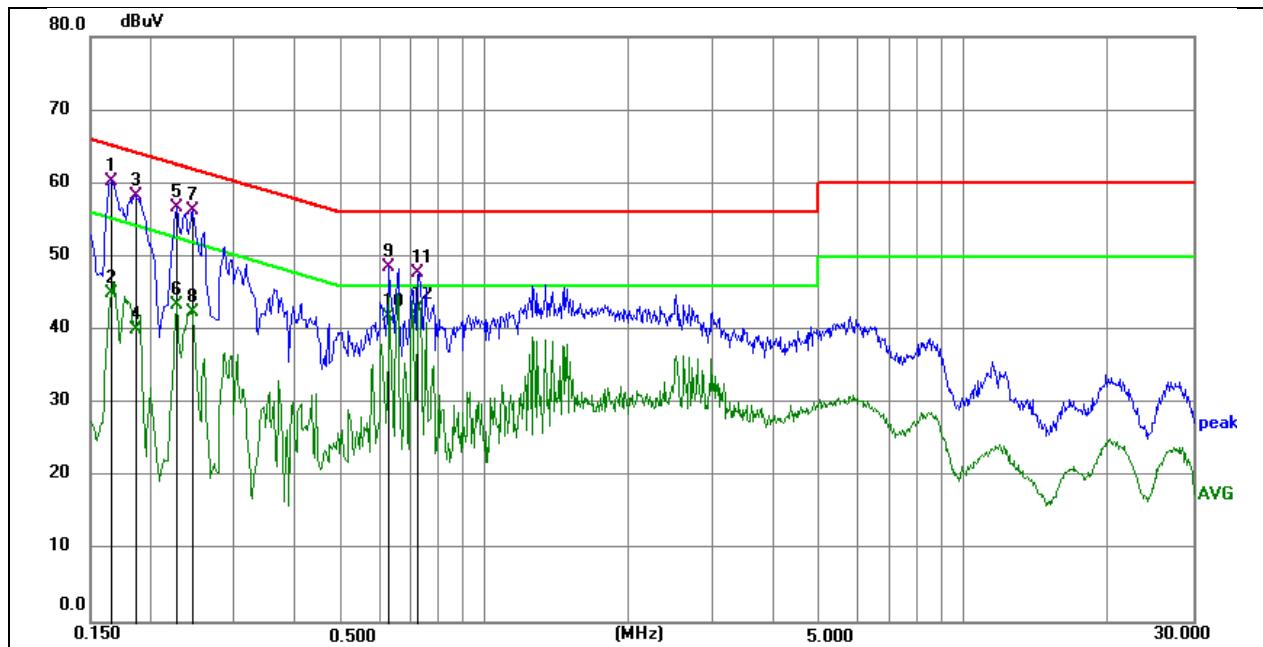**TEST RESULTS**

Phase: N

Mode: A-5260

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1658	50.30	9.88	60.18	65.17	-4.99	QP
2	0.1658	35.09	9.88	44.97	55.17	-10.20	AVG
3	0.1860	48.51	9.84	58.35	64.21	-5.86	QP
4	0.1860	30.13	9.84	39.97	54.21	-14.24	AVG
5	0.2265	46.95	9.80	56.75	62.58	-5.83	QP
6	0.2265	33.48	9.80	43.28	52.58	-9.30	AVG
7	0.2444	46.51	9.80	56.31	61.95	-5.64	QP
8	0.2444	32.54	9.80	42.34	51.95	-9.61	AVG
9	0.6312	38.78	9.80	48.58	56.00	-7.42	QP
10	0.6312	32.03	9.80	41.83	46.00	-4.17	AVG
11	0.7304	37.98	9.83	47.81	56.00	-8.19	QP
12	0.7304	33.03	9.83	42.86	46.00	-3.14	AVG

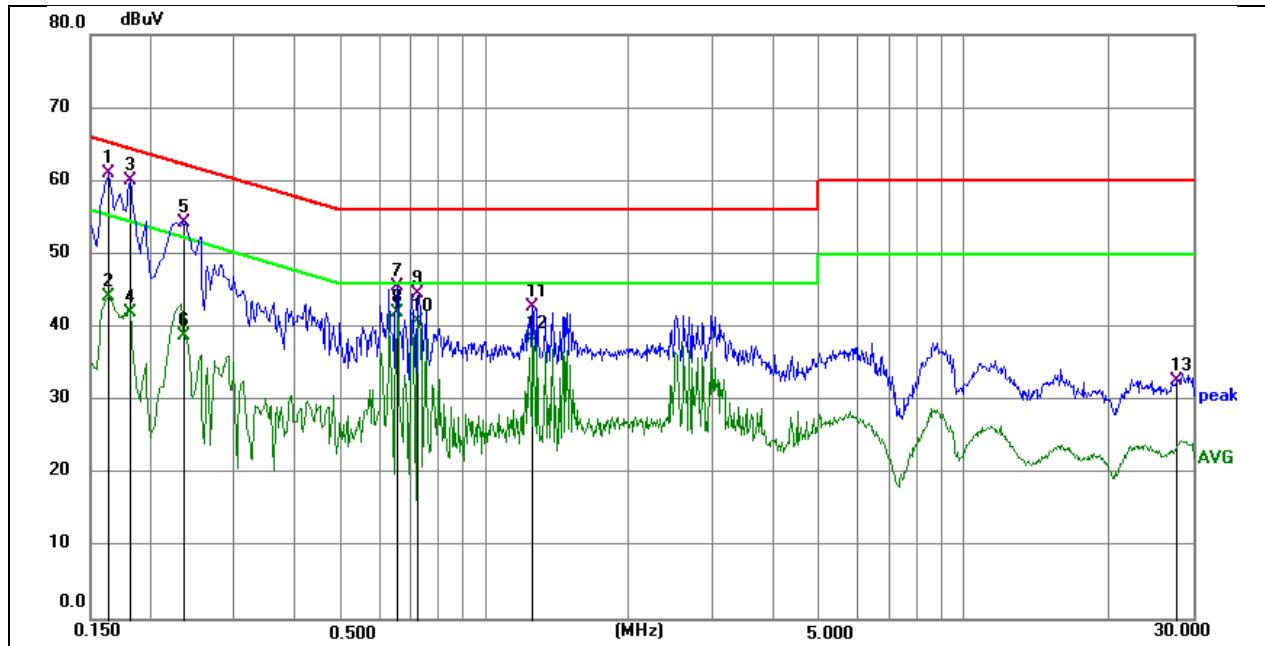

Phase: L1

Mode: A-5260

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1635	51.34	9.71	61.05	65.28	-4.23	QP
2	0.1635	34.54	9.71	44.25	55.28	-11.03	AVG
3	0.1814	50.26	9.71	59.97	64.42	-4.45	QP
4	0.1814	32.28	9.71	41.99	54.42	-12.43	AVG
5	0.2353	44.67	9.72	54.39	62.26	-7.87	QP
6	0.2353	29.10	9.72	38.82	52.26	-13.44	AVG
7	0.6540	35.71	9.83	45.54	56.00	-10.46	QP
8	0.6540	32.14	9.83	41.97	46.00	-4.03	AVG
9	0.7304	34.73	9.82	44.55	56.00	-11.45	QP
10	0.7304	30.89	9.82	40.71	46.00	-5.29	AVG
11	1.2615	32.95	9.79	42.74	56.00	-13.26	QP
12	1.2615	28.58	9.79	38.37	46.00	-7.63	AVG

## 10. ANTENNA REQUIREMENT

### **REQUIREMENT**

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.407(a)(1)(2)(3)

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **DESCRIPTION**

Pass.

## **11. TEST DATA - Appendix D**

Please refer to section "Test Data" - Appendix D and Appendix D.

---

**END OF REPORT**