

深圳市宙达通讯电子有限公司

Shenzhen Zodia Communication Electronics Co., Ltd.

产 品 规 格 书

Product specification

CUSTOMER: Shenzhen Chenxing Technology Co., Ltd

客 户: 尘星科技

CUSTOMER:

客 户 案 号:

CUSTOMER P/N:

本 厂 编 号:

SC-N794FPC-L95

OUR MODEL NO:

品 名 / 规 格:

2.4G-794 Built-in antenna

2.4G-794 内置天线

SPECIFICATIONS:

样 品 数:

0

Q' TY:

日 期:


2024-4-23

深圳市宙达通讯电子有限公司			客户承认
工程 Engineering	品保 Quality	核准 Approved	签名（盖章）
谢工	黄小姐	高工	

1. Technical Specification 技术规格

A. Electrical Characteristics	
Working Frequency Range	2400~2500MHz
S.W.R.	2400~2500MHz:<3.0
Antenna Gain(avg.)	2400~2500MHz: 3.05dbi
Impedance	50ohm
B. Material	
brass	
C. Environmental	
Operation Temperature	-45℃~+85℃
Storage Temperature	-45℃~+85℃

2. Matching Circuits 匹配电路

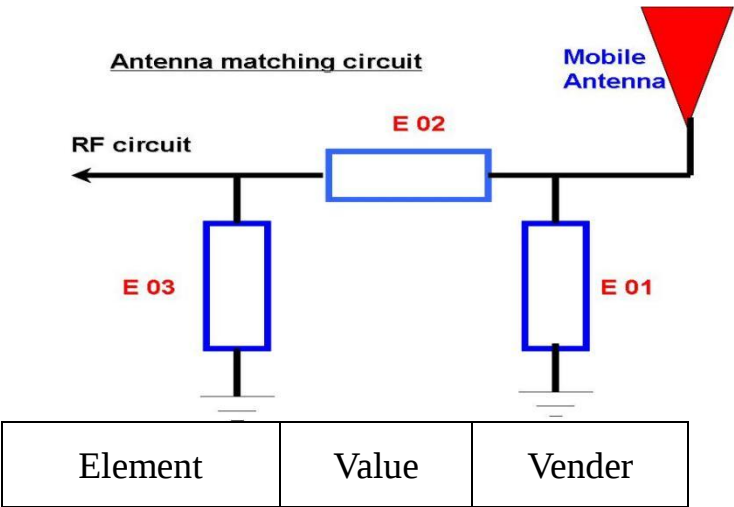

E1(0402)	OPEN	/
E2(0402)	SHORT	50Ω
E3(0402)	OPEN	/

注:匹配未更改。


3. Curing antenna S11 Testing Result. 无源测试

The S11 parameter was performed using a Agilent 8753D Network Analyzer and BEST'S test fixture that was using customer-providing device.

VSWR (Voltage standing wave ratio)

The Voltage Standing Wave Ratio (VSWR) is an indication of how good the impedance match is. VSWR is often abbreviated as SWR. If the transmission line and the antenna are not matched, the antenna will not accept all the power from the transmission line. The part it does not accept is reflected back and forth between the transmitter and the antenna. This sets up a fixed wave pattern along the line which we can measure and which is called the voltage standing wave ration(VSWR).The VSWR (ratio of maximum voltage to the minimum voltage along the line)expresses the degree of match between the transmission line and the antenna. When the VSWR is 1 to 1(1:1) the match is perfect and all the energy is transferred to the antenna prior to be radiated. When the VSWR is 1.5:1, 96% of the power reaches the antenna. By definition VSWR can never be less than 1.VSWR and reflected power are different ways of measuring and expressing the same thing. A high VSWR is indication that the signal is reflected prior to being radiated by the antenna.

驻波 VSWR

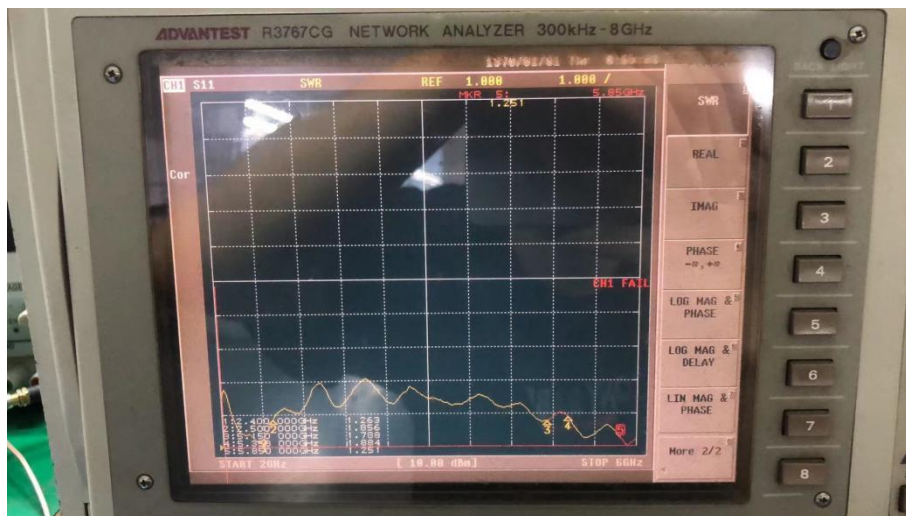

深圳市宙达通讯电子有限公司

Shenzhen Zodia Communication Electronics Co., Ltd.


深圳市龙华区观湖街道新田社区环观南路 72-6 号创客大厦 716

716 Maker Building, No. 72-6 Huanguan South Road, Xintian Community, Guanhu Street, Longhua District, Shenzhen

4. 测试 3D 报告 Test 3D Report


频率: 2400MHZ 增益: 3.05dbi

Frequency: 2400 MHZ Peak gain:3.05dbi

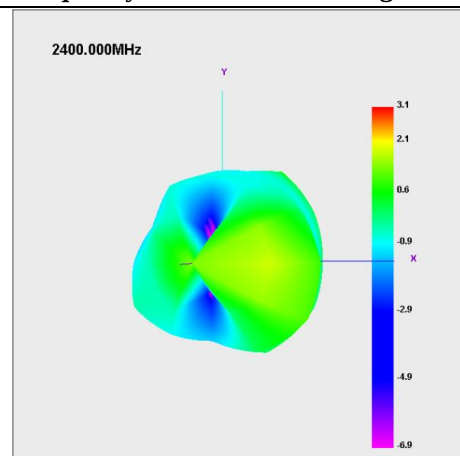


频率: 2450MHZ 增益: 1.39dbi

Frequency: 2450MHZ Peak gain: 1.39dbi

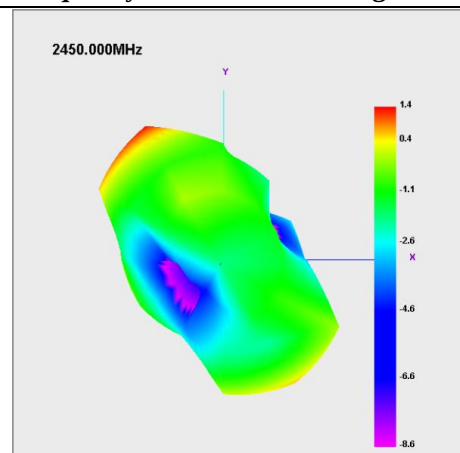

频率: 2500MHZ 增益: 1.90dbi


Frequency:2500MHZ Peak gain: 1.90dbi

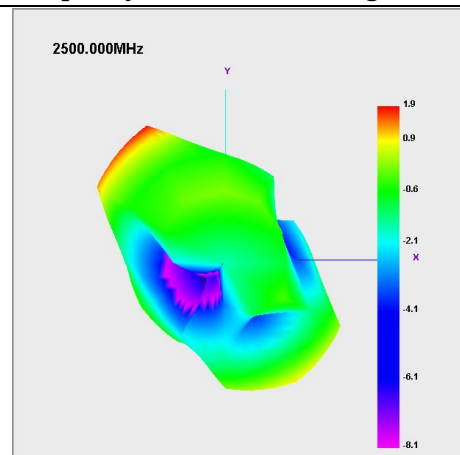

Frequency (MHz)	Efficiency (%)	Peak Gain / dB
2400	62.6	3.05
2450	65.7	1.39
2500	64.1	1.90

5. Dimensions

Unit: MM

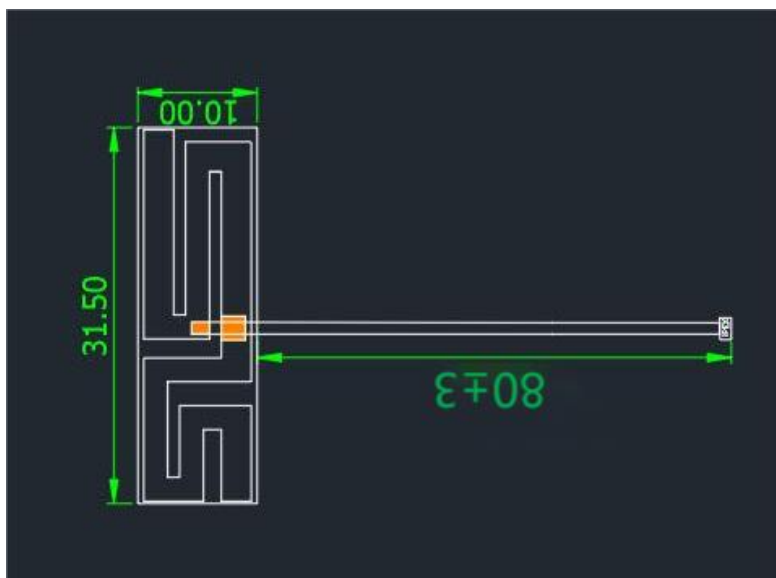

产品实物 2.4G-内置 FPC 1.13 黑线出线长 95MM

Product Physical object 2.4G - Built-in FPC 1.13 black wire output length 95MM