




802.11 n-HT20 CH64 (5320MHz)

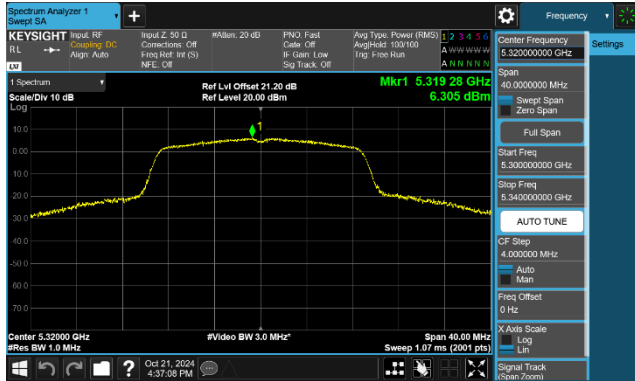


802.11 n-HT20 CH100 (5500MHz)

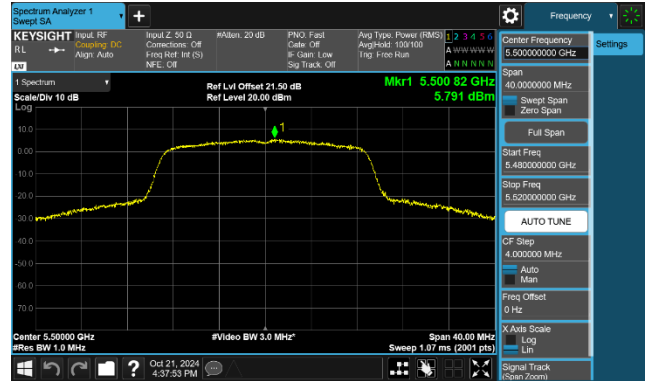


802.11 n-HT20 CH116 (5580MHz)

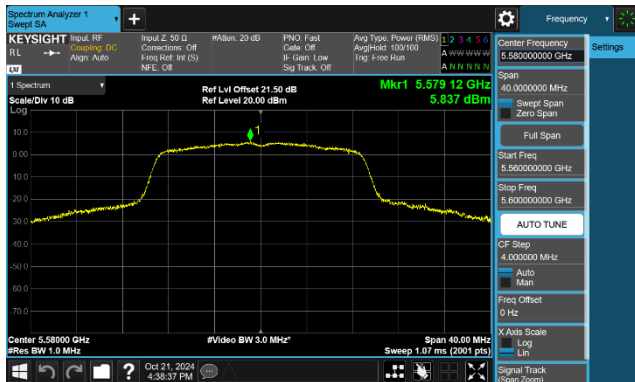


802.11 n-HT20 CH140 (5700MHz)

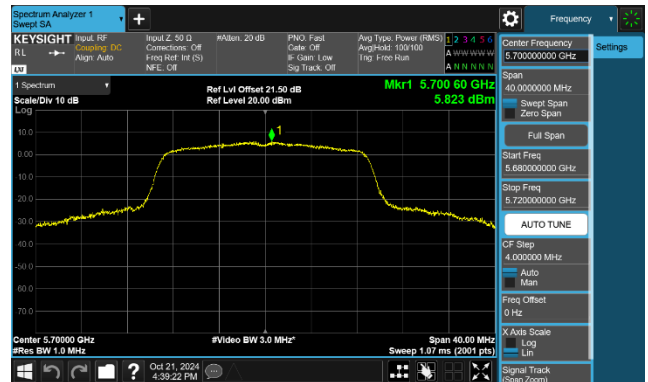


802.11 n-HT20 CH144 (5720MHz)

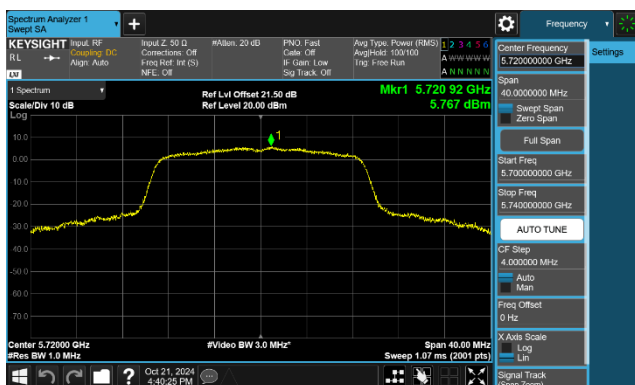


802.11 n-HT20 CH149 (5745MHz)

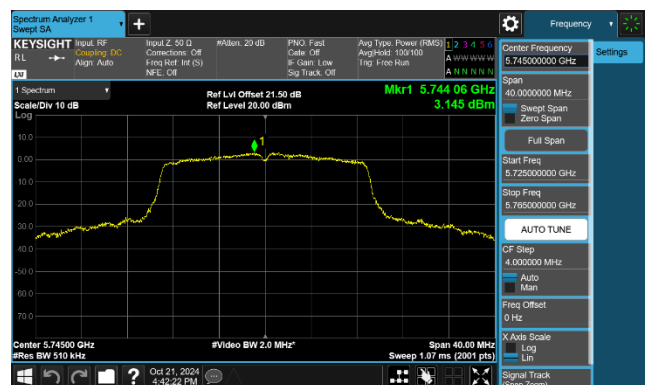


802.11 n-HT20 CH157 (5785MHz)

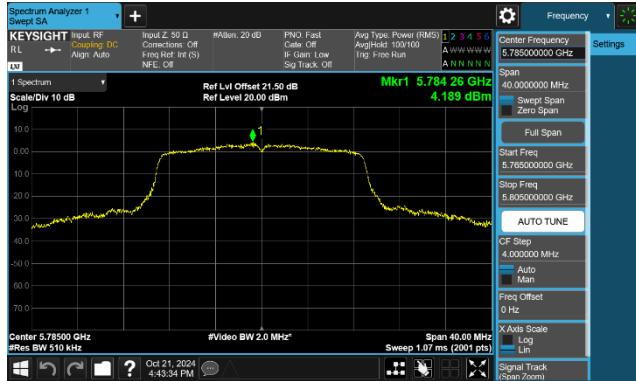


802.11 n-HT20 CH165 (5825MHz)

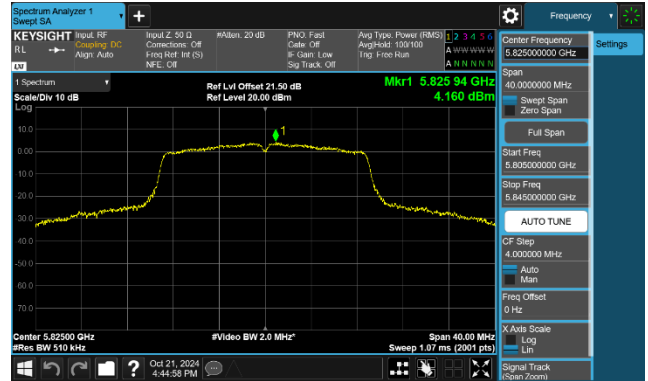


802.11 n-HT40 CH38 (5190MHz)

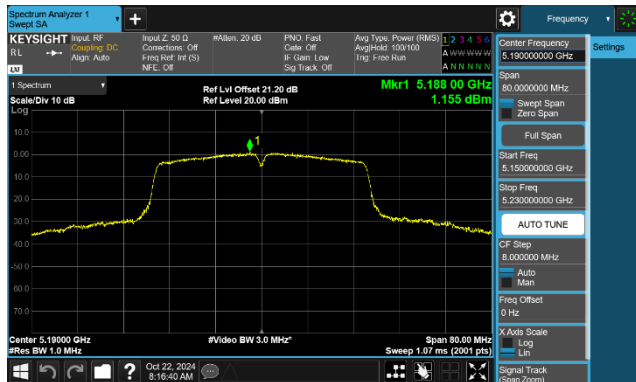


802.11 n-HT40 CH46 (5230MHz)

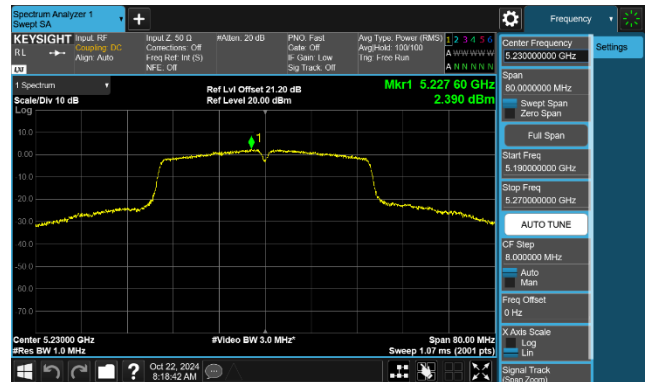


802.11 n-HT40 CH54 (5270MHz)

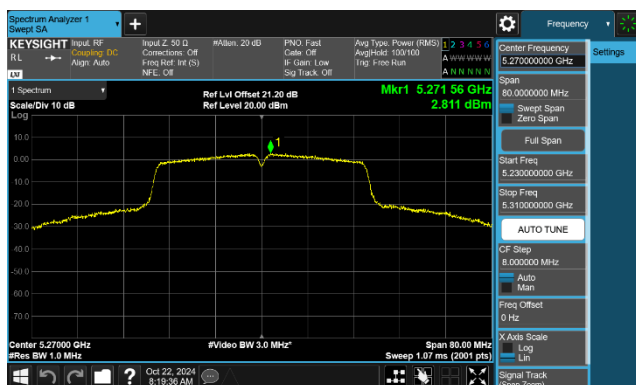


802.11 n-HT40 CH62 (5310MHz)

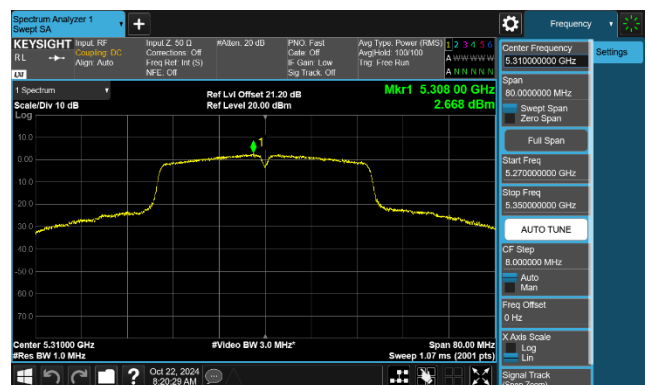


802.11 n-HT40 CH102 (5510MHz)

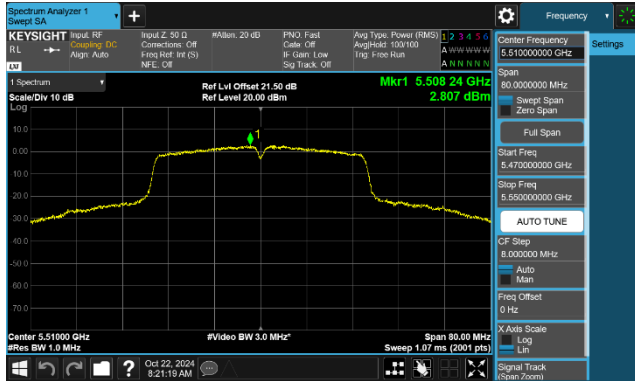


802.11 n-HT40 CH110 (5550MHz)

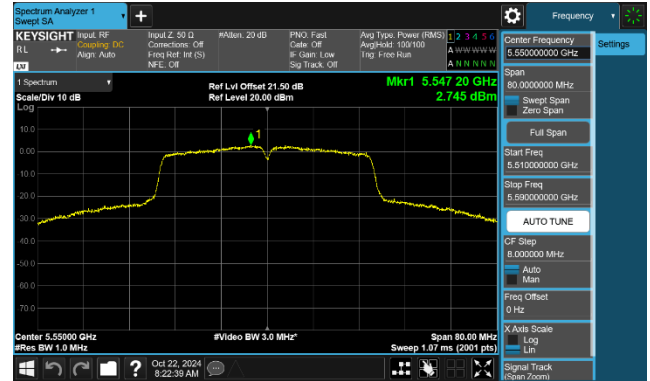


802.11 n-HT40 CH134 (5670MHz)

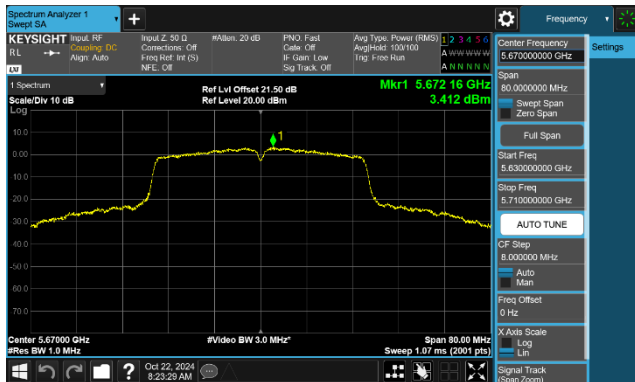


802.11 n-HT40 CH142 (5710MHz)

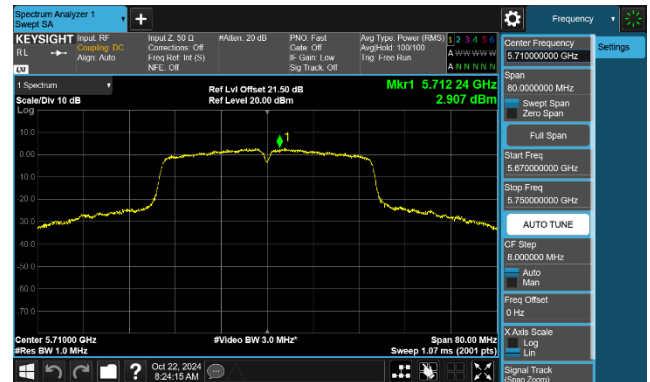

802.11 n-HT40 CH151 (5755MHz)

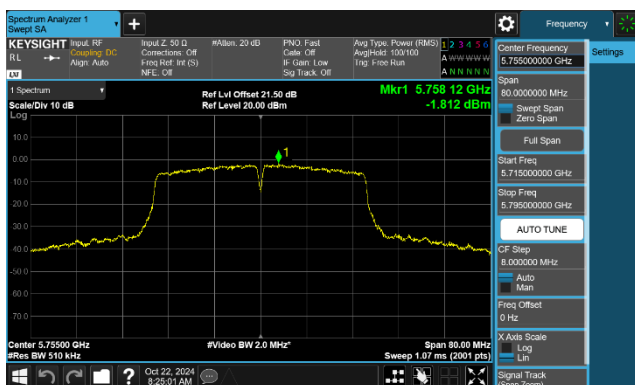

802.11 n-HT40 CH159 (5795MHz)

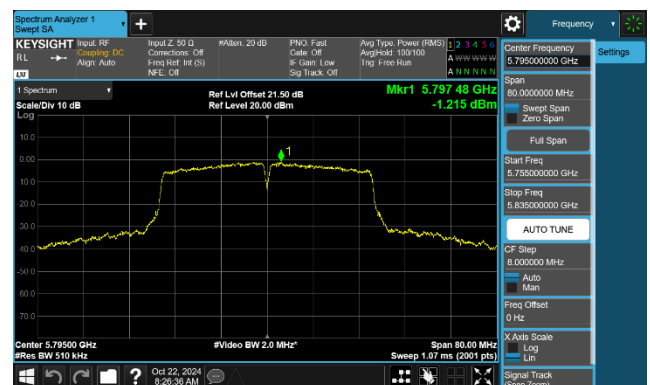

7.7. Frequency Stability Measurement

7.7.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.7.2. Test Limit

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3. Test Setup

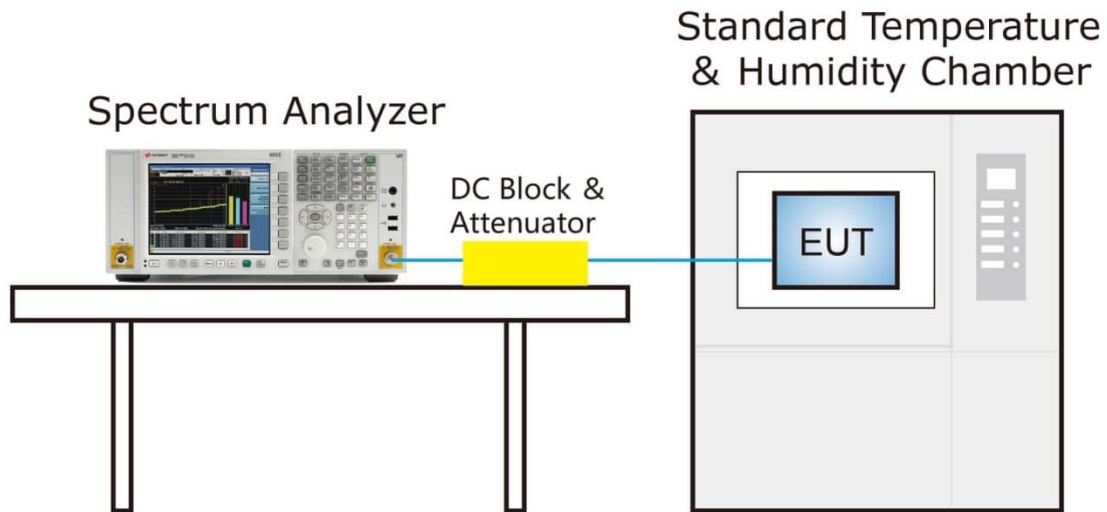

7.7.4. Test Result

Grantee ensure that the product meets e-CFR Title 47 section 15.407(g) and KDB 789033 D02v02r01 frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

KDB 789033 D02v02r01 – Section G

7.8.3. Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120 kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Average Measurements above 1GHz (Method AD)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (Average)
5. Number of measurement points = 1001 (Number of points must be $> 2 \times \text{span}/\text{RBW}$)
6. Sweep time = auto
7. Trace was averaged over at 100 sweeps

Quasi-Peak & Average Measurements below 30MHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 200Hz for 9kHz to 150kHz frequency; RBW = 9kHz for 0.15MHz to 30MHz frequency
4. Detector = CISPR quasi-peak or power average (Average)
5. Sweep time = auto couple
6. Trace was allowed to stabilize

7.8.4. Test Setup


9kHz ~ 30MHz Test Setup:

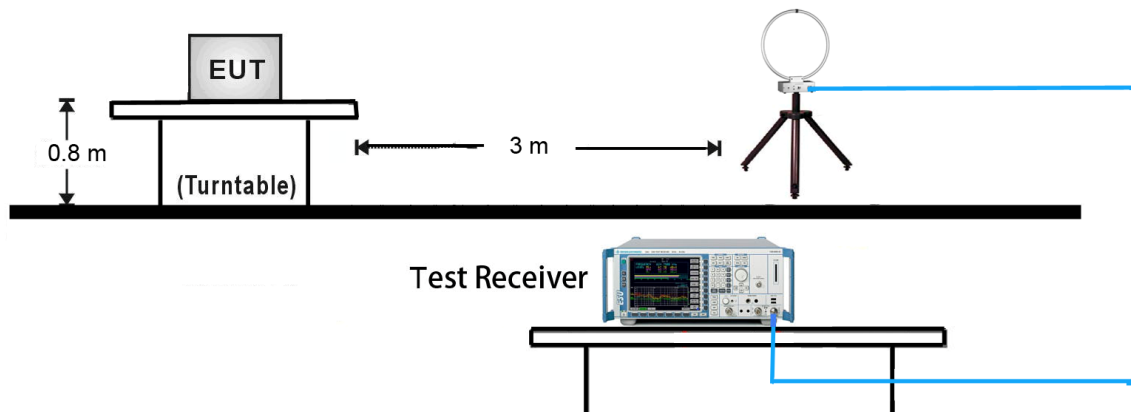


30MHz ~ 1GHz Test Setup:

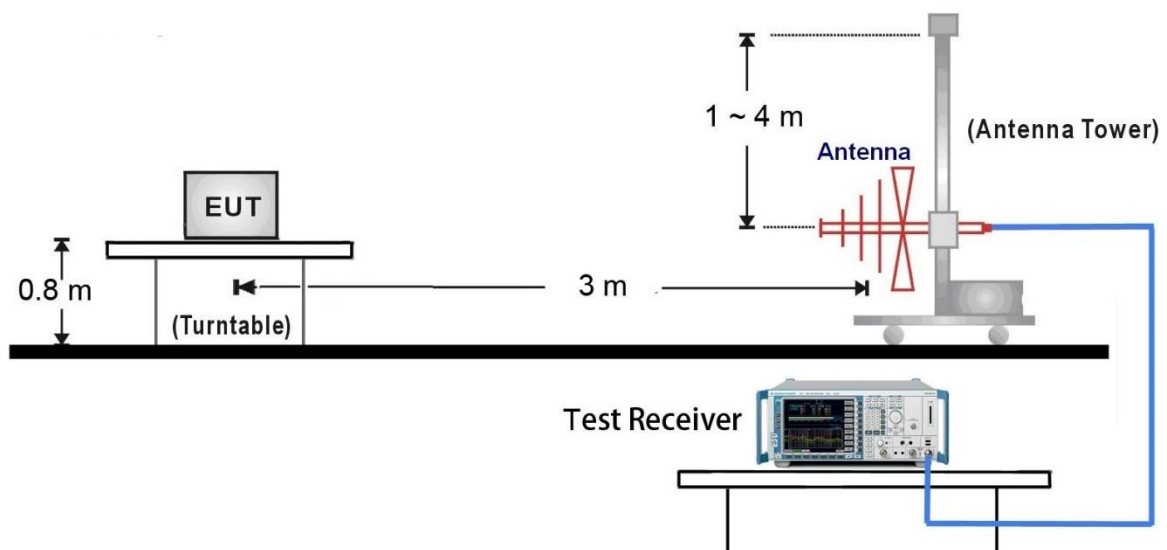

1GHz ~18GHz Test Setup:

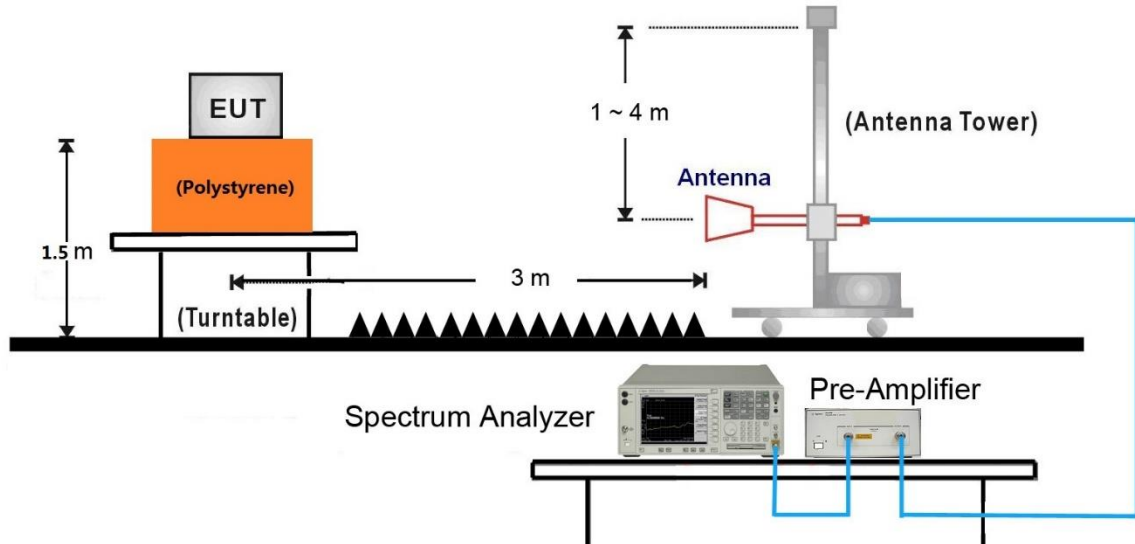


18GHz ~40GHz Test Setup:

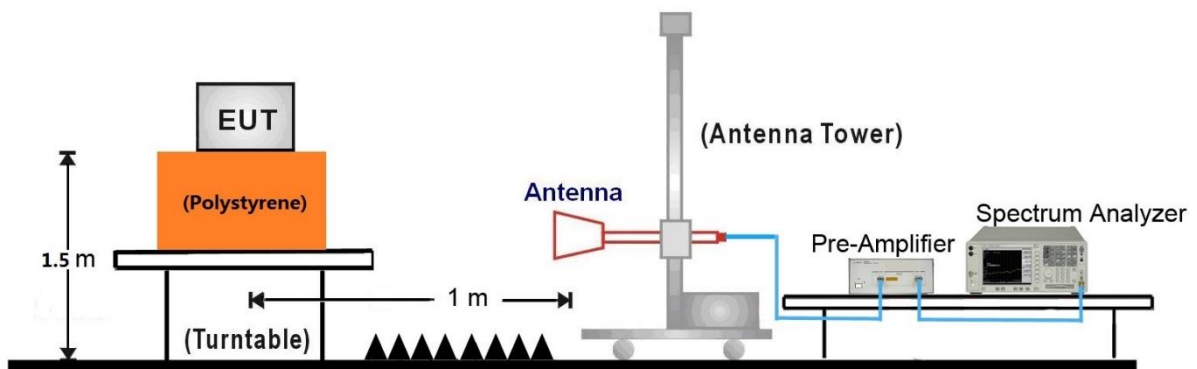

7.8.5. Test Result

EUT	Camera	Date of Test	2024-10-23
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Dio
Test Mode	802.11n_20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

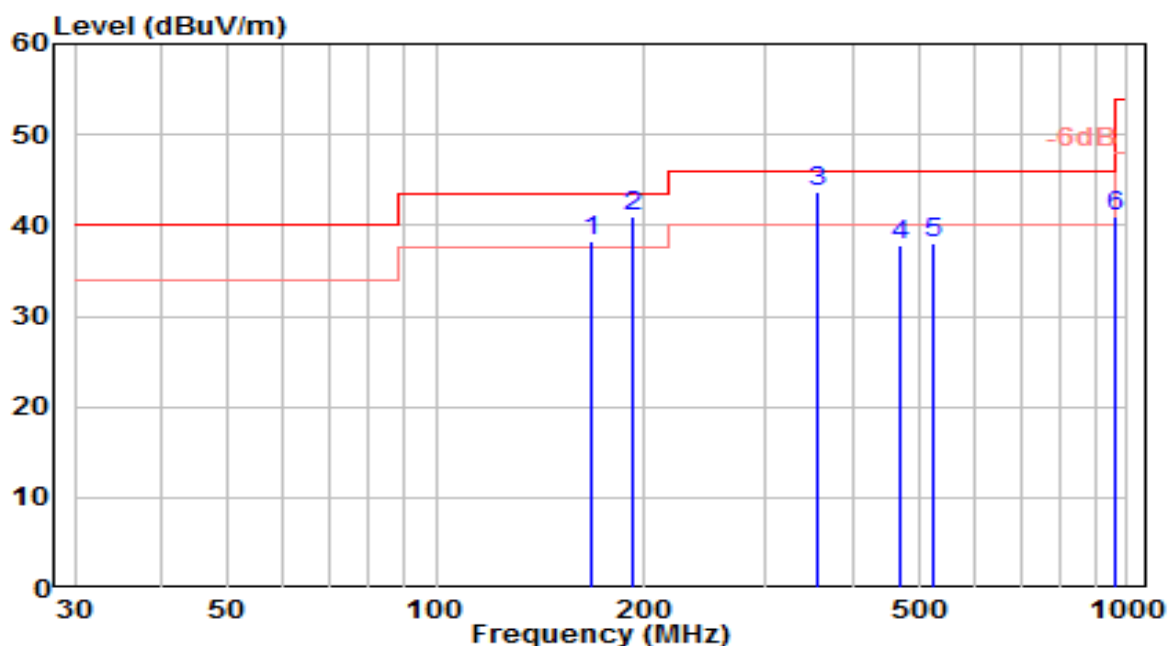


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	167.740	22.48	15.89	38.36	-5.14	43.50	100	120	QP
2	192.960	23.10	17.78	40.88	-2.62	43.50	100	70	QP
3	* 356.890	21.00	22.81	43.81	-2.19	46.00	200	190	QP
4	470.380	13.19	24.59	37.78	-8.22	46.00	150	110	QP
5	523.730	12.34	25.67	38.01	-7.99	46.00	150	110	QP
6	965.080	9.38	31.70	41.08	-12.92	54.00	105	360	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Camera	Date of Test	2024-10-23
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Dio
Test Mode	802.11n_20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

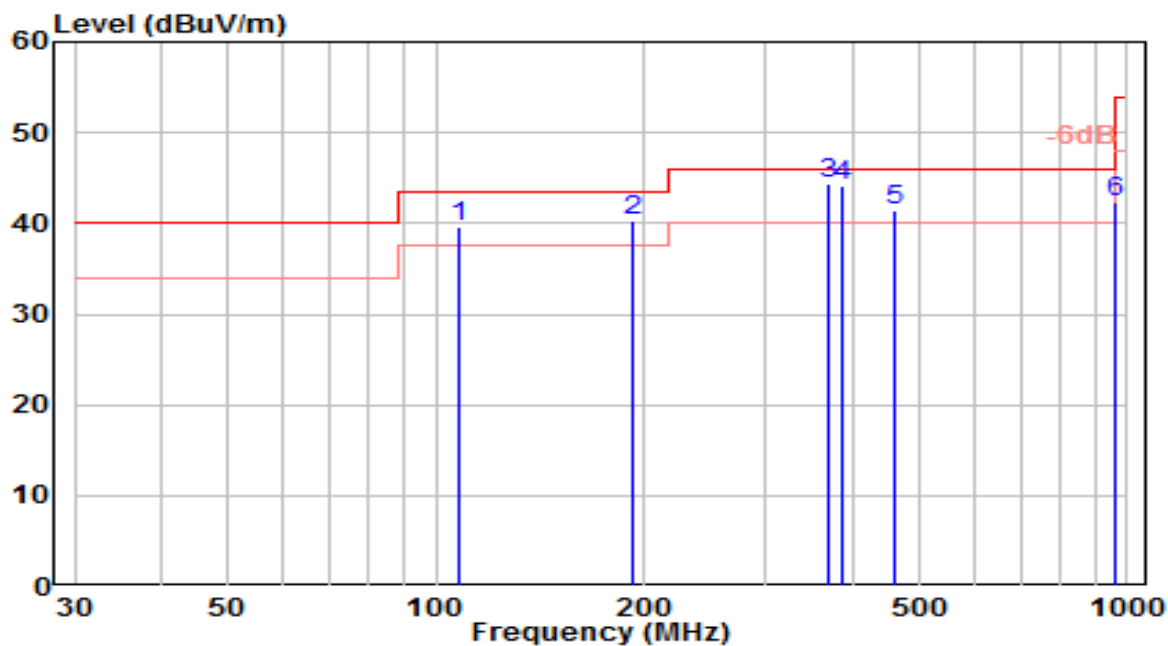


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	107.600	21.07	18.52	39.59	-3.91	43.50	173	0	QP
2	192.960	22.43	17.78	40.22	-3.28	43.50	100	291	QP
3	* 370.470	21.39	23.06	44.45	-1.55	46.00	100	264	QP
4	385.990	20.73	23.35	44.08	-1.92	46.00	100	250	QP
5	462.620	16.95	24.40	41.35	-4.65	46.00	100	37	QP
6	965.080	10.61	31.70	42.30	-11.70	54.00	100	220	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

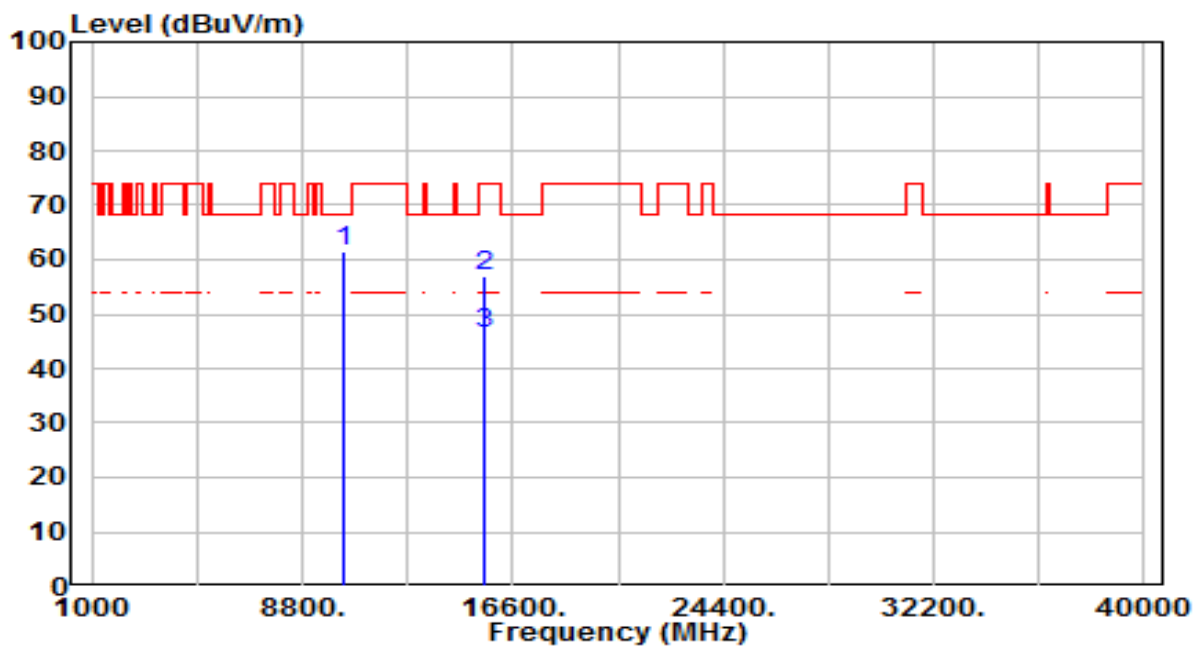


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	43.80	17.87	61.67	-6.53	68.20	100	86	Peak
2		15540.000	35.73	21.14	56.88	-17.12	74.00	100	105	Peak
3	*	15540.000	25.20	21.14	46.34	-7.66	54.00	100	105	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

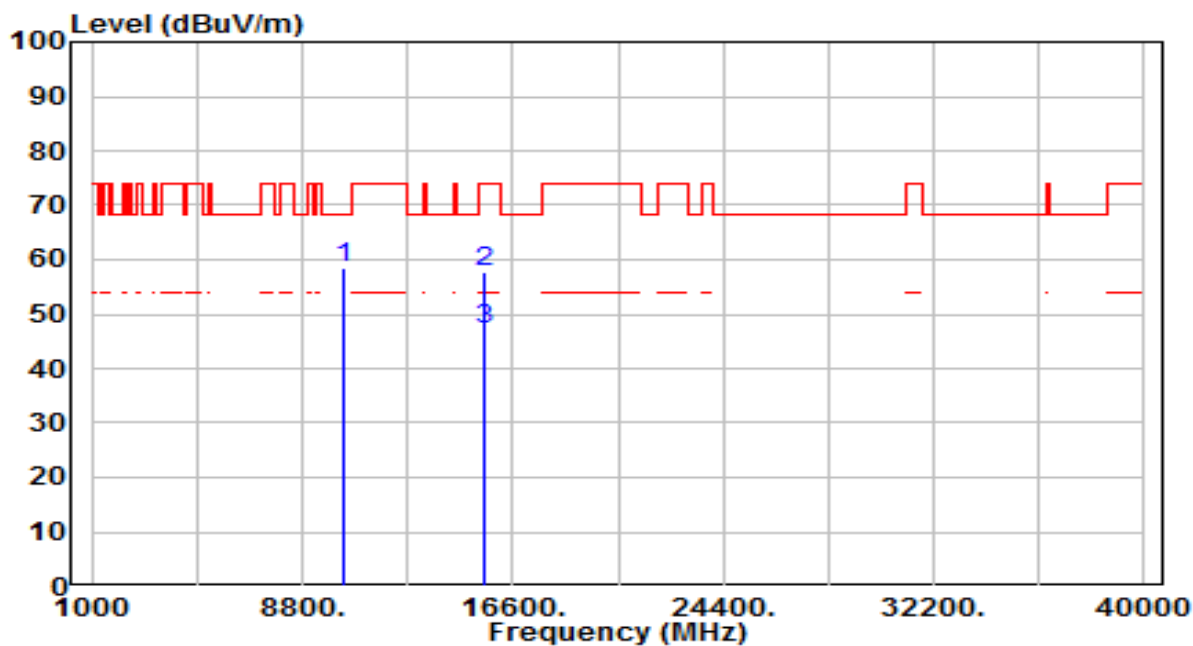


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	40.67	17.87	58.54	-9.66	68.20	100	143	Peak
2		15540.000	36.45	21.14	57.60	-16.40	74.00	100	139	Peak
3	*	15540.000	26.00	21.14	47.14	-6.86	54.00	100	139	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

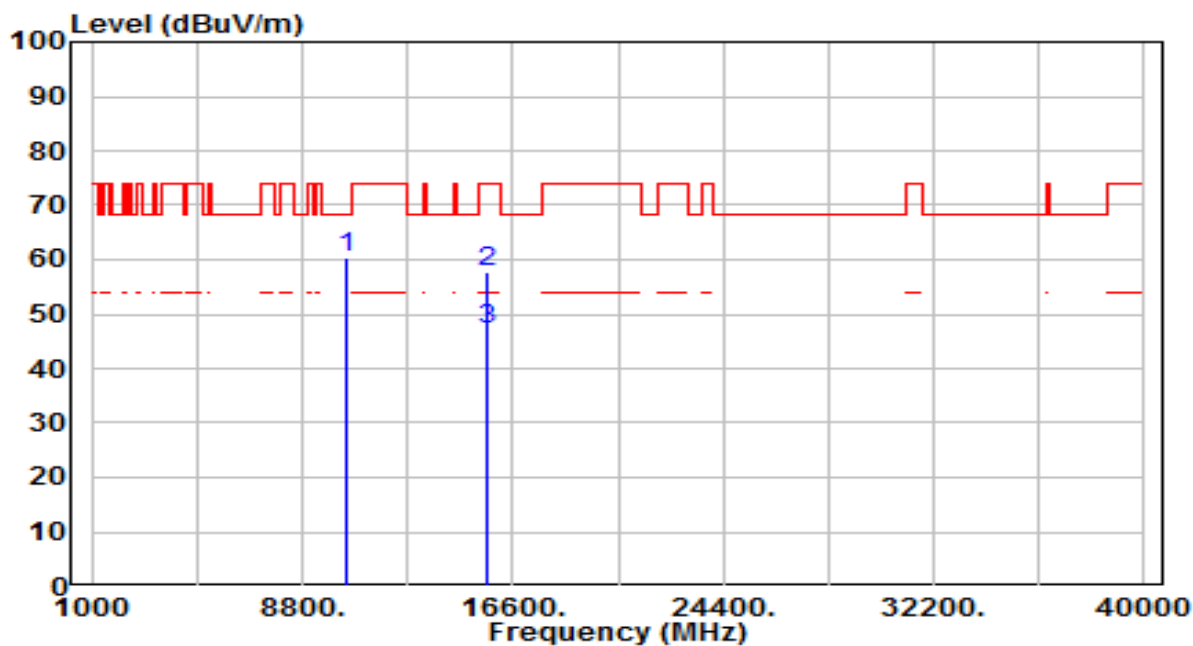


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	42.26	18.19	60.45	-7.75	68.20	100	122	Peak
2		15660.000	36.79	20.78	57.56	-16.44	74.00	100	110	Peak
3	*	15660.000	26.30	20.78	47.08	-6.92	54.00	100	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

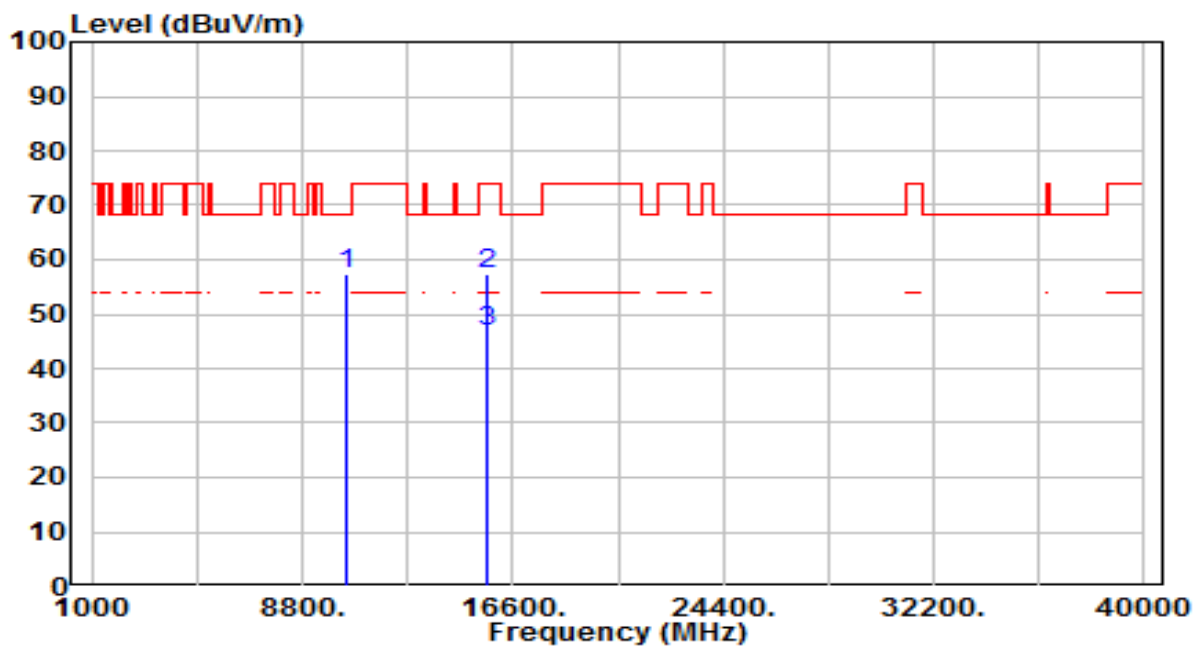


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	39.08	18.19	57.27	-10.93	68.20	100	151	Peak
2		15660.000	36.63	20.78	57.41	-16.59	74.00	100	210	Peak
3	*	15660.000	26.20	20.78	46.98	-7.02	54.00	100	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 48_ANT 0	Test Voltage	AC 120V/60Hz

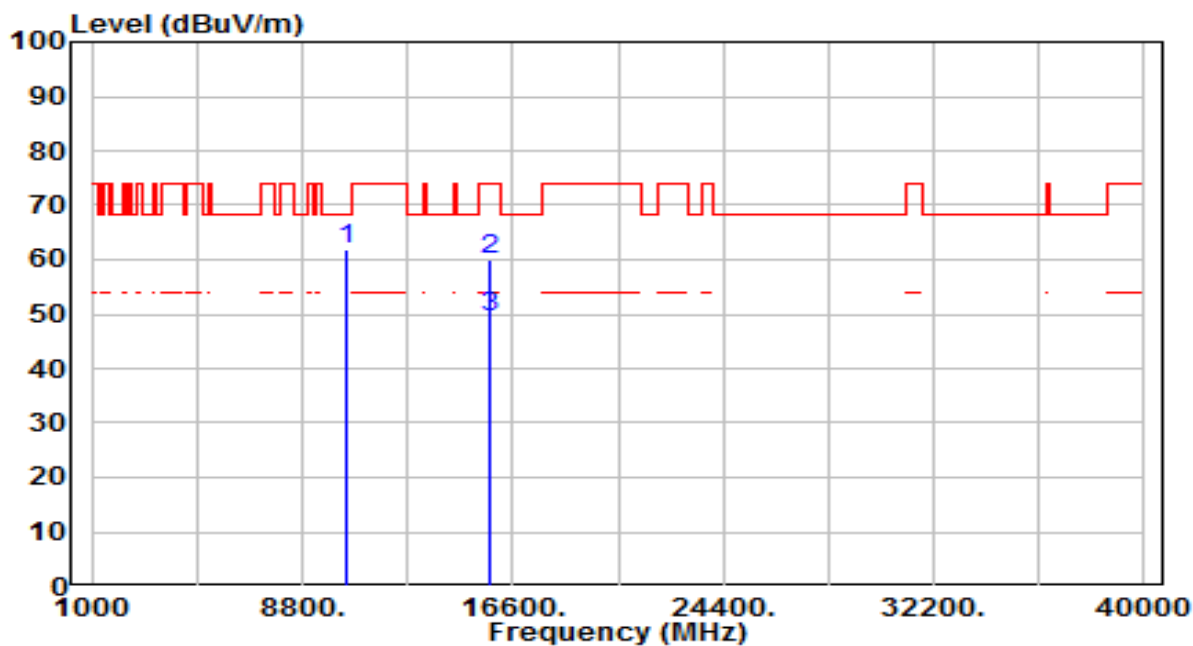


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	43.58	18.35	61.94	-6.26	68.20	100	138	Peak
2		15720.000	39.30	20.59	59.89	-14.11	74.00	100	96	Peak
3	*	15720.000	28.80	20.59	49.39	-4.61	54.00	100	96	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 48_ANT 0	Test Voltage	AC 120V/60Hz

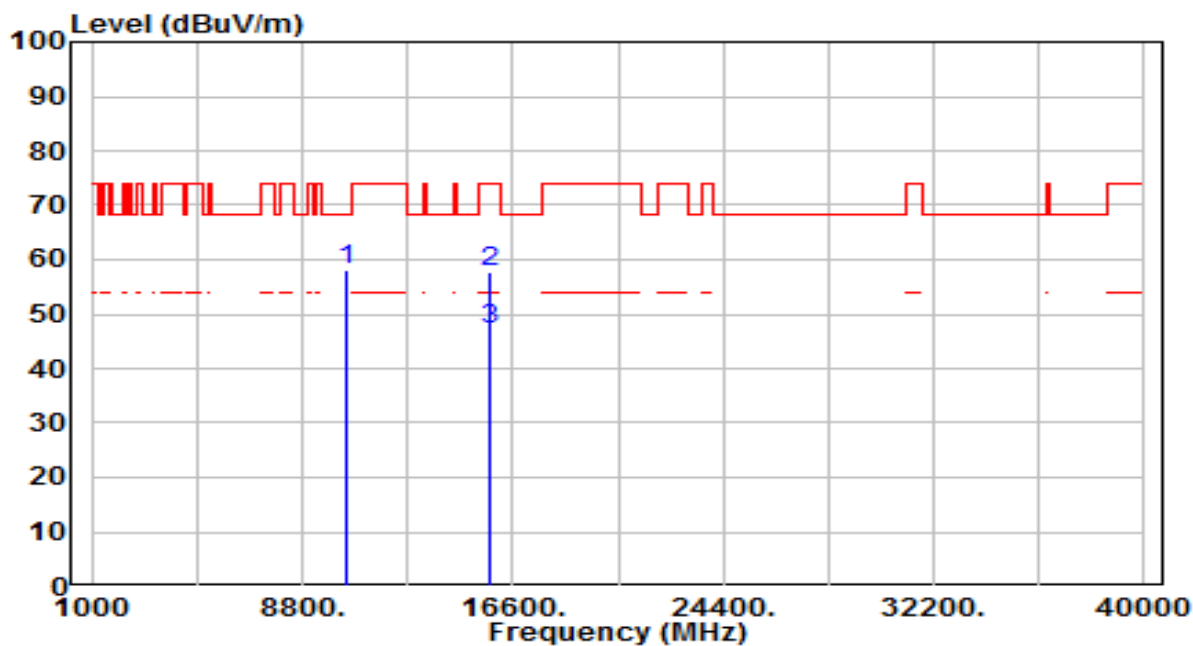


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	39.95	18.35	58.30	-9.90	68.20	100	151	Peak
2		15720.000	37.19	20.59	57.79	-16.21	74.00	100	136	Peak
3	*	15720.000	26.70	20.59	47.29	-6.71	54.00	100	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 52_ANT 0	Test Voltage	AC 120V/60Hz

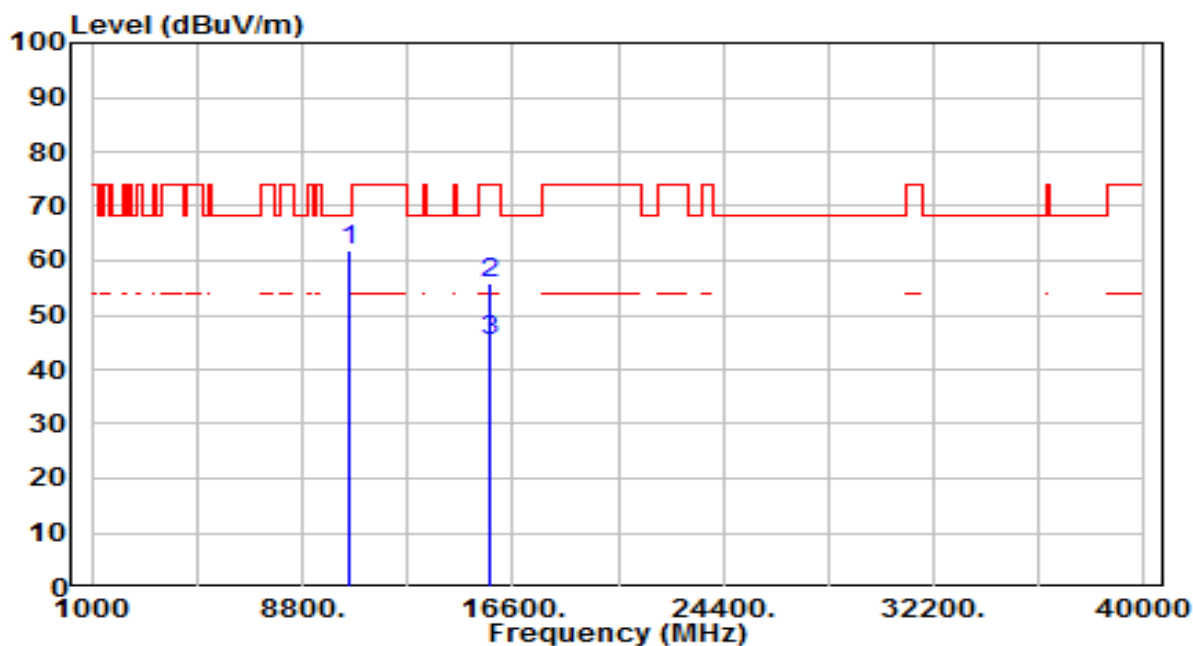


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	43.55	18.45	62.00	-6.20	68.20	100	69	Peak
2		15780.000	35.47	20.41	55.88	-18.12	74.00	100	268	Peak
3	*	15780.000	25.00	20.41	45.41	-8.59	54.00	100	268	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 52_ANT 0	Test Voltage	AC 120V/60Hz

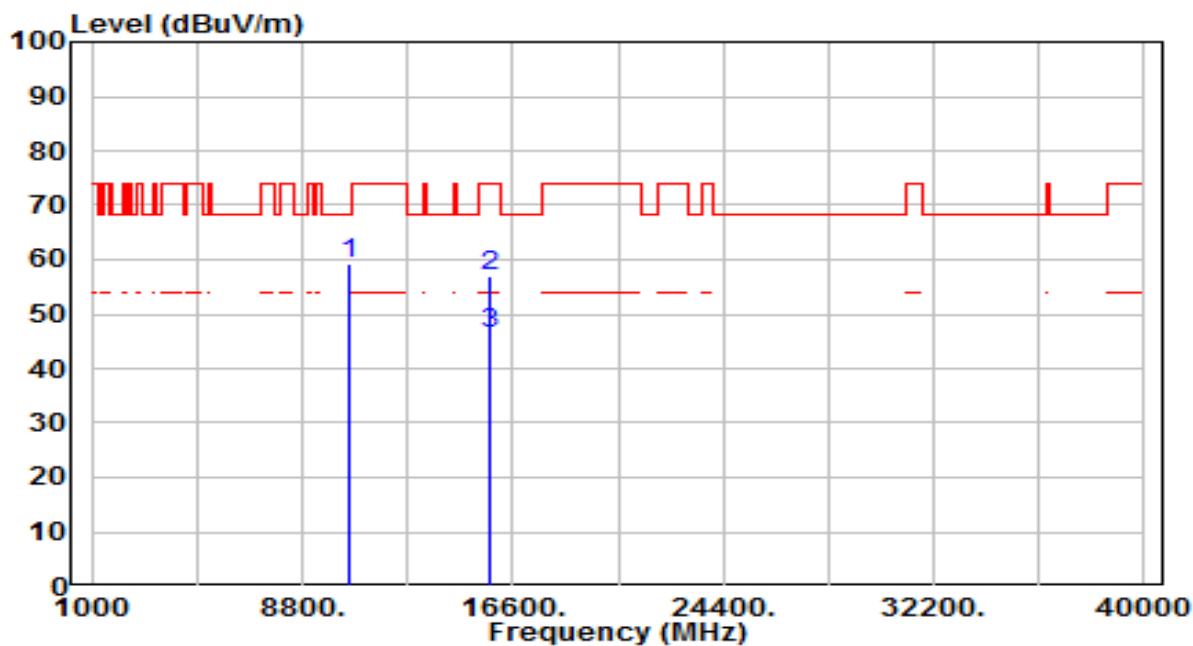


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	40.98	18.45	59.43	-8.77	68.20	100	152	Peak
2		15780.000	36.42	20.41	56.83	-17.17	74.00	100	137	Peak
3	*	15780.000	26.00	20.41	46.41	-7.59	54.00	100	137	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 60_ANT 0	Test Voltage	AC 120V/60Hz

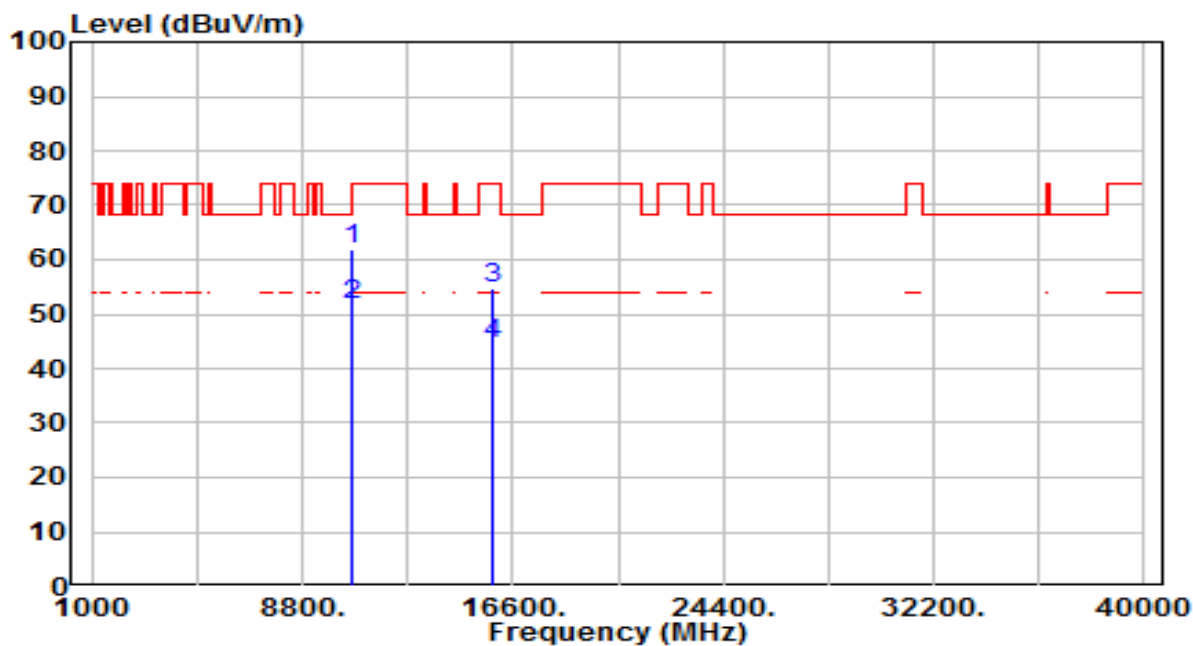


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	43.33	18.52	61.86	-6.34	68.20	100	138	Peak
2	*	10600.000	33.00	18.52	51.52	-2.48	54.00	100	138	Average
3		15900.000	34.82	20.05	54.87	-19.13	74.00	100	99	Peak
4		15900.000	24.40	20.05	44.45	-9.56	54.00	100	99	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 60_ANT 0	Test Voltage	AC 120V/60Hz

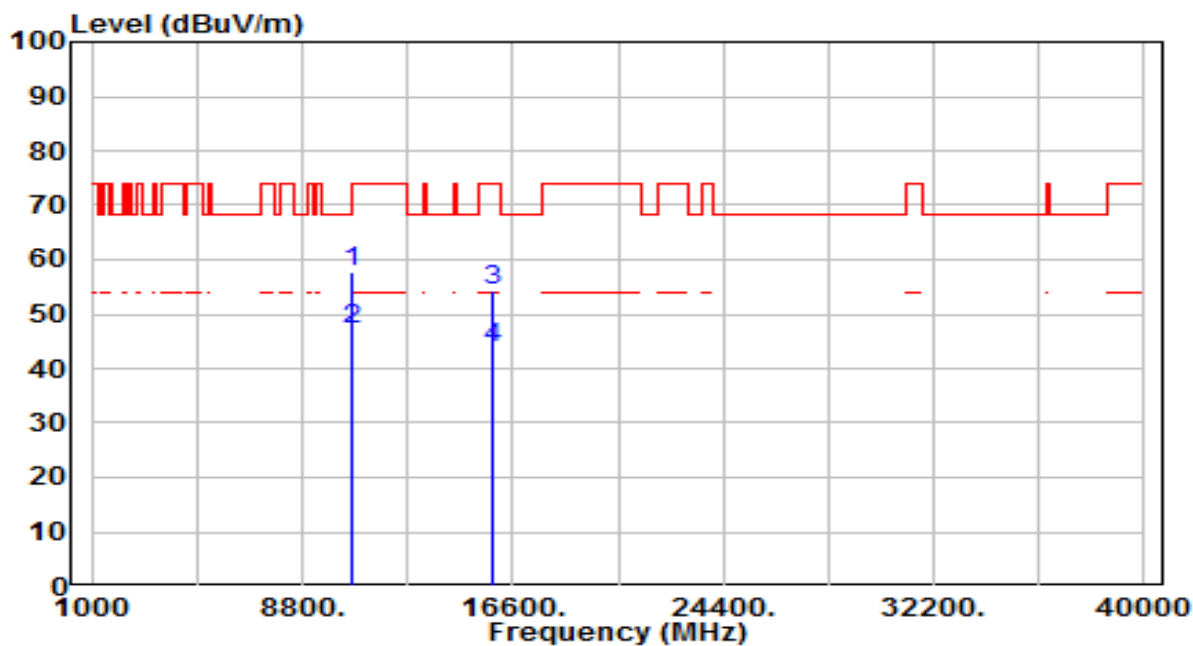


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	39.21	18.52	57.74	-10.46	68.20	100	158	Peak
2	*	10600.000	28.80	18.52	47.32	-6.68	54.00	100	158	Average
3		15900.000	34.25	20.05	54.29	-19.71	74.00	100	289	Peak
4		15900.000	23.80	20.05	43.85	-10.16	54.00	100	289	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

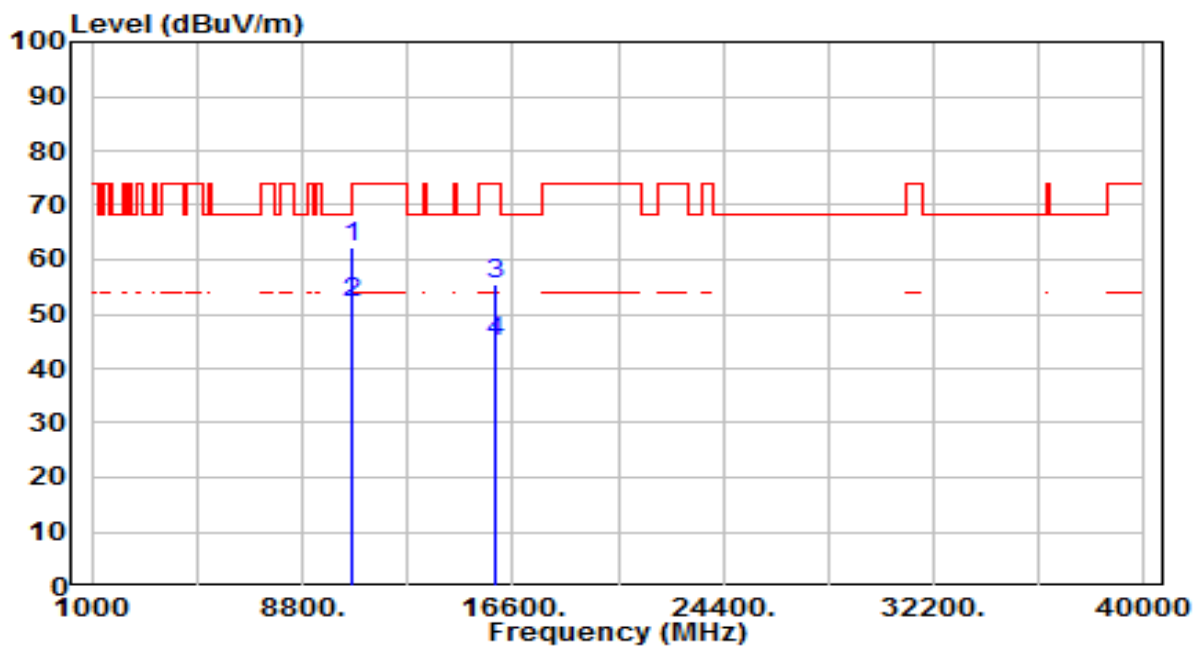


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10640.000	43.86	18.56	62.42	-11.58	74.00	100	152	Peak
2	*	10640.000	33.40	18.56	51.96	-2.04	54.00	100	152	Average
3		15960.000	35.60	19.86	55.46	-18.54	74.00	100	149	Peak
4		15960.000	25.10	19.86	44.96	-9.04	54.00	100	149	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

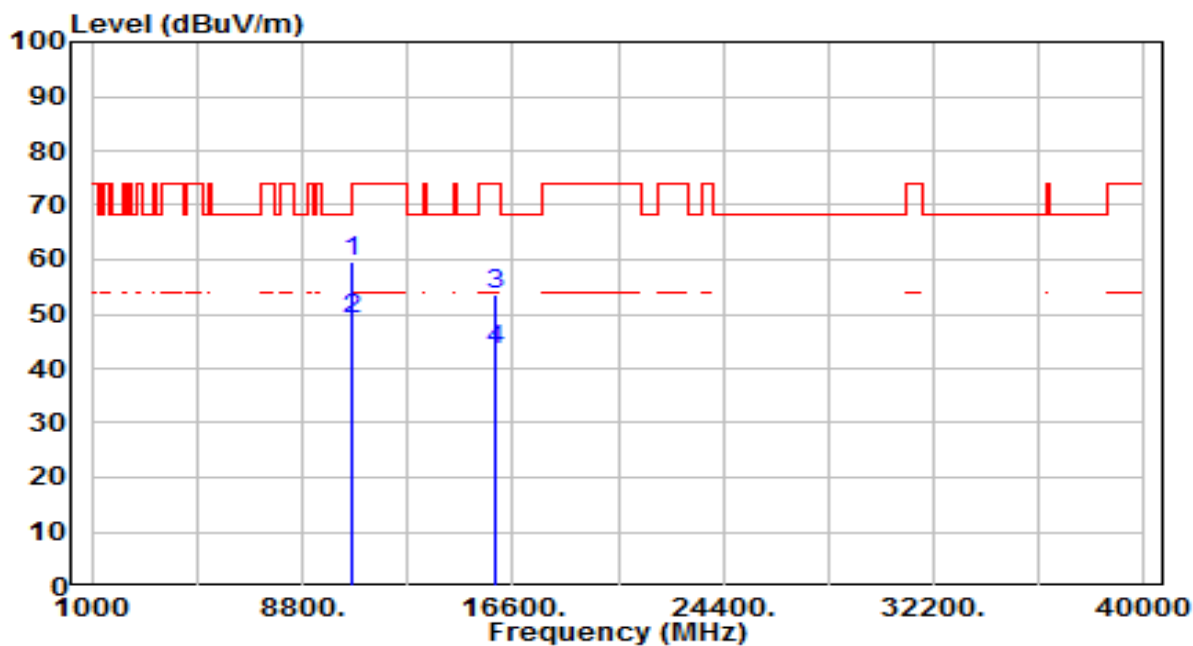


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10640.000	41.09	18.56	59.65	-14.35	74.00	100	142	Peak
2	*	10640.000	30.60	18.56	49.16	-4.84	54.00	100	142	Average
3		15960.000	33.86	19.86	53.72	-20.28	74.00	100	222	Peak
4		15960.000	23.40	19.86	43.26	-10.74	54.00	100	222	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

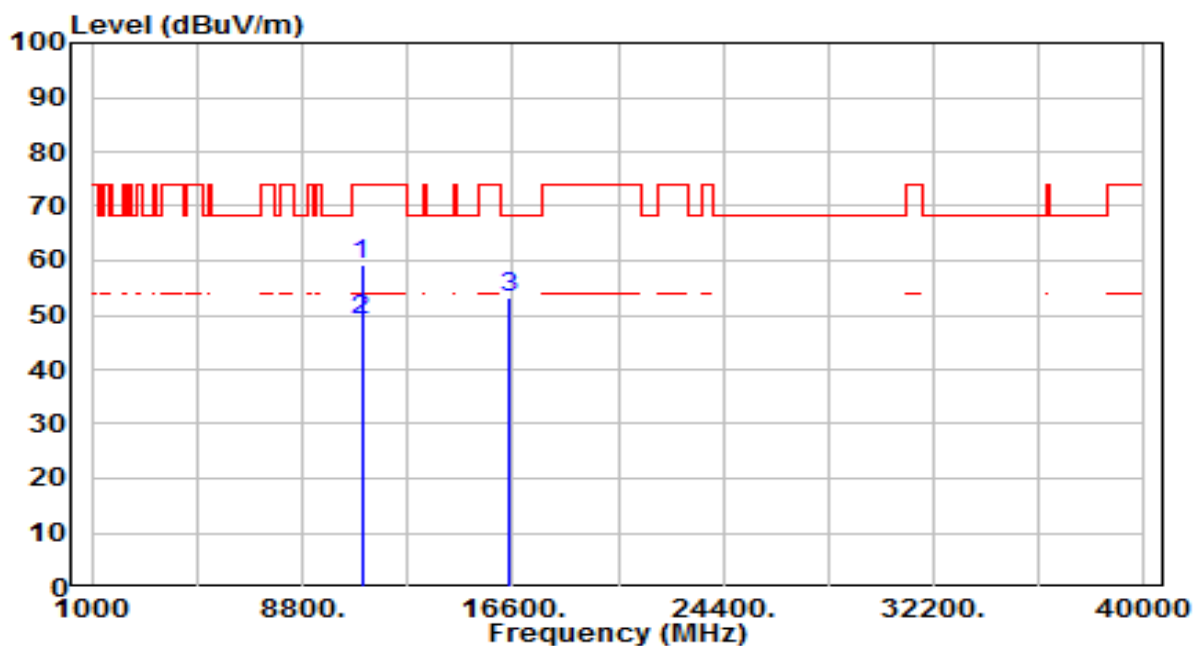


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11000.000	40.50	18.88	59.38	-14.62	74.00	100	155	Peak
2	*	11000.000	30.00	18.88	48.88	-5.12	54.00	100	155	Average
3		16500.000	32.60	20.64	53.24	-14.96	68.20	100	73	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

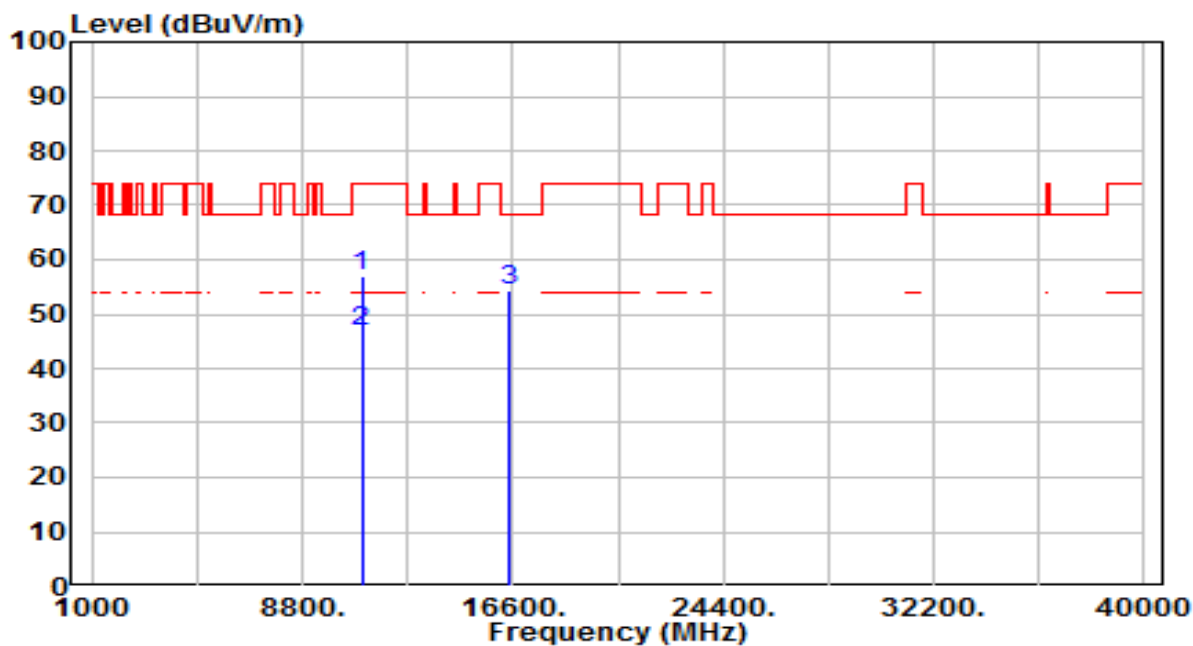


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	38.20	18.88	57.08	-16.92	74.00	100	153	Peak
2	* 11000.000	27.80	18.88	46.68	-7.32	54.00	100	153	Average
3	* 16500.000	33.79	20.64	54.42	-13.78	68.20	100	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 116_ANT 0	Test Voltage	AC 120V/60Hz

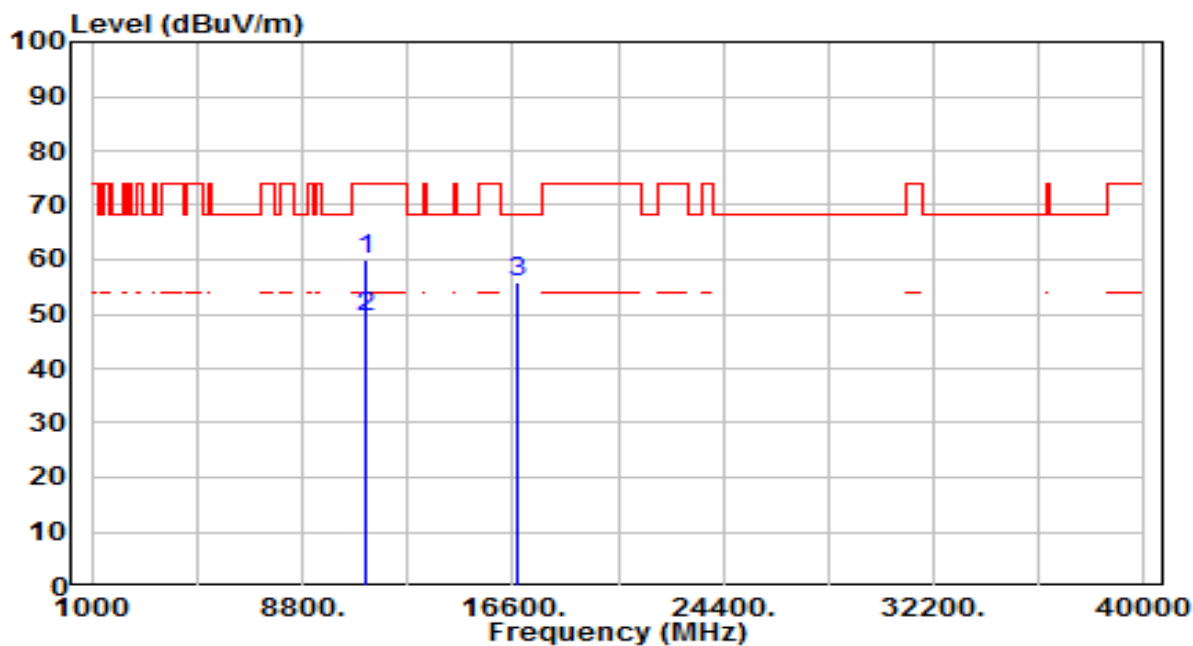


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	40.71	19.19	59.90	-14.10	74.00	100	143	Peak
2	* 11160.000	30.20	19.19	49.39	-4.61	54.00	100	143	Average
3	* 16740.000	33.55	22.26	55.81	-12.39	68.20	100	100	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 116_ANT 0	Test Voltage	AC 120V/60Hz

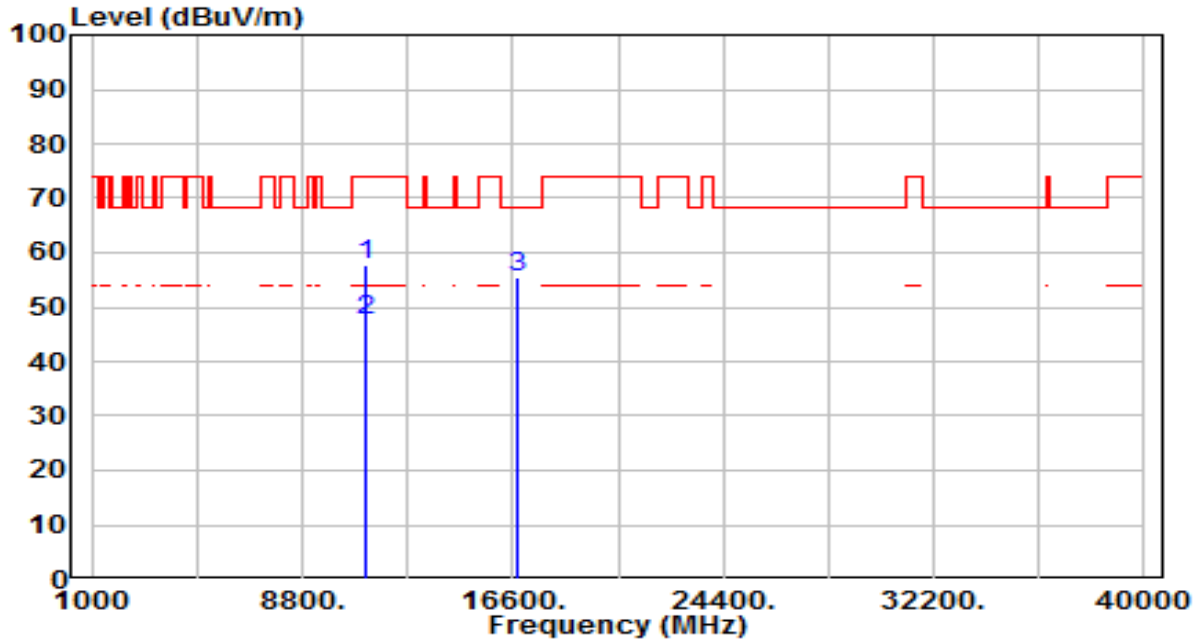


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	38.70	19.19	57.89	-16.11	74.00	100	230	Peak
2	* 11160.000	28.40	19.19	47.59	-6.41	54.00	100	230	Average
3	* 16740.000	33.33	22.26	55.59	-12.61	68.20	100	358	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

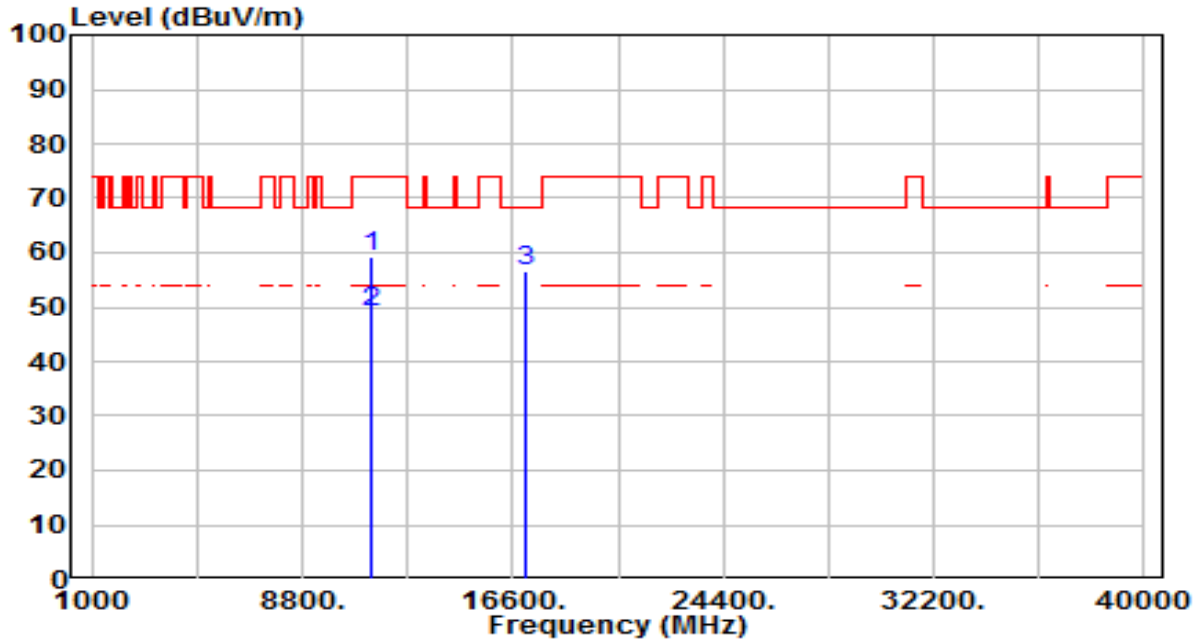


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	39.77	19.66	59.43	-14.57	74.00	100	158	Peak
2	* 11400.000	29.30	19.66	48.96	-5.04	54.00	100	158	Average
3	* 17100.000	31.86	24.76	56.62	-11.58	68.20	100	109	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

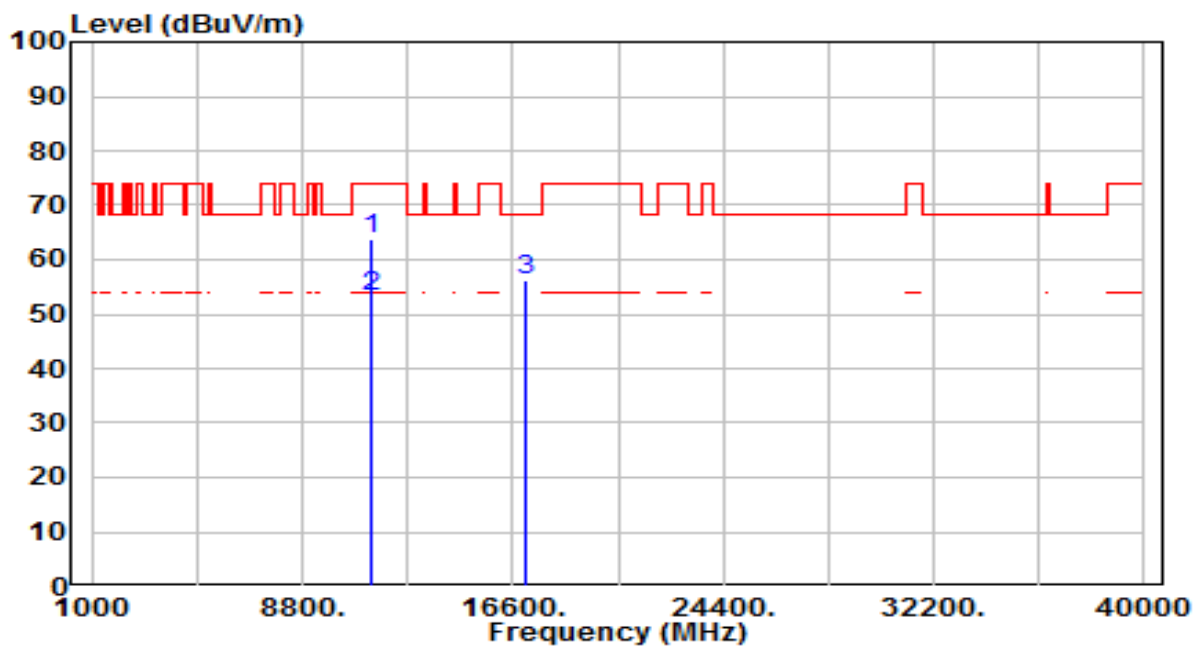


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11400.000	44.00	19.66	63.66	-10.34	74.00	100	137	Peak
2	*	11400.000	33.64	19.66	53.30	-0.70	54.00	100	137	Average
3		17100.000	31.41	24.76	56.17	-12.03	68.20	100	259	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 144_ANT 0	Test Voltage	AC 120V/60Hz

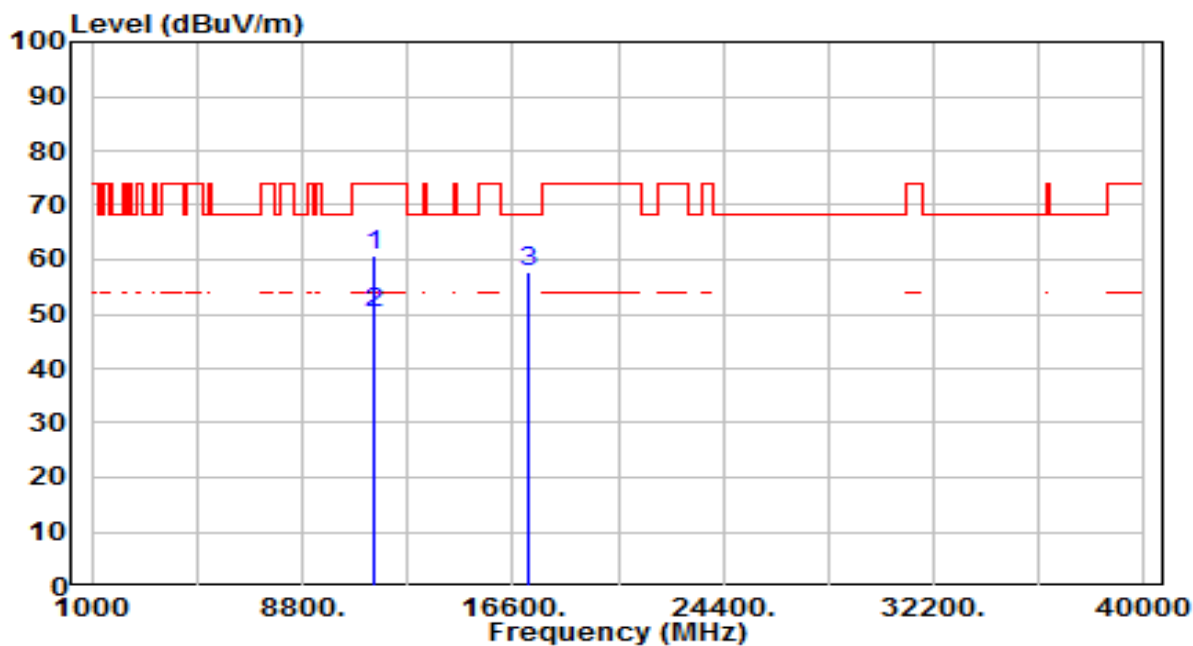


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	40.95	19.73	60.68	-13.32	74.00	100	166	Peak
2	* 11440.000	30.50	19.73	50.23	-3.77	54.00	100	166	Average
3	* 17160.000	32.41	25.21	57.62	-10.58	68.20	100	120	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 144_ANT 0	Test Voltage	AC 120V/60Hz

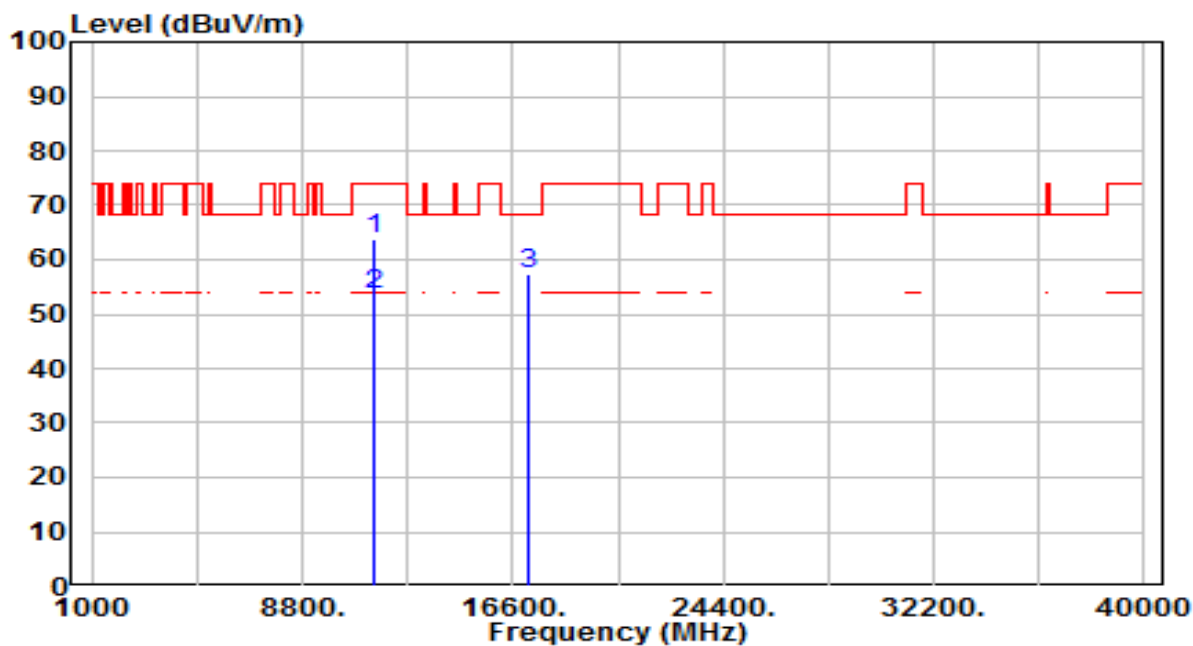


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11440.000	44.10	19.73	63.83	-10.17	74.00	100	138	Peak
2	*	11440.000	33.67	19.73	53.40	-0.60	54.00	100	138	Average
3		17160.000	32.16	25.21	57.37	-10.83	68.20	100	211	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

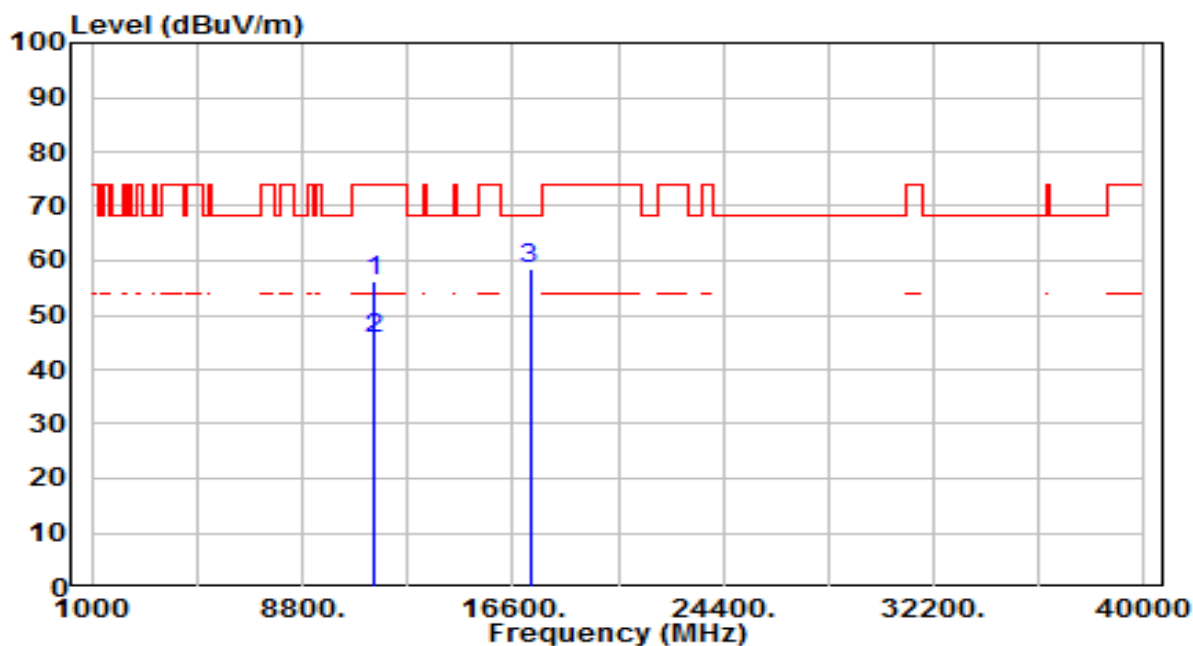


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	36.44	19.83	56.27	-17.73	74.00	100	146	Peak
2	* 11490.000	26.00	19.83	45.83	-8.17	54.00	100	146	Average
3	* 17235.000	32.72	25.76	58.48	-9.72	68.20	100	160	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

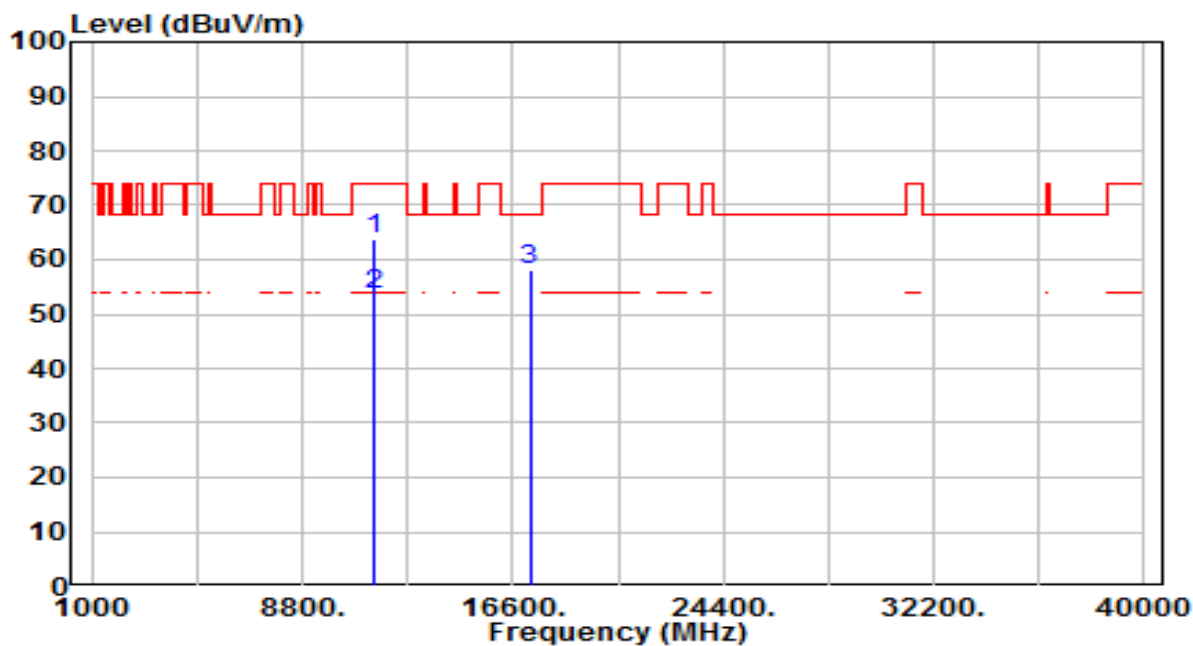


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	44.00	19.83	63.83	-10.17	74.00	100	149	Peak
2	* 11490.000	33.64	19.83	53.47	-0.53	54.00	100	149	Average
3	* 17235.000	32.29	25.76	58.05	-10.15	68.20	100	66	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 157_ANT 0	Test Voltage	AC 120V/60Hz

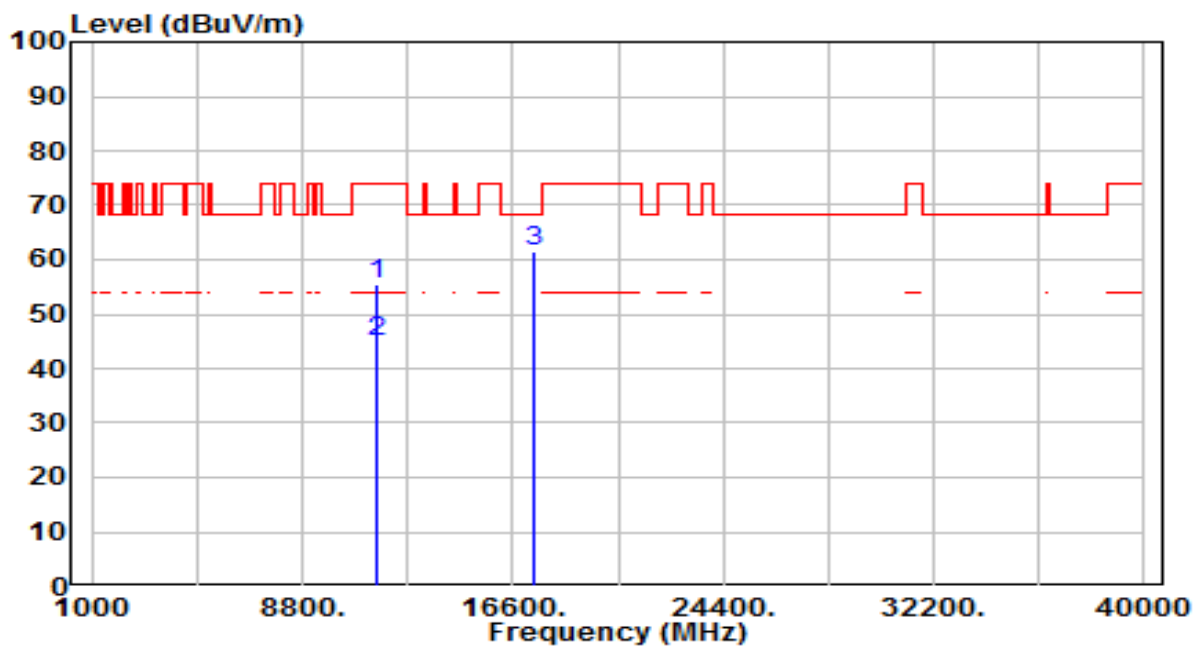


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	35.60	19.72	55.32	-18.68	74.00	100	145	Peak
2	* 11570.000	25.20	19.72	44.92	-9.08	54.00	100	145	Average
3	* 17355.000	35.03	26.65	61.69	-6.51	68.20	100	145	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 157_ANT 0	Test Voltage	AC 120V/60Hz

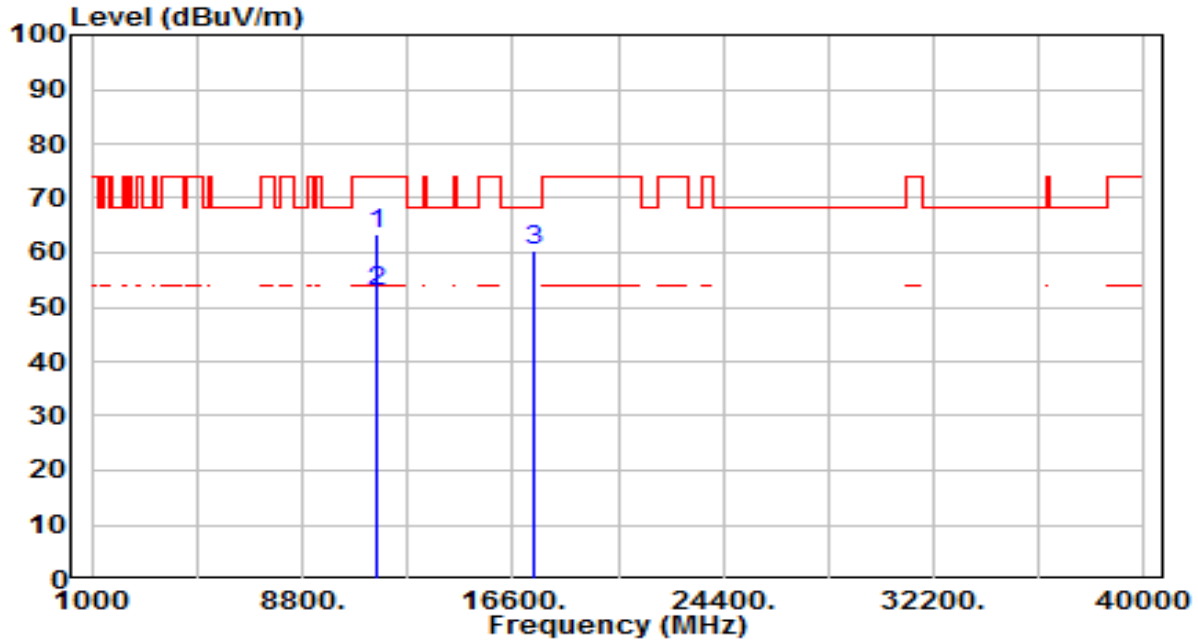


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	43.60	19.72	63.32	-10.68	74.00	100	146	Peak
2	* 11570.000	33.29	19.72	53.01	-0.99	54.00	100	146	Average
3	* 17355.000	33.86	26.65	60.51	-7.69	68.20	100	142	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

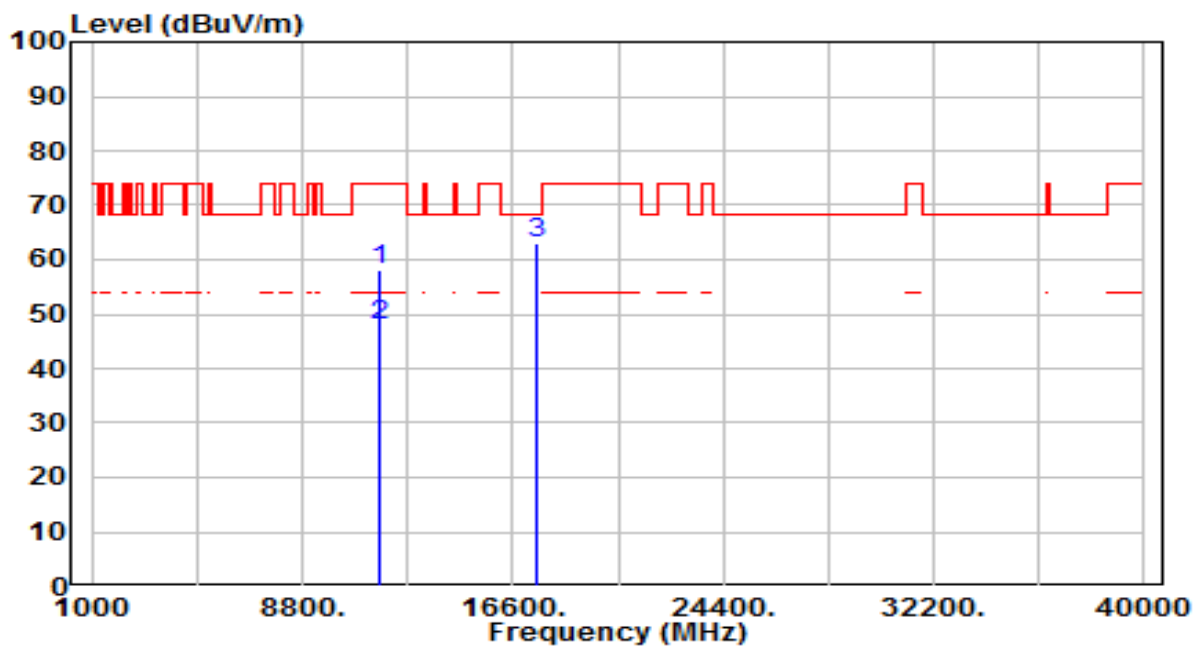


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	38.60	19.57	58.17	-15.83	74.00	100	149	Peak
2	* 11650.000	28.20	19.57	47.77	-6.23	54.00	100	149	Average
3	* 17475.000	35.59	27.54	63.13	-5.07	68.20	100	49	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

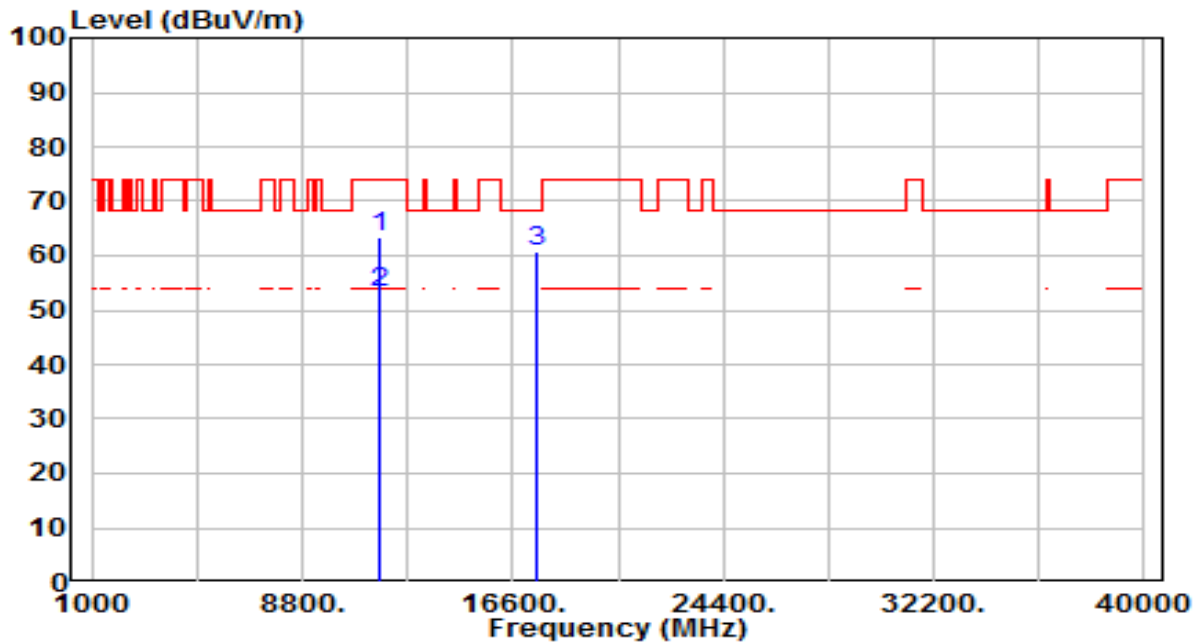


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	43.80	19.57	63.37	-10.63	74.00	100	156	Peak
2	* 11650.000	33.49	19.57	53.06	-0.94	54.00	100	156	Average
3	* 17475.000	33.14	27.54	60.68	-7.52	68.20	100	200	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

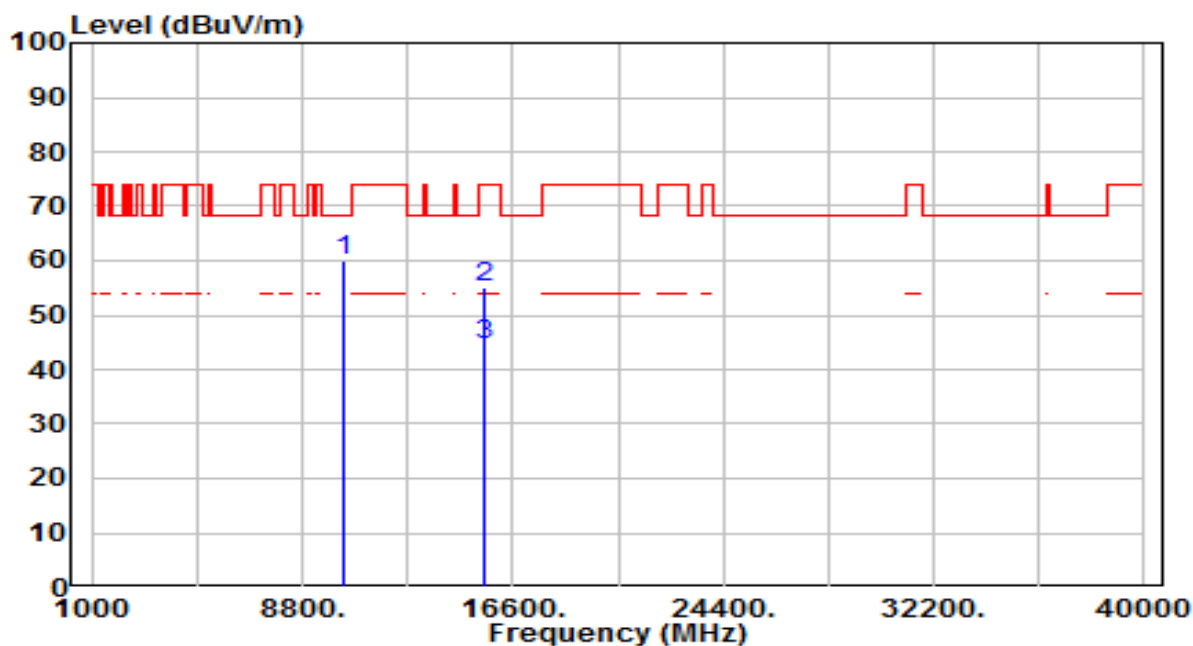


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.99	17.87	59.86	-8.34	68.20	100	121	Peak
2		15540.000	33.83	21.14	54.97	-19.03	74.00	100	107	Peak
3	*	15540.000	23.40	21.14	44.54	-9.46	54.00	100	107	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

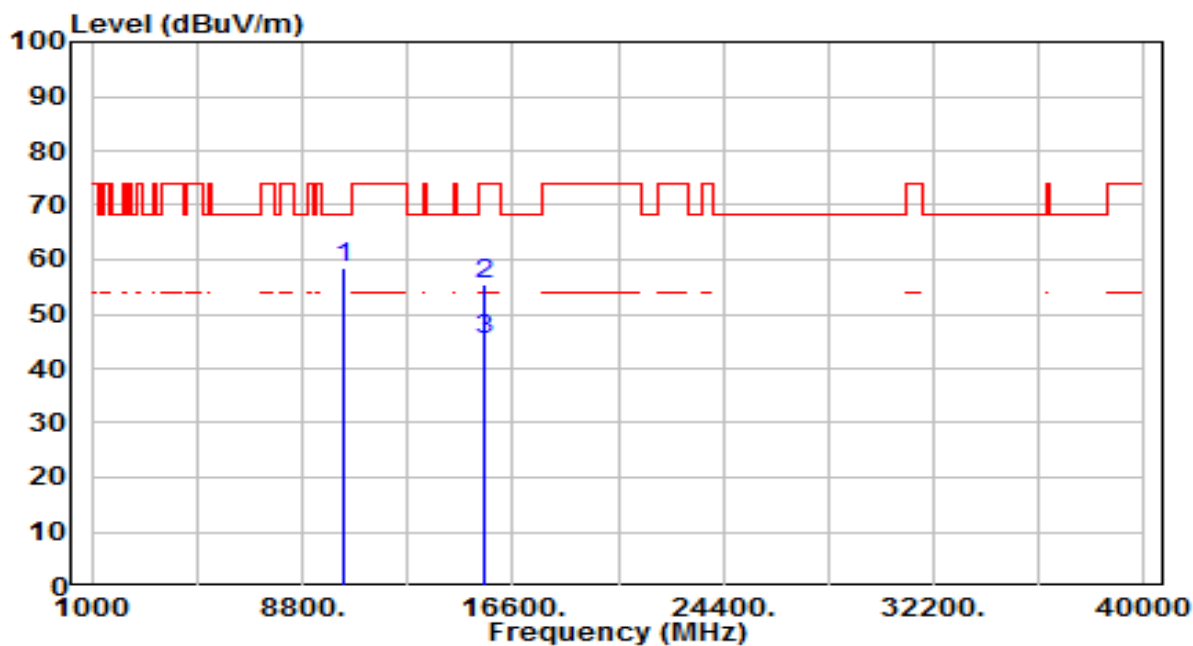


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	40.63	17.87	58.50	-9.70	68.20	100	144	Peak
2		15540.000	34.46	21.14	55.61	-18.39	74.00	100	39	Peak
3	*	15540.000	24.00	21.14	45.14	-8.86	54.00	100	39	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

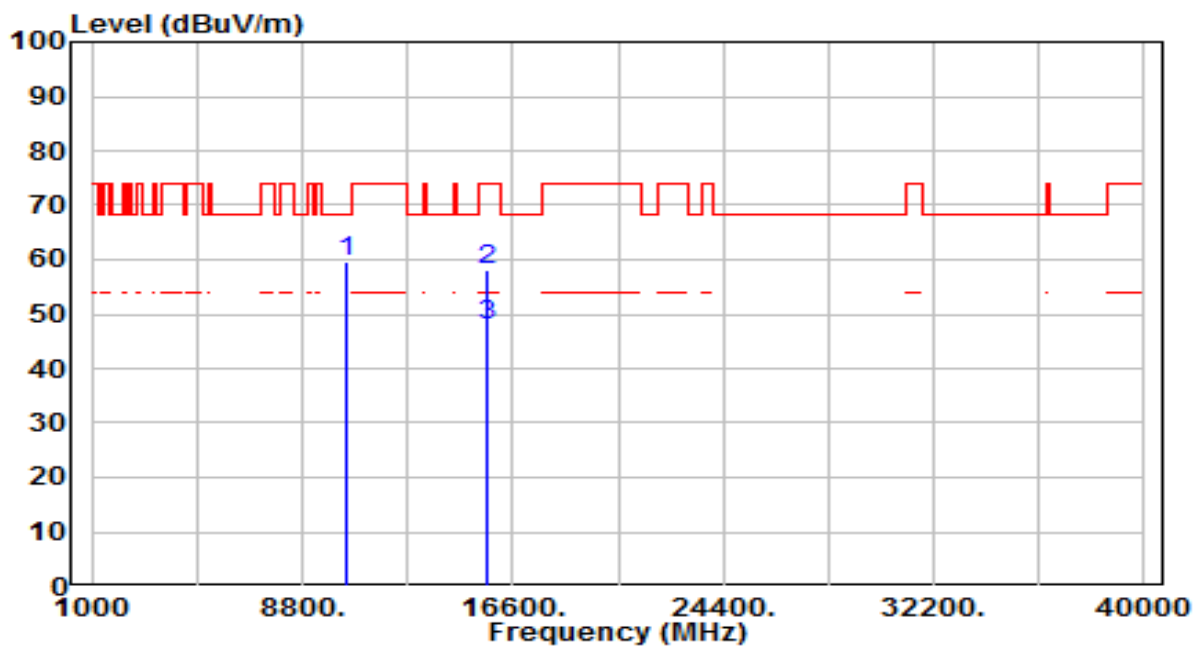


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	41.47	18.19	59.66	-8.54	68.20	100	124	Peak
2		15660.000	37.49	20.78	58.27	-15.73	74.00	100	95	Peak
3	*	15660.000	27.10	20.78	47.88	-6.12	54.00	100	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

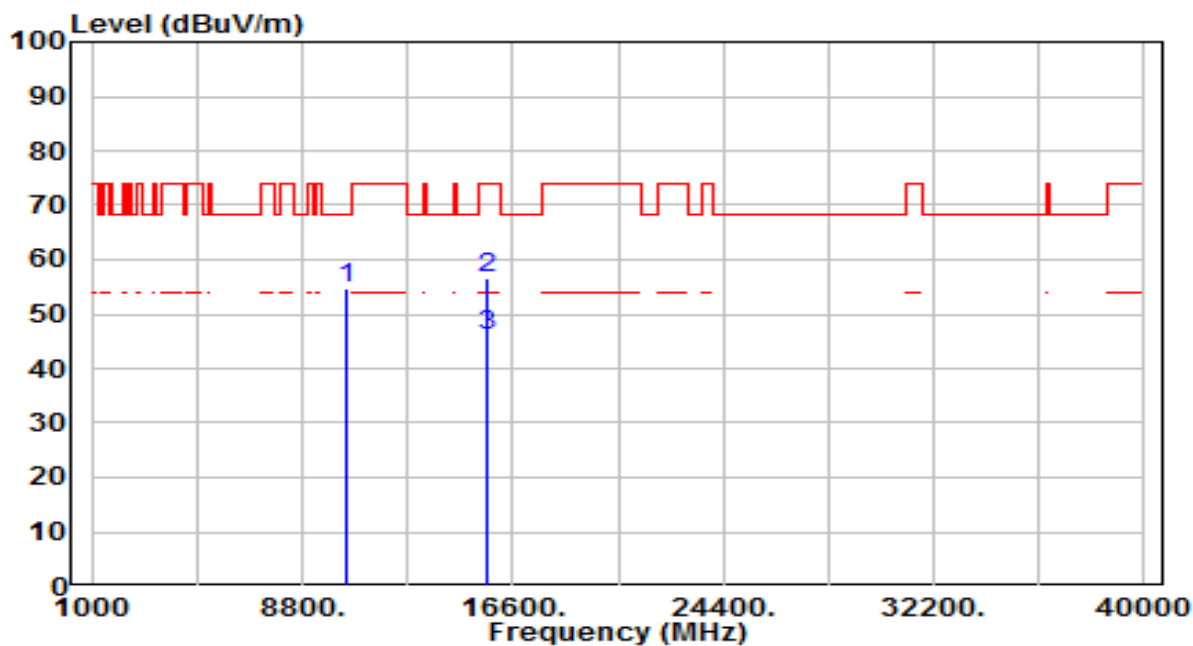


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	36.59	18.19	54.79	-13.41	68.20	100	228	Peak
2		15660.000	35.90	20.78	56.67	-17.33	74.00	100	139	Peak
3	*	15660.000	25.40	20.78	46.18	-7.82	54.00	100	139	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band1_CH 48_ANT 0	Test Voltage	AC 120V/60Hz

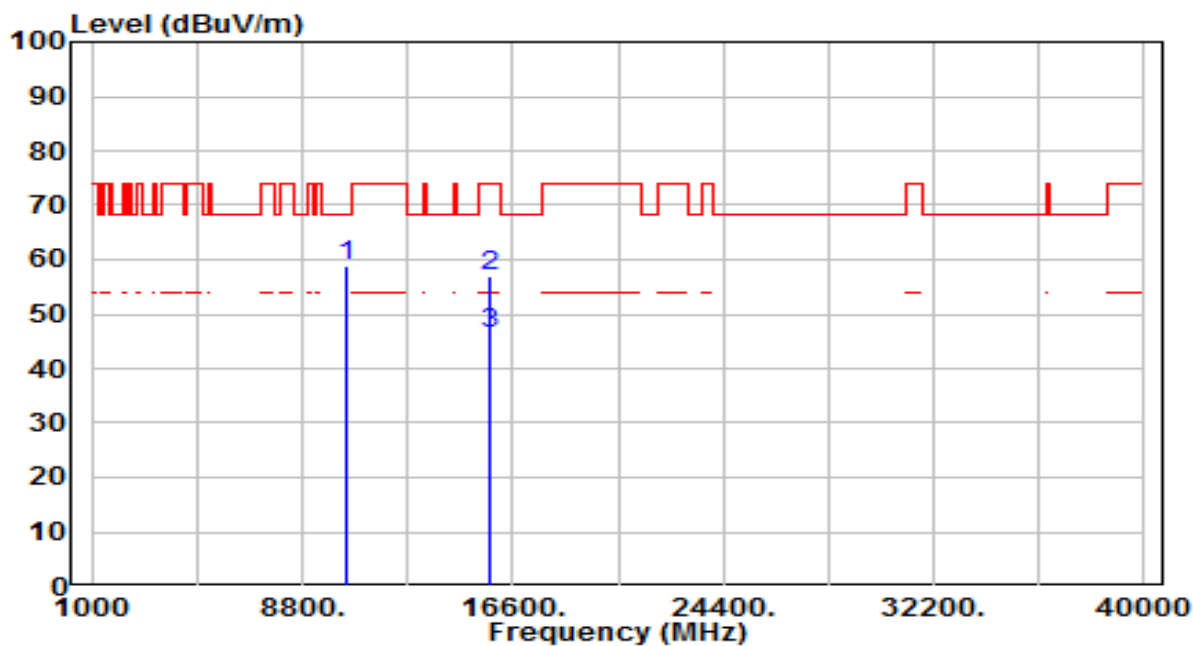


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	40.53	18.35	58.89	-9.31	68.20	100	110	Peak
2		15720.000	36.31	20.59	56.90	-17.10	74.00	100	143	Peak
3	*	15720.000	26.00	20.59	46.59	-7.41	54.00	100	143	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band1_CH 48_ANT 0	Test Voltage	AC 120V/60Hz

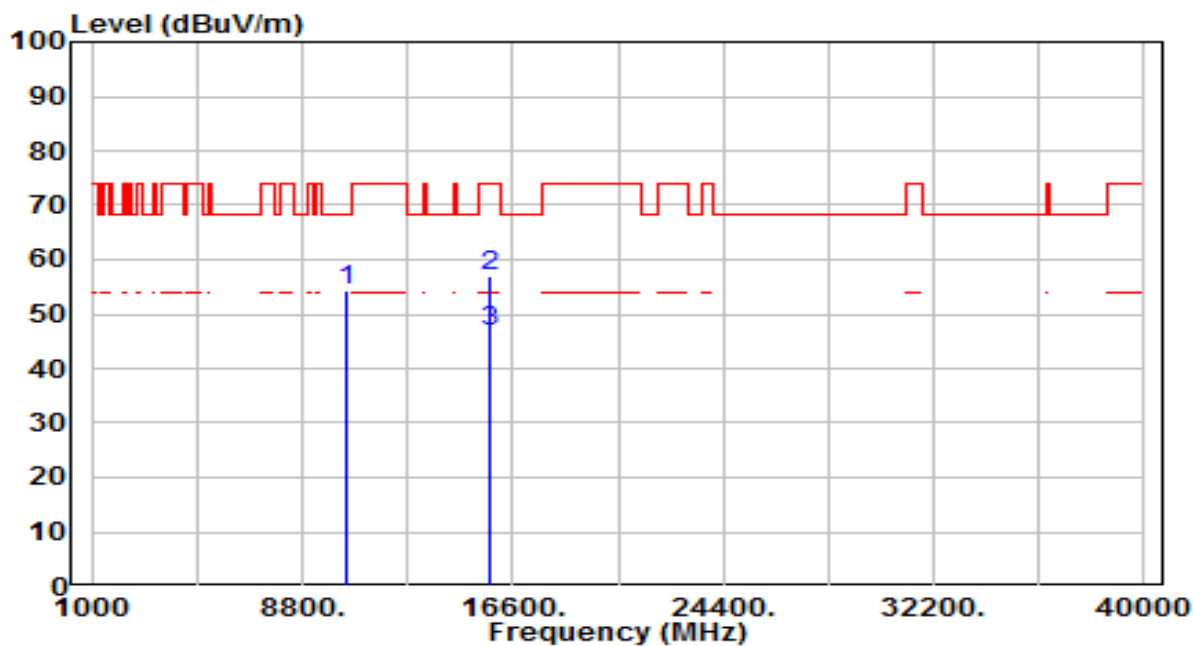


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	36.06	18.35	54.41	-13.79	68.20	100	150	Peak
2		15720.000	36.53	20.59	57.13	-16.87	74.00	100	154	Peak
3	*	15720.000	26.10	20.59	46.69	-7.31	54.00	100	154	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band2_CH 52_ANT 0	Test Voltage	AC 120V/60Hz

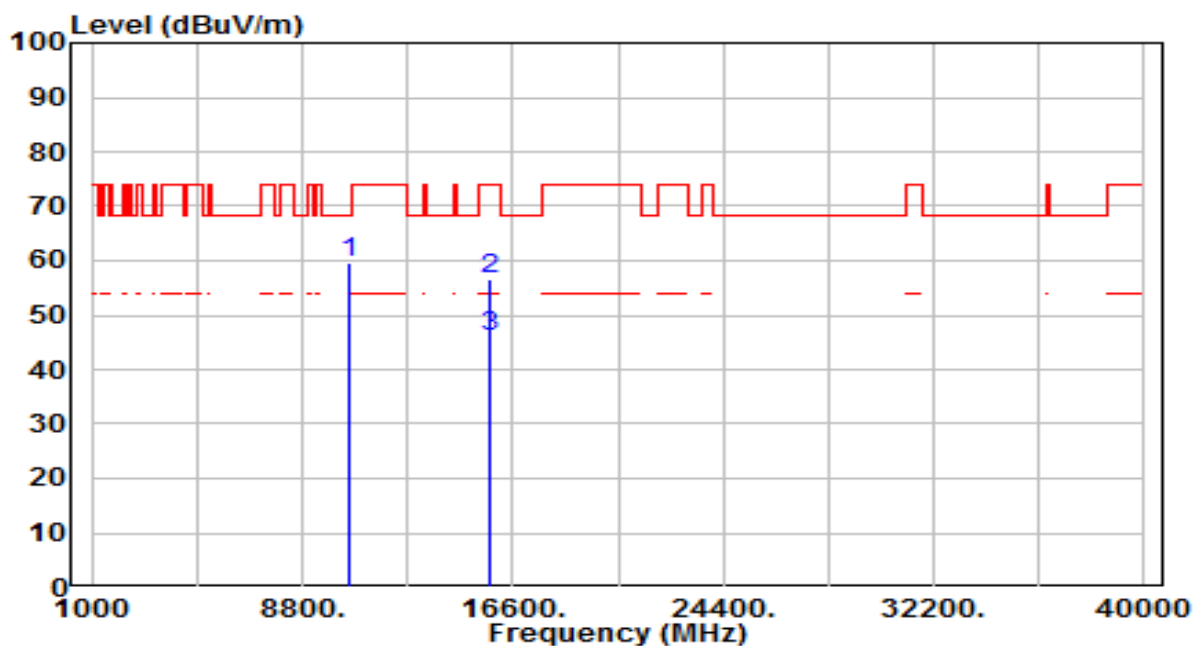


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.30	18.45	59.75	-8.45	68.20	100	132	Peak
2		15780.000	36.21	20.41	56.62	-17.38	74.00	100	89	Peak
3	*	15780.000	25.80	20.41	46.21	-7.79	54.00	100	89	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band2_CH 52_ANT 0	Test Voltage	AC 120V/60Hz

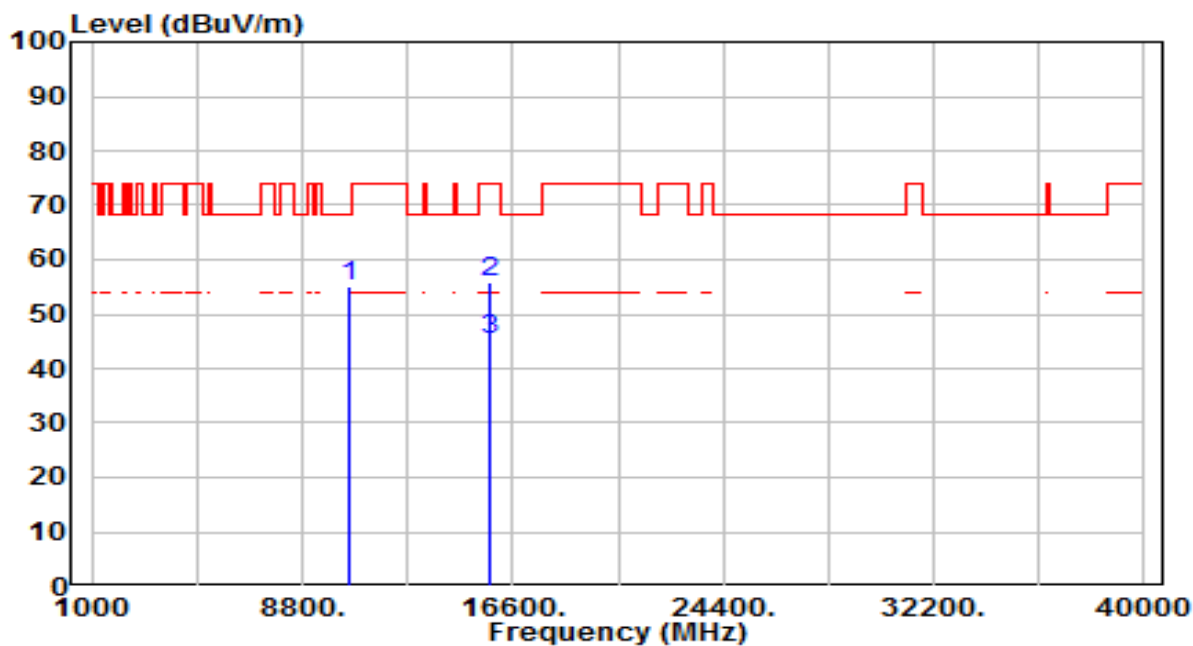


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	36.57	18.45	55.02	-13.18	68.20	100	148	Peak
2		15780.000	35.26	20.41	55.67	-18.33	74.00	100	221	Peak
3	*	15780.000	24.80	20.41	45.21	-8.79	54.00	100	221	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band2_CH 60_ANT 0	Test Voltage	AC 120V/60Hz

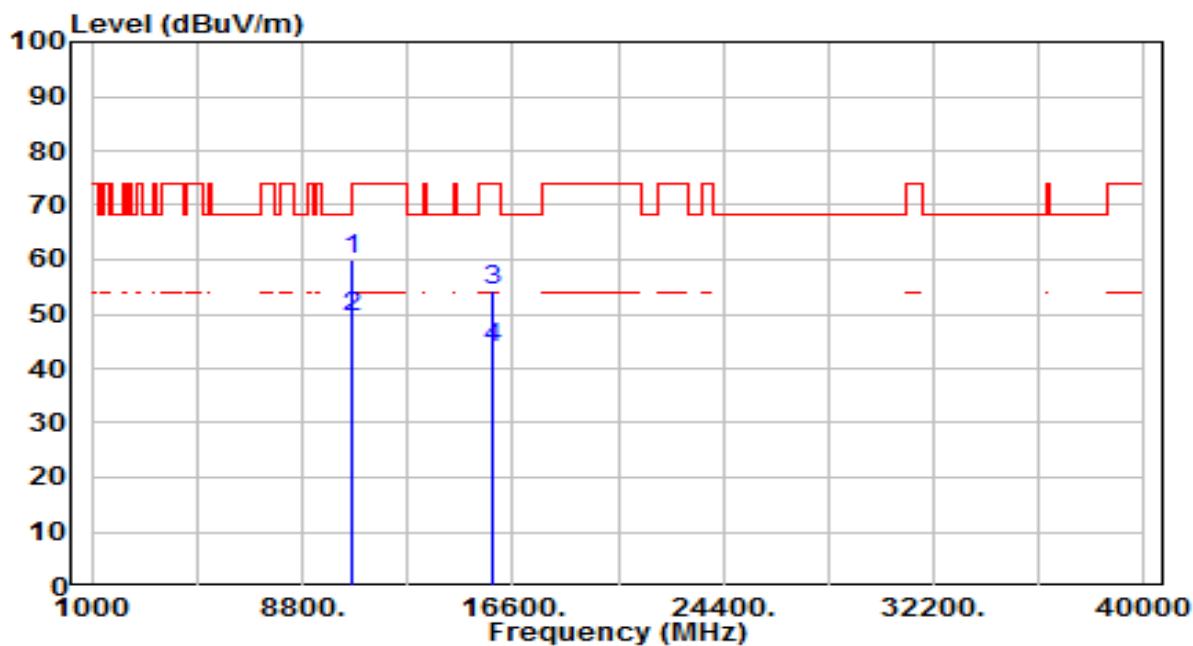


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.41	18.52	59.93	-8.27	68.20	100	136	Peak
2	*	10600.000	31.00	18.52	49.52	-4.48	54.00	100	136	Average
3		15900.000	34.27	20.05	54.32	-19.68	74.00	100	99	Peak
4		15900.000	23.70	20.05	43.75	-10.26	54.00	100	99	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band2_CH 60_ANT 0	Test Voltage	AC 120V/60Hz

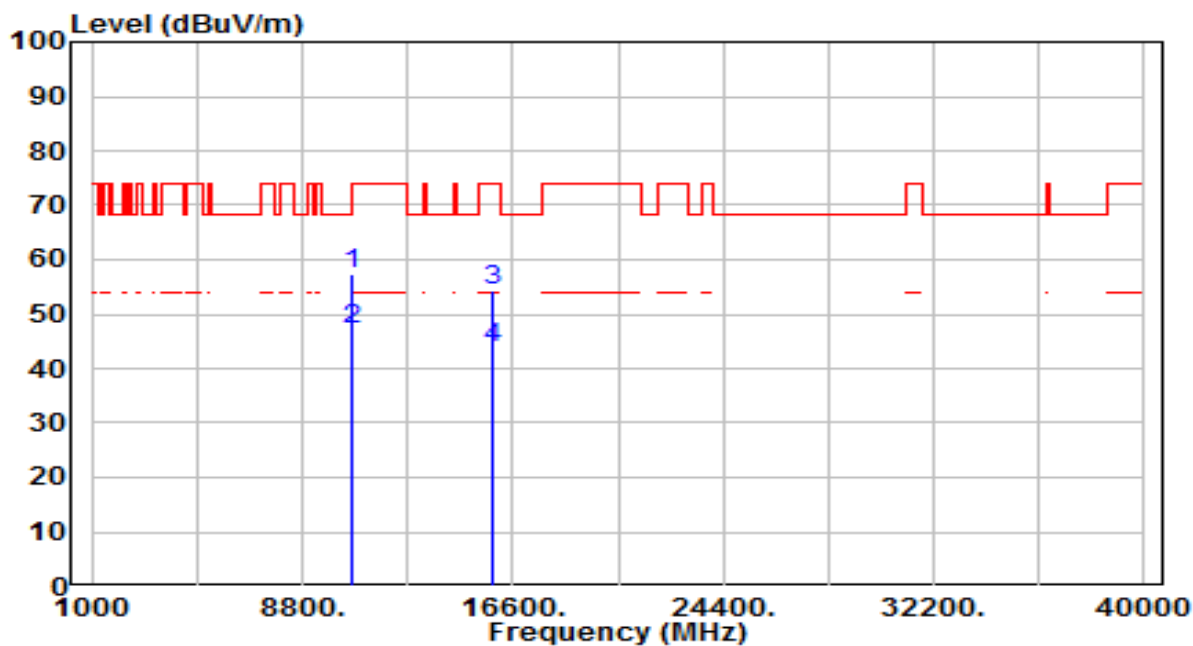


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	39.02	18.52	57.55	-10.65	68.20	100	149	Peak
2	*	10600.000	28.60	18.52	47.12	-6.88	54.00	100	149	Average
3		15900.000	34.24	20.05	54.29	-19.71	74.00	100	131	Peak
4		15900.000	23.80	20.05	43.85	-10.16	54.00	100	131	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

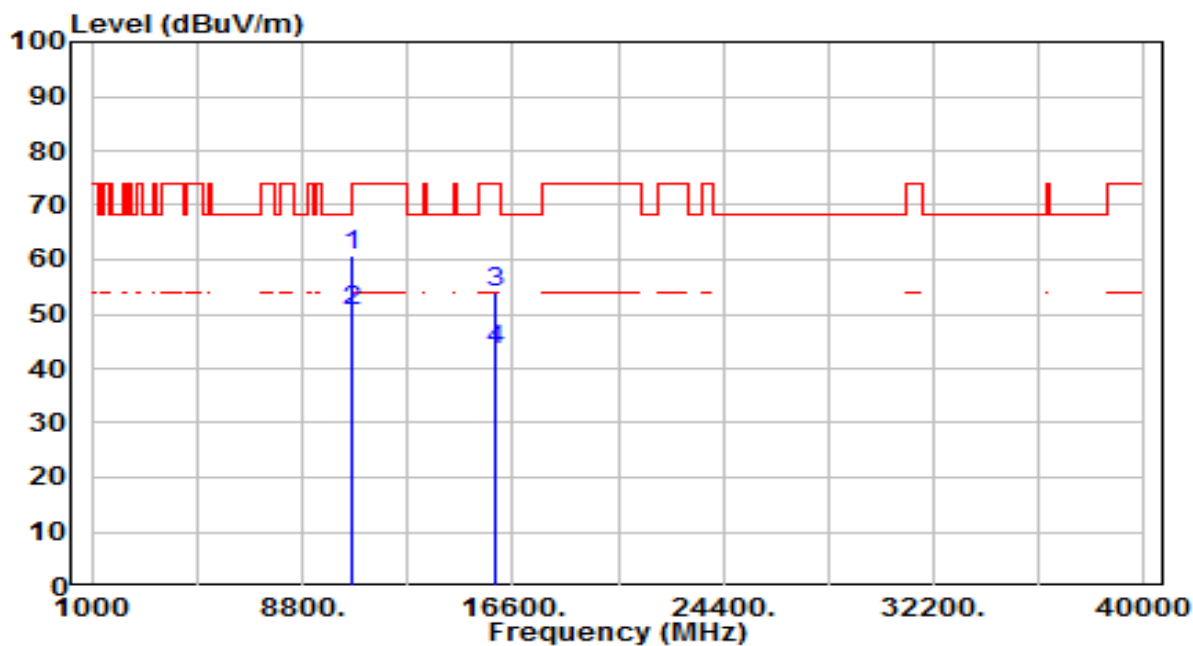


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10640.000	42.33	18.56	60.89	-13.11	74.00	100	160	Peak
2	*	10640.000	32.00	18.56	50.56	-3.44	54.00	100	160	Average
3		15960.000	34.19	19.86	54.05	-19.95	74.00	100	167	Peak
4		15960.000	23.60	19.86	43.46	-10.54	54.00	100	167	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

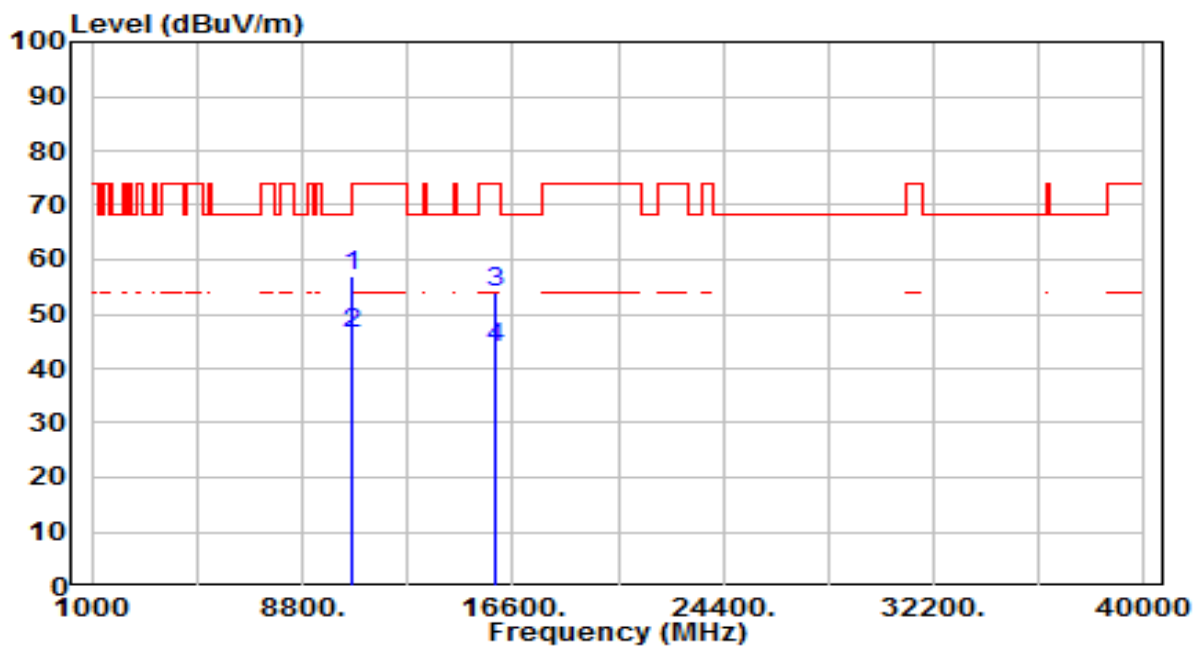


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10640.000	38.35	18.56	56.91	-17.09	74.00	100	137	Peak
2	*	10640.000	27.90	18.56	46.46	-7.54	54.00	100	137	Average
3		15960.000	34.20	19.86	54.07	-19.93	74.00	100	26	Peak
4		15960.000	23.80	19.86	43.66	-10.34	54.00	100	26	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

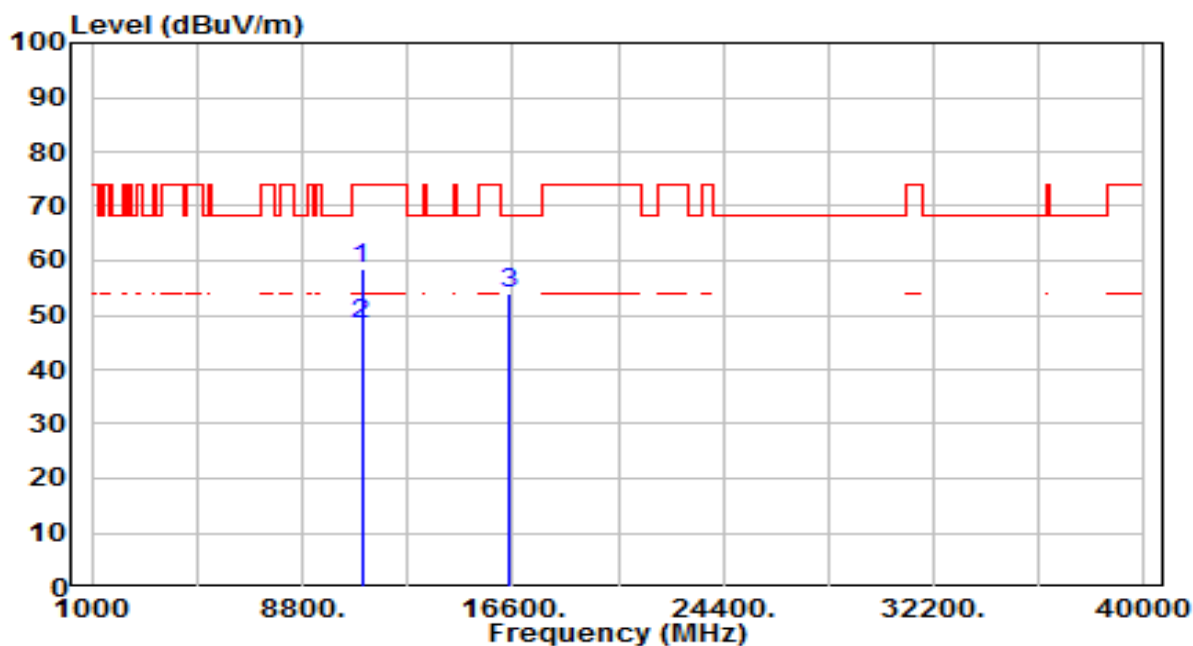


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	39.77	18.88	58.65	-15.35	74.00	100	151	Peak
2	* 11000.000	29.30	18.88	48.18	-5.82	54.00	100	151	Average
3	* 16500.000	33.18	20.64	53.82	-14.38	68.20	100	201	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

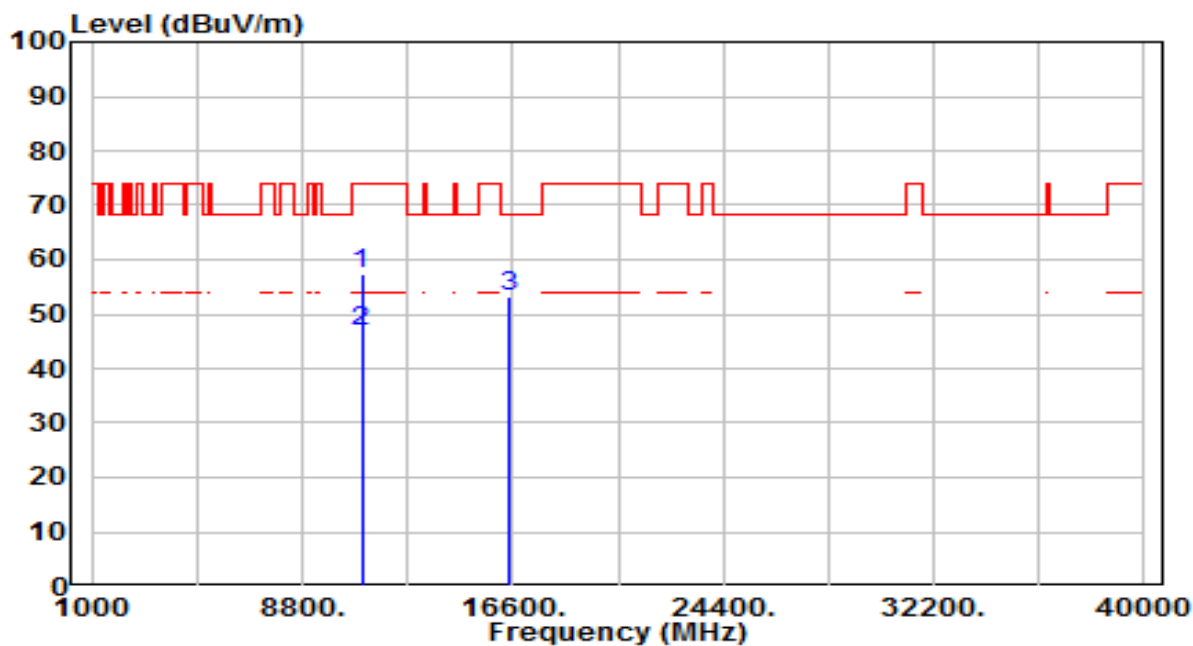


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	38.44	18.88	57.32	-16.68	74.00	100	156	Peak
2	* 11000.000	28.00	18.88	46.88	-7.12	54.00	100	156	Average
3	* 16500.000	32.74	20.64	53.38	-14.82	68.20	100	109	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band3_CH 116_ANT 0	Test Voltage	AC 120V/60Hz

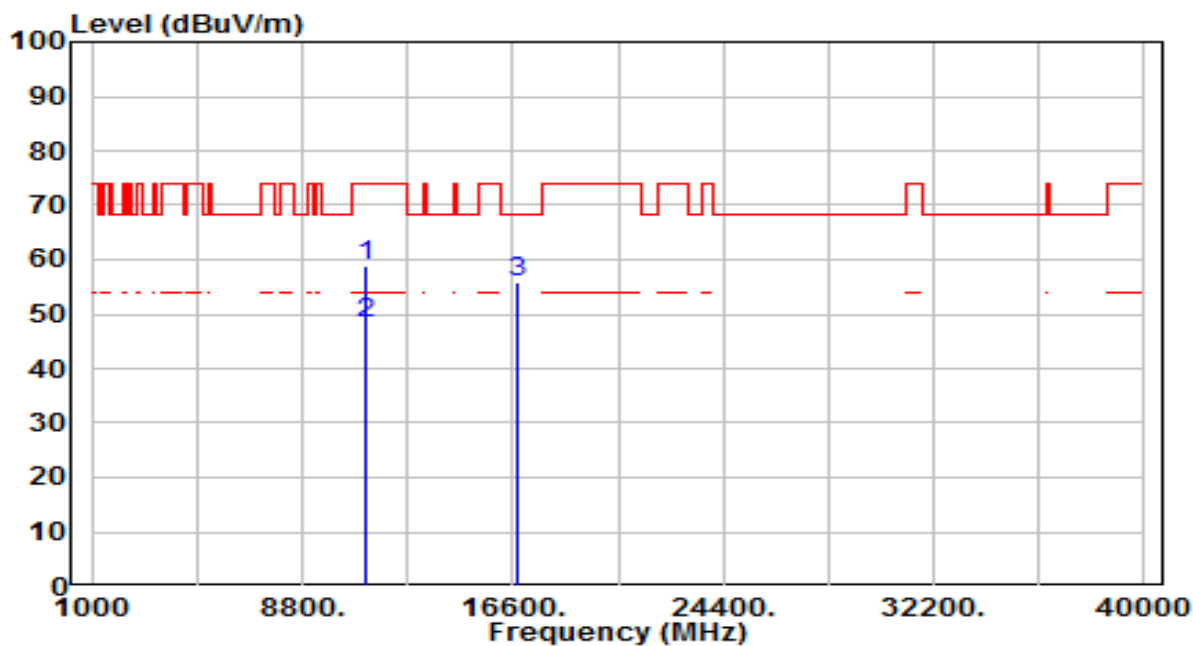


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	39.79	19.19	58.98	-15.02	74.00	100	146	Peak
2	* 11160.000	29.30	19.19	48.49	-5.51	54.00	100	146	Average
3	* 16740.000	33.43	22.26	55.69	-12.51	68.20	100	125	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band3_CH 116_ANT 0	Test Voltage	AC 120V/60Hz

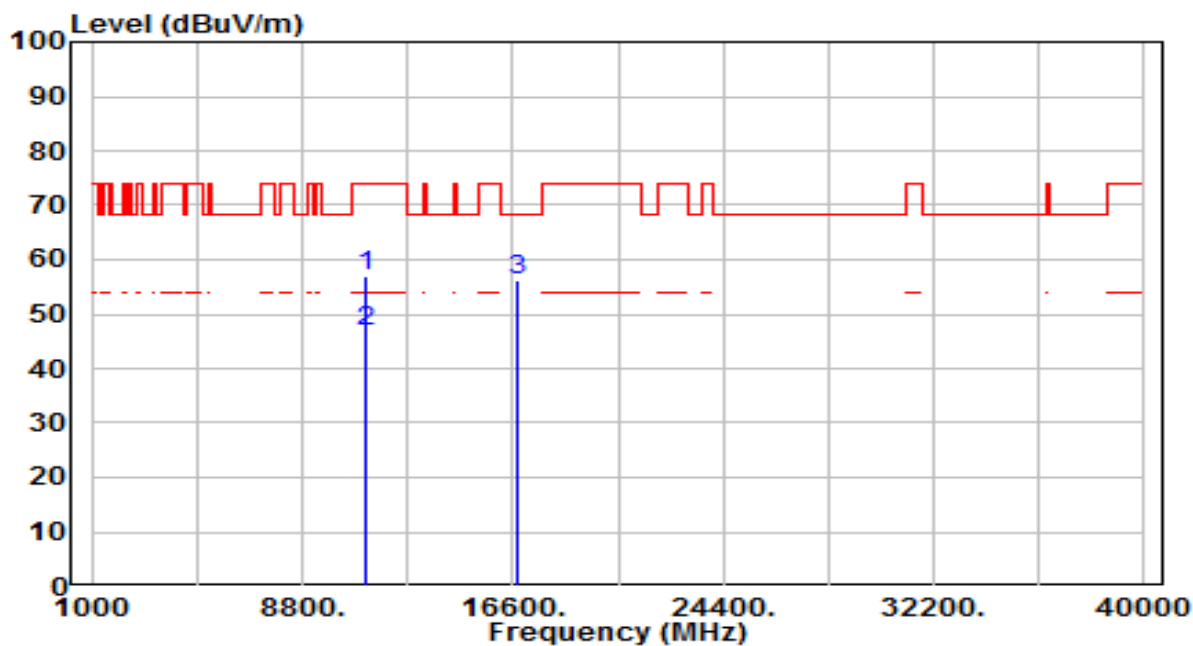


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	37.95	19.19	57.14	-16.86	74.00	100	159	Peak
2	* 11160.000	27.50	19.19	46.69	-7.31	54.00	100	159	Average
3	* 16740.000	33.79	22.26	56.05	-12.15	68.20	100	246	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

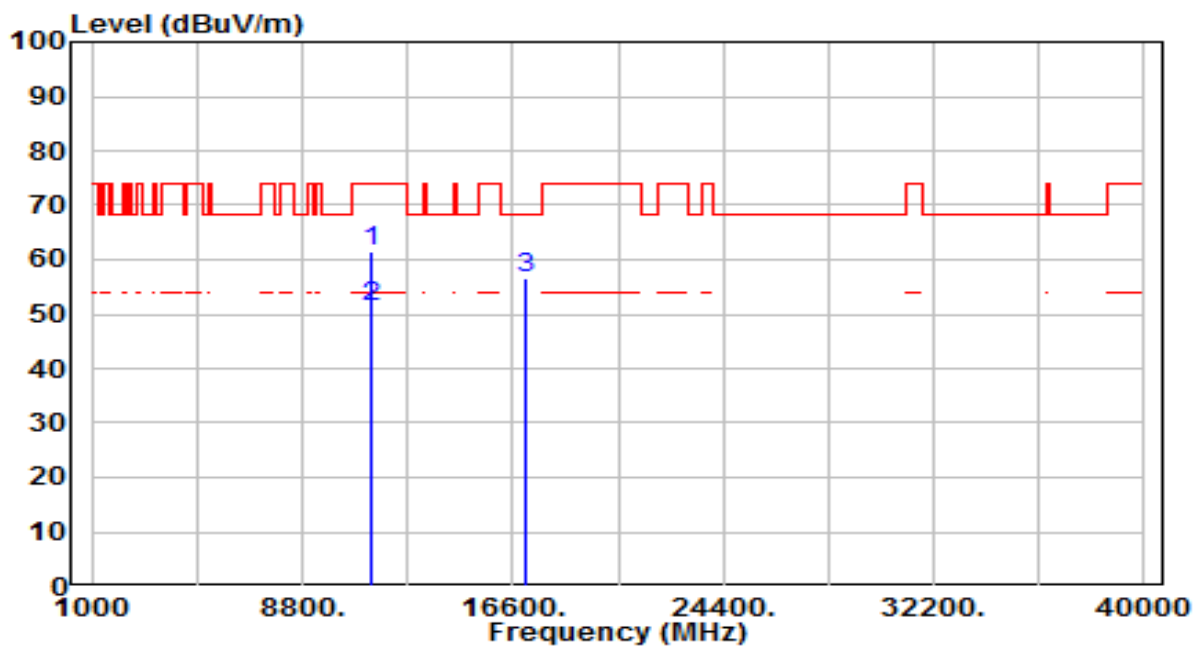


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.03	19.66	61.68	-12.32	74.00	100	143	Peak
2	* 11400.000	31.60	19.66	51.26	-2.74	54.00	100	143	Average
3	* 17100.000	31.97	24.76	56.73	-11.47	68.20	100	71	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

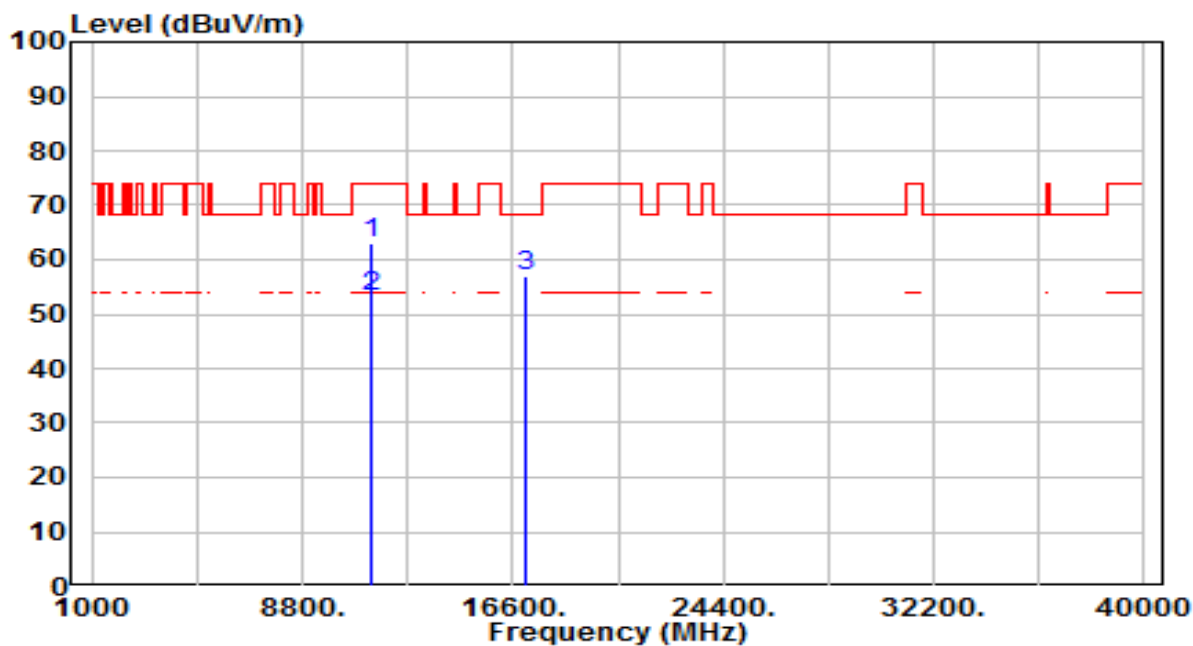


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11400.000	43.48	19.66	63.13	-10.87	74.00	100	134	Peak
2	*	11400.000	33.64	19.66	53.30	-0.70	54.00	100	134	Average
3		17100.000	32.12	24.76	56.88	-11.32	68.20	100	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band3_CH 144_ANT 0	Test Voltage	AC 120V/60Hz

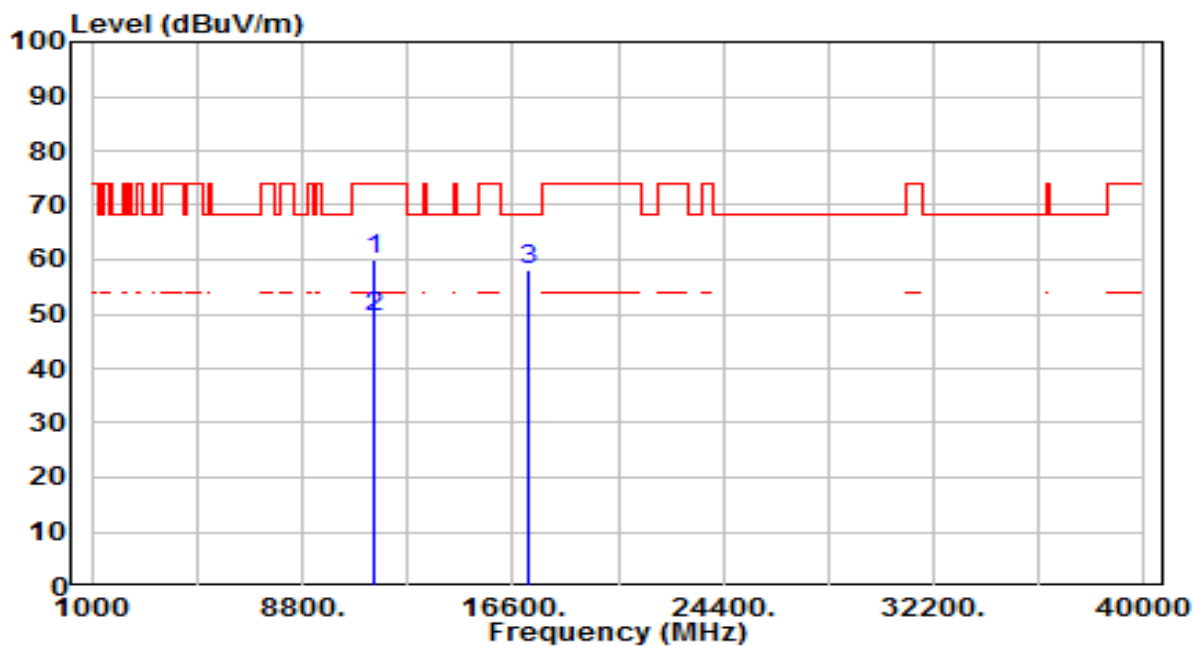


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	40.11	19.73	59.84	-14.16	74.00	100	147	Peak
2	* 11440.000	29.70	19.73	49.43	-4.57	54.00	100	147	Average
3	* 17160.000	32.89	25.21	58.10	-10.10	68.20	100	67	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band3_CH 144_ANT 0	Test Voltage	AC 120V/60Hz

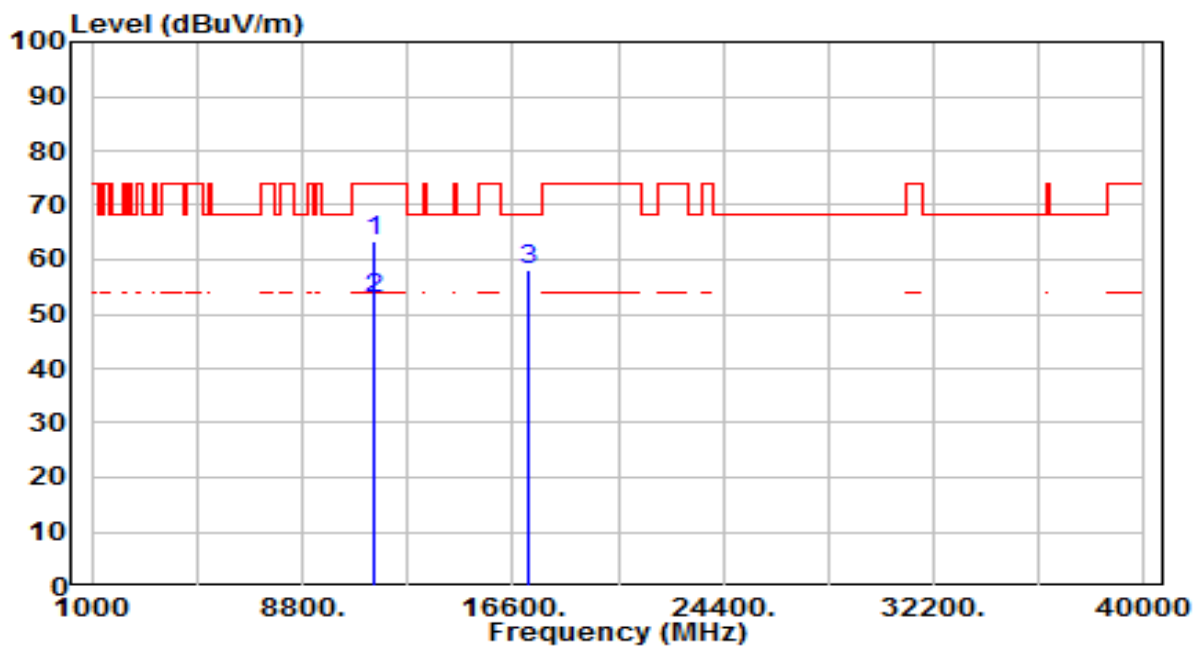


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	43.50	19.73	63.23	-10.77	74.00	100	136	Peak
2	* 11440.000	33.11	19.73	52.84	-1.16	54.00	100	136	Average
3	* 17160.000	33.00	25.21	58.21	-9.99	68.20	100	194	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

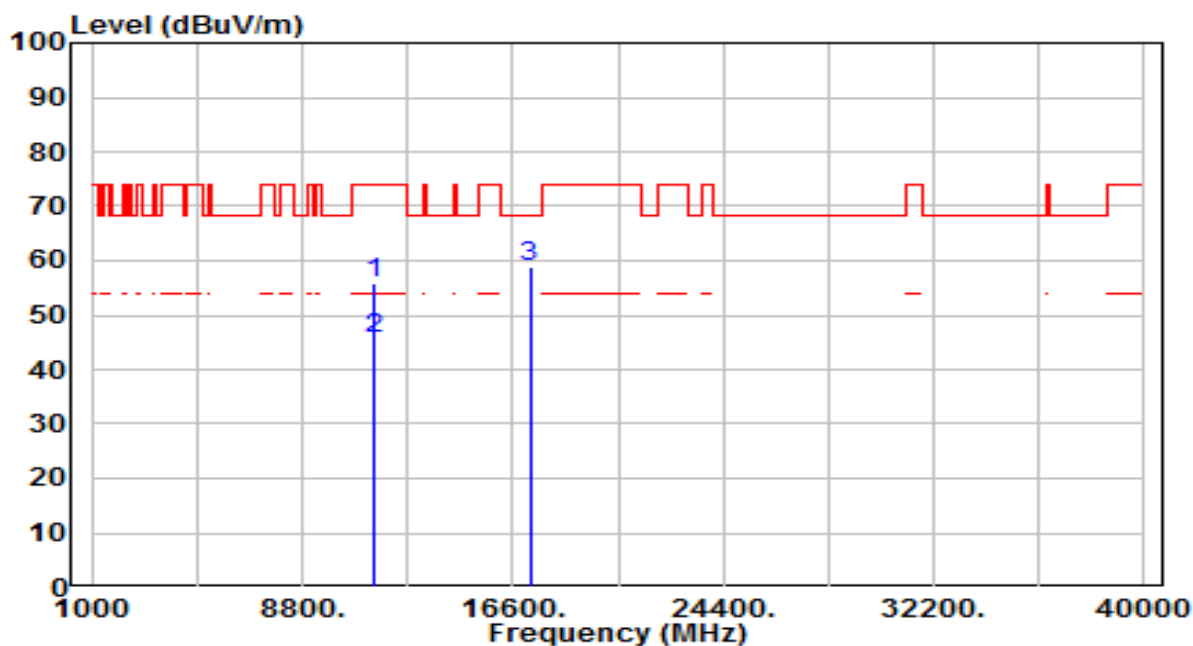


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	36.20	19.83	56.03	-17.97	74.00	100	193	Peak
2	* 11490.000	25.80	19.83	45.63	-8.37	54.00	100	193	Average
3	* 17235.000	33.07	25.76	58.83	-9.37	68.20	100	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

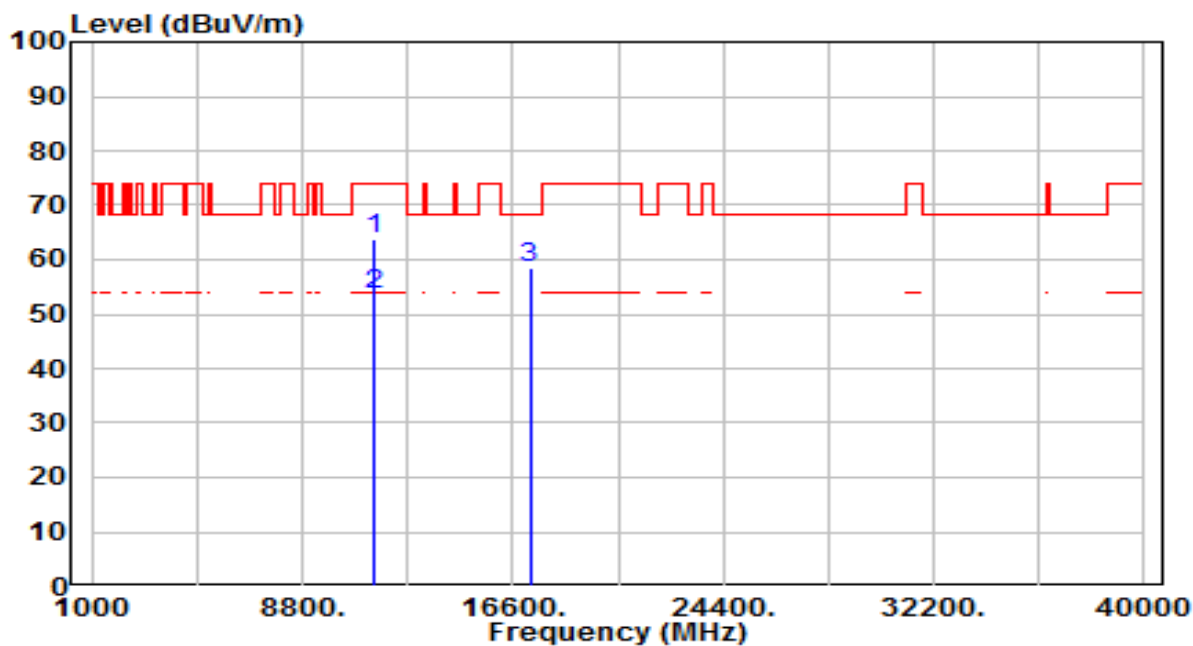


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	44.00	19.83	63.83	-10.17	74.00	100	141	Peak
2	* 11490.000	33.60	19.83	53.43	-0.57	54.00	100	141	Average
3	* 17235.000	32.72	25.76	58.48	-9.72	68.20	100	257	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band4_CH 157_ANT 0	Test Voltage	AC 120V/60Hz

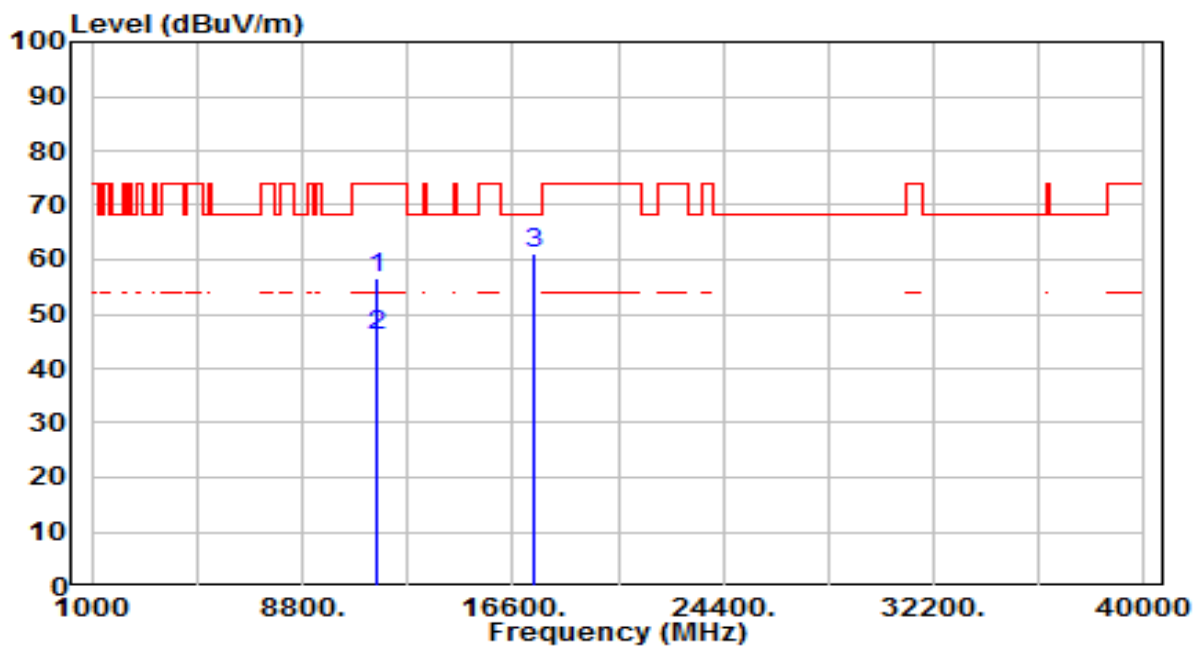


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	36.79	19.72	56.51	-17.49	74.00	100	132	Peak
2	* 11570.000	26.30	19.72	46.02	-7.98	54.00	100	132	Average
3	* 17355.000	34.56	26.65	61.22	-6.98	68.20	100	150	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band4_CH 157_ANT 0	Test Voltage	AC 120V/60Hz

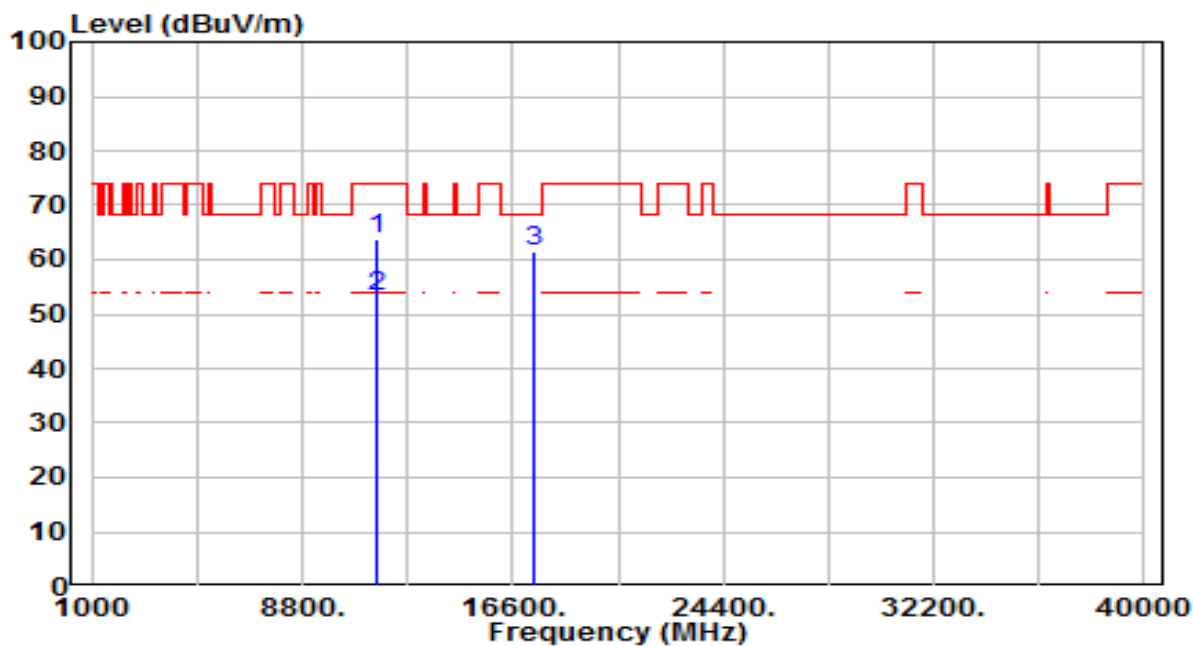


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	44.10	19.72	63.82	-10.18	74.00	100	135	Peak
2	* 11570.000	33.65	19.72	53.37	-0.63	54.00	100	135	Average
3	* 17355.000	34.79	26.65	61.45	-6.75	68.20	100	357	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

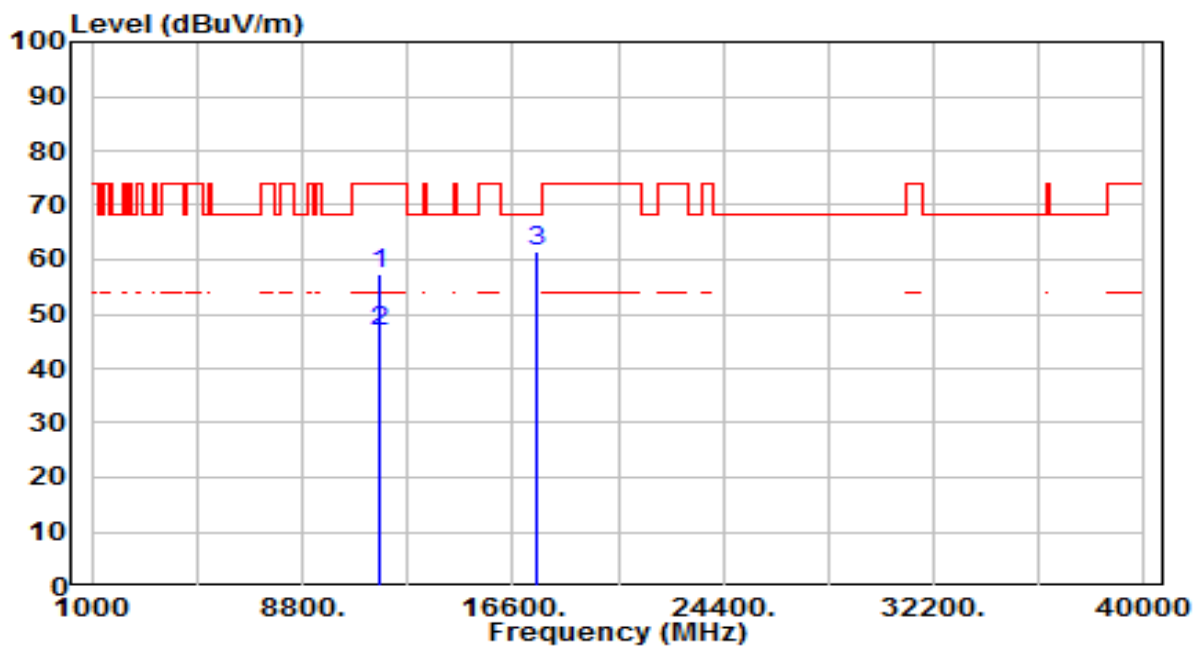


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	37.87	19.57	57.44	-16.56	74.00	100	172	Peak
2	* 11650.000	27.40	19.57	46.97	-7.03	54.00	100	172	Average
3	* 17475.000	33.80	27.54	61.34	-6.86	68.20	100	93	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

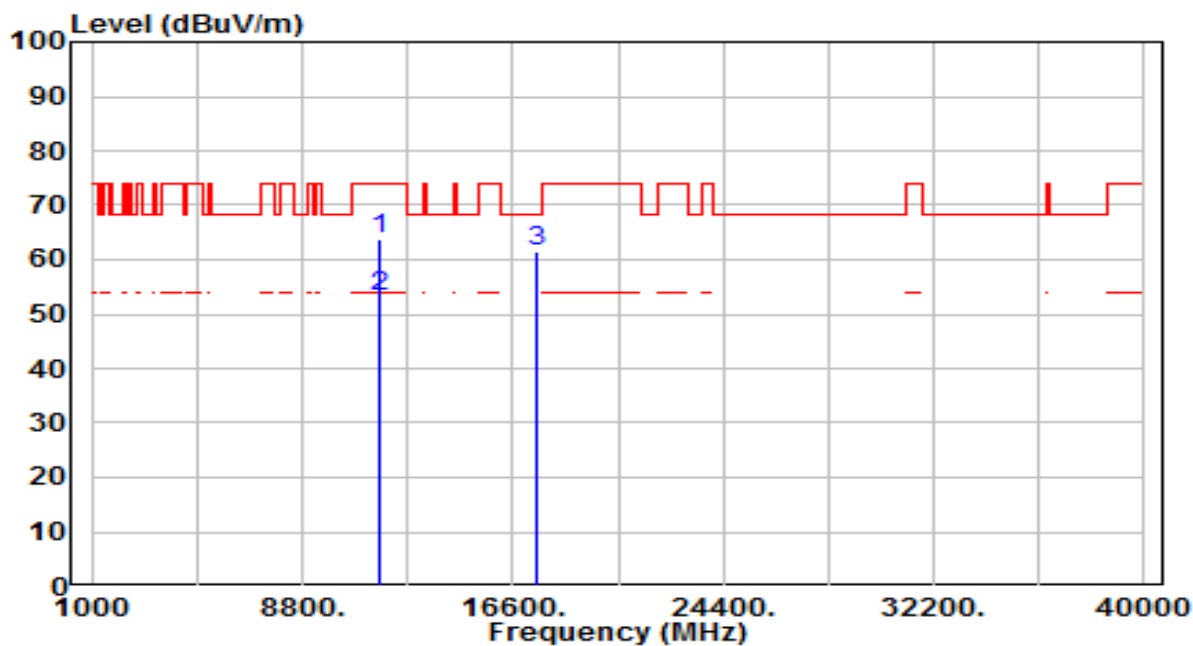


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	44.10	19.57	63.67	-10.33	74.00	100	152	Peak
2	* 11650.000	33.61	19.57	53.18	-0.82	54.00	100	152	Average
3	* 17475.000	33.88	27.54	61.43	-6.77	68.20	100	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

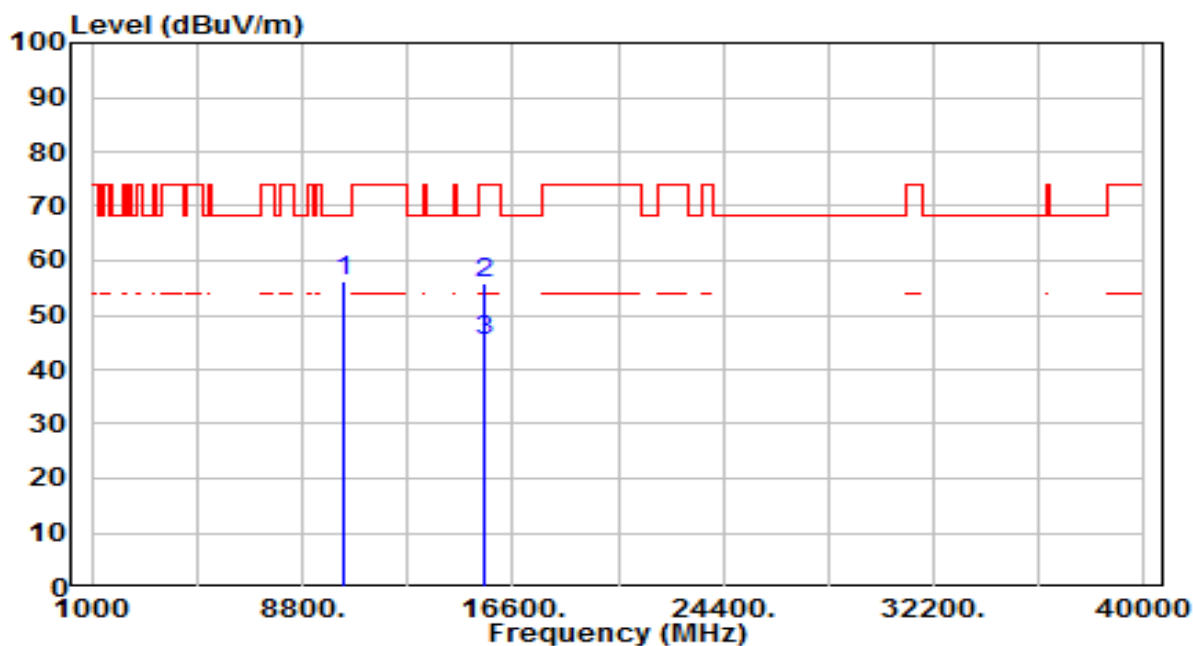


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	38.31	17.95	56.26	-11.94	68.20	100	78	Peak
2		15570.000	34.67	21.05	55.72	-18.28	74.00	100	258	Peak
3	*	15570.000	24.20	21.05	45.25	-8.75	54.00	100	258	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

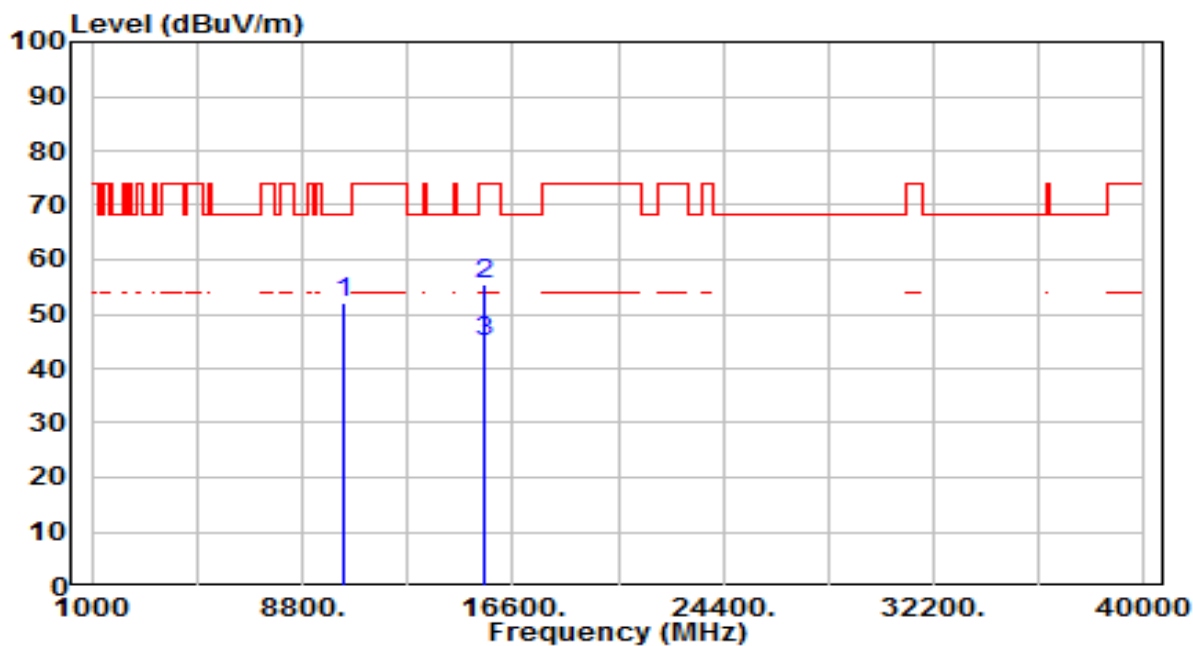


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	34.13	17.95	52.08	-16.12	68.20	100	142	Peak
2		15570.000	34.26	21.05	55.31	-18.69	74.00	100	67	Peak
3	*	15570.000	23.80	21.05	44.85	-9.15	54.00	100	67	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band1_CH 46_ANT 0	Test Voltage	AC 120V/60Hz

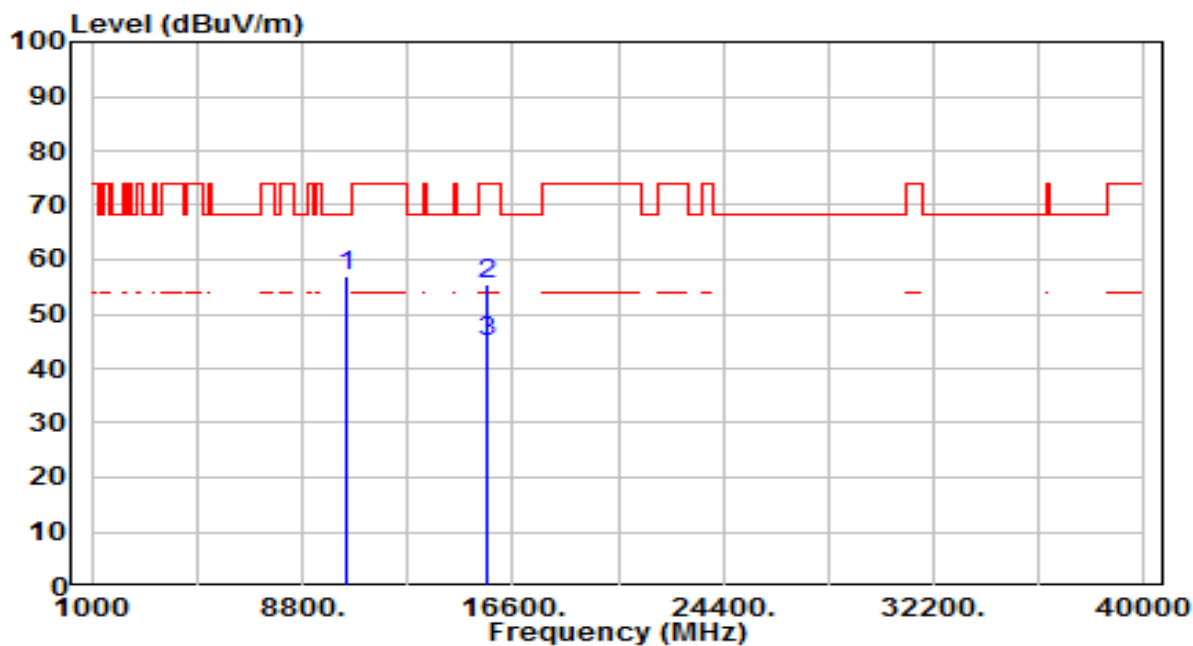


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	38.60	18.27	56.87	-11.33	68.20	100	144	Peak
2		15690.000	34.69	20.69	55.38	-18.62	74.00	100	104	Peak
3	*	15690.000	24.20	20.69	44.89	-9.11	54.00	100	104	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band1_CH 46_ANT 0	Test Voltage	AC 120V/60Hz

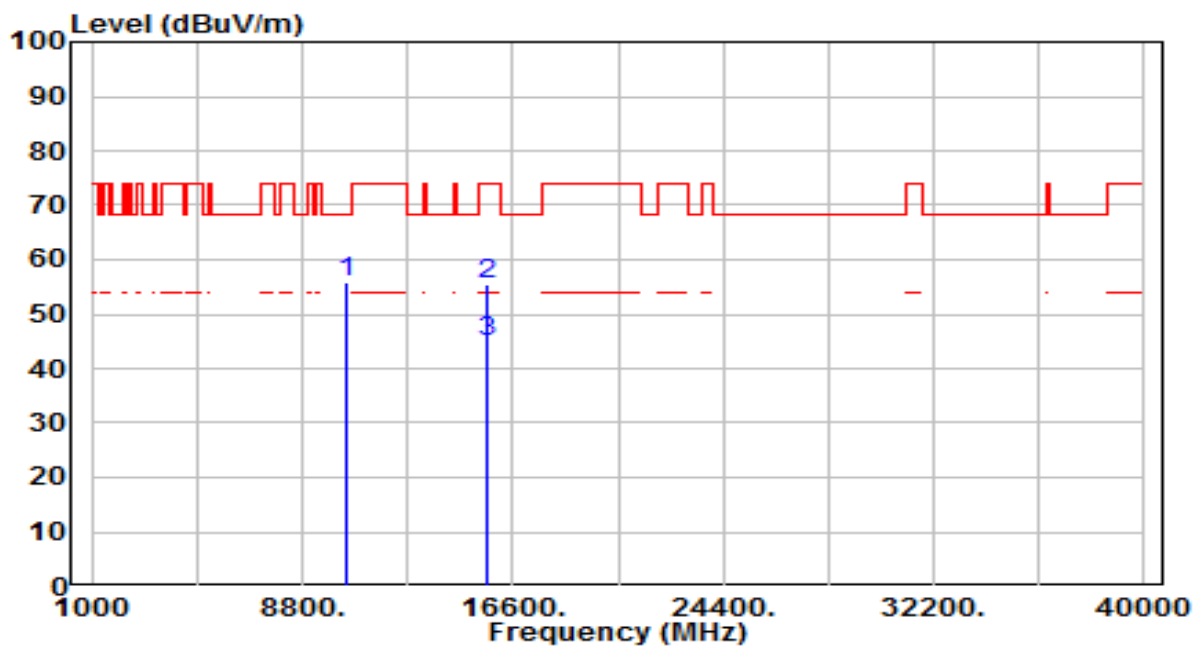


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	37.76	18.27	56.03	-12.17	68.20	100	138	Peak
2		15690.000	34.88	20.69	55.56	-18.44	74.00	100	304	Peak
3	*	15690.000	24.40	20.69	45.09	-8.91	54.00	100	304	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band2_CH 54_ANT 0	Test Voltage	AC 120V/60Hz

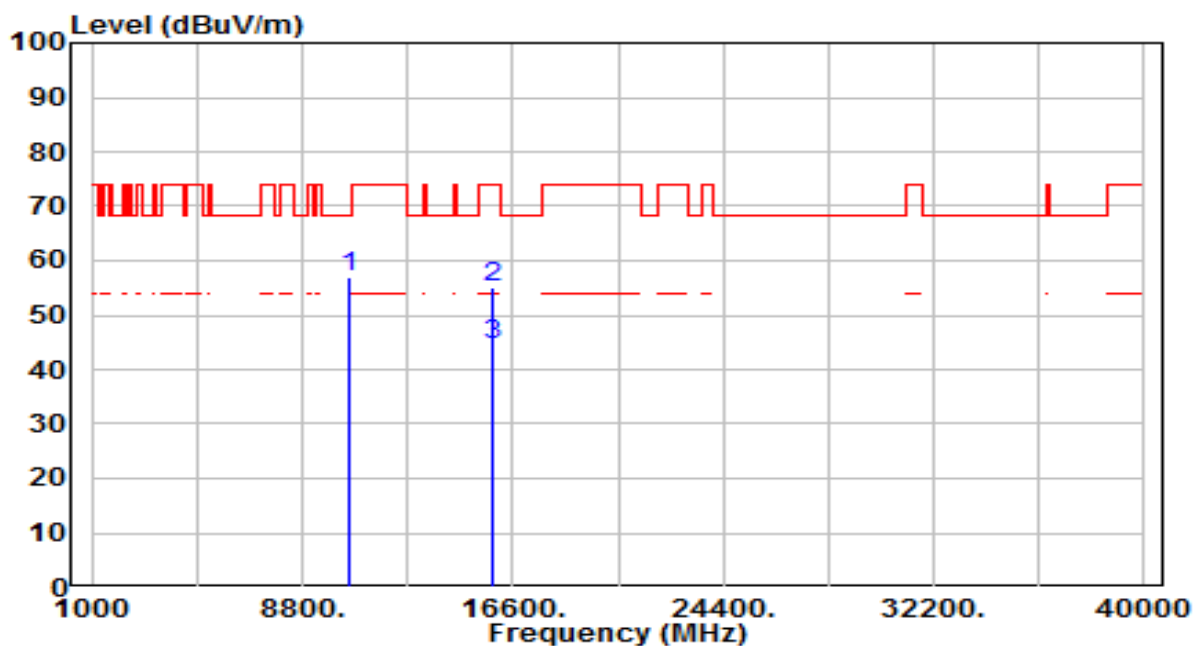


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	38.53	18.47	57.01	-11.19	68.20	100	133	Peak
2		15810.000	34.79	20.32	55.11	-18.89	74.00	100	10	Peak
3	*	15810.000	24.30	20.32	44.62	-9.38	54.00	100	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band2_CH 54_ANT 0	Test Voltage	AC 120V/60Hz

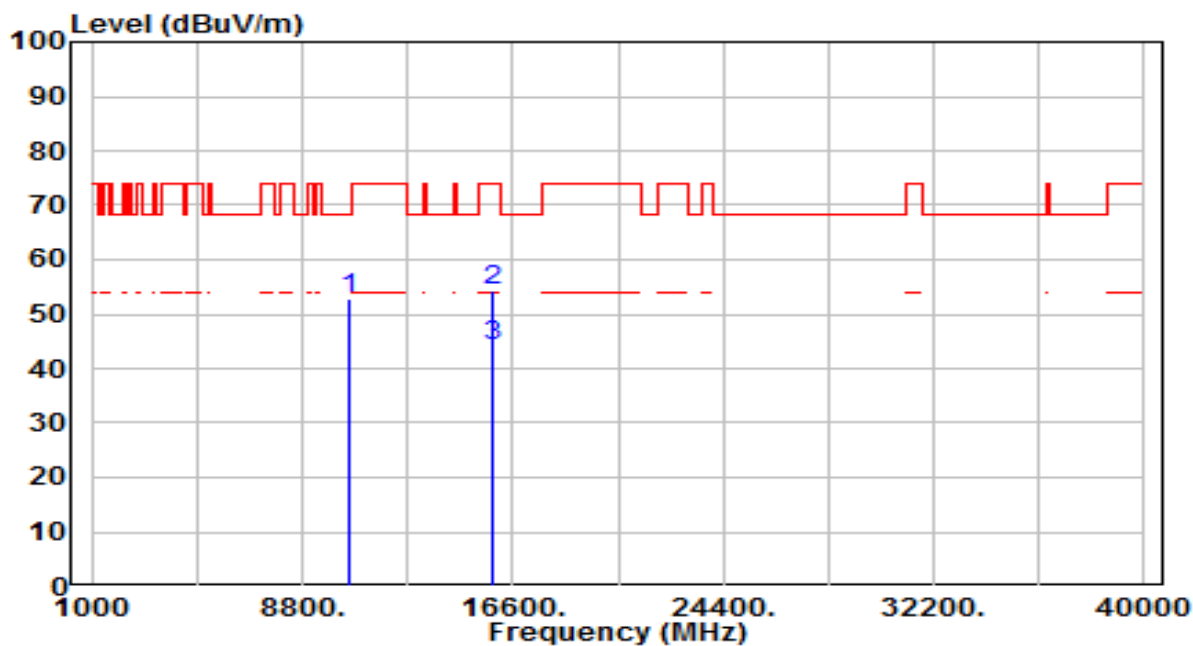


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	34.44	18.47	52.91	-15.29	68.20	100	145	Peak
2		15810.000	34.10	20.32	54.42	-19.58	74.00	100	32	Peak
3	*	15810.000	23.70	20.32	44.02	-9.98	54.00	100	32	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0	Test Voltage	AC 120V/60Hz

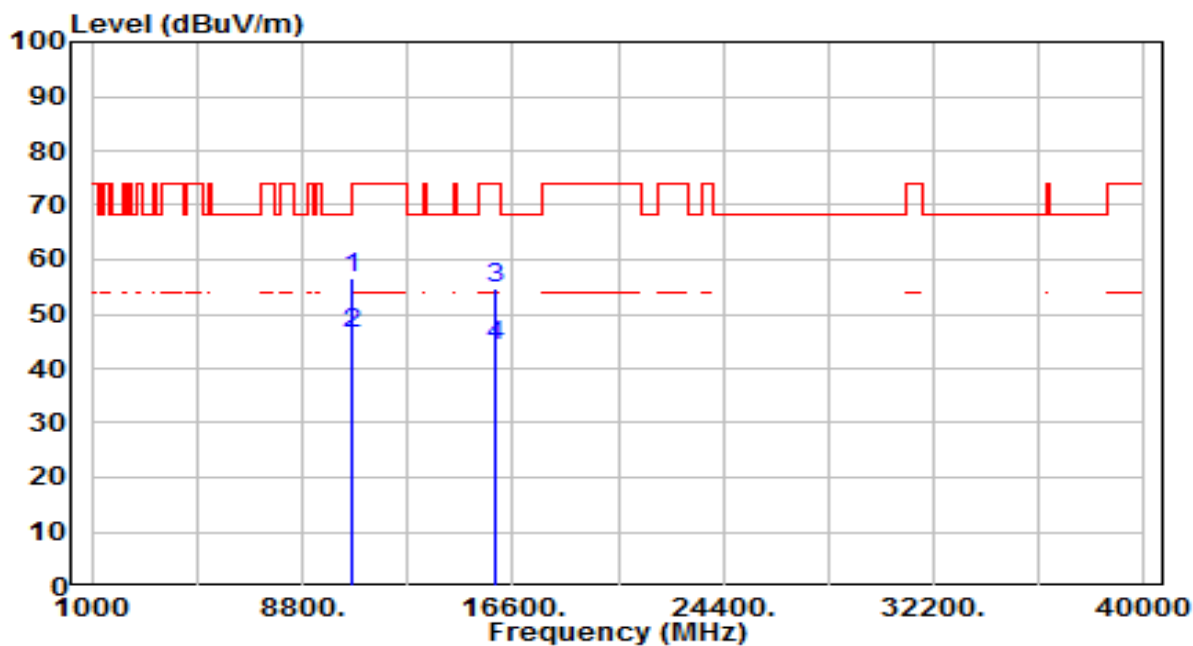


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10620.000	38.20	18.54	56.74	-17.26	74.00	100	128	Peak
2	*	10620.000	27.80	18.54	46.34	-7.66	54.00	100	128	Average
3		15930.000	34.66	19.95	54.61	-19.39	74.00	100	251	Peak
4		15930.000	24.20	19.95	44.15	-9.85	54.00	100	251	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0	Test Voltage	AC 120V/60Hz

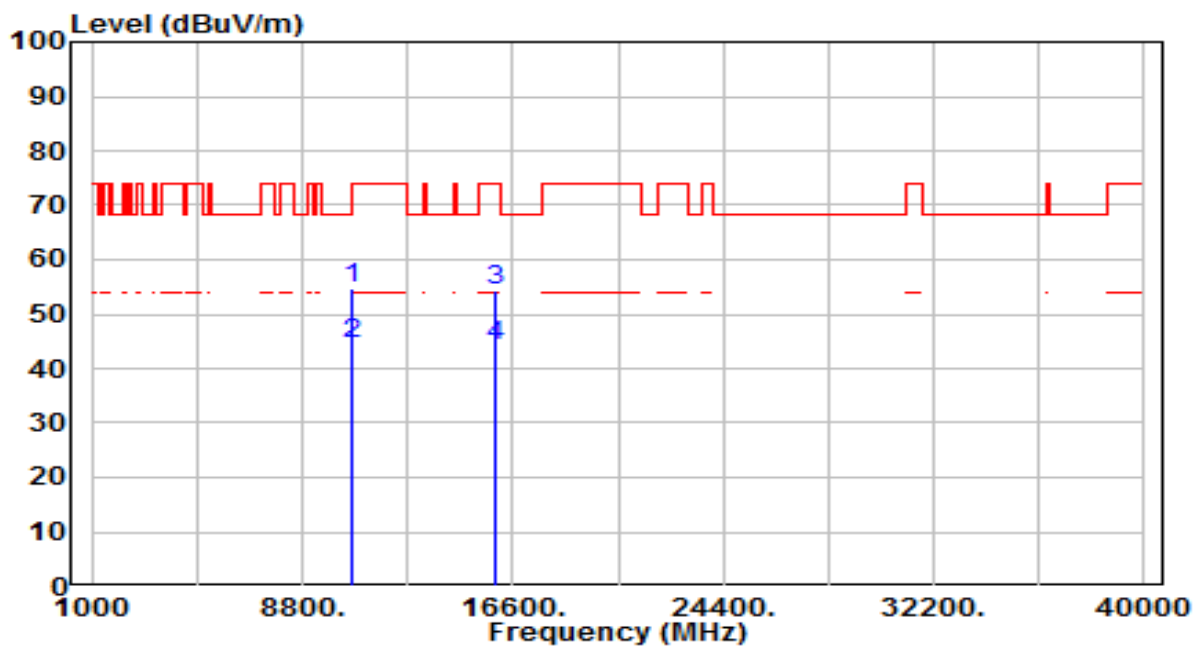


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10620.000	36.20	18.54	54.74	-19.26	74.00	100	144	Peak
2	*	10620.000	25.80	18.54	44.34	-9.66	54.00	100	144	Average
3		15930.000	34.52	19.95	54.47	-19.53	74.00	100	75	Peak
4		15930.000	24.10	19.95	44.05	-9.95	54.00	100	75	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0	Test Voltage	AC 120V/60Hz

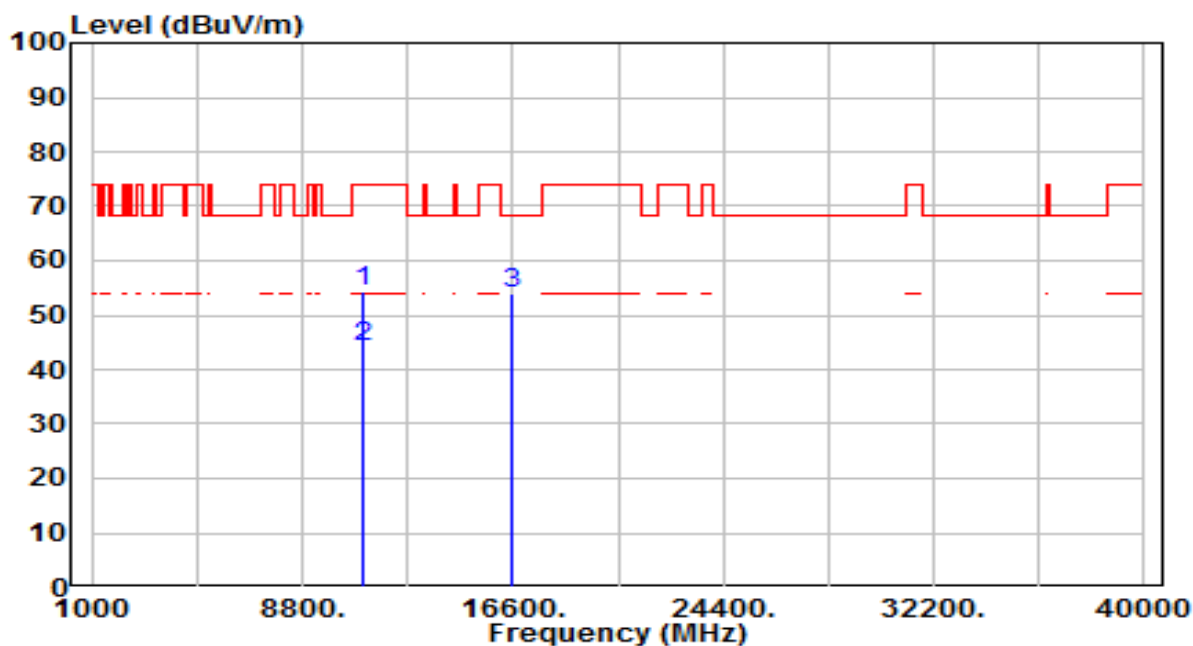


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	35.56	18.92	54.48	-19.52	74.00	100	147	Peak
2	* 11020.000	25.10	18.92	44.02	-9.98	54.00	100	147	Average
3	* 16530.000	33.26	20.84	54.09	-14.11	68.20	100	158	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0	Test Voltage	AC 120V/60Hz

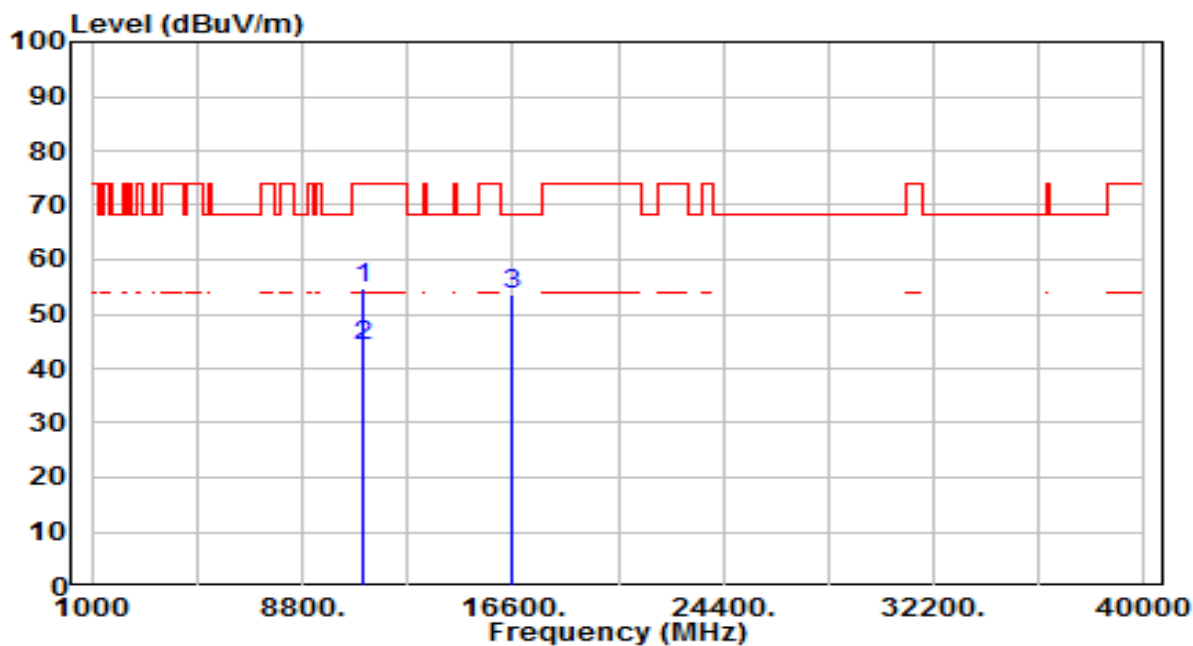


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	35.90	18.92	54.82	-19.18	74.00	100	127	Peak
2	* 11020.000	25.40	18.92	44.32	-9.68	54.00	100	127	Average
3	* 16530.000	32.89	20.84	53.72	-14.48	68.20	100	325	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band3_CH 110_ANT 0	Test Voltage	AC 120V/60Hz

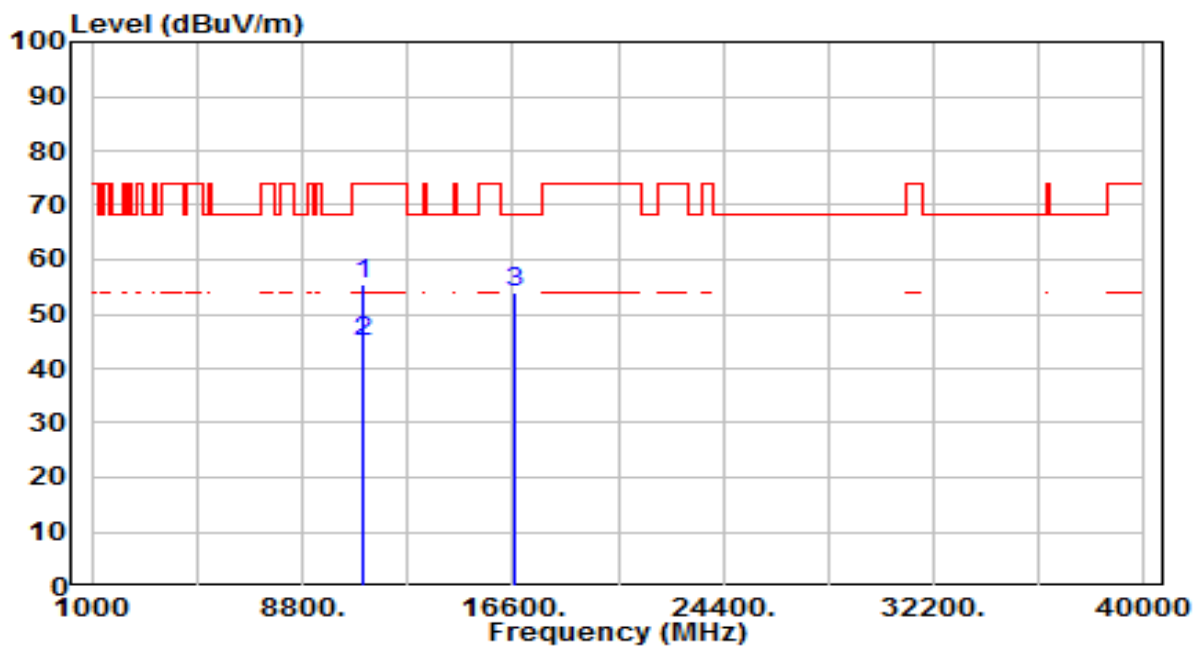


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	36.27	19.07	55.34	-18.66	74.00	100	150	Peak
2	* 11100.000	25.80	19.07	44.87	-9.13	54.00	100	150	Average
3	* 16650.000	32.31	21.65	53.96	-14.24	68.20	100	50	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band3_CH 110_ANT 0	Test Voltage	AC 120V/60Hz

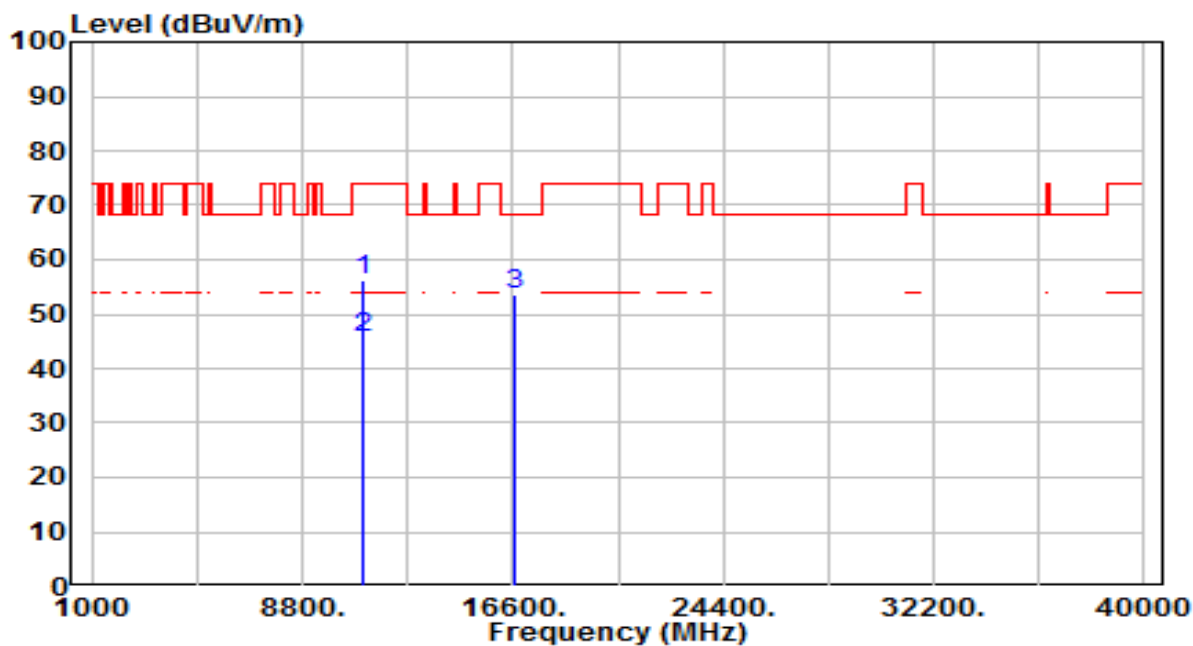


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	37.17	19.07	56.25	-17.75	74.00	100	133	Peak
2	* 11100.000	26.70	19.07	45.77	-8.23	54.00	100	133	Average
3	* 16650.000	32.01	21.65	53.66	-14.54	68.20	100	143	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band3_CH 134_ANT 0	Test Voltage	AC 120V/60Hz

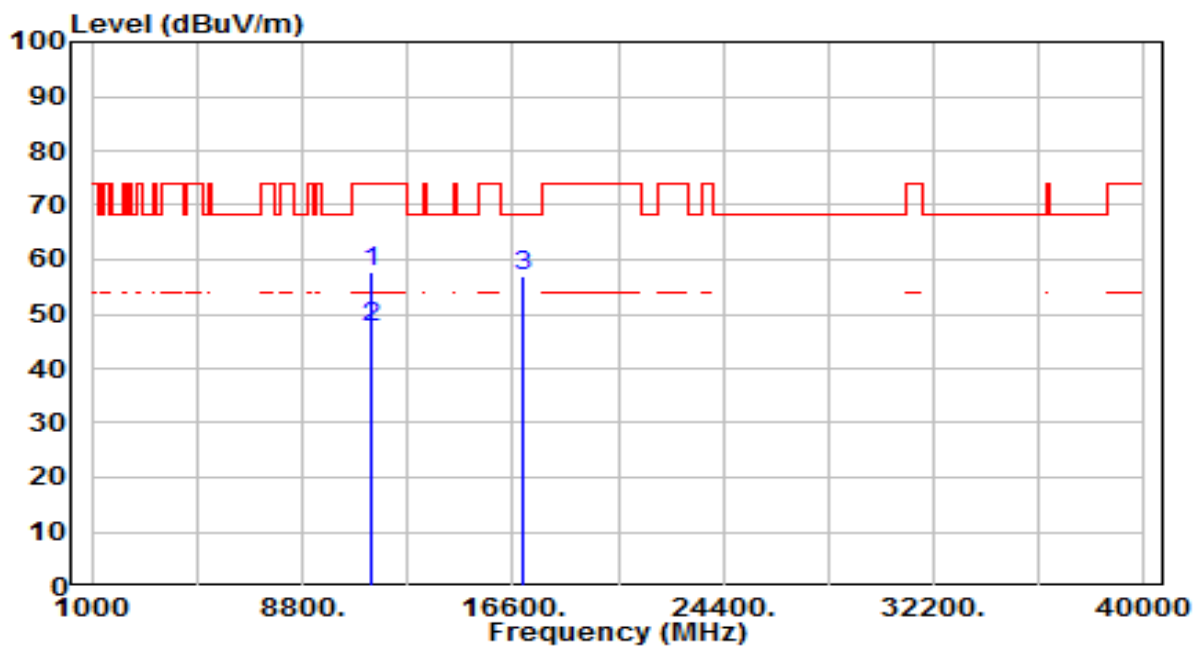


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	38.34	19.54	57.88	-16.12	74.00	100	152	Peak
2	* 11340.000	28.00	19.54	47.54	-6.46	54.00	100	152	Average
3	* 17010.000	32.99	24.09	57.08	-11.12	68.20	100	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band3_CH 134_ANT 0	Test Voltage	AC 120V/60Hz

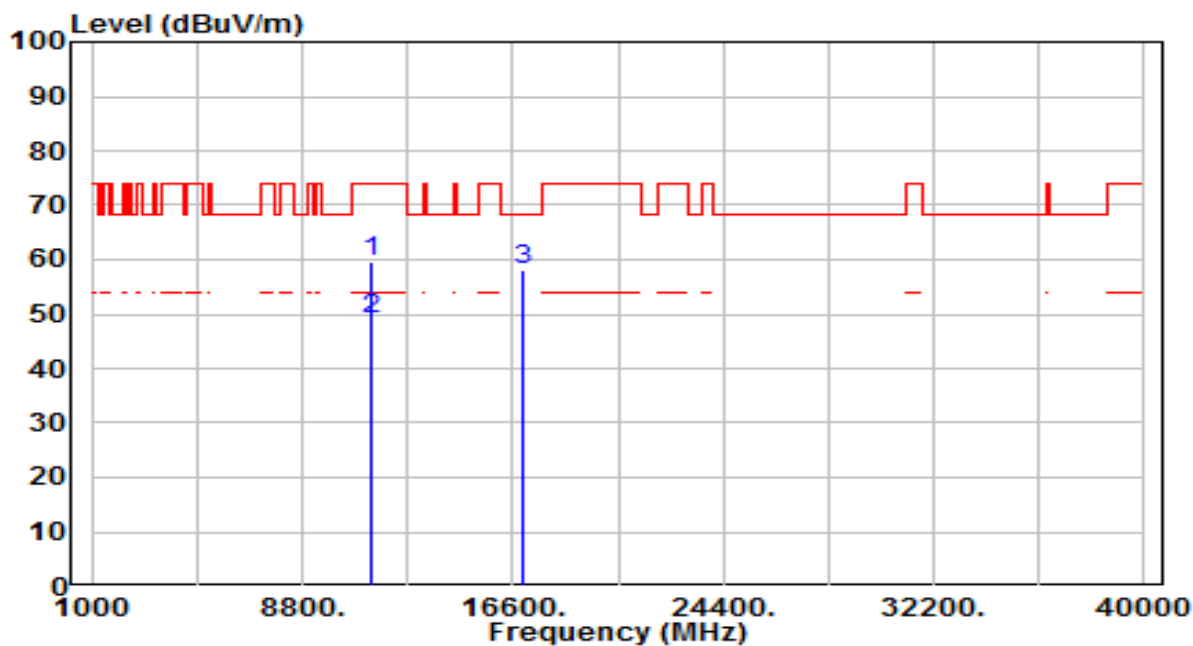


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	40.18	19.54	59.72	-14.28	74.00	100	153	Peak
2	* 11340.000	29.70	19.54	49.24	-4.76	54.00	100	153	Average
3	* 17010.000	34.10	24.09	58.19	-10.01	68.20	100	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band3_CH 142_ANT 0	Test Voltage	AC 120V/60Hz

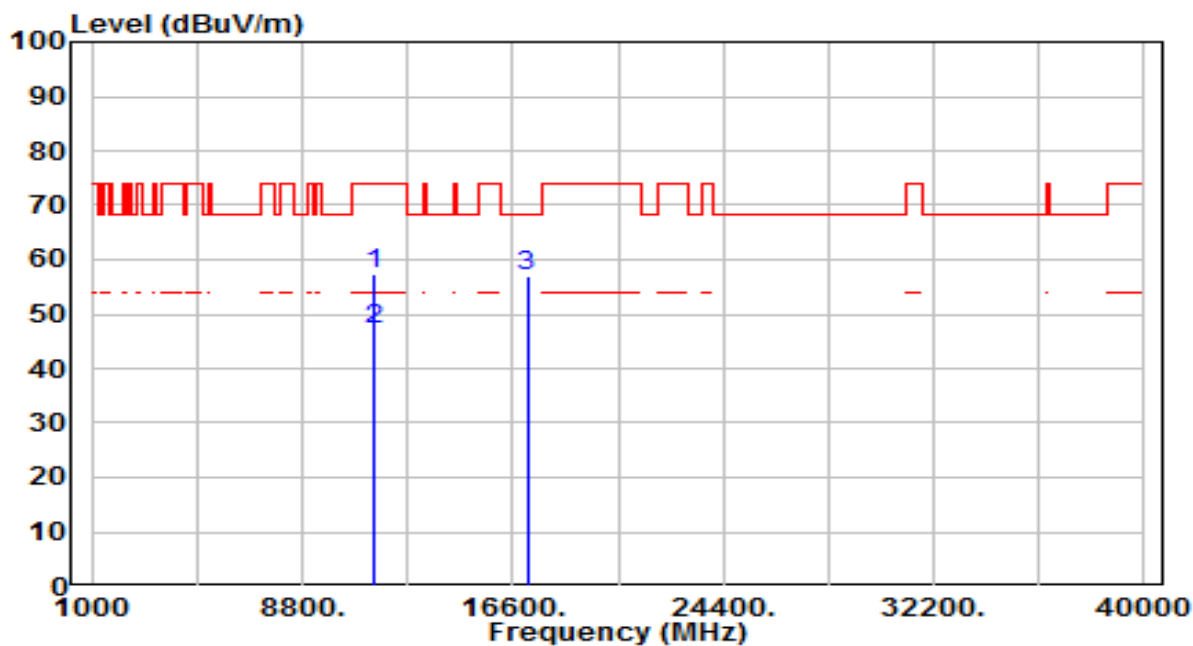


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	37.84	19.69	57.53	-16.47	74.00	100	144	Peak
2	* 11420.000	27.40	19.69	47.09	-6.91	54.00	100	144	Average
3	* 17130.000	31.95	24.98	56.94	-11.26	68.20	100	308	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band3_CH 142_ANT 0	Test Voltage	AC 120V/60Hz

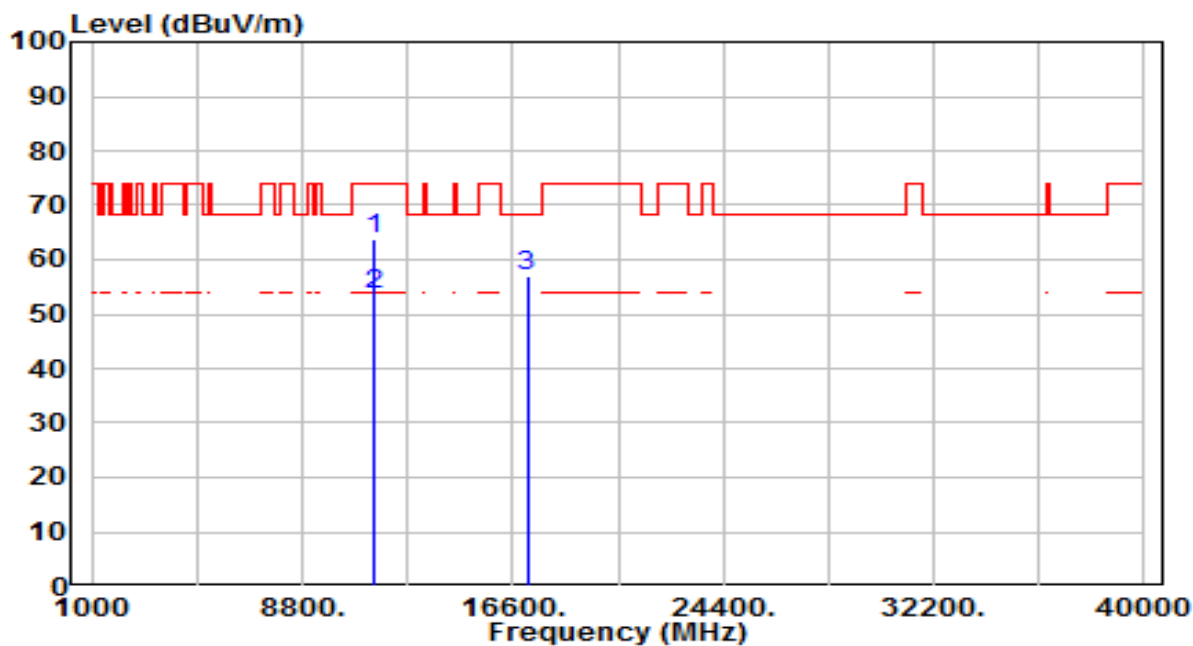


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11420.000	44.03	19.69	63.73	-10.27	74.00	100	139	Peak
2	*	11420.000	33.76	19.69	53.45	-0.55	54.00	100	139	Average
3		17130.000	31.96	24.98	56.94	-11.26	68.20	100	310	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	AC 120V/60Hz

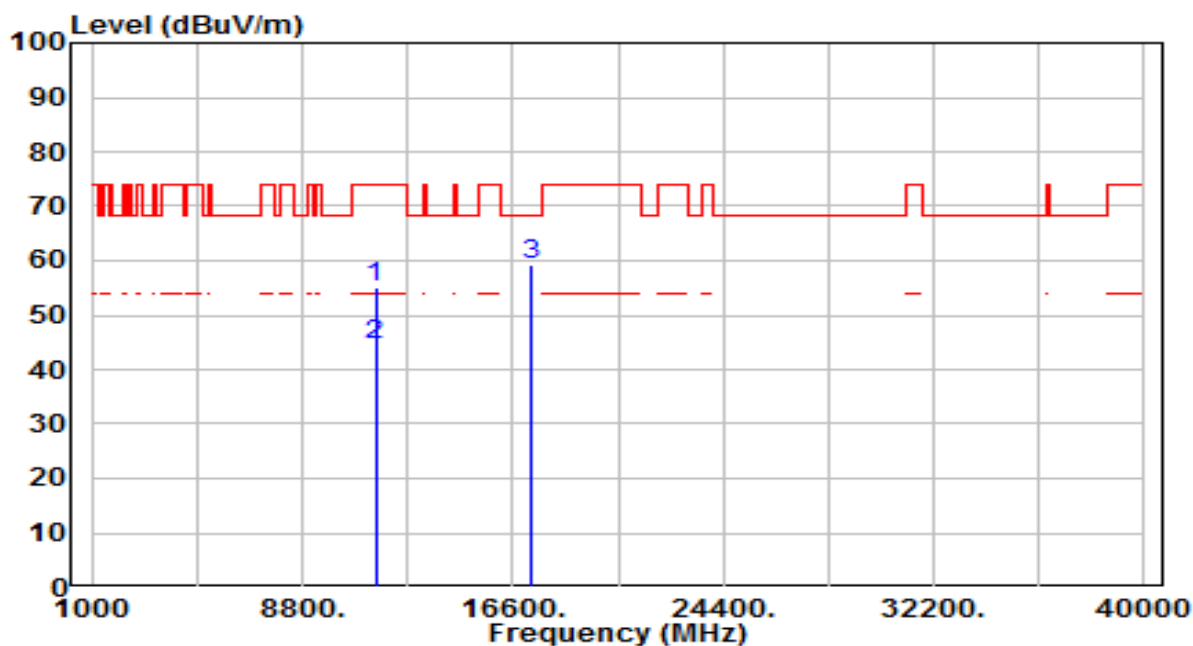


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	35.20	19.83	55.03	-18.97	74.00	100	239	Peak
2	* 11510.000	24.80	19.83	44.63	-9.37	54.00	100	239	Average
3	* 17265.000	33.40	25.99	59.38	-8.82	68.20	100	298	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	AC 120V/60Hz

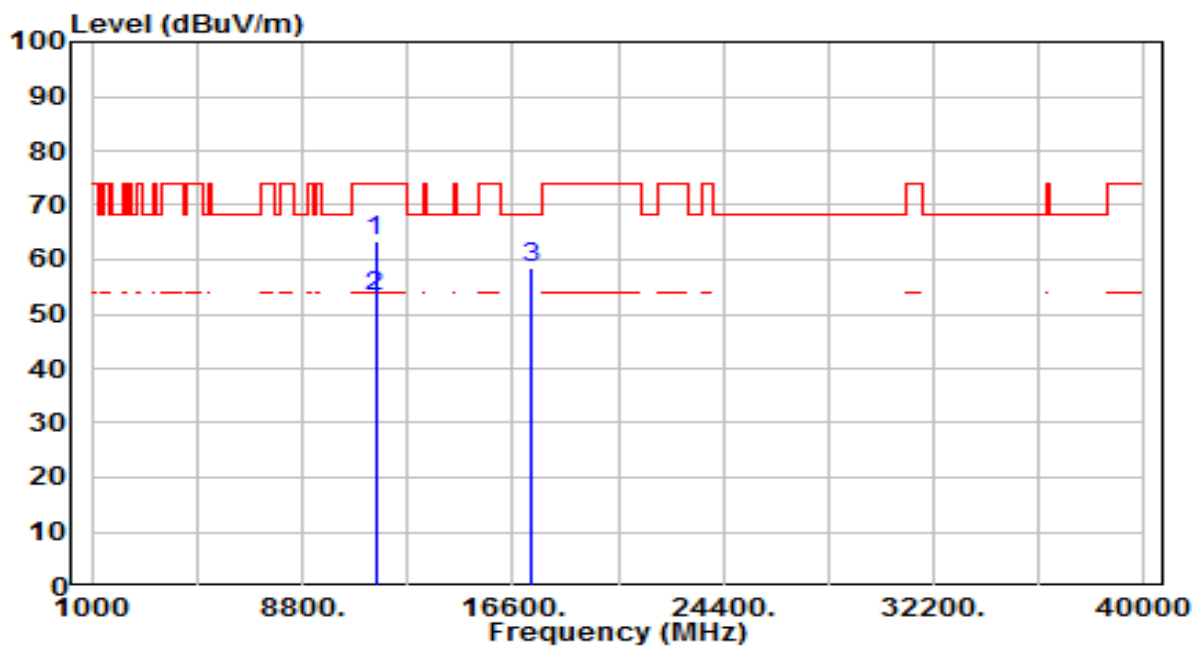


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	43.74	19.83	63.57	-10.43	74.00	100	132	Peak
2	* 11510.000	33.30	19.83	53.13	-0.87	54.00	100	132	Average
3	* 17265.000	32.44	25.99	58.43	-9.77	68.20	100	306	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	AC 120V/60Hz

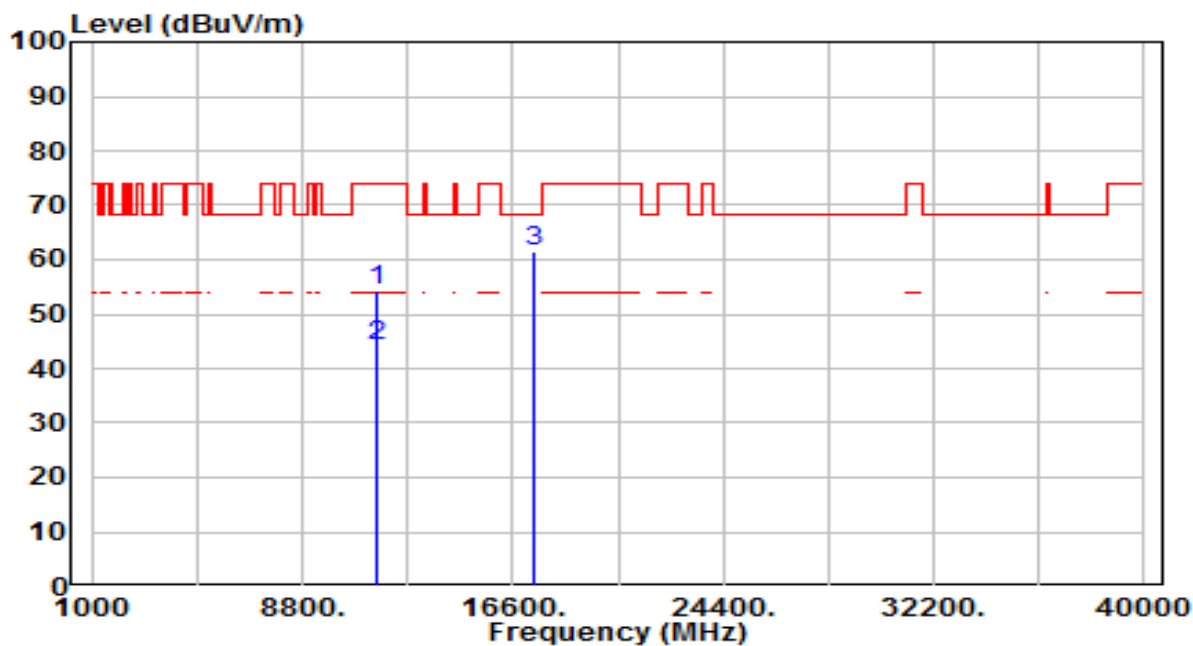


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	34.80	19.68	54.48	-19.52	74.00	100	188	Peak
2	* 11590.000	24.30	19.68	43.98	-10.02	54.00	100	188	Average
3	* 17385.000	34.69	26.88	61.56	-6.64	68.20	100	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	AC 120V/60Hz

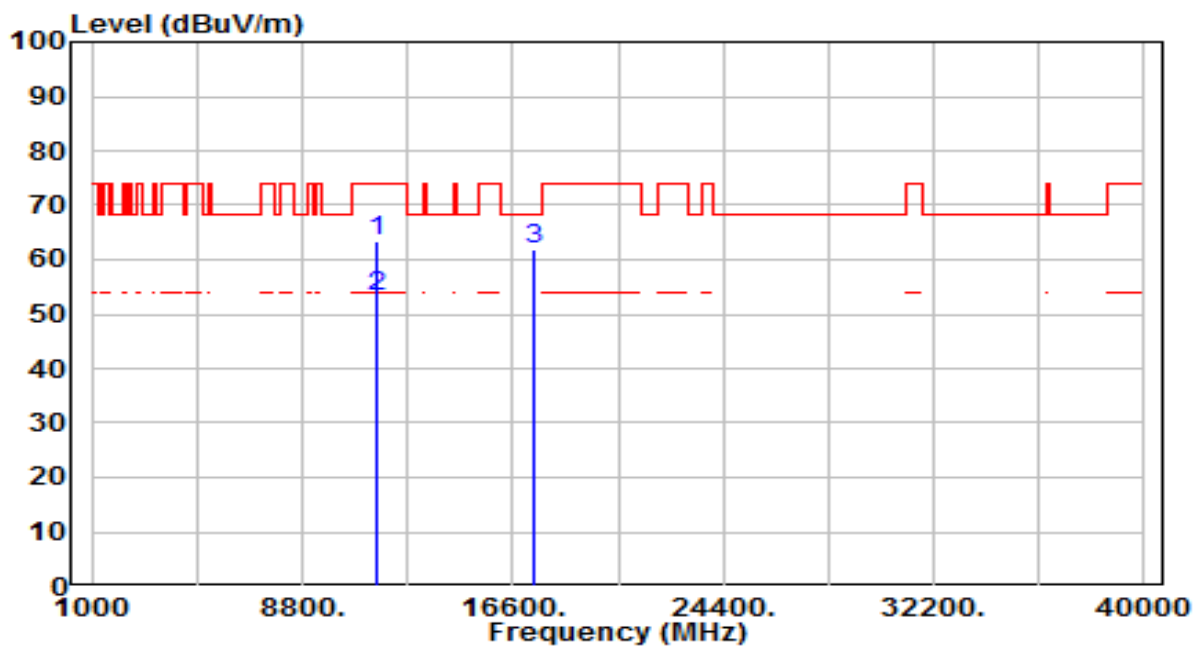

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	43.74	19.68	63.42	-10.58	74.00	100	141	Peak
2	* 11590.000	33.39	19.68	53.07	-0.93	54.00	100	141	Average
3	* 17385.000	35.00	26.88	61.88	-6.32	68.20	100	82	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For FCC transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For IC transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.


All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC-Radiated emission limits; general requirements.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.9.2. Test Result

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

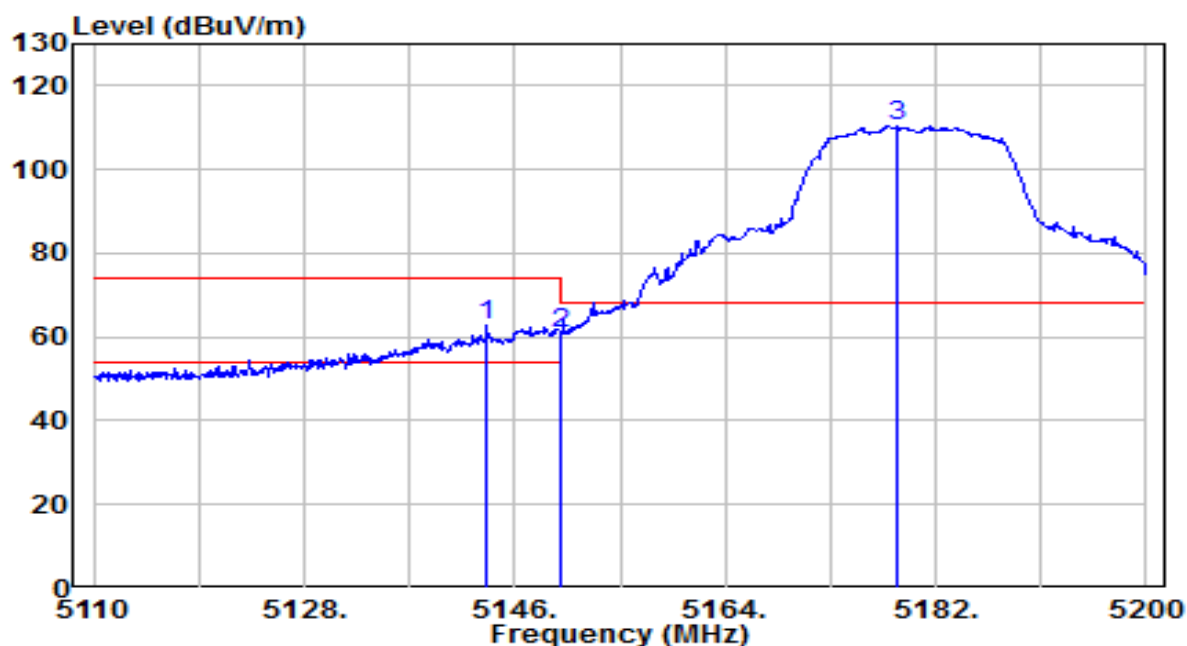


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.660	58.38	4.26	62.64	-11.36	74.00	100	195	Peak
2		5150.000	56.59	4.27	60.86	-13.14	74.00	100	195	Peak
3		5178.670	106.26	4.31	110.57	N/A	N/A	100	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

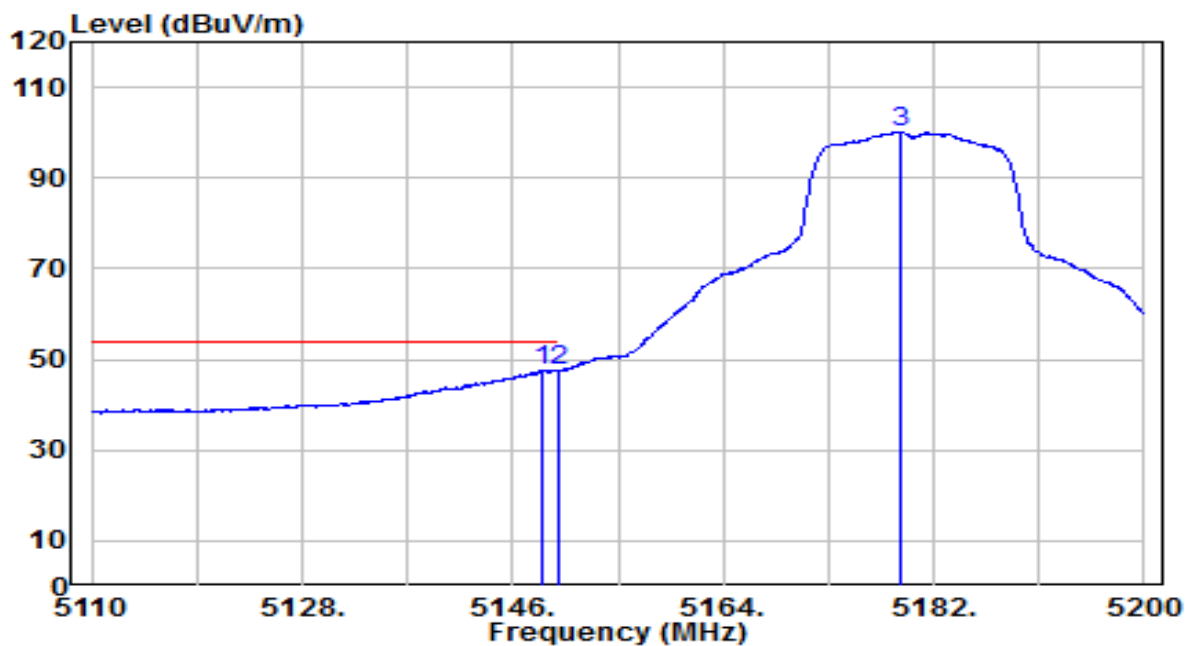


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.520	43.25	4.27	47.52	-6.48	54.00	100	195	Average
2		5150.000	43.19	4.27	47.47	-6.53	54.00	100	195	Average
3		5179.210	95.90	4.31	100.21	N/A	N/A	100	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

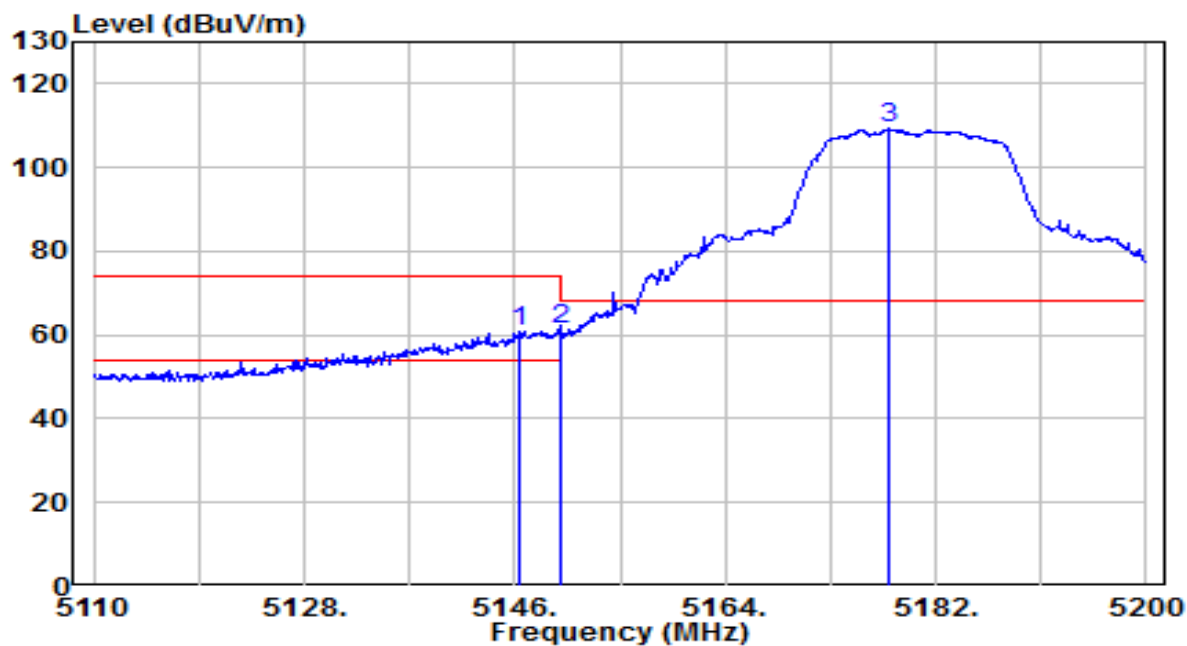


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5146.450	56.63	4.27	60.90	-13.10	74.00	125	110	Peak
2	* 5150.000	57.17	4.27	61.44	-12.56	74.00	125	110	Peak
3	5177.950	104.87	4.31	109.18	N/A	N/A	125	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

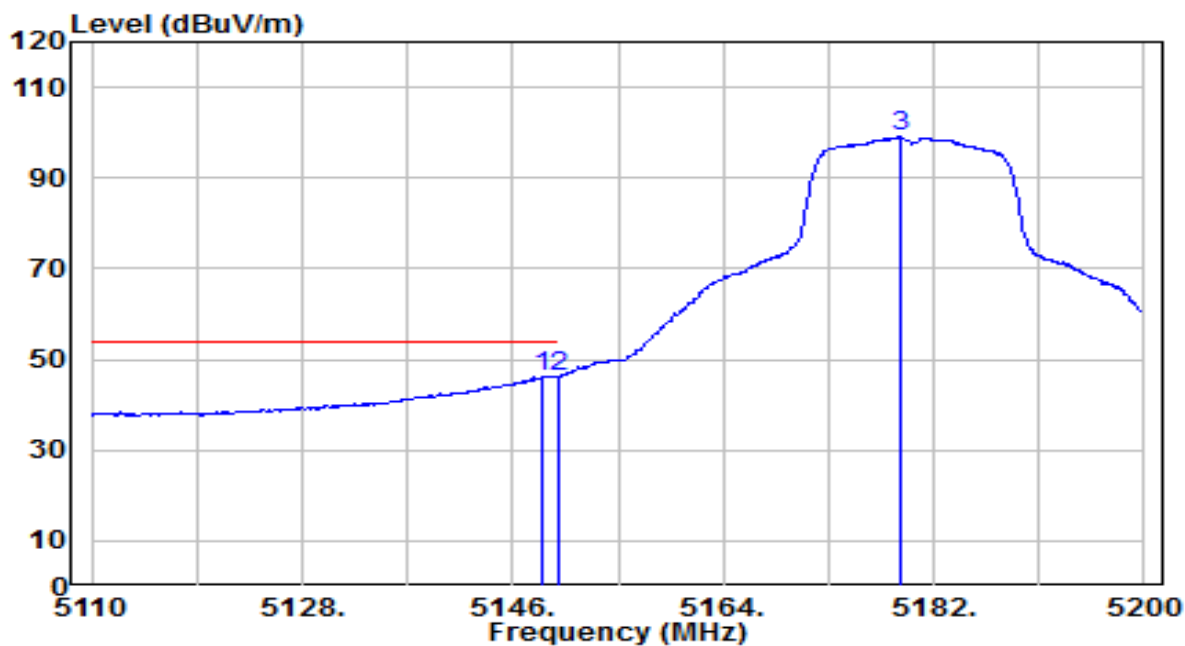


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.430	41.78	4.27	46.06	-7.94	54.00	125	110	Average
2	* 5150.000	42.02	4.27	46.29	-7.71	54.00	125	110	Average
3	5179.120	94.72	4.31	99.04	N/A	N/A	125	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

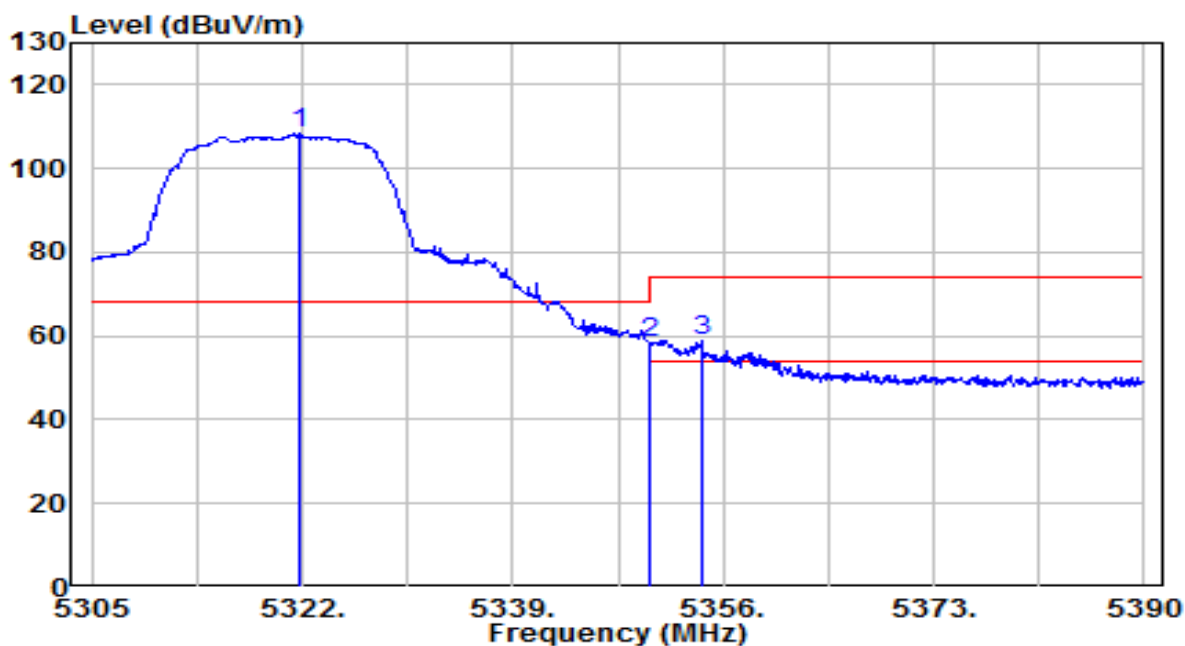


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.830	103.86	4.52	108.38	N/A	N/A	100	195	Peak
2	* 5350.000	53.76	4.56	58.32	-9.88	68.20	100	195	Peak
3	5354.300	54.26	4.56	58.83	-15.17	74.00	100	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

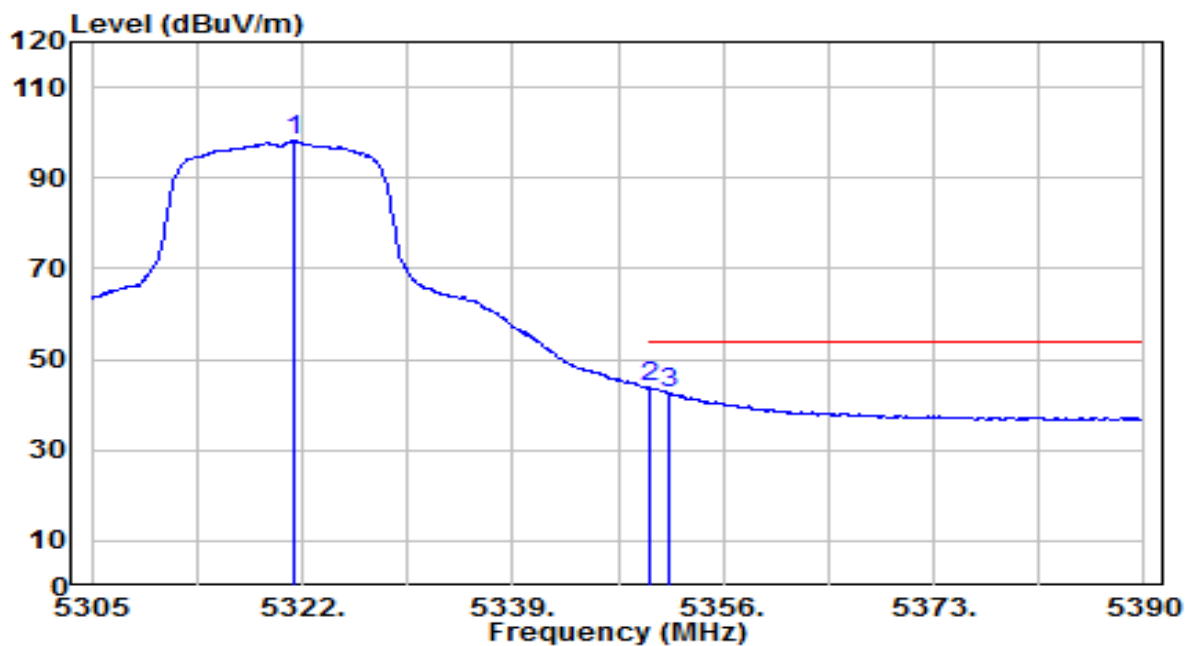


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.320	93.63	4.52	98.14	N/A	N/A	100	195	Average
2	* 5350.000	39.21	4.56	43.76	-10.24	54.00	100	195	Average
3	5351.665	38.02	4.56	42.58	-11.42	54.00	100	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

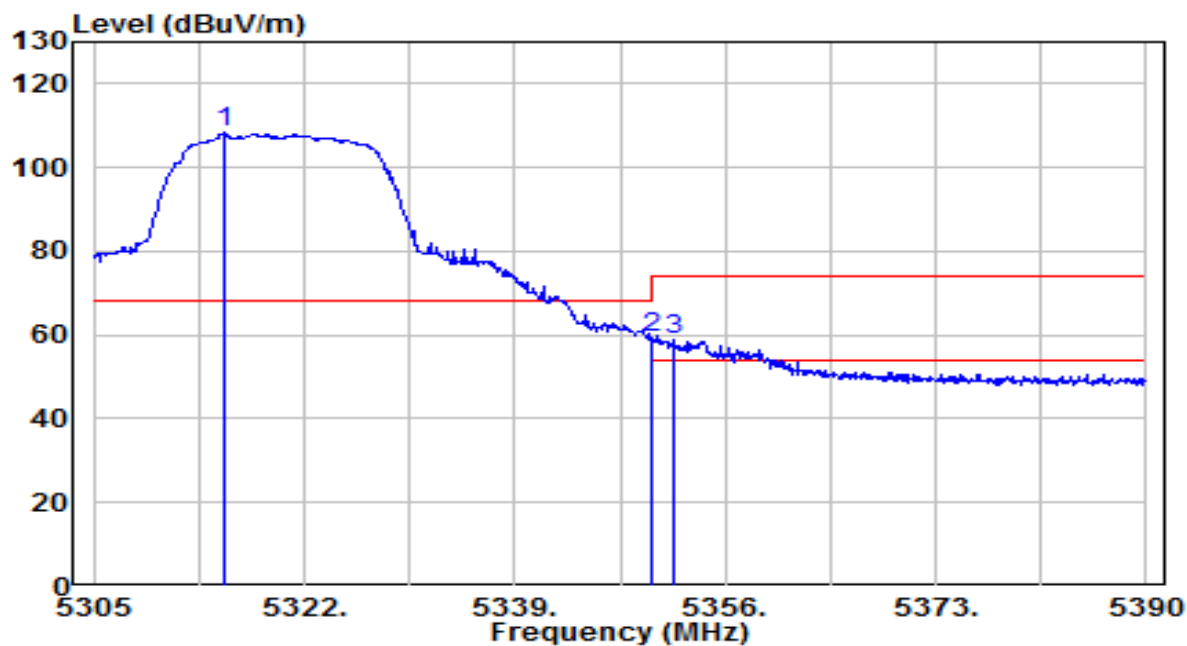


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.540	103.74	4.51	108.25	N/A	N/A	110	120	Peak
2	* 5350.000	54.91	4.56	59.47	-8.73	68.20	110	120	Peak
3	5351.750	54.40	4.56	58.96	-15.04	74.00	110	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

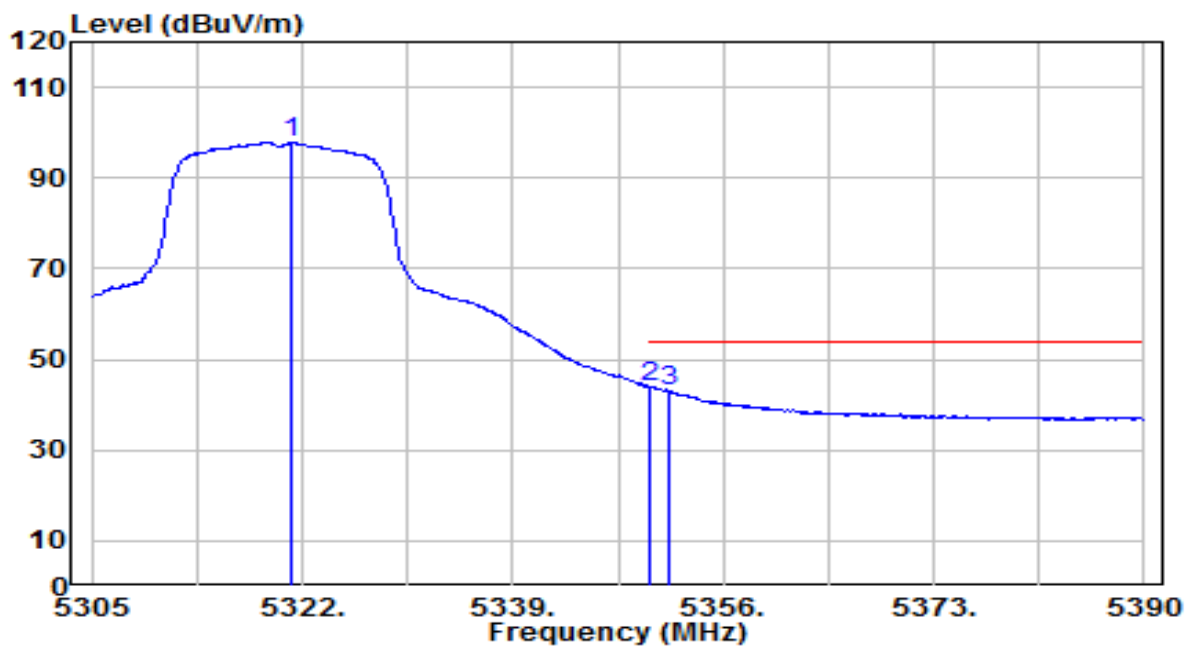


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.150	93.44	4.52	97.95	N/A	N/A	110	120	Average
2	* 5350.000	39.48	4.56	44.03	-9.97	54.00	110	120	Average
3	5351.580	38.55	4.56	43.11	-10.89	54.00	110	120	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

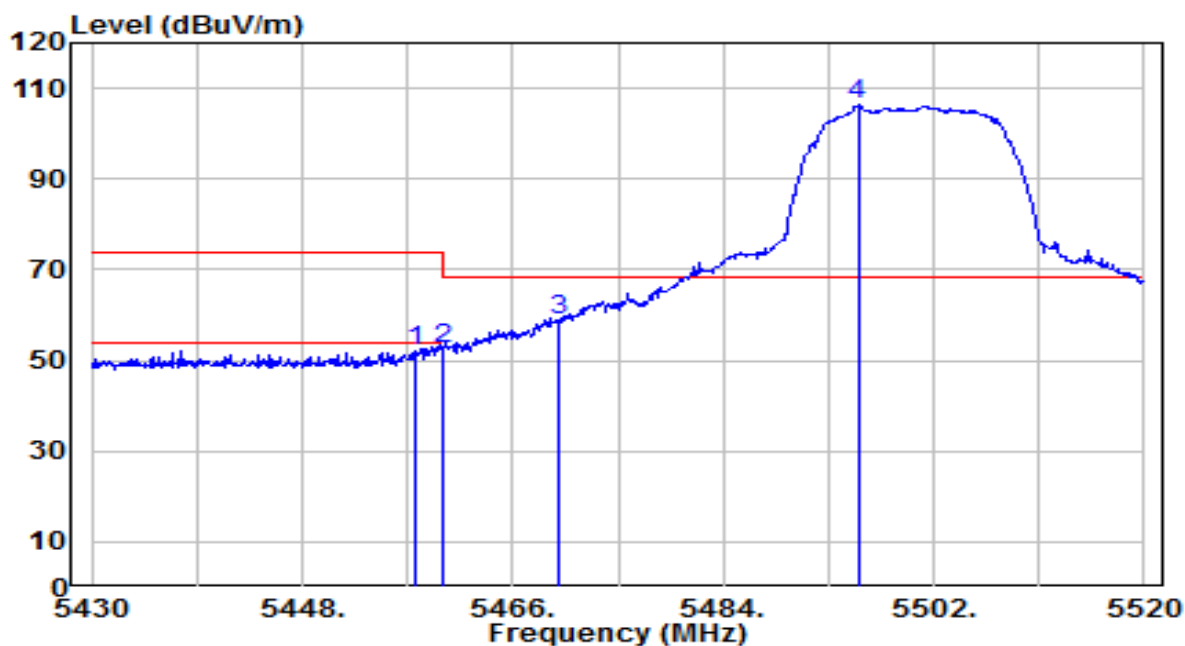


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.630	47.26	4.71	51.97	-22.03	74.00	100	155	Peak
2	5460.000	47.62	4.71	52.33	-15.87	68.20	100	155	Peak
3	* 5470.000	54.30	4.73	59.03	-9.17	68.20	100	155	Peak
4	5495.520	101.44	4.76	106.20	N/A	N/A	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

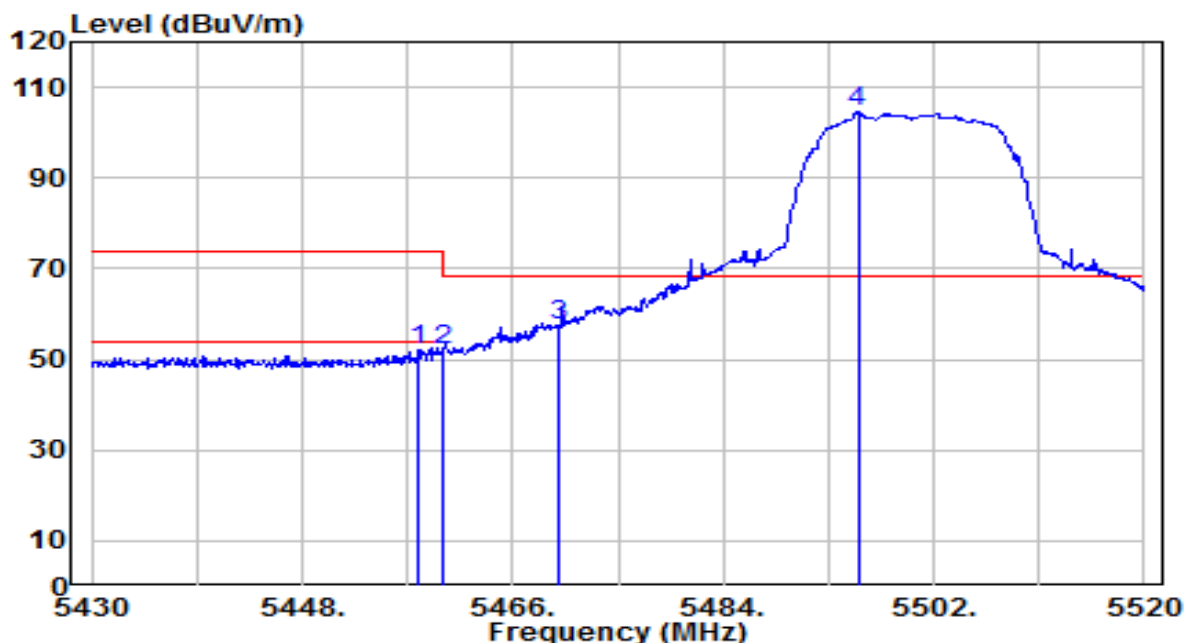


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.900	47.23	4.71	51.94	-22.06	74.00	100	100	Peak
2	5460.000	47.58	4.71	52.29	-15.91	68.20	100	100	Peak
3	* 5470.000	52.70	4.73	57.43	-10.77	68.20	100	100	Peak
4	5495.520	99.70	4.76	104.46	N/A	N/A	100	100	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

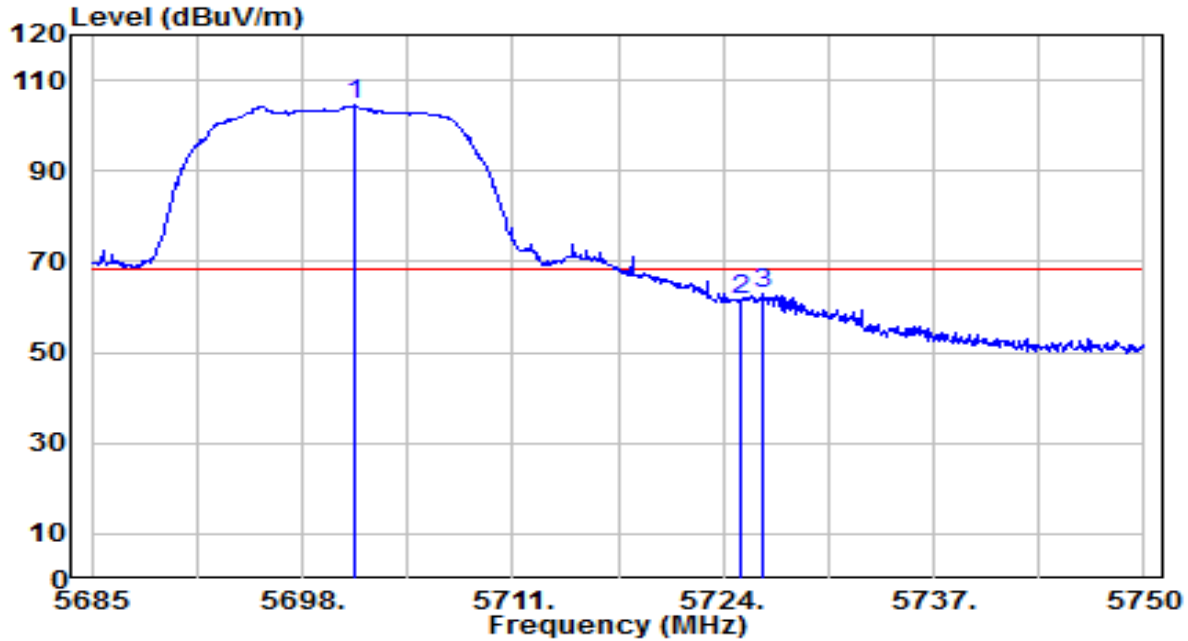


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.315	98.97	5.45	104.42	N/A	N/A	100	155	Peak
2	5725.000	56.19	5.53	61.71	-6.49	68.20	100	155	Peak
3	* 5726.405	57.52	5.53	63.06	-5.14	68.20	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

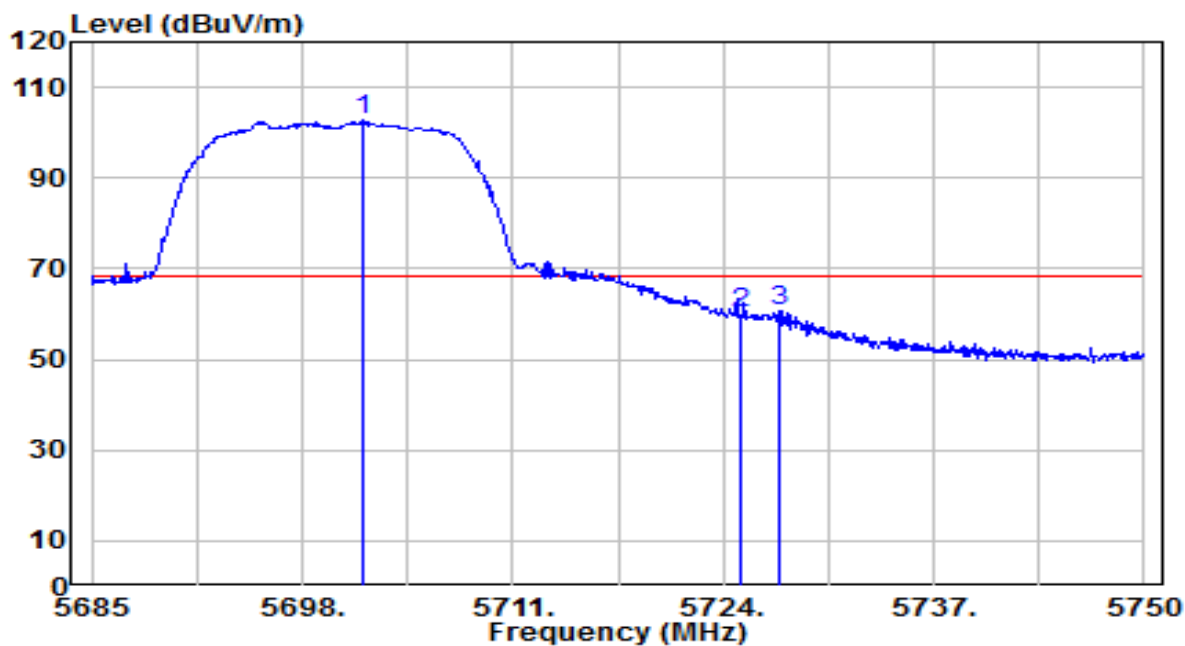


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.770	97.16	5.45	102.61	N/A	N/A	100	100	Peak
2	5725.000	54.64	5.53	60.17	-8.03	68.20	100	100	Peak
3	* 5727.445	55.31	5.53	60.85	-7.35	68.20	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

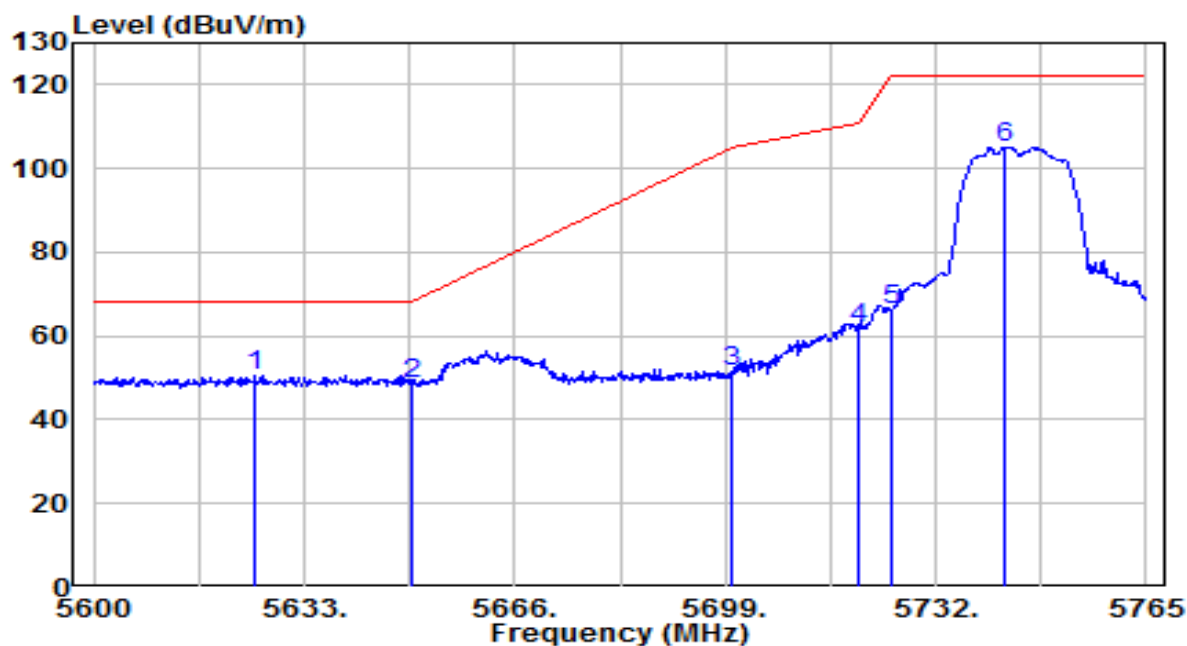


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5625.245	45.30	5.19	50.49	-17.71	68.20	100	155	Peak
2		5650.000	43.19	5.27	48.47	-19.73	68.20	100	155	Peak
3		5700.000	45.87	5.44	51.31	-53.89	105.20	100	155	Peak
4		5720.000	56.26	5.51	61.77	-49.03	110.80	100	155	Peak
5		5725.000	60.78	5.53	66.31	-55.89	122.20	100	155	Peak
6		5742.890	99.63	5.59	105.22	N/A	N/A	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

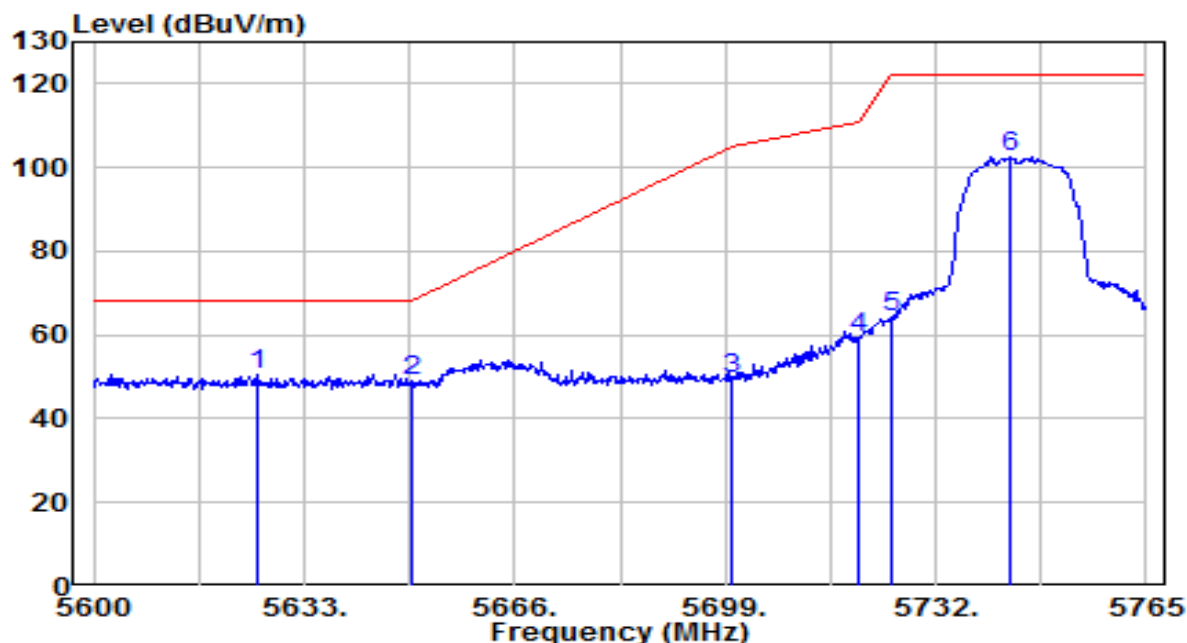


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5625.740	45.25	5.19	50.44	-17.76	68.20	140	100	Peak
2	5650.000	43.54	5.27	48.81	-19.39	68.20	140	100	Peak
3	5700.000	44.17	5.44	49.61	-55.59	105.20	140	100	Peak
4	5720.000	53.77	5.51	59.27	-51.53	110.80	140	100	Peak
5	5725.000	58.63	5.53	64.15	-58.05	122.20	140	100	Peak
6	5743.550	97.07	5.59	102.66	N/A	N/A	140	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

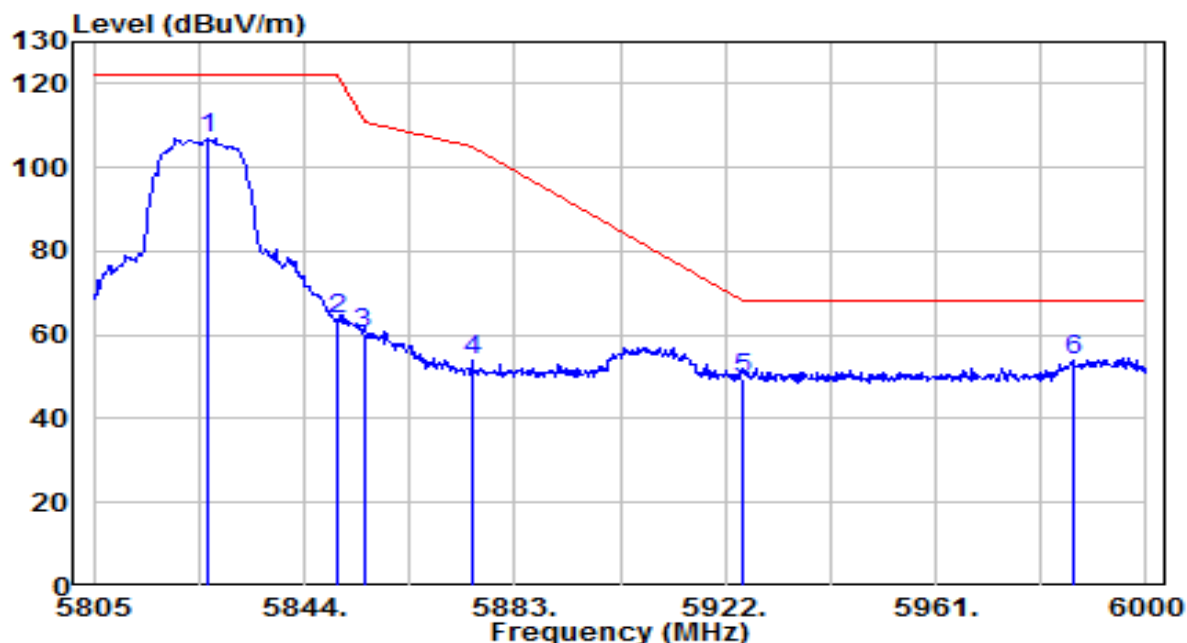


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.255	101.17	5.87	107.04	N/A	N/A	110	150	Peak
2	5850.000	57.96	5.95	63.91	-58.29	122.20	110	150	Peak
3	5855.000	54.48	5.96	60.45	-50.35	110.80	110	150	Peak
4	5875.000	47.72	6.03	53.75	-51.45	105.20	110	150	Peak
5	5925.000	43.42	6.20	49.62	-18.58	68.20	110	150	Peak
6	* 5986.350	47.39	6.40	53.80	-14.40	68.20	110	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

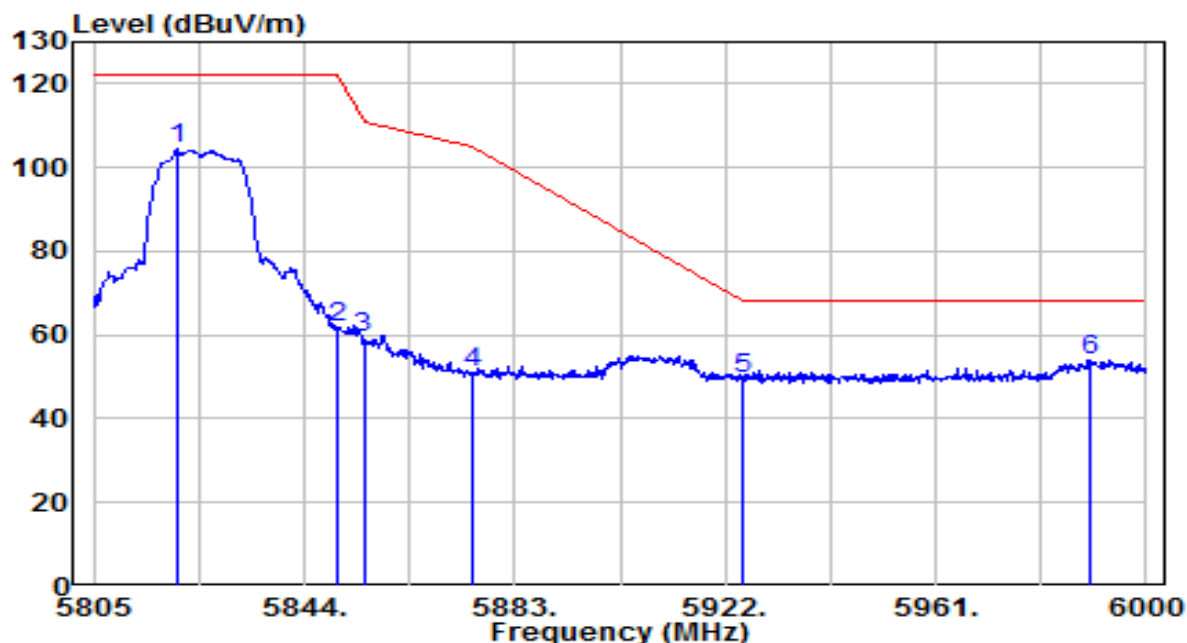

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.405	98.40	5.85	104.25	N/A	N/A	115	105	Peak
2	5850.000	55.71	5.95	61.66	-60.54	122.20	115	105	Peak
3	5855.000	53.38	5.96	59.34	-51.46	110.80	115	105	Peak
4	5875.000	44.96	6.03	50.99	-54.21	105.20	115	105	Peak
5	5925.000	43.22	6.20	49.42	-18.78	68.20	115	105	Peak
6	* 5989.665	47.68	6.42	54.09	-14.11	68.20	115	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.