


EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

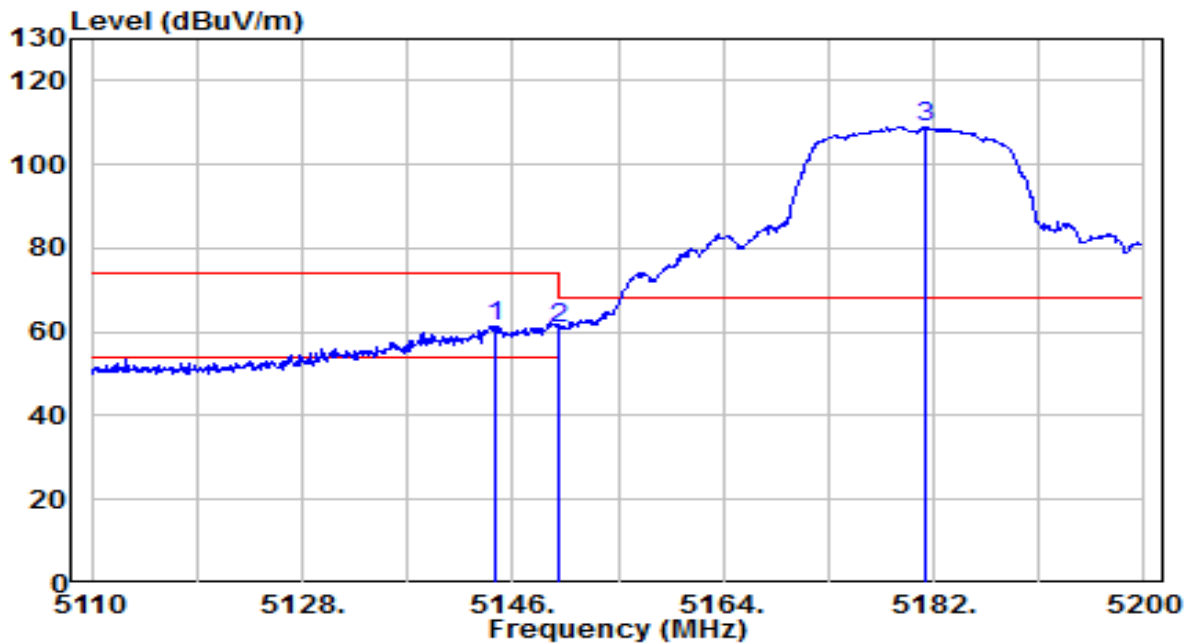


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.470	57.29	4.27	61.56	-12.44	74.00	100	195	Peak
2		5150.000	56.69	4.27	60.96	-13.04	74.00	100	195	Peak
3		5181.280	104.75	4.32	109.06	N/A	N/A	100	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

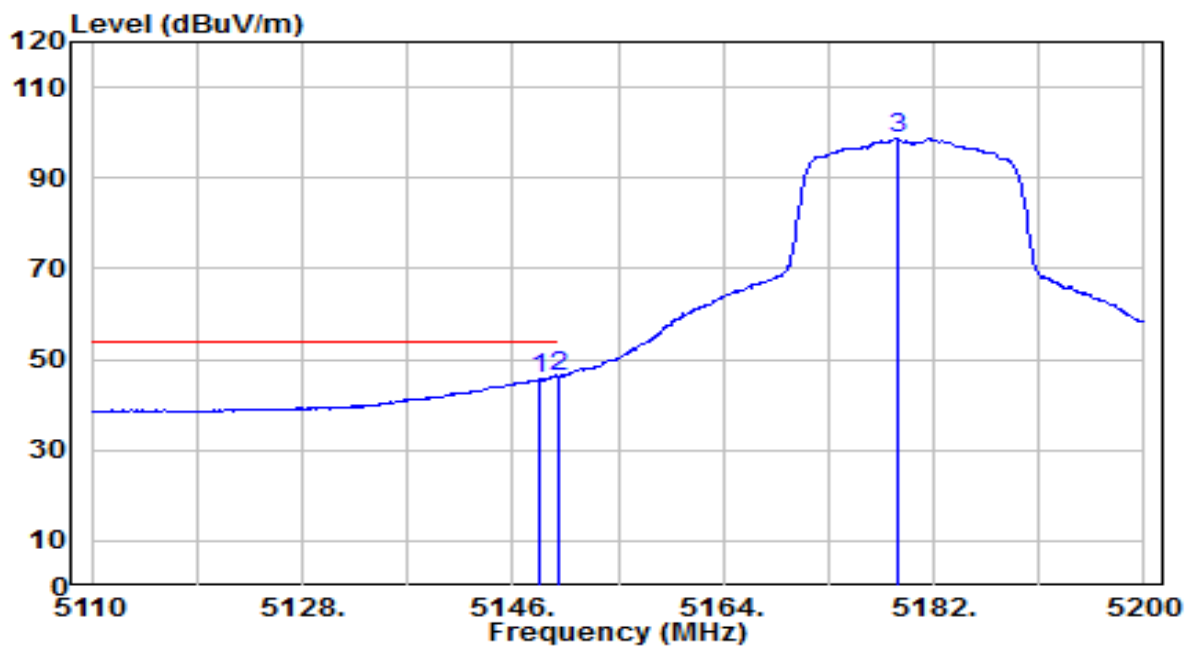


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.340	41.31	4.27	45.58	-8.42	54.00	100	195	Average
2	* 5150.000	41.84	4.27	46.11	-7.89	54.00	100	195	Average
3	5178.850	94.43	4.31	98.74	N/A	N/A	100	195	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

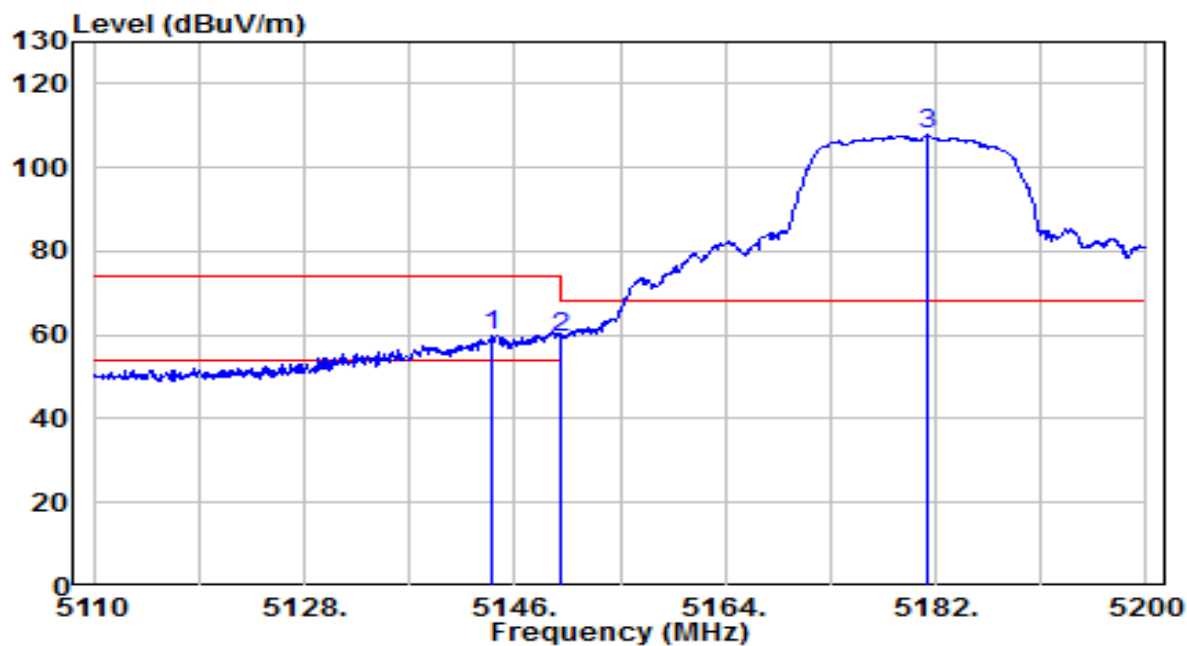


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.930	55.54	4.26	59.80	-14.20	74.00	125	110	Peak
2		5150.000	55.16	4.27	59.43	-14.57	74.00	125	110	Peak
3		5181.280	103.40	4.32	107.71	N/A	N/A	125	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

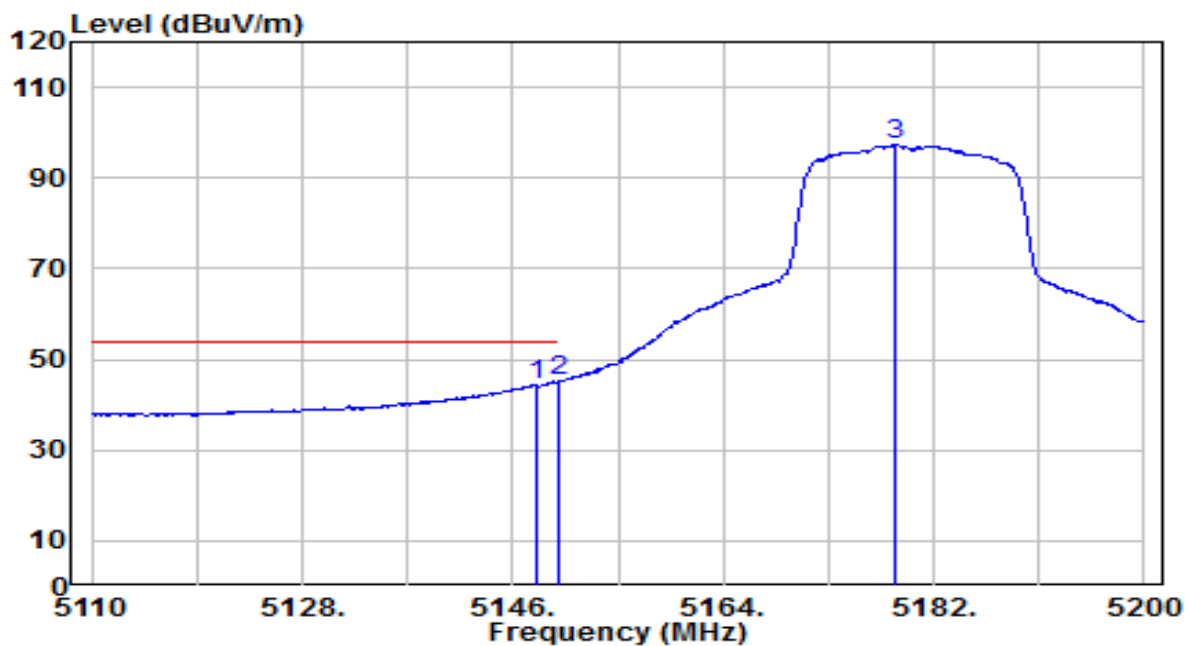


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.070	40.09	4.27	44.36	-9.64	54.00	125	110	Average
2	* 5150.000	40.83	4.27	45.11	-8.89	54.00	125	110	Average
3	5178.760	93.15	4.31	97.46	N/A	N/A	125	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

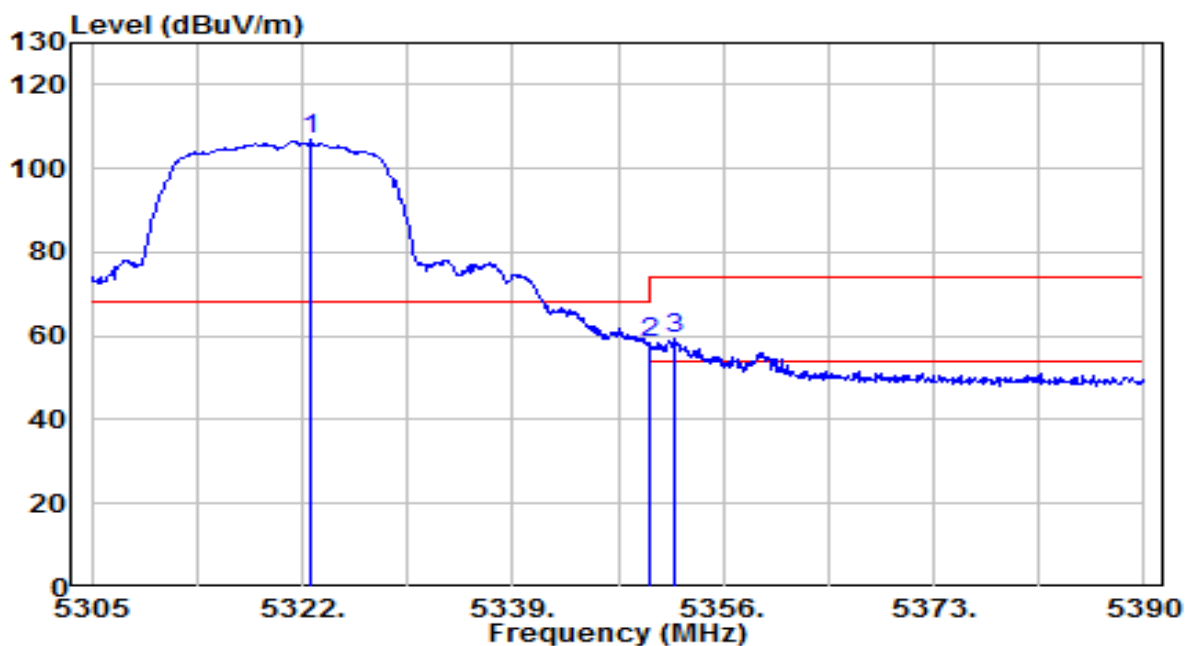


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.595	102.58	4.52	107.10	N/A	N/A	100	195	Peak
2	* 5350.000	53.63	4.56	58.19	-10.01	68.20	100	195	Peak
3	5352.005	54.87	4.56	59.43	-14.57	74.00	100	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

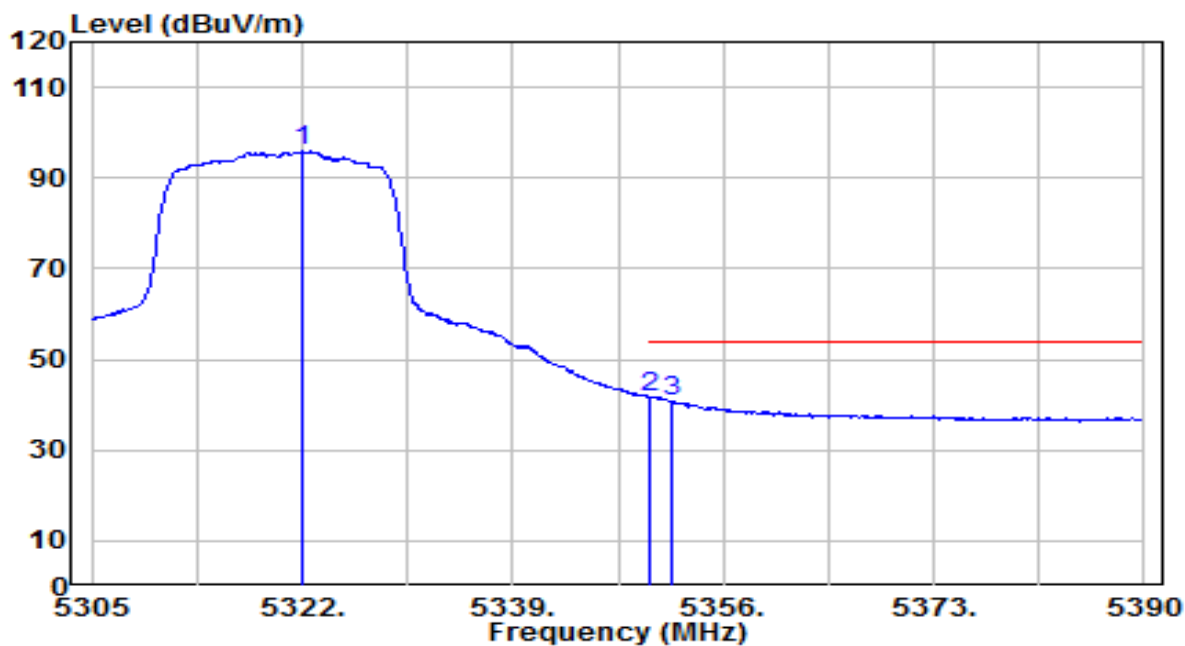


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.085	91.29	4.52	95.81	N/A	N/A	100	195	Average
2	* 5350.000	37.08	4.56	41.63	-12.37	54.00	100	195	Average
3	5351.750	36.32	4.56	40.88	-13.12	54.00	100	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

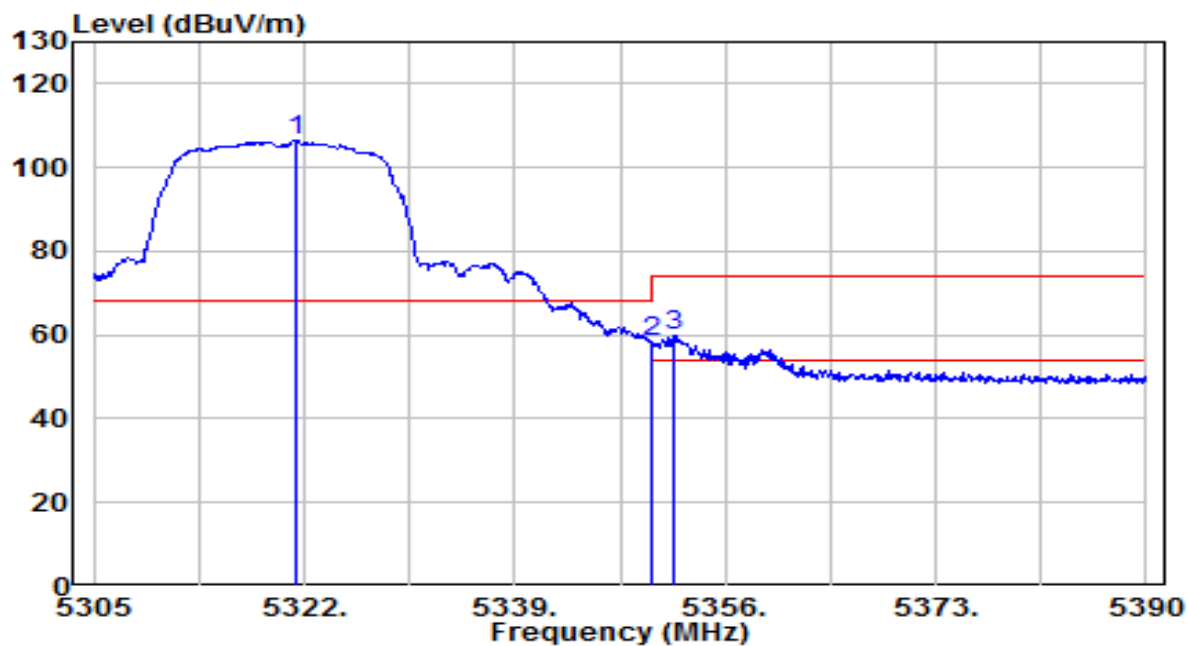


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.235	101.79	4.52	106.30	N/A	N/A	110	120	Peak
2	* 5350.000	53.89	4.56	58.45	-9.75	68.20	110	120	Peak
3	5351.920	55.36	4.56	59.92	-14.08	74.00	110	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

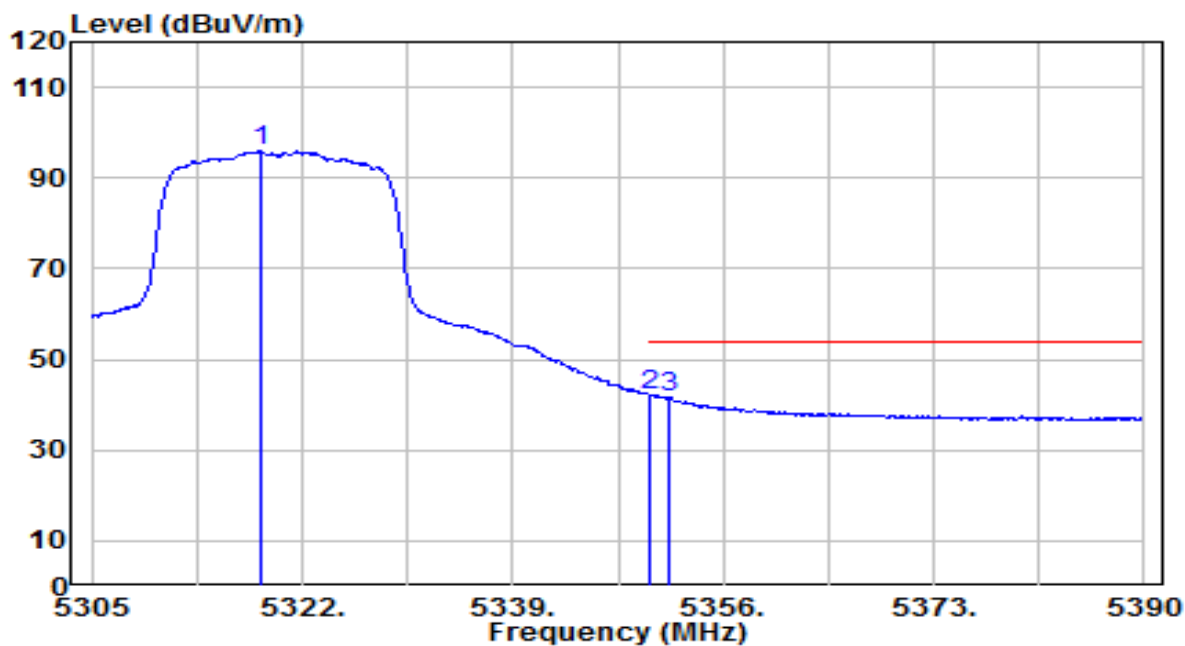


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.770	91.37	4.51	95.88	N/A	N/A	110	120	Average
2	* 5350.000	37.58	4.56	42.14	-11.86	54.00	110	120	Average
3	5351.580	37.08	4.56	41.63	-12.37	54.00	110	120	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

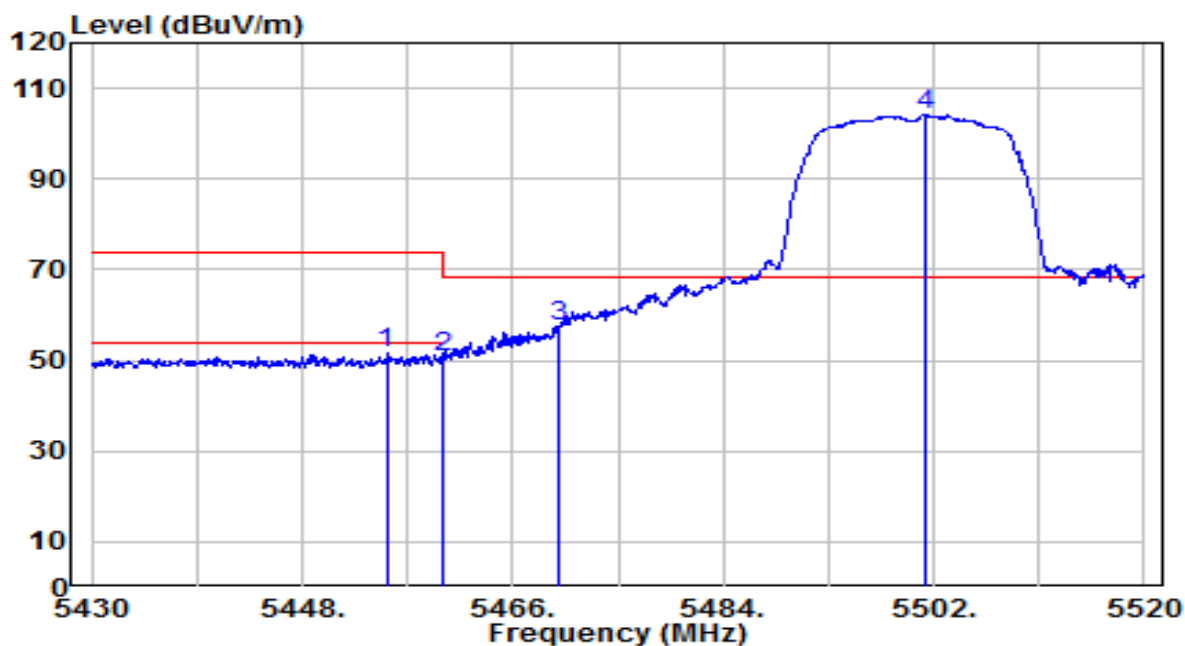


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.200	47.00	4.71	51.70	-22.30	74.00	100	155	Peak
2	5460.000	46.20	4.71	50.92	-17.28	68.20	100	155	Peak
3	* 5470.000	52.70	4.73	57.43	-10.77	68.20	100	155	Peak
4	5501.370	99.59	4.77	104.37	N/A	N/A	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

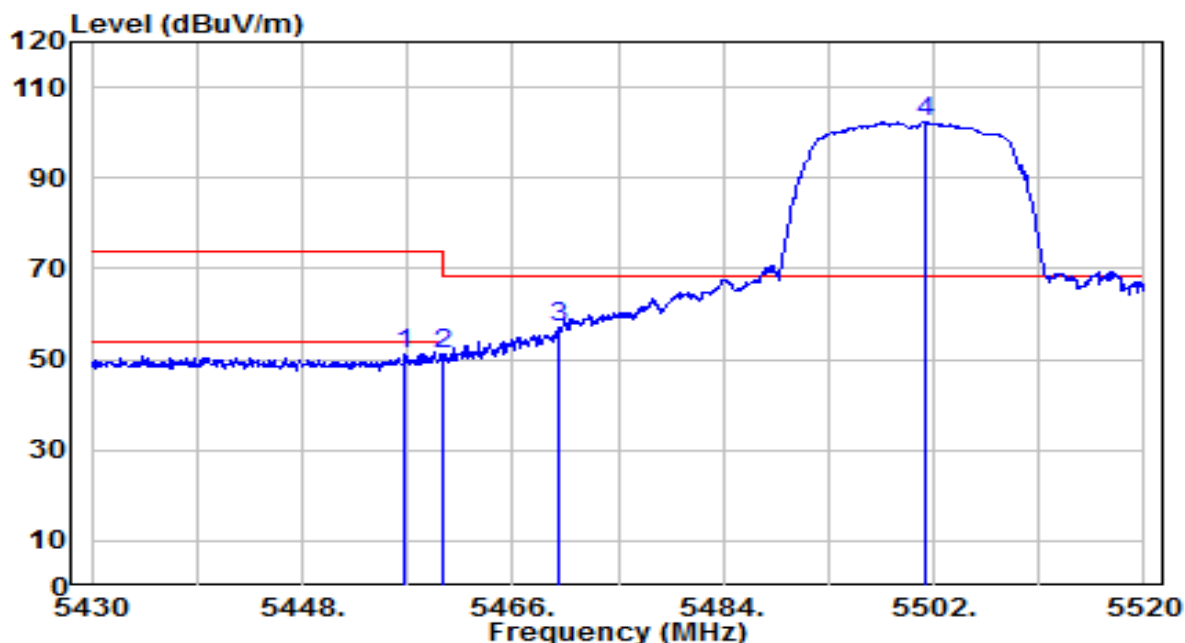


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.730	46.25	4.71	50.96	-23.04	74.00	100	100	Peak
2	5460.000	46.27	4.71	50.98	-17.22	68.20	100	100	Peak
3	* 5470.000	52.32	4.73	57.04	-11.16	68.20	100	100	Peak
4	5501.370	97.56	4.77	102.34	N/A	N/A	100	100	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

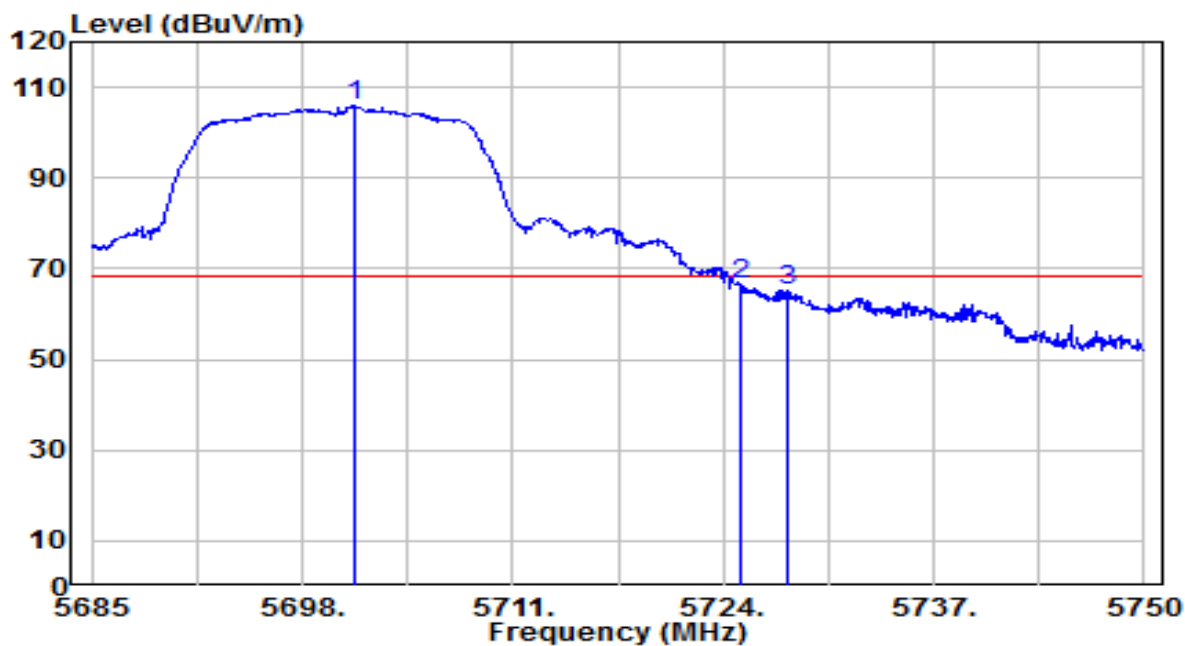


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.250	100.34	5.45	105.78	N/A	N/A	100	155	Peak
2	* 5725.000	60.92	5.53	66.45	-1.75	68.20	100	155	Peak
3	5727.900	59.72	5.54	65.26	-2.94	68.20	100	155	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

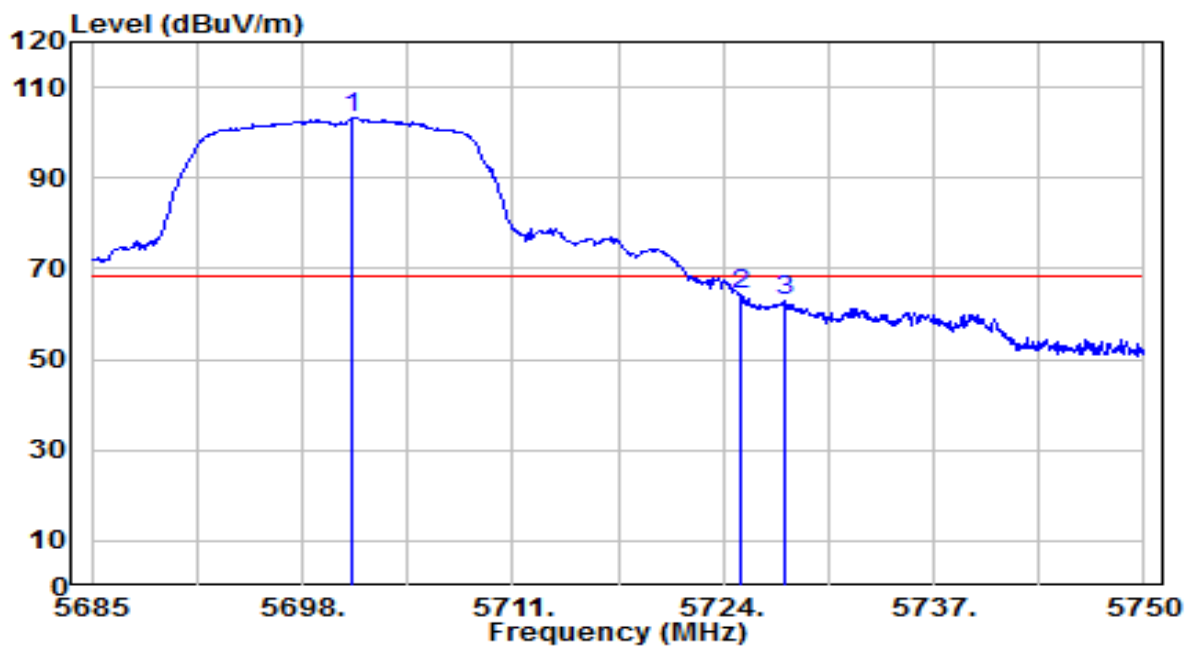


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.120	97.92	5.45	103.37	N/A	N/A	100	100	Peak
2	* 5725.000	58.81	5.53	64.34	-3.86	68.20	100	100	Peak
3	5727.770	57.37	5.54	62.90	-5.30	68.20	100	100	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

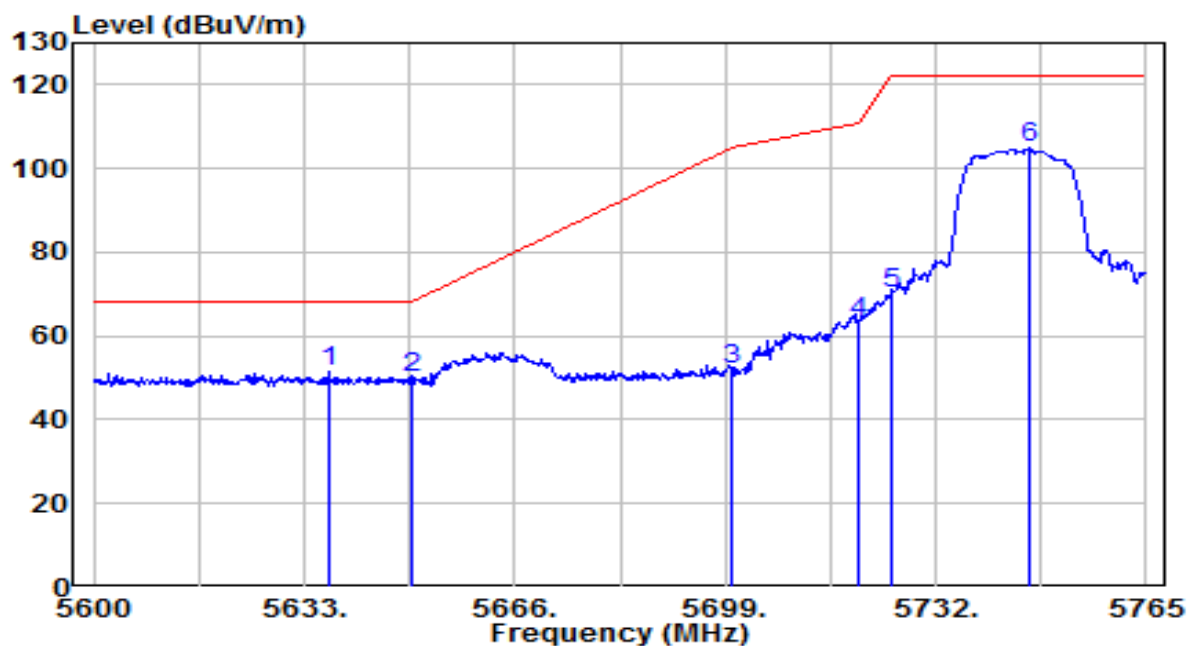


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.795	46.11	5.23	51.34	-16.86	68.20	100	155	Peak
2		5650.000	44.58	5.27	49.86	-18.34	68.20	100	155	Peak
3		5700.000	46.55	5.44	51.99	-53.21	105.20	100	155	Peak
4		5720.000	57.57	5.51	63.08	-47.72	110.80	100	155	Peak
5		5725.000	64.39	5.53	69.91	-52.29	122.20	100	155	Peak
6		5746.520	99.20	5.60	104.79	N/A	N/A	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

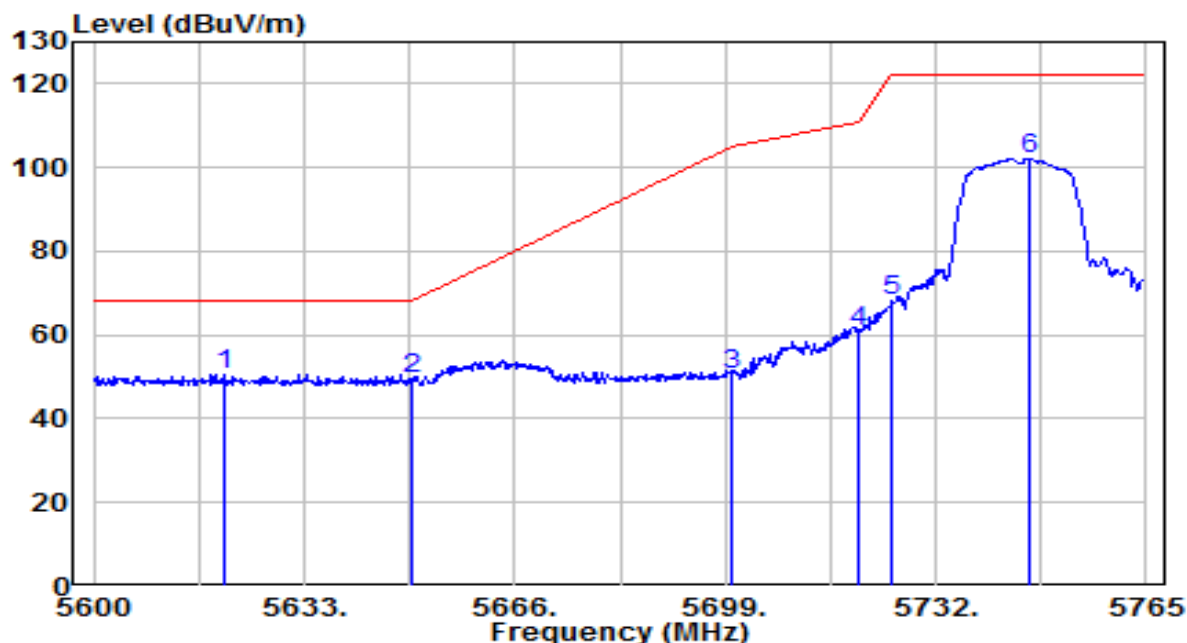


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5620.295	45.27	5.17	50.45	-17.75	68.20	140	100	Peak
2		5650.000	44.17	5.27	49.45	-18.75	68.20	140	100	Peak
3		5700.000	44.97	5.44	50.41	-54.79	105.20	140	100	Peak
4		5720.000	55.31	5.51	60.82	-49.98	110.80	140	100	Peak
5		5725.000	62.51	5.53	68.03	-54.17	122.20	140	100	Peak
6		5746.520	96.57	5.60	102.17	N/A	N/A	140	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

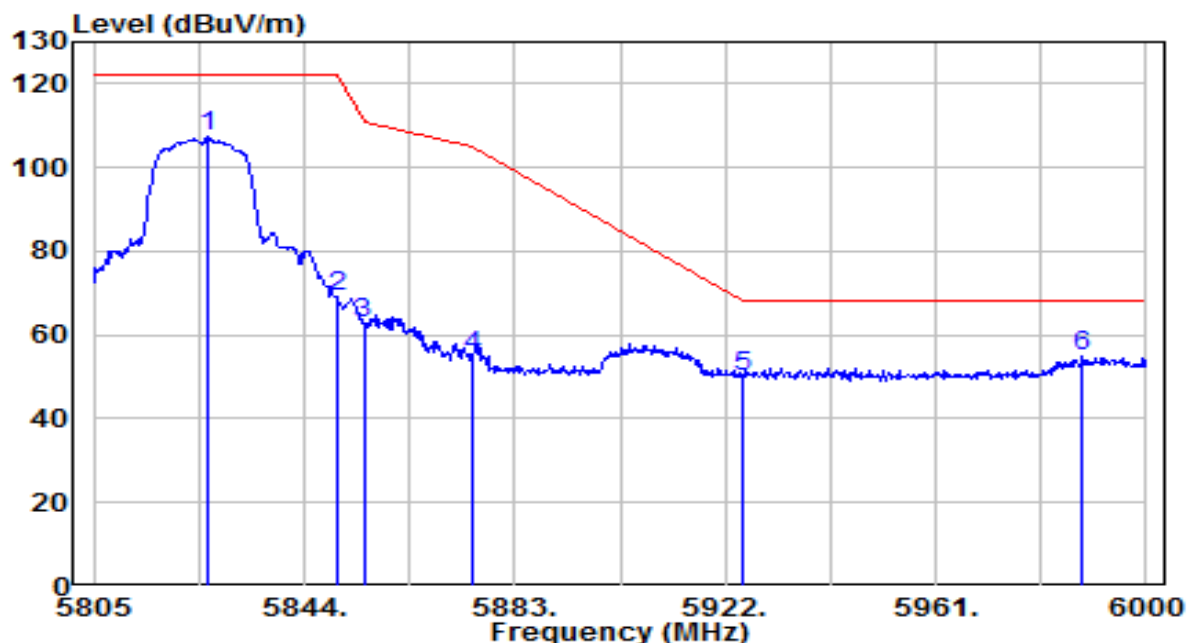


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.255	101.36	5.87	107.22	N/A	N/A	110	150	Peak
2	5850.000	63.31	5.95	69.26	-52.94	122.20	110	150	Peak
3	5855.000	56.85	5.96	62.81	-47.99	110.80	110	150	Peak
4	5875.000	48.80	6.03	54.83	-50.37	105.20	110	150	Peak
5	5925.000	43.75	6.20	49.95	-18.25	68.20	110	150	Peak
6	* 5988.300	48.67	6.41	55.08	-13.12	68.20	110	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

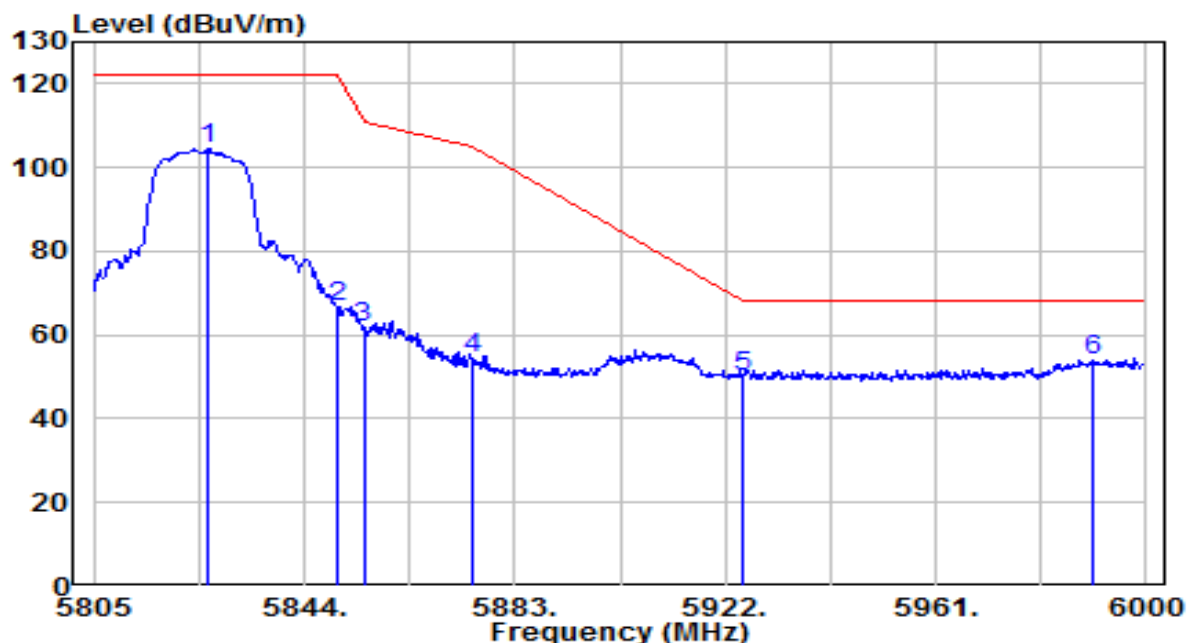


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.255	98.54	5.87	104.41	N/A	N/A	115	105	Peak
2	5850.000	60.91	5.95	66.86	-55.34	122.20	115	105	Peak
3	5855.000	56.09	5.96	62.05	-48.75	110.80	115	105	Peak
4	5875.000	48.47	6.03	54.50	-50.70	105.20	115	105	Peak
5	5925.000	43.88	6.20	50.07	-18.13	68.20	115	105	Peak
6	* 5990.055	47.75	6.42	54.17	-14.03	68.20	115	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

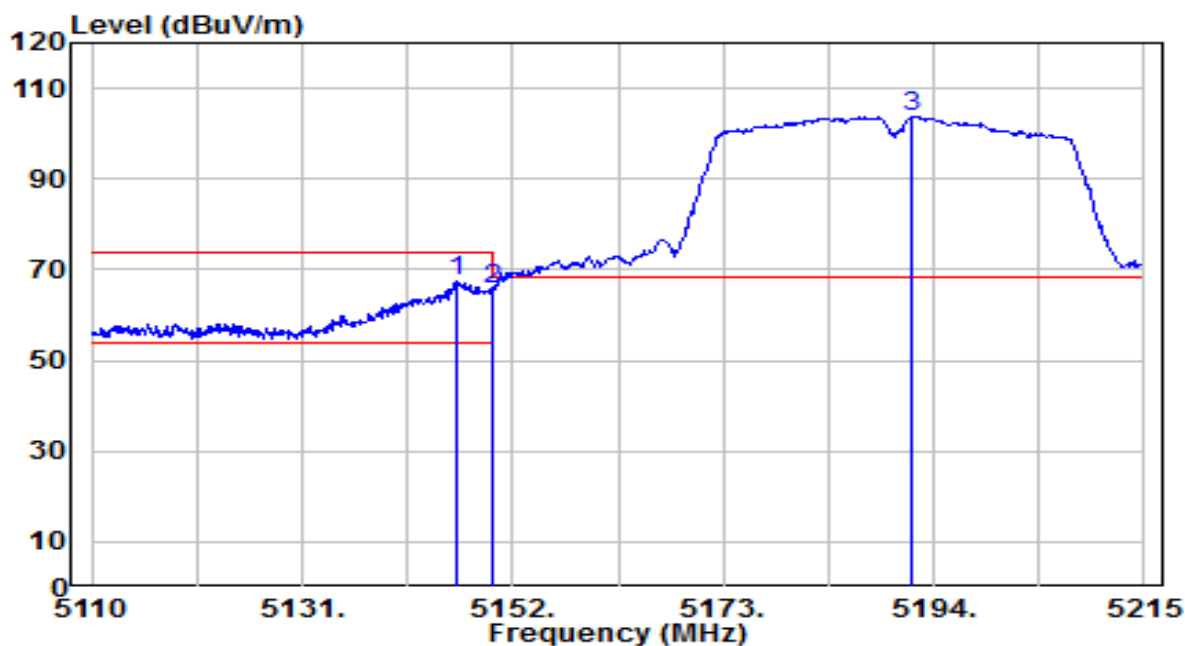


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.435	63.20	4.27	67.47	-6.53	74.00	100	195	Peak
2		5150.000	61.37	4.27	65.65	-8.35	74.00	100	195	Peak
3		5191.900	99.27	4.33	103.61	N/A	N/A	100	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

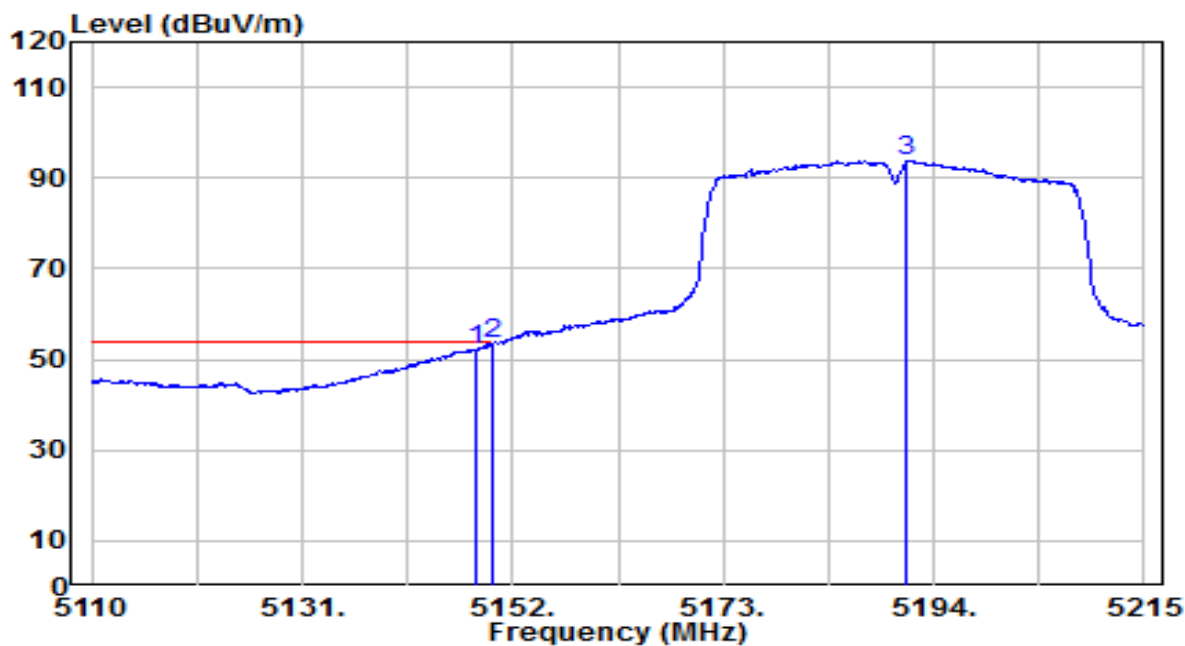


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.430	47.98	4.27	52.25	-1.75	54.00	100	195	Average
2	* 5150.000	49.10	4.27	53.37	-0.63	54.00	100	195	Average
3	5191.375	89.51	4.33	93.85	N/A	N/A	100	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

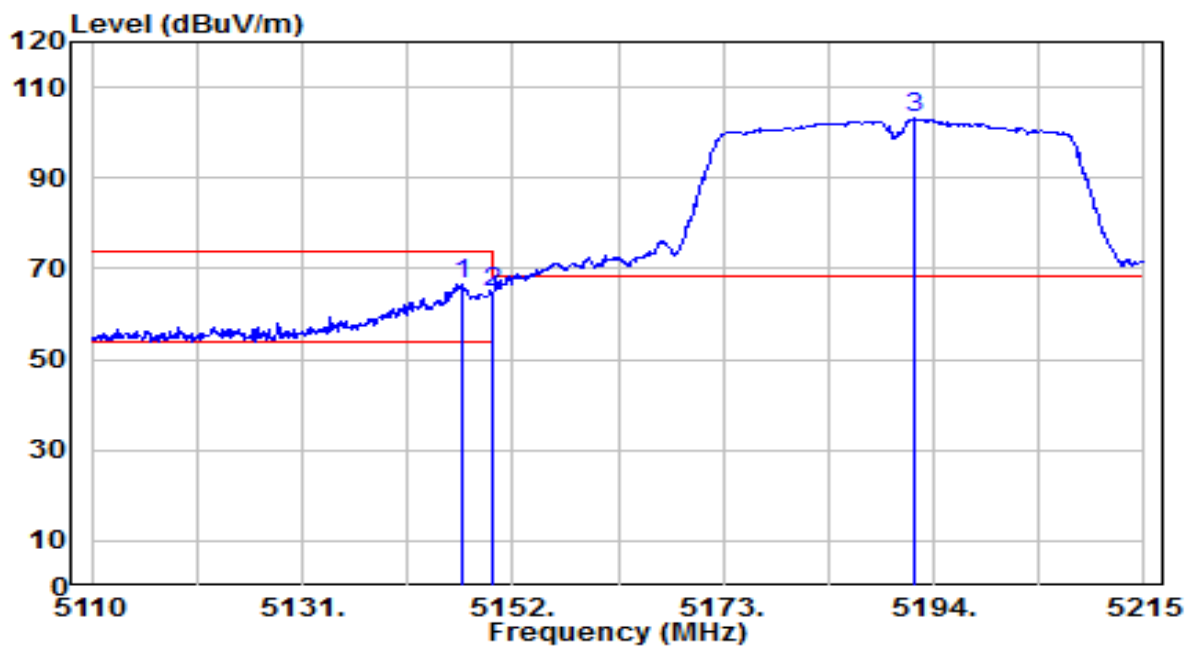


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5147.065	62.37	4.27	66.64	-7.36	74.00	125	110	Peak
2	5150.000	60.58	4.27	64.85	-9.15	74.00	125	110	Peak
3	5192.005	98.70	4.33	103.03	N/A	N/A	125	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

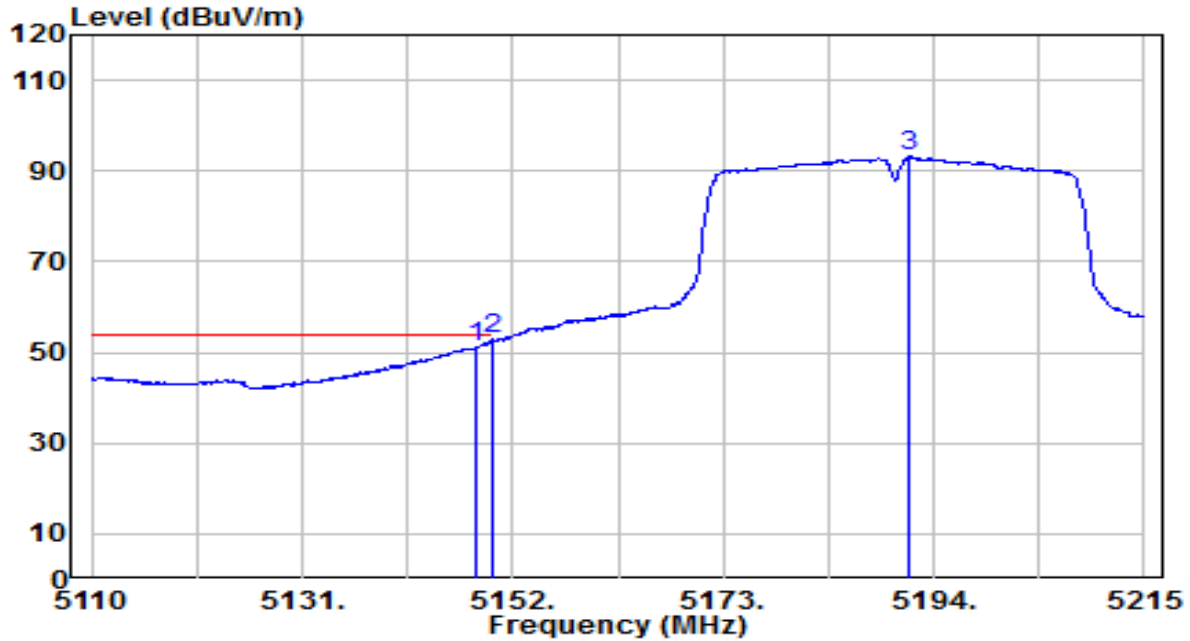


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.430	46.81	4.27	51.08	-2.92	54.00	125	110	Average
2	* 5150.000	48.54	4.27	52.81	-1.19	54.00	125	110	Average
3	5191.585	88.85	4.33	93.18	N/A	N/A	125	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0	Test Voltage	AC 120V/60Hz

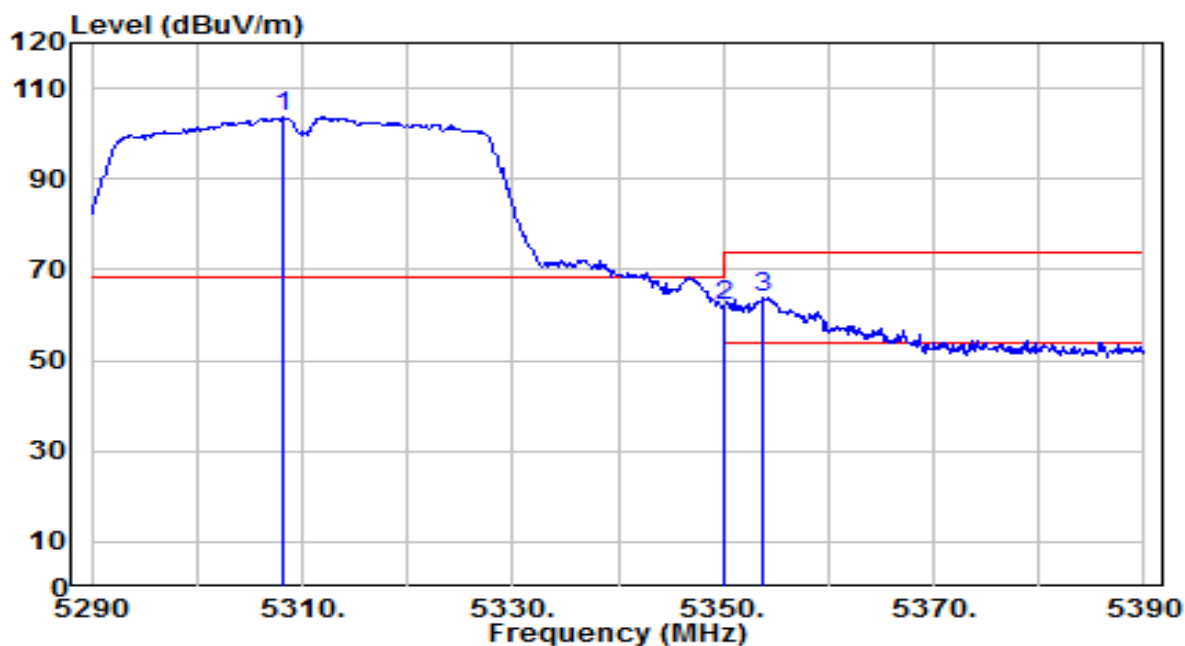


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.300	99.08	4.50	103.58	N/A	N/A	100	195	Peak
2	* 5350.000	57.41	4.56	61.97	-6.23	68.20	100	195	Peak
3	5353.800	59.24	4.56	63.80	-10.20	74.00	100	195	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0	Test Voltage	AC 120V/60Hz

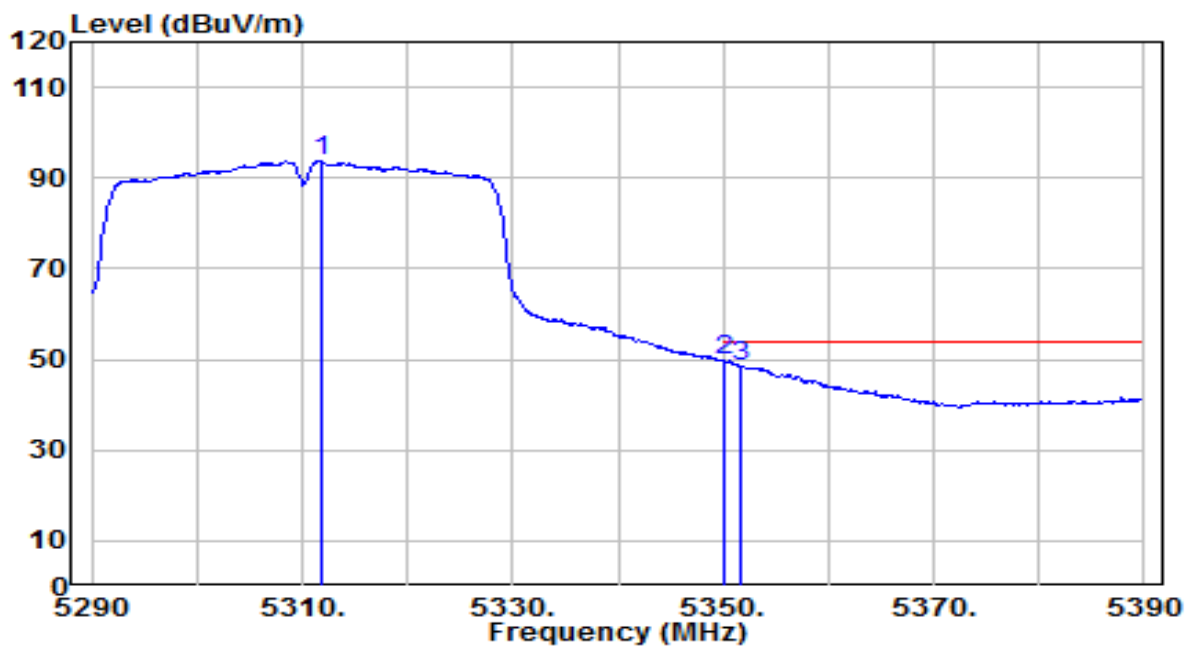


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.800	89.22	4.50	93.72	N/A	N/A	100	195	Average
2	* 5350.000	45.06	4.56	49.62	-4.38	54.00	100	195	Average
3	5351.600	44.03	4.56	48.59	-5.41	54.00	100	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0	Test Voltage	AC 120V/60Hz

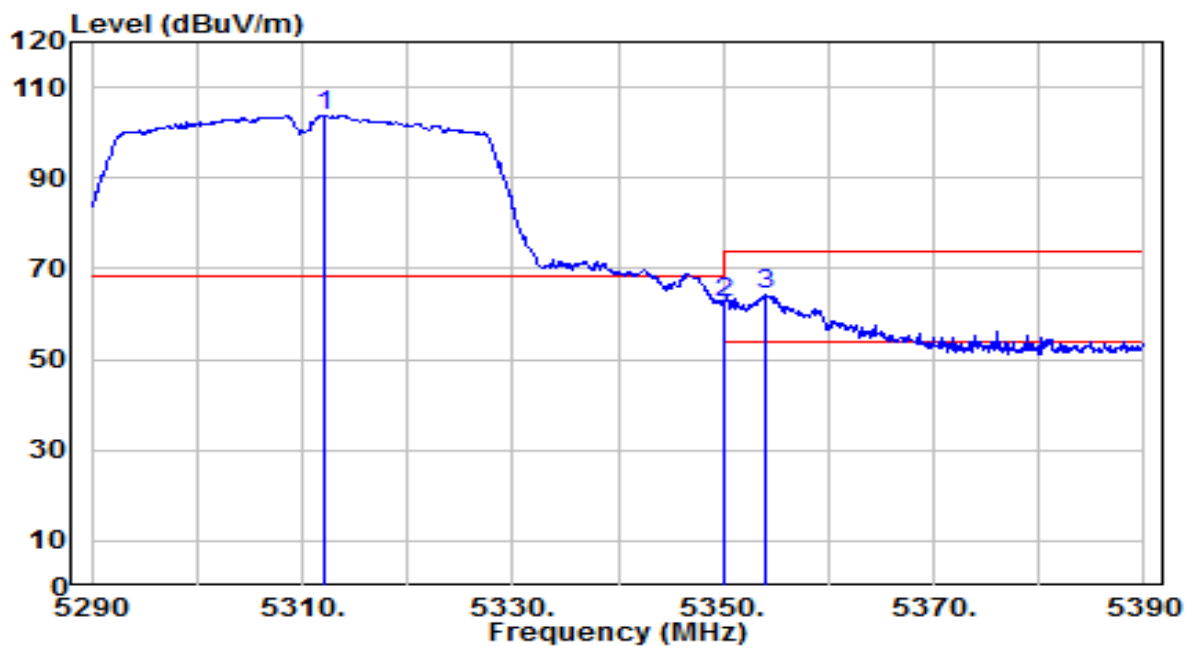


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.100	99.29	4.50	103.80	N/A	N/A	110	120	Peak
2	* 5350.000	57.92	4.56	62.48	-5.72	68.20	110	120	Peak
3	5353.900	59.62	4.56	64.18	-9.82	74.00	110	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0	Test Voltage	AC 120V/60Hz

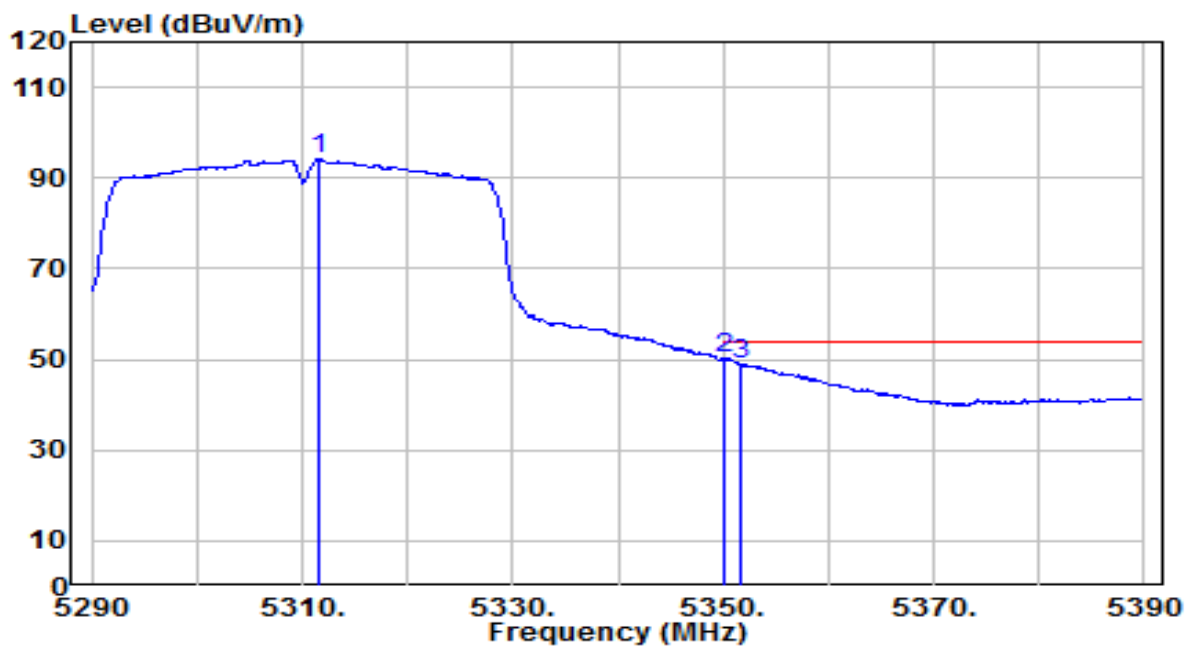


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.700	89.54	4.50	94.04	N/A	N/A	110	120	Average
2	* 5350.000	45.57	4.56	50.12	-3.88	54.00	110	120	Average
3	5351.700	44.27	4.56	48.83	-5.17	54.00	110	120	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0	Test Voltage	AC 120V/60Hz

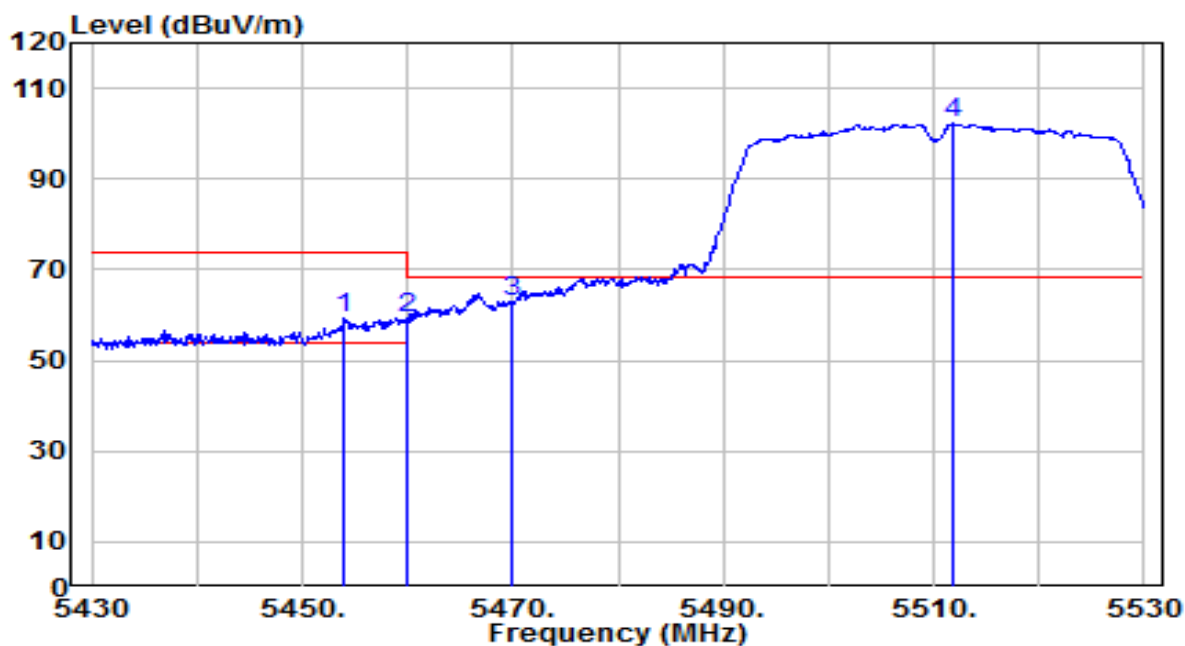


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.000	54.59	4.70	59.29	-14.71	74.00	100	155	Peak
2	5460.000	54.46	4.71	59.18	-9.02	68.20	100	155	Peak
3	* 5470.000	58.10	4.73	62.83	-5.37	68.20	100	155	Peak
4	5511.900	97.46	4.81	102.27	N/A	N/A	100	155	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0	Test Voltage	AC 120V/60Hz

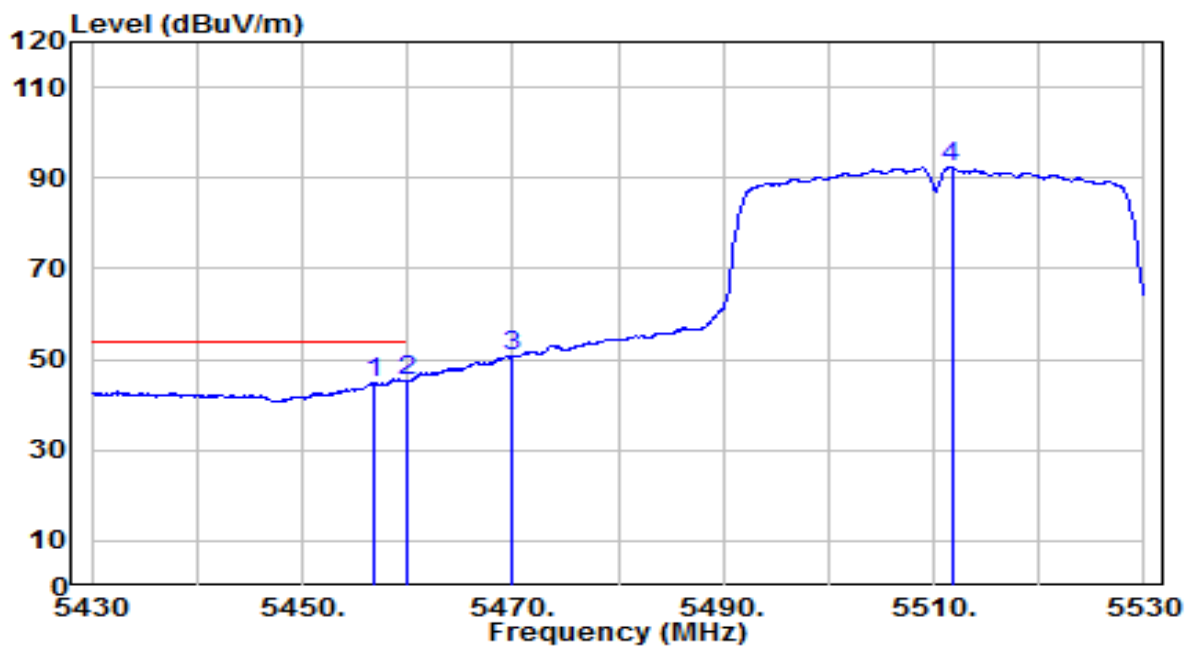


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.800	40.30	4.71	45.01	-8.99	54.00	100	155	Average
2	* 5460.000	40.47	4.71	45.18	-8.82	54.00	100	155	Average
3	5470.000	45.91	4.73	50.64	N/A	N/A	100	155	Average
4	5511.700	87.71	4.81	92.52	N/A	N/A	100	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0	Test Voltage	AC 120V/60Hz

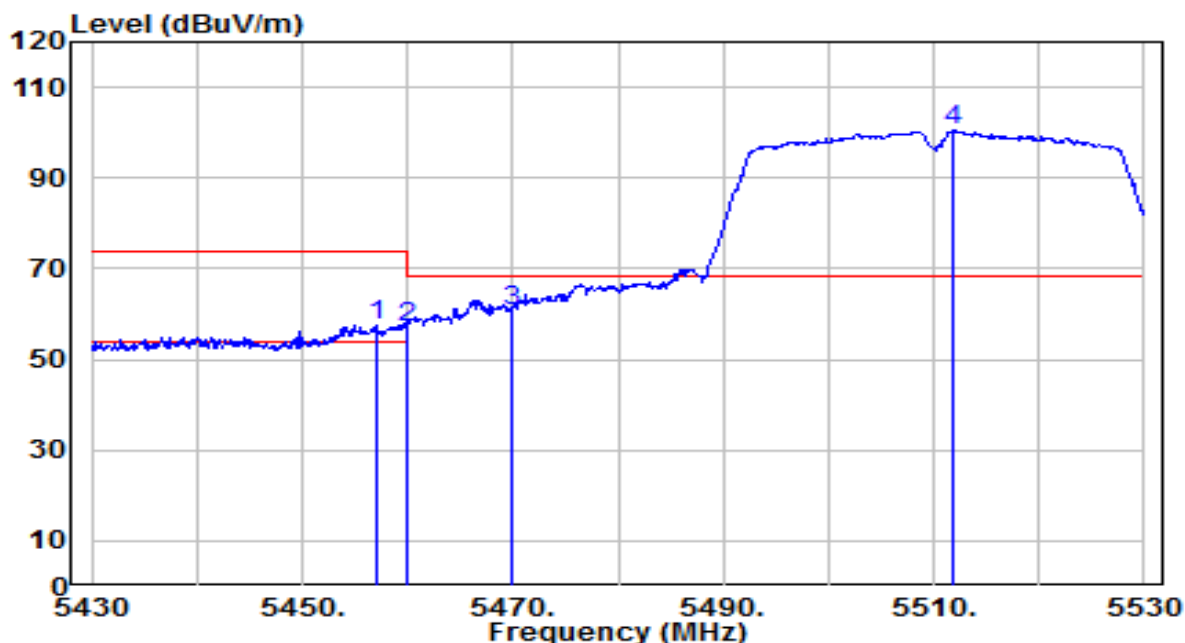


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.000	52.97	4.71	57.68	-16.32	74.00	100	100	Peak
2	5460.000	52.37	4.71	57.09	-11.11	68.20	100	100	Peak
3	* 5470.000	56.02	4.73	60.75	-7.45	68.20	100	100	Peak
4	5511.900	95.58	4.81	100.39	N/A	N/A	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0	Test Voltage	AC 120V/60Hz

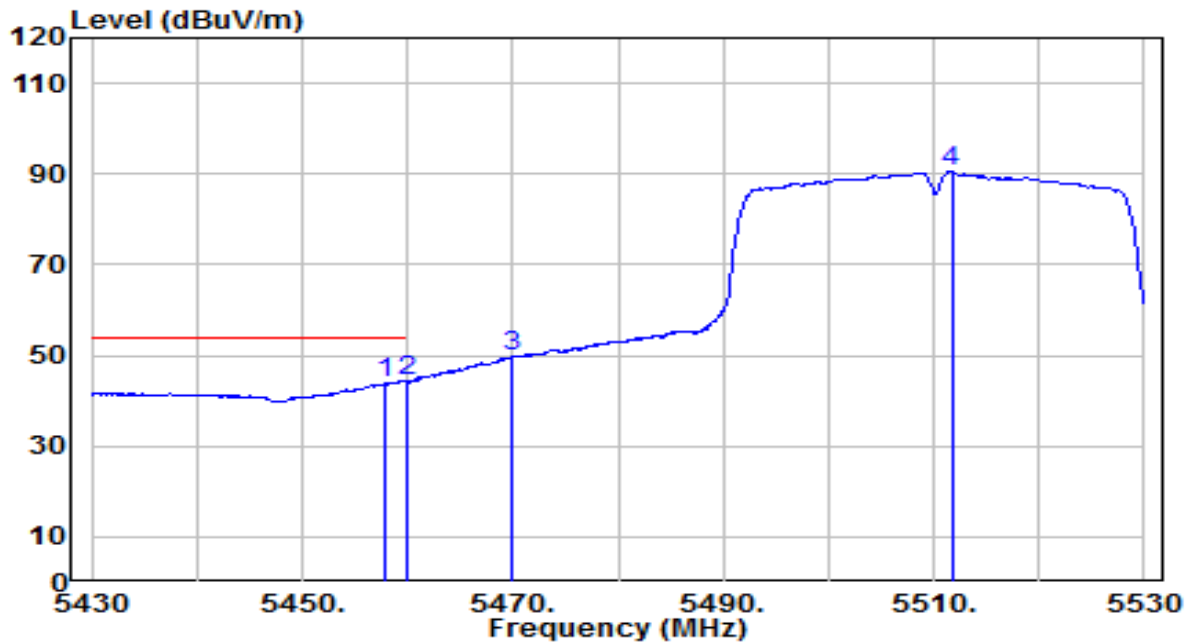


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.800	39.28	4.71	43.99	-10.01	54.00	100	100	Average
2	* 5460.000	39.52	4.71	44.23	-9.77	54.00	100	100	Average
3	5470.000	44.88	4.73	49.60	N/A	N/A	100	100	Average
4	5511.700	85.79	4.81	90.60	N/A	N/A	100	100	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band3_CH 134_ANT 0	Test Voltage	AC 120V/60Hz

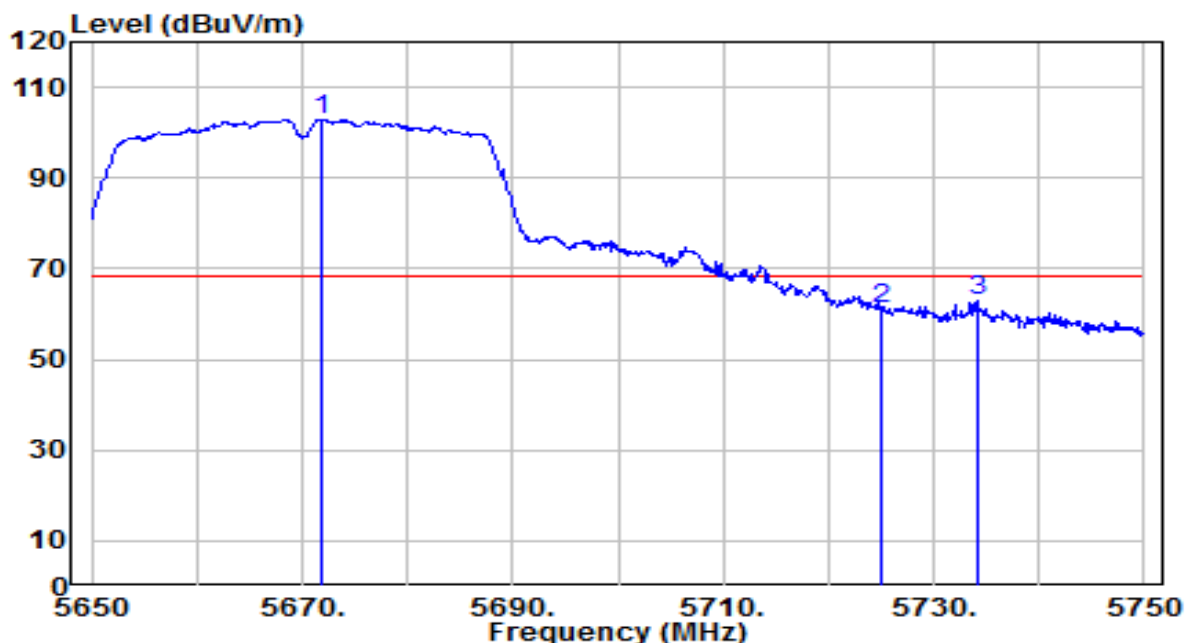


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5671.900	97.59	5.35	102.94	N/A	N/A	100	155	Peak
2	5725.000	55.71	5.53	61.24	-6.96	68.20	100	155	Peak
3	* 5734.100	57.53	5.56	63.09	-5.11	68.20	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band3_CH 134_ANT 0	Test Voltage	AC 120V/60Hz

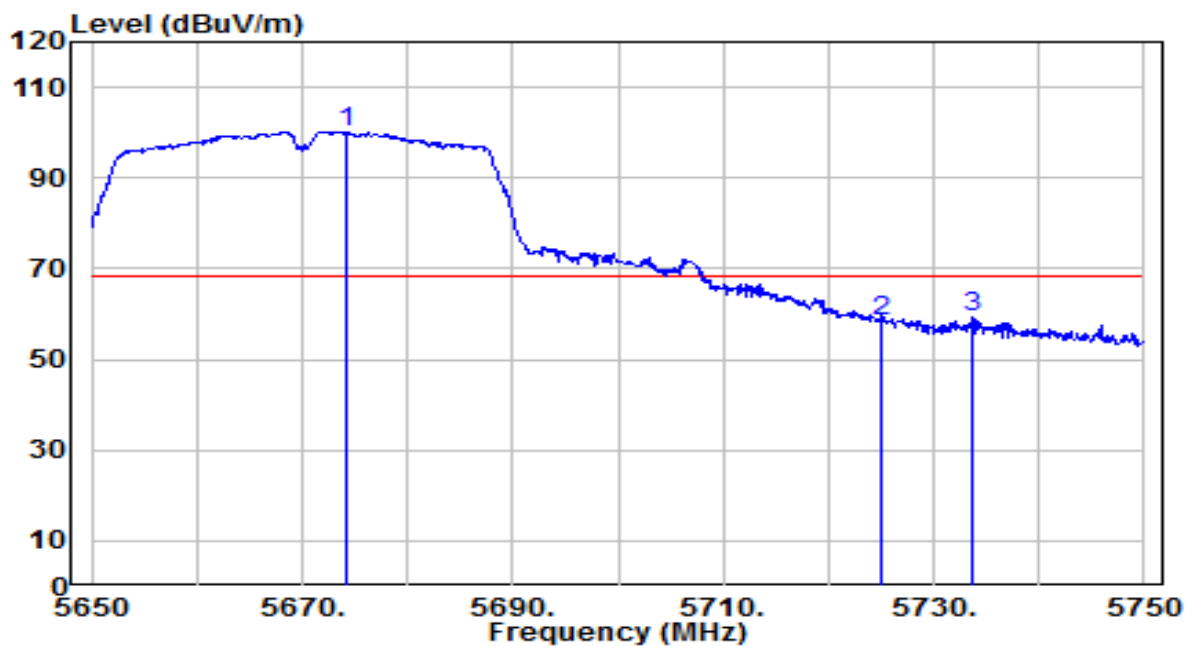


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5674.100	94.94	5.35	100.29	N/A	N/A	100	100	Peak
2	5725.000	52.90	5.53	58.43	-9.77	68.20	100	100	Peak
3	* 5733.700	53.56	5.56	59.11	-9.09	68.20	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	AC 120V/60Hz

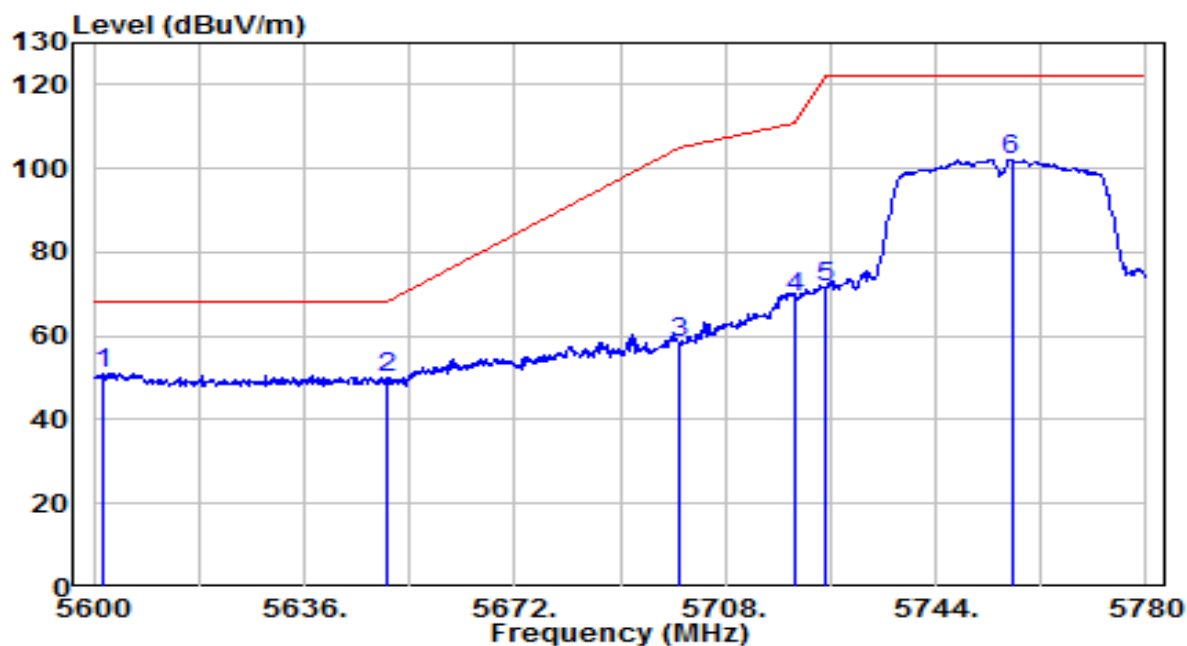


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5601.800	46.07	5.11	51.18	-17.02	68.20	100	155	Peak
2		5650.000	44.52	5.27	49.79	-18.41	68.20	100	155	Peak
3		5700.000	52.91	5.44	58.35	-46.85	105.20	100	155	Peak
4		5720.000	63.62	5.51	69.13	-41.67	110.80	100	155	Peak
5		5725.000	66.09	5.53	71.62	-50.58	122.20	100	155	Peak
6		5756.960	96.61	5.63	102.24	N/A	N/A	100	155	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	AC 120V/60Hz

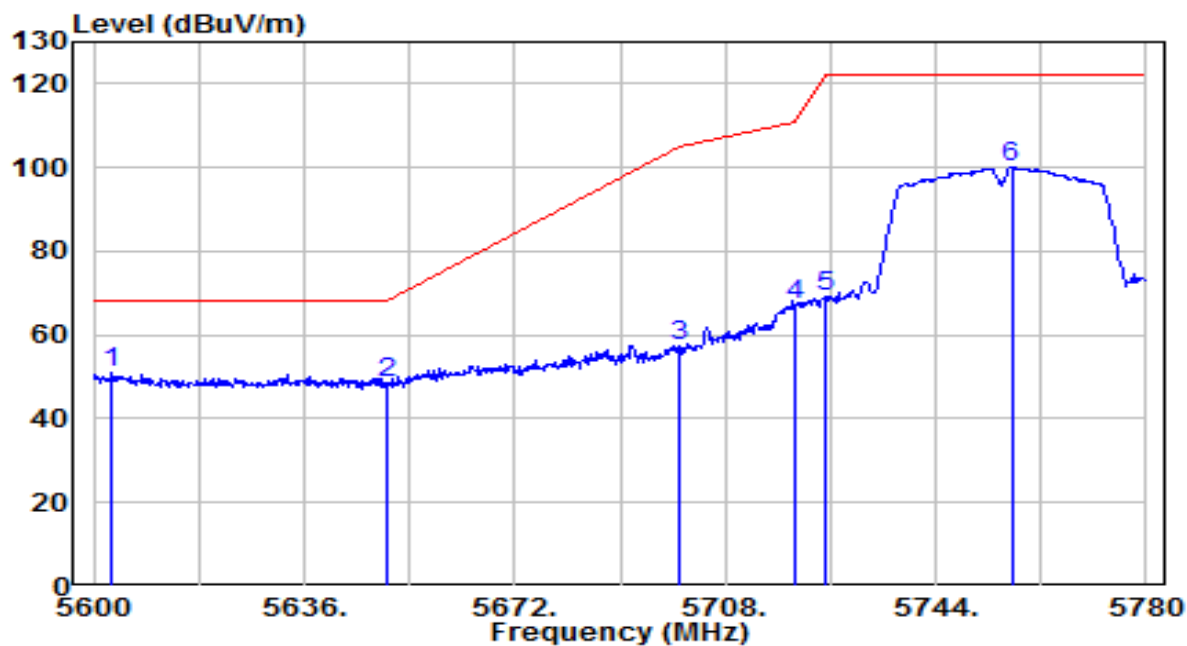


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5603.060	46.13	5.12	51.24	-16.96	68.20	140	100	Peak
2		5650.000	43.30	5.27	48.57	-19.63	68.20	140	100	Peak
3		5700.000	51.77	5.44	57.21	-47.99	105.20	140	100	Peak
4		5720.000	61.65	5.51	67.16	-43.64	110.80	140	100	Peak
5		5725.000	63.64	5.53	69.17	-53.03	122.20	140	100	Peak
6		5756.960	94.39	5.63	100.03	N/A	N/A	140	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	AC 120V/60Hz

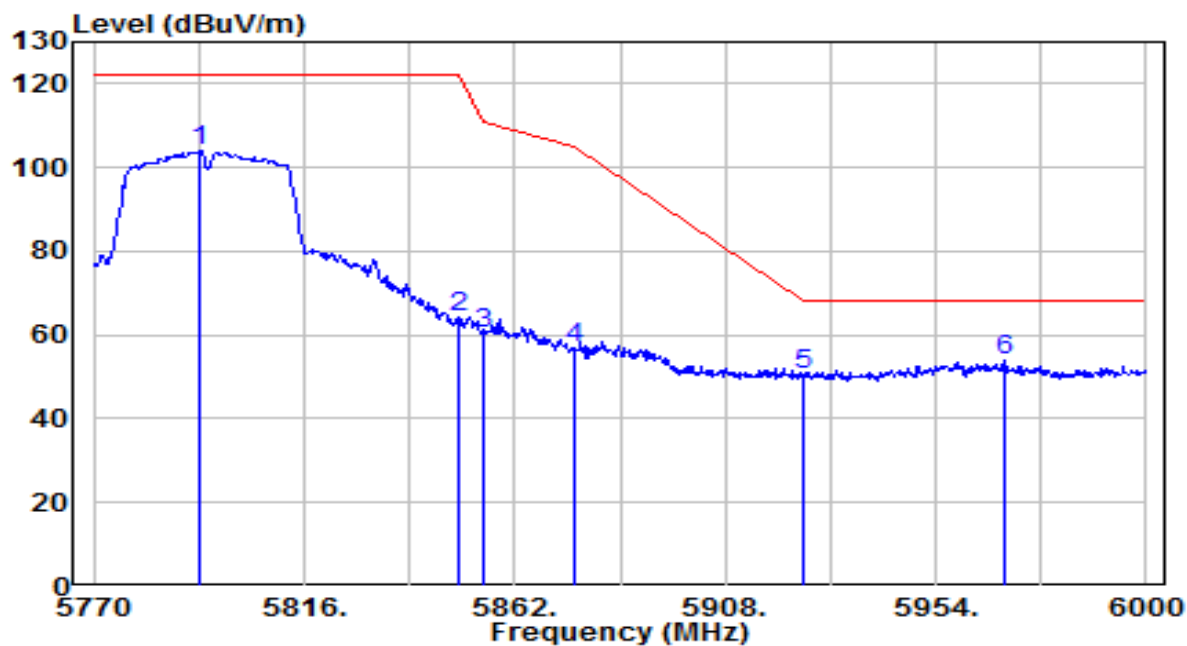


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5793.230	98.06	5.76	103.81	N/A	N/A	110	150	Peak
2	5850.000	58.09	5.95	64.03	-58.17	122.20	110	150	Peak
3	5855.000	54.37	5.96	60.33	-50.47	110.80	110	150	Peak
4	5875.000	50.63	6.03	56.66	-48.54	105.20	110	150	Peak
5	5925.000	44.31	6.20	50.50	-17.70	68.20	110	150	Peak
6	* 5968.950	47.47	6.35	53.82	-14.38	68.20	110	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-19
Factor	BBHA 9120D	Temp. / Humidity	23°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	AC 120V/60Hz

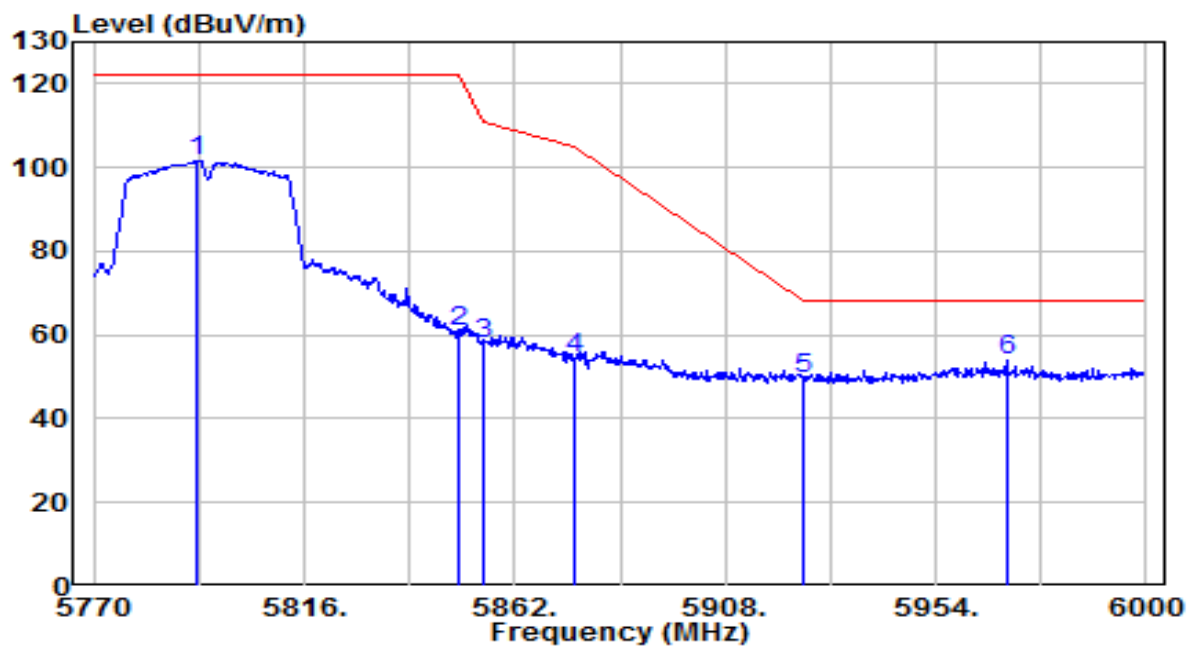

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5792.540	95.84	5.75	101.60	N/A	N/A	115	105	Peak
2	5850.000	55.10	5.95	61.04	-61.16	122.20	115	105	Peak
3	5855.000	51.85	5.96	57.81	-52.99	110.80	115	105	Peak
4	5875.000	48.66	6.03	54.69	-50.51	105.20	115	105	Peak
5	5925.000	43.37	6.20	49.56	-18.64	68.20	115	105	Peak
6	* 5969.410	47.68	6.35	54.03	-14.17	68.20	115	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10. AC Conducted Emissions Measurement

7.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

7.10.3. Test Setup

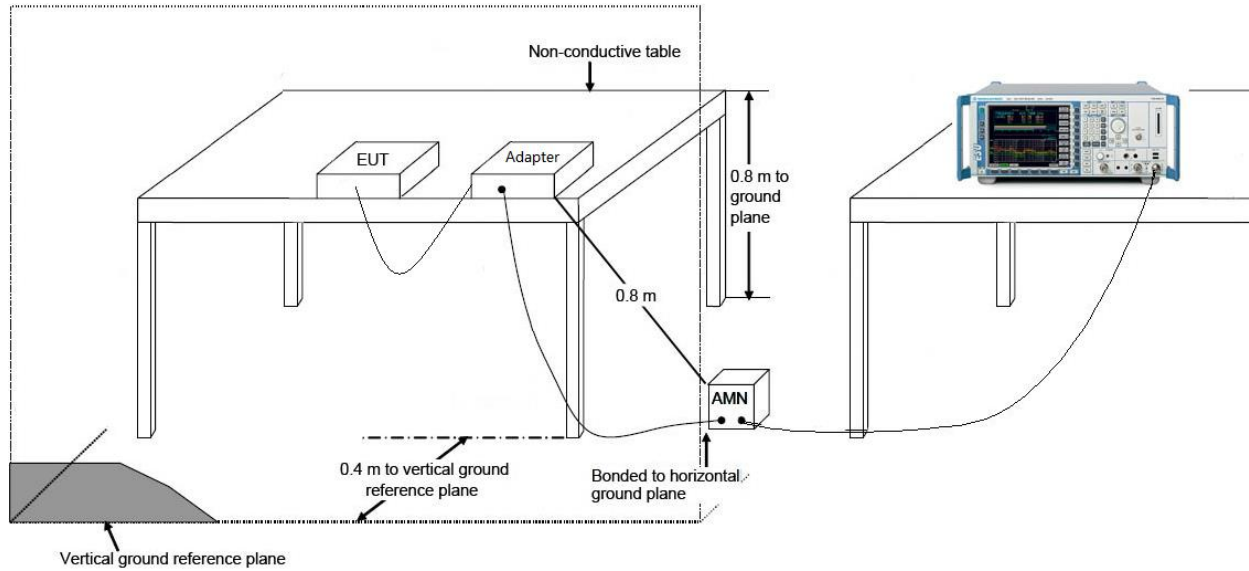

7.10.4. Test Result

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.1°C /46%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

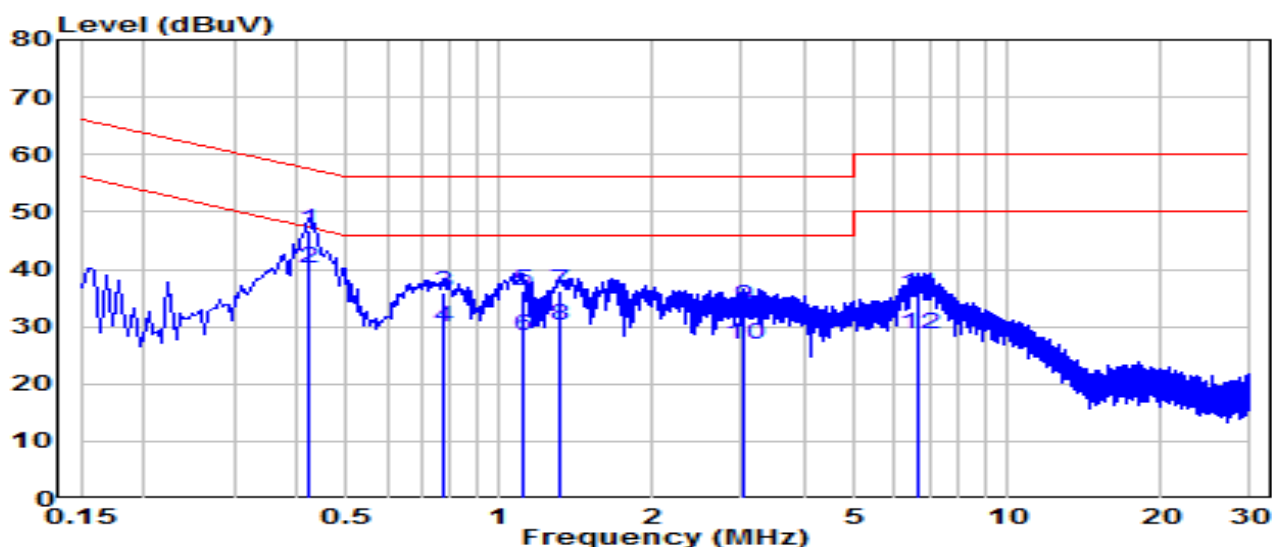


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.420	37.20	9.65	46.84	-10.61	57.45	QP
2	*	0.420	30.41	9.65	40.06	-7.39	47.45	Average
3		0.775	26.23	9.67	35.90	-20.10	56.00	QP
4		0.775	20.27	9.67	29.94	-16.06	46.00	Average
5		1.108	26.63	9.68	36.31	-19.69	56.00	QP
6		1.108	18.56	9.68	28.24	-17.76	46.00	Average
7		1.320	26.49	9.69	36.18	-19.82	56.00	QP
8		1.320	20.40	9.69	30.09	-15.91	46.00	Average
9		3.012	23.66	9.72	33.38	-22.62	56.00	QP
10		3.012	17.05	9.72	26.77	-19.23	46.00	Average
11		6.670	25.97	9.79	35.75	-24.25	60.00	QP
12		6.670	18.76	9.79	28.55	-21.45	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.1°C /46%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

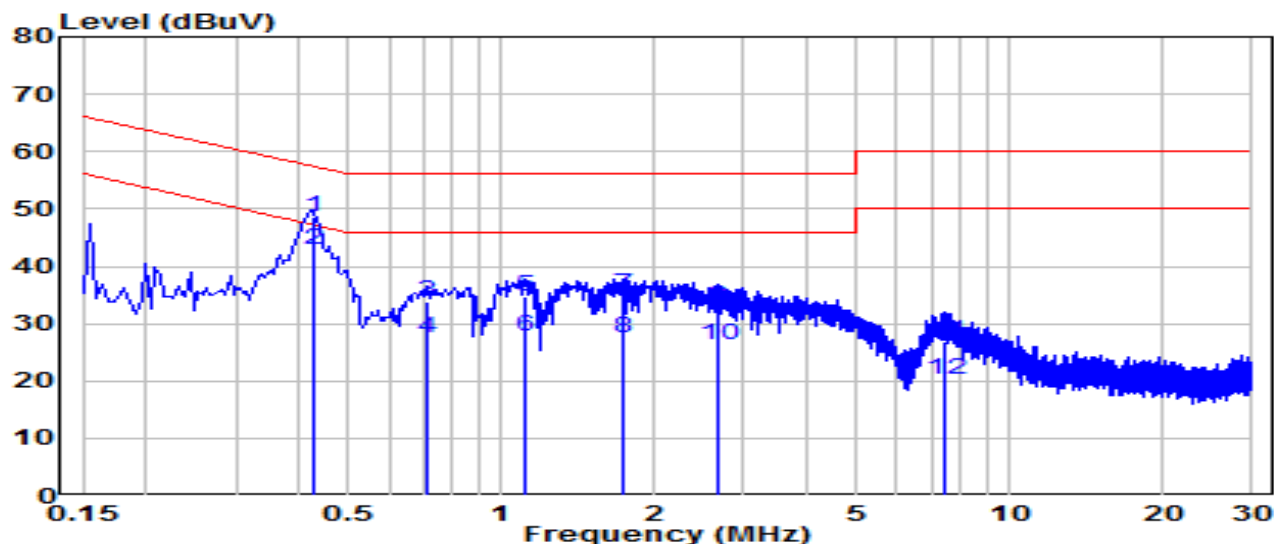


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.424	39.03	9.65	48.68	-8.68	57.36	QP
2	*	0.424	33.20	9.65	42.85	-4.51	47.36	Average
3		0.717	24.11	9.66	33.77	-22.23	56.00	QP
4		0.717	17.73	9.66	27.40	-18.60	46.00	Average
5		1.117	25.04	9.68	34.73	-21.27	56.00	QP
6		1.117	18.17	9.68	27.85	-18.15	46.00	Average
7		1.738	25.36	9.70	35.06	-20.94	56.00	QP
8		1.738	17.91	9.70	27.61	-18.39	46.00	Average
9		2.679	23.11	9.72	32.83	-23.17	56.00	QP
10		2.679	16.48	9.72	26.20	-19.80	46.00	Average
11		7.475	17.16	9.82	26.99	-33.01	60.00	QP
12		7.475	10.36	9.82	20.18	-29.82	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.1°C /46%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	AC 240V/60Hz

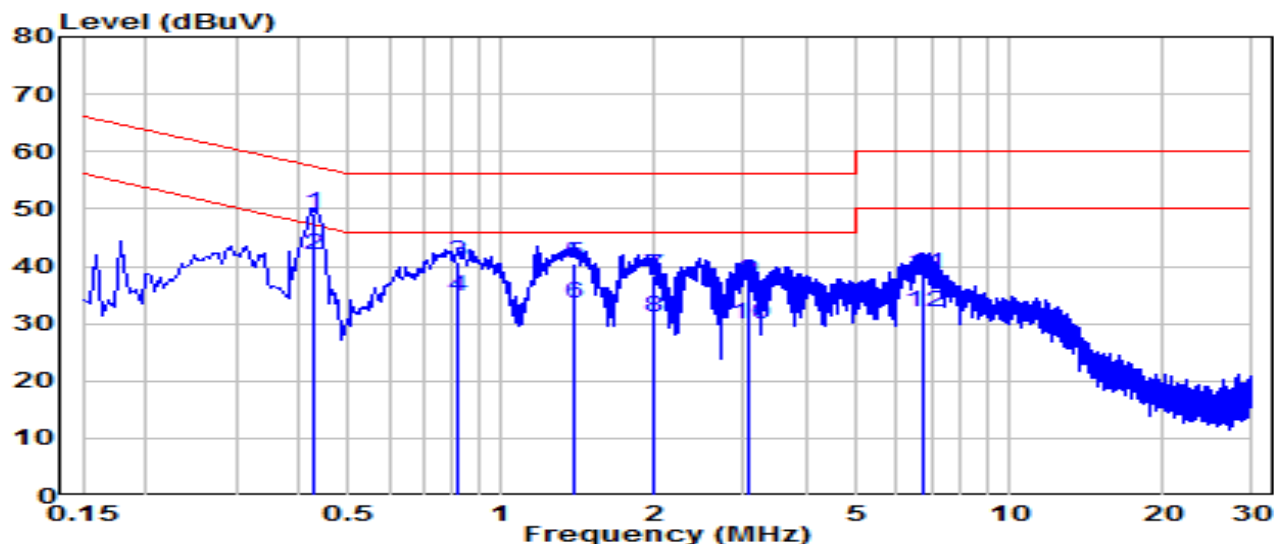


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.429	39.57	9.65	49.21	-8.06	57.27	QP
2	*	0.429	32.25	9.65	41.90	-5.38	47.27	Average
3		0.820	31.23	9.67	40.90	-15.10	56.00	QP
4		0.820	25.03	9.67	34.70	-11.30	46.00	Average
5		1.396	30.76	9.69	40.44	-15.56	56.00	QP
6		1.396	23.89	9.69	33.58	-12.42	46.00	Average
7		2.004	28.69	9.70	38.39	-17.61	56.00	QP
8		2.004	21.39	9.70	31.09	-14.91	46.00	Average
9		3.070	27.59	9.72	37.31	-18.69	56.00	QP
10		3.070	20.06	9.72	29.77	-16.23	46.00	Average
11		6.782	28.78	9.79	38.57	-21.43	60.00	QP
12		6.782	22.30	9.79	32.09	-17.91	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Non-Contact Edge-AI Fall Detection Camera	Date of Test	2024-10-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.1°C /46%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	AC 240V/60Hz

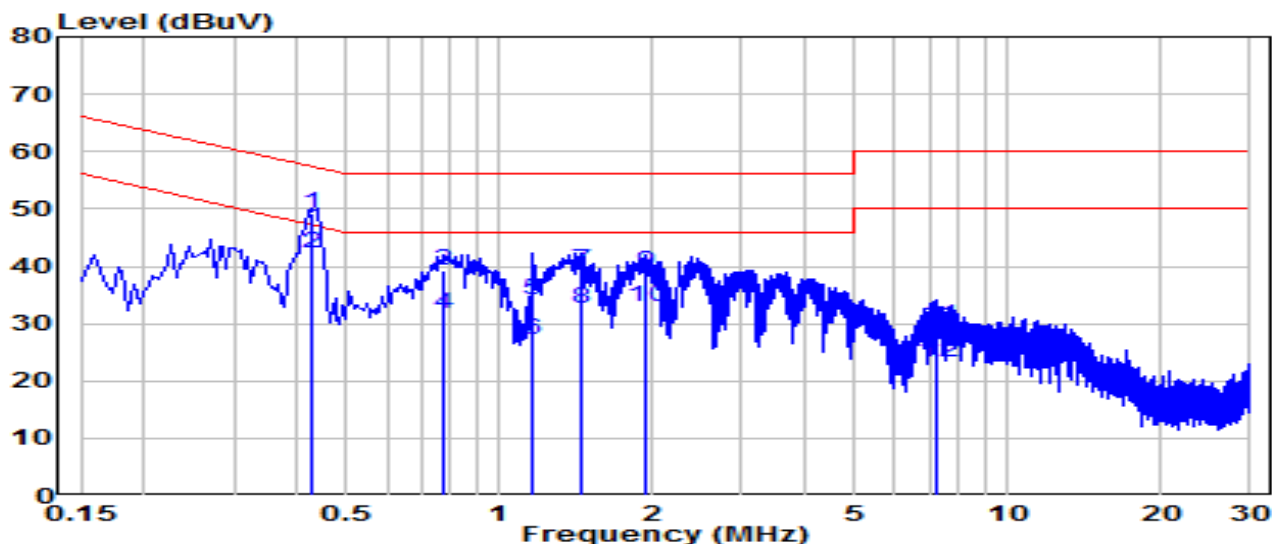

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.429	39.52	9.65	49.16	-8.11	57.27	QP
2	*	0.429	32.55	9.65	42.19	-5.08	47.27	Average
3		0.780	29.48	9.67	39.14	-16.86	56.00	QP
4		0.780	22.16	9.67	31.82	-14.18	46.00	Average
5		1.158	24.47	9.68	34.15	-21.85	56.00	QP
6		1.158	17.46	9.68	27.14	-18.86	46.00	Average
7		1.450	29.58	9.69	39.28	-16.72	56.00	QP
8		1.450	23.04	9.69	32.74	-13.26	46.00	Average
9		1.927	29.11	9.71	38.82	-17.18	56.00	QP
10		1.927	23.13	9.71	32.83	-13.17	46.00	Average
11		7.277	19.81	9.82	29.63	-30.37	60.00	QP
12		7.277	13.39	9.82	23.21	-26.79	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Non-Contact Edge-AI Fall Detection Camera** is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Photograph

Refer to “2407TW7401-UT” file.

Appendix B : External Photograph

Refer to “2407TW7401-UE” file.

Appendix C : Internal Photograph

Refer to “2407TW7401-UI” file.

————— The End —————