

Product specif Ration


1. Technical indicators of products

Frequency Range (MHz)	2400~2500
Band Width(MHz)	100
Impedance (Ω)	50
VSWR	1.91 MAX
Return Loss (dB)	-15.3
Peak Gain(dBi)	1.2232
Polarization	Linear Vertical
Antenna Material	PCB
Operating Temp (° C)	-20 ~65
Storage Temp (C)	-30 ~75


Manufacture's Name:BALLAR TECHNOLOGY CO LIMITED

Address:Floor 7, H Building, JCD industrial Park,Shangwei, Guanlan Town,Longhua District, Shenzhen
Shenzhen, China


2. Product picture

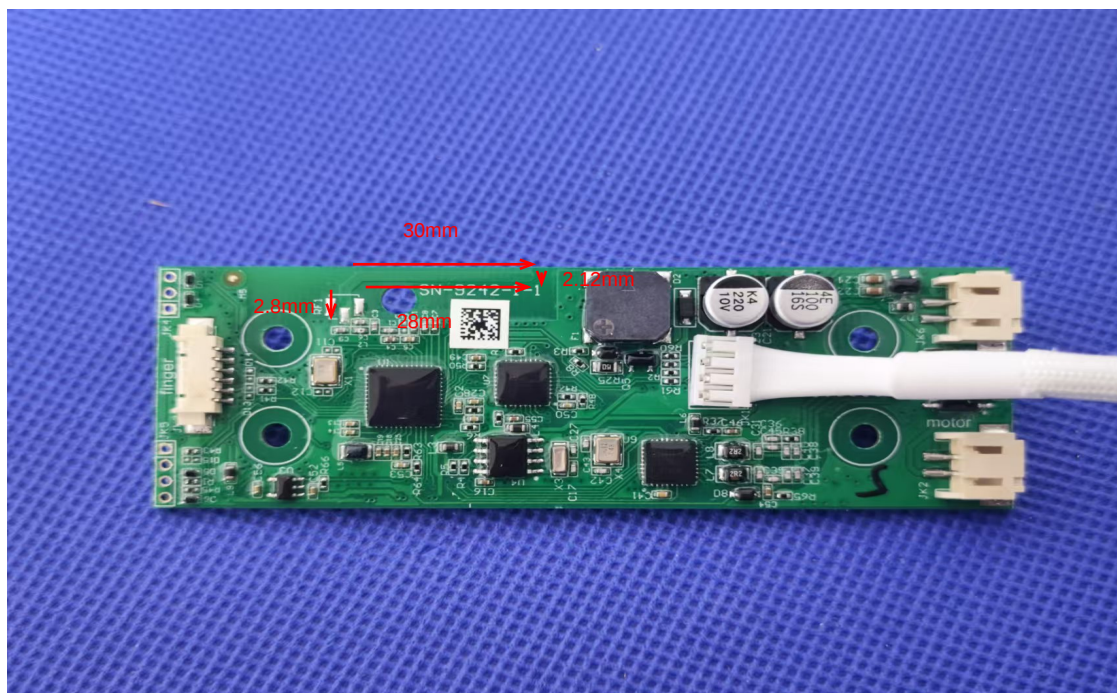

2. S11

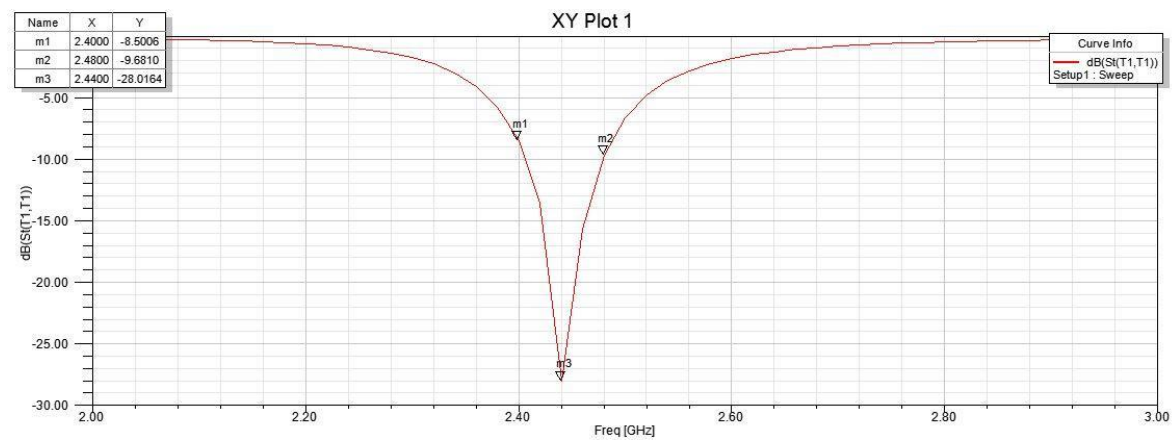


3. Radiation Pattern

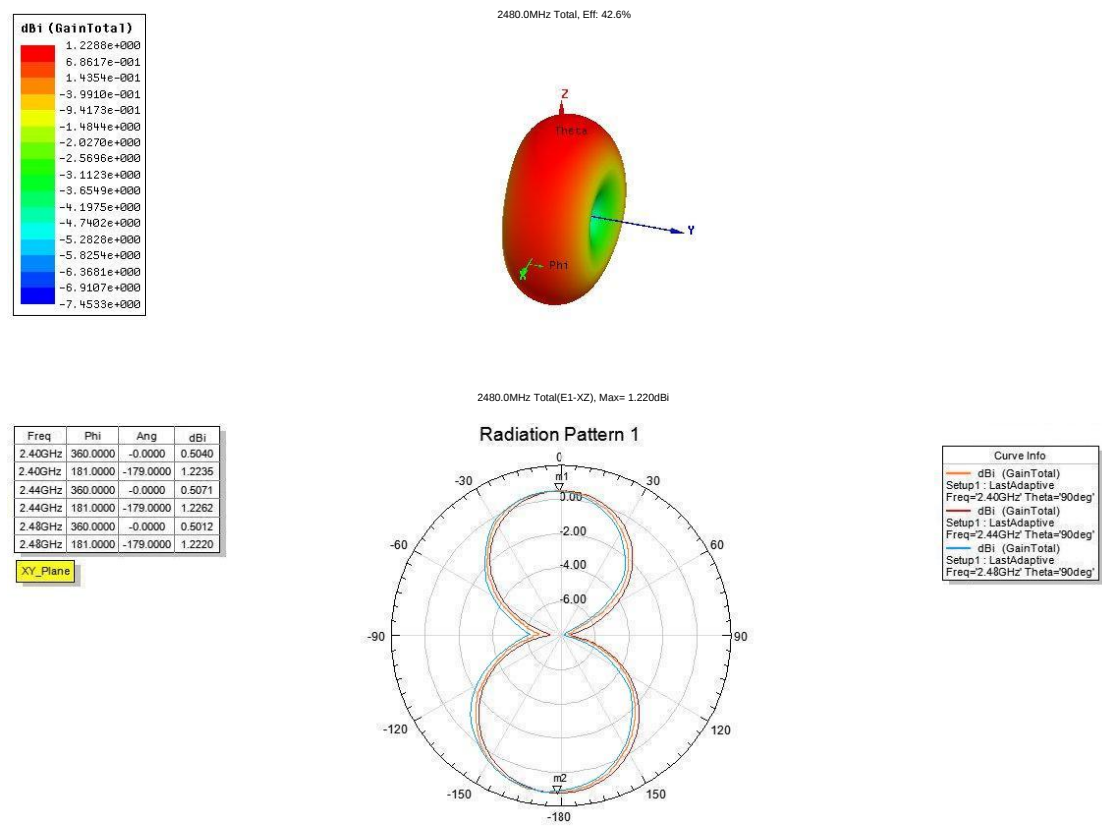

Freq	Theta	Ang	dBi
2.40GHz	-93.0000	-93.0000	1.2232
2.40GHz	92.0000	92.0000	0.5092
2.44GHz	-93.0000	-93.0000	1.2257
2.44GHz	92.0000	92.0000	0.5101
2.48GHz	-93.0000	-93.0000	1.2215
2.48GHz	92.0000	92.0000	0.5075


XZ_Plane

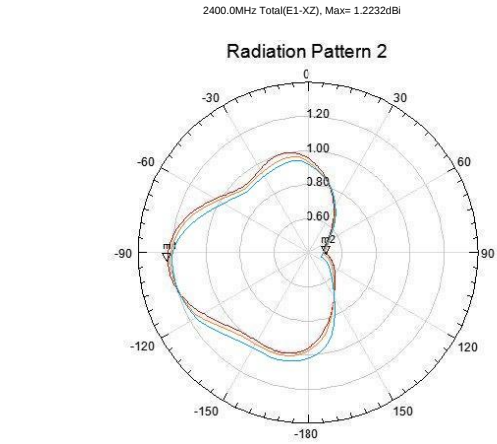

Curve Info	
—	dBi (GainTotal)
—	Setup1 : LastAdaptive
—	Freq=2.40GHz Phi=0deg'
—	dBi (GainTotal)
—	Setup1 : LastAdaptive
—	Freq=2.44GHz Phi=0deg'
—	dBi (GainTotal)
—	Setup1 : LastAdaptive
—	Freq=2.48GHz Phi=0deg'

Freq	Theta	Ang	dBi
2.40GHz	0.0000	0.0000	0.9522
2.40GHz	-179.0000	-179.0000	0.9560
2.44GHz	0.0000	0.0000	0.9557
2.44GHz	-179.0000	-179.0000	0.9583
2.48GHz	0.0000	0.0000	0.9513
2.48GHz	-179.0000	-179.0000	0.9541

YZ_Plane

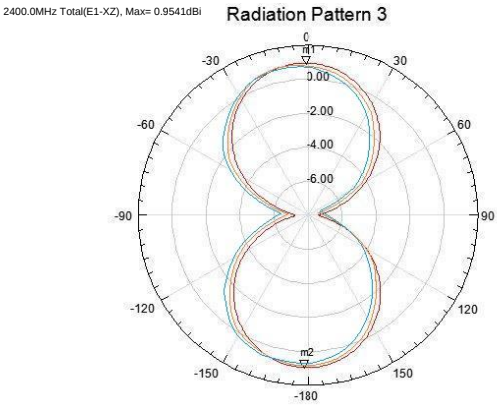

Curve Info	
—	dBi (GainTotal)
—	Setup1 : LastAdaptive
—	Freq=2.40GHz Phi=90deg'
—	dBi (GainTotal)
—	Setup1 : LastAdaptive
—	Freq=2.44GHz Phi=90deg'
—	dBi (GainTotal)
—	Setup1 : LastAdaptive
—	Freq=2.48GHz Phi=90deg'