SPECIFICATION FOR APPROVAL

CUSTOMER'S NAME : Shenzhen hibiker Technology Co., Ltd

CUSTOMER`S P/N <u>:</u> 92-05-01-027

PRODUCT SPEC: Y. WAC. 084

ISSUE DATE : Mar. 19, 2025

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE
Li Bei	Cheng Jie	Li Bowen	



DONGCUAN BOHONG TECHNOLOGY CO., LTD

ADD: 4F, 533 Fumin Middle Road, Dalang Town, Dongguan City

TEL: 0769-82866410

FAX: 0769-82866409

^{*}Please sign this acknowledgement before the first order is placed for production of this model, otherwise you will be deemed to have consented to all contents in this acknowledgement *

DONGGUAN BOHONG TECHNOLOGY COLLTD SPECIFICATION FOR APPROVAL

CUST	OMER	hik	oiker		CUST	OMER		田音	2-05-01-	027
ISSUE	DATE	Mar. 1	9, 202	25	PROD	UCT	SPEC	川早	Y. WAC. C	84
	SF	PECIFIC	ATIO	N	CON	TRO	L DR	AWIN	G	
	REVISIONS									
REV	DES	SCRIPTION	Γ		DATE		ISSU	E BY	APPRO	OVAL BY
A		INITIAL		Mar	. 19,	2025	Li	Bei	Li	Bowen


DONGGUAN BOHONG TECHNOLOGY COLLTD SPECIFICATION FOR APPROVAL

CUSTOMER hibiker		er	CUSTOMER'S PA	田音 92-0	05-01-027		
IS	ISSUE DATE Mar. 19, 2025		2025		11 —	WAC. 084	
1.M	ATERIAL	J:					
NO	ITEM		ТҮРЕ		SUPPLIERS		UL FILE NO
1	magnetic sheet		MnZn-Ferrite (A06-1)		QS		/
2	wire rod	xxUEW-FLZ@0. 08*24P		24P_	FSFY		E303260
3	glue		BE818		BE		E468573
4	tin		Sn99. 3:Cu0. 7		BTL	/	
5	gum	513#			HG	/	
6	magnet	7. 5*2. 5/N52		LC		/	

DONGGUAN BOHONG TECHNOLOGY CO., LTD SPECIFICATION FOR APPROVAL

CUSTOMER	hibiker	CUSTOMER	海州 田 幸	92-05-01-027
ISSUE DATE	Mar. 19, 2025	PRODUCT	SPEC SPEC	Y. WAC. 084

2.DIMENSION:

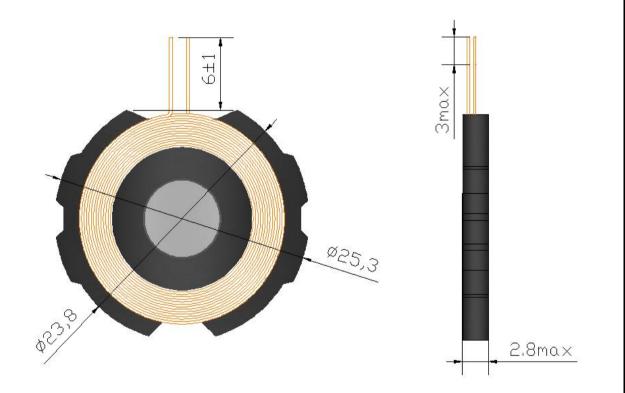

Remark:

- 1. \emptyset 19*T0.13 Crown 513# double-sided tape on the back;
- 2. Magnet 7.5*2.5mm GaUSS 3600ref;
- 3. The rated current of the watch coil is 1A, and the coil temperature is 155 degrees Celsius;

ISSUE	I.D.	CHECK	O1 T •	APPROVAL	т • 1
BY	L1 Be1	BY	Cheng Jie	BY	L1 bowen

DONGGUAN BOHONG TECHNOLOGY CO., LTD SPECIFICATION FOR APPROVAL

		されて を では では では では では では では では では では	
CUSTOMER	hibiker	CUSTOMER'S P/N	2-05-01-027 2-05-01-027
ISSUE DATE	Mar. 19, 2025	PRODUCT SPEC	Y. WAC. 084
4.CIRCUIT DIAG	RAM		
		1.1	

" ● ": POLARITY/极性

5.WINDING

NO	WINDING	WIRE	TURNS	TAPE	WINDING CONDITION
N1	S-F	Ø0.08*24P	13	/	CCW

6.CHARACTERISTIC


ITEM	MEASURED POINT	TECHNICAL DATA	TESTING CONDITION & INSTRUMENT
LS	S-F	7.25uH±2%	LCR1062 100KHz/1V AT 25°C±2°C
Q	S-F	25 MIN	LCR1062 100KHz/1V AT 25°C±2°C
DCR	S-F	130mΩ ΜΑΧ	LCR1062 1KHz/0.3V AT 25℃±2℃

DONGGUAN BOHONG TECHNOLOGY CO., LTD SPECIFICATION FOR APPROVAL


CUSTOMER hibiker		CUSTOMER	海 美 田 音	2-05-01-027
ISSUE DATE	Mar. 19, 2025	PRODUCT	SPEC	Y. WAC. 084

7.THE PACKING WAY

鱼屋図



- 1. Pearl cotton specifications:
 375*265*30mm*120;
- 2. 2pcs per box, 240pcs per disc;
- 3. Each box contains 11 discs.
- 4. Total: 2640pcs per box;
- 5. Carton material: K=K++;

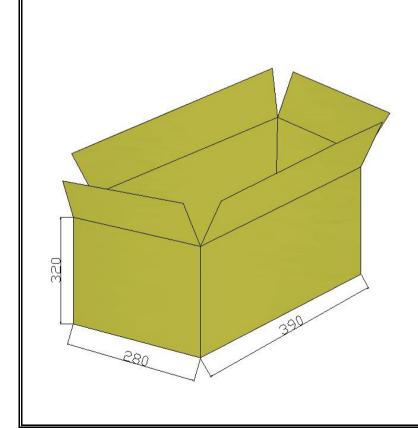

DONGGUAN BOHONG TECHNOLOGY CO. LTD SPECIFICATION FOR APPROVAL

C	USTOMER	hibi	ker	CUSTOMER:S	部 学 用 章	2-05-01-027		
IS	SUE DATE	Mar. 19,	2025	PRODUCT S	SPEC	Y. WAC. 084		
	memoire							
No.	con	tent内		handling method	signa	ture Date		
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								