

TEST REPORT

FCC ID: 2BMG6-IOT9816

Product : Uhf desktop electronic label reader

Model Name : IoT-9816Dk

Brand : N/A

Report No. : NCT24049067

Prepared for

Neology Inc.

1917 Palomar Oaks Way Suite 110 Carlsbad, CA 92008 USA

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

1 TEST RESULT CERTIFICATION

Applicant's name : Neology Inc.

Address : 1917 Palomar Oaks Way Suite 110 Carlsbad, CA 92008 USA

Manufacture's name : POSKITZ Ltd

Address : Room 2, 6F., No.307, Beida Rd., North Dist., Hsinchu City 30044, Taiwan.

Product name : Uhf desktop electronic label reader

Model name : IoT-9816Dk

Standards : FCC CFR47 Part 15 Section 15.249

Test procedure : ANSI C63.10:2020

Date of test : Nov. 27, 2024 to Dec. 06, 2024

Date of Issue : Dec. 06, 2024

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:


Keven Wu / Engineer

Technical Manager:


Henry Wang / Manager




Contents

Page

1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
2.1 TEST SITE	6
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF E.U.T.	7
3.2 CHANNEL LIST	8
3.3 TEST SETUP CONFIGURATION	9
3.4 TEST MODE	9
4 EQUIPMENT DURING TEST	10
4.1 EQUIPMENTS LIST	10
4.2 MEASUREMENT UNCERTAINTY	12
4.3 DESCRIPTION OF SUPPORT UNITS	12
5 CONDUCTED EMISSION	13
5.1 E.U.T. OPERATION	13
5.2 EUT SETUP	13
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
5.4 MEASUREMENT PROCEDURE	14
5.5 CONDUCTED EMISSION LIMIT	14
5.6 MEASUREMENT DESCRIPTION	14
5.7 CONDUCTED EMISSION TEST RESULT	14
6 RADIATED SPURIOUS EMISSIONS, RESTRICT BAND AND FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL	15
6.1 EUT OPERATION	15
6.2 TEST SETUP	16
6.3 SPECTRUM ANALYZER SETUP	17
6.4 TEST PROCEDURE	18
6.5 SUMMARY OF TEST RESULTS	19
7 BANDWIDTH MEASUREMENT	28
7.1 TEST SETUP	28

7.2 TEST PROCEDURE	28
7.3 TEST RESULT	28
8 ANTENNA APPLICATION	32
8.1 ANTENNA REQUIREMENT	32
8.2 RESULT	32
9 TEST SETUP PHOTOS AND EUT PHOTOS	33

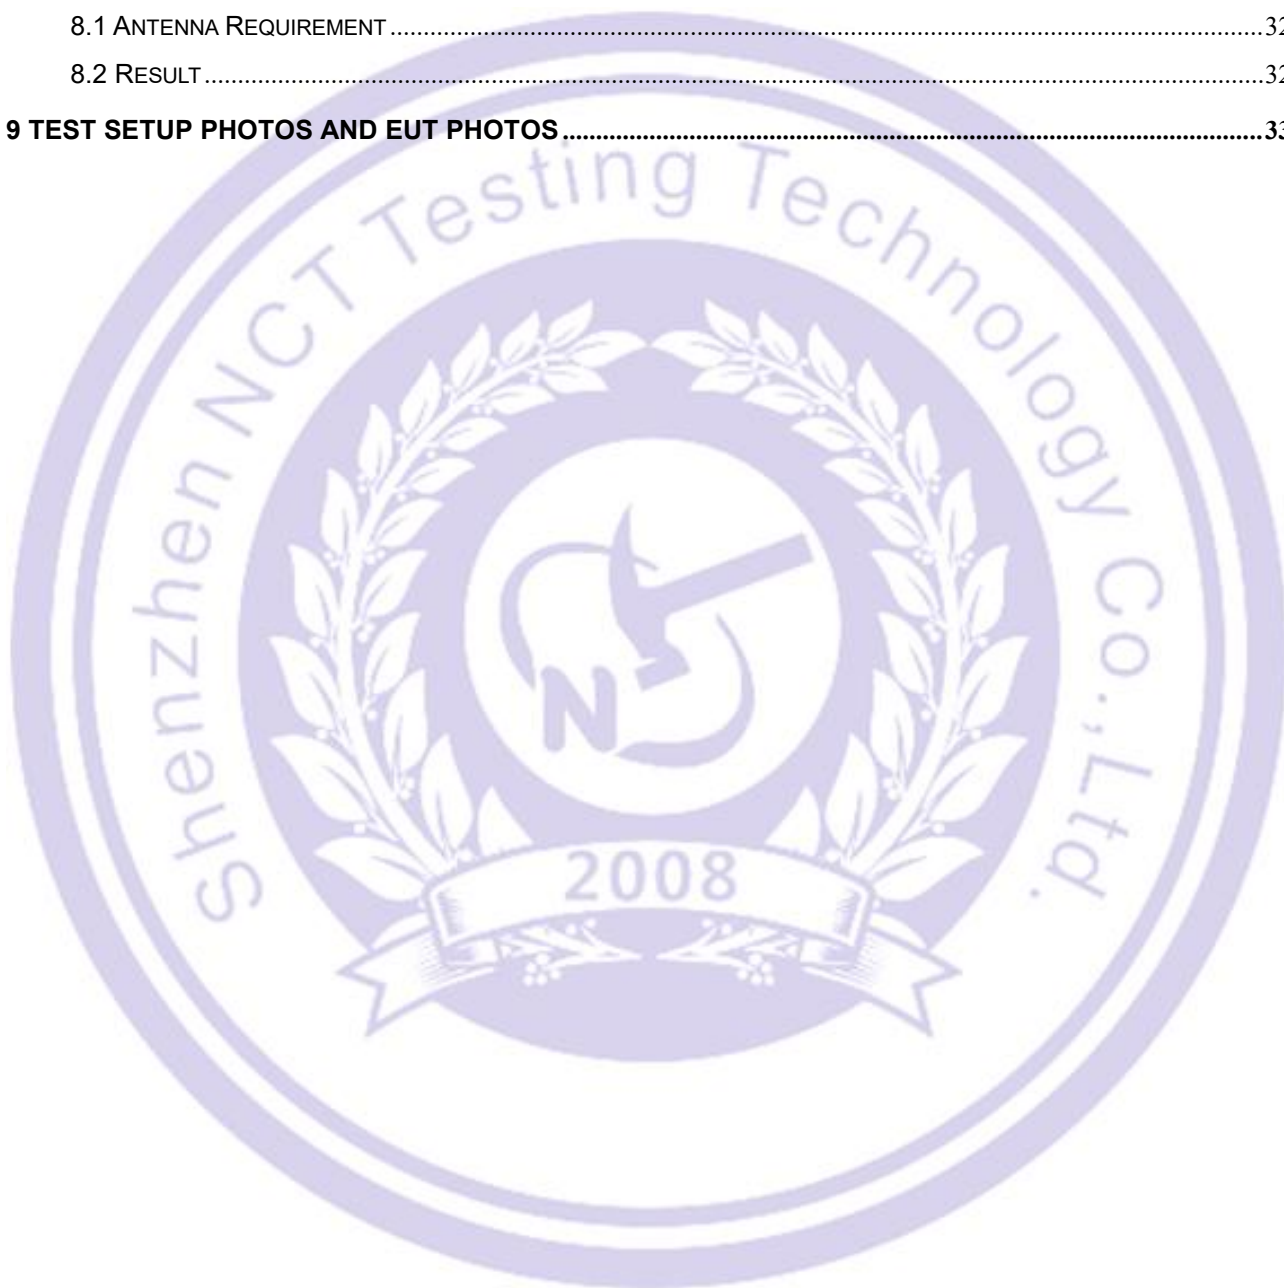

2 Test Summary

Test Items	Test Requirement	Result
FCC part 15.203/15.249 (c)	Antenna requirement	PASS
FCC part 15.207	AC Power Line Conducted Emission	N/A
FCC part 15.15.249 (a)	Field strength of the fundamental signal	PASS
FCC part 15.15.249 (a) (d)/15.209	Spurious emissions	PASS
FCC part 15.249 (d)/15.205	Band edge	PASS
FCC part 15.215 (c)	20dB Occupied Bandwidth	PASS

Remark:

1. "N/A" denotes test is not applicable in this Test Report.

2.1 Test Site

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

3 General Information

3.1 General Description of E.U.T.

Product Name	:	Uhf desktop electronic label reader
Model Name	:	IoT-9816Dk
Series model	:	N/A
HVIN	:	N/A
Sample ID	:	N/A
Sample(s) Status:	:	Engineer sample
Series Model	:	IoT-9816Dk
Model Different.:	:	N/A
Operating frequency	:	902.75MHz-927.25MHZ
Number of Channels	:	50 channels
Type of Modulation	:	GFSK
Antenna installation	:	Internal Antenna
Antenna Gain	:	3.65dBi
Power supply	:	Input: DC 5V for USB Port
Hardware Version	:	N/A
Software Version	:	N/A
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		

3.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10:2020 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	902.75MHz	17	910.75MHz	33	918.75MHz	49	926.75MHz
2	903.25MHz	18	911.25MHz	34	919.25MHz	50	927.25MHz
3	903.75MHz	19	911.75MHz	35	919.75MHz	/	/
4	904.25MHz	20	912.25MHz	36	920.25MHz	/	/
5	904.75MHz	21	912.75MHz	37	920.75MHz	/	/
6	905.25MHz	22	913.25MHz	38	921.25MHz	/	/
7	905.75MHz	23	913.75MHz	39	921.75MHz	/	/
8	906.25MHz	24	914.25MHz	40	922.25MHz	/	/
9	906.75MHz	25	914.75MHz	41	922.75MHz	/	/
10	907.25MHz	26	915.25MHz	42	923.25MHz	/	/
11	907.75MHz	27	915.75MHz	43	923.75MHz	/	/
12	908.25MHz	28	916.25MHz	44	924.25MHz	/	/
13	908.75MHz	29	916.75MHz	45	924.75MHz	/	/
14	909.25MHz	30	917.25MHz	46	925.25MHz	/	/
15	909.75MHz	31	917.75MHz	47	925.75MHz	/	/
16	910.25MHz	32	918.25MHz	48	926.25MHz	/	/


Note:

1. Test of channel was included the lowest, middle and highest frequency in highest data rate and to perform the test, then record on this report.

3.3 Test Setup Configuration

Radiated Emission(30MHz-1GHz)

DC Line



Radiated Emission(above 1GHz)

DC Line



3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
-------------------	---

Test Software	UHFRReader86Demo
Power level setup	< 10 dBm

	Channel	Frequency(MHz)
Low Channel	1	902.75
Mid Channel	25	914.75
High Channel	50	927.25

4 Equipment During Test

4.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	ENV 216	102796	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	VN1-13S	004023	CRANAGE	2024/6/17	2025/6/16
Cable	RG223-1500MM	NA	RG	2024/6/17	2025/6/16

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2024/6/17	2025/6/16
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHNWARZBECK	2024/6/17	2025/6/16
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNWARZBECK	2023/3/19	2025/3/18
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNWARZBECK	2023/3/19	2025/3/18
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHNWARZBECK	2024/6/17	2025/6/16
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2024/6/17	2025/6/16
Preamplifier (18GHz-40GHz)	BBV 9721	0056	SCHNWARZBECK	2024/6/17	2025/6/16
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2023/3/19	2025/3/18
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHNWARZBECK	2024/6/17	2025/6/16
Amplifier (9KHz-30MHz)	CVP 9222 C	00109	CHNWARZBECK	2024/6/17	2025/6/16

MXG Signal Analyzer	N9020A	MY50510202	Agilent	2024/6/17	2025/6/16
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2024/6/17	2025/6/16
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2024/6/17	2025/6/16
Power Sensor	TR1029-2	512364	Techoy	2024/6/17	2025/6/16
RF Swith	TR1029-1	512364	Techoy	2024/6/17	2025/6/16
Cable	DA800-4000MM	NA	DA	2024/6/17	2025/6/16
Cable	DA800-11000MM	NA	DA	2024/6/17	2025/6/16

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9kHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Computer	N/A	TS480	N/A	AE

Note: (1)The support equipment was authorized by Declaration of Confirmation.

(2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

5 Conducted Emission

Test Requirement	: FCC CFR 47 Part 15 Section 15.207
Test Method	: ANSI C63.10:2020
Test Result	: N/A
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B


5.1 E.U.T. Operation

Operating Environment :

Temperature	: 25.5 °C
Humidity	: 51 % RH
Atmospheric Pressure	: 101.2kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2020.

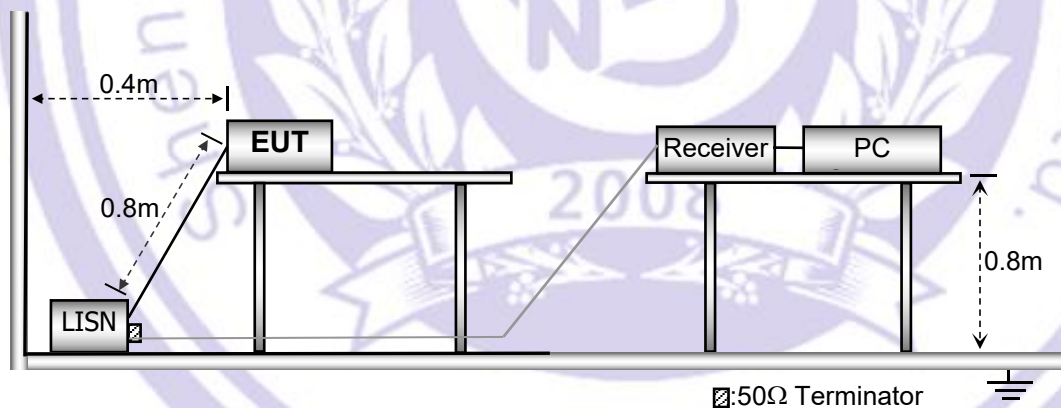

5.3 Test SET-UP (Block Diagram of Configuration)



5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result

N/A

EUT power supply is provided by DC, is not applicable in this Test report.

6 Radiated Spurious Emissions, Restrict band and Field Strength of The Fundamental Signal

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.205&15.249
 Test Method : ANSI C63.10:2020
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature : 23.5 °C
 Humidity : 51.1 % RH
 Atmospheric Pressure : 101.2kPa


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

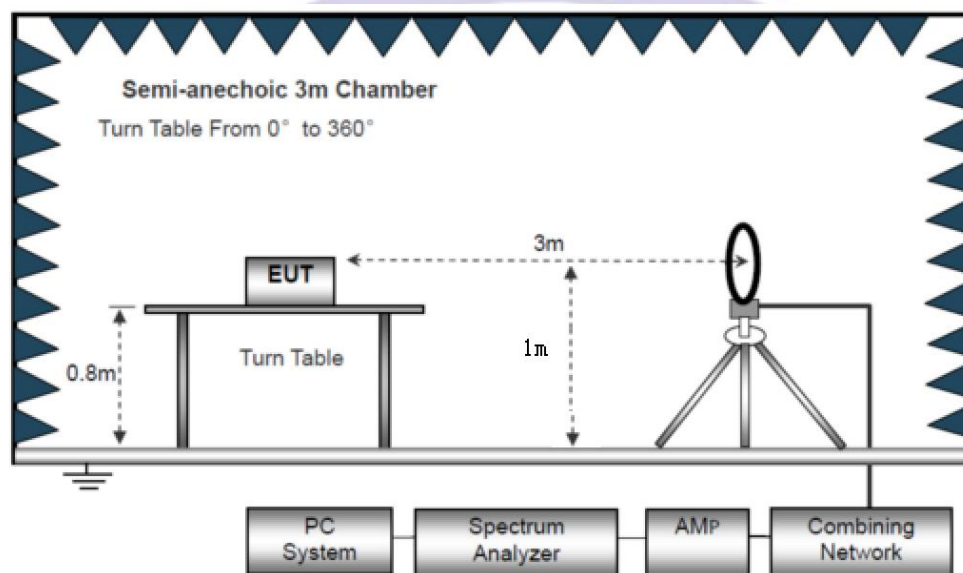

The test setup for emission measurement from 30 MHz to 1 GHz.

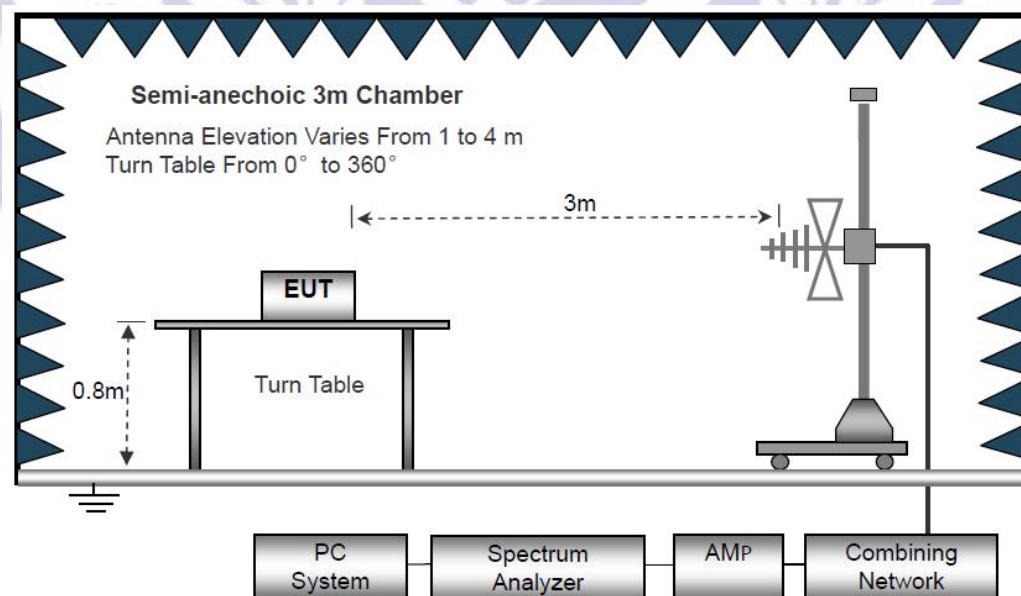

The test setup for emission measurement above 1 GHz

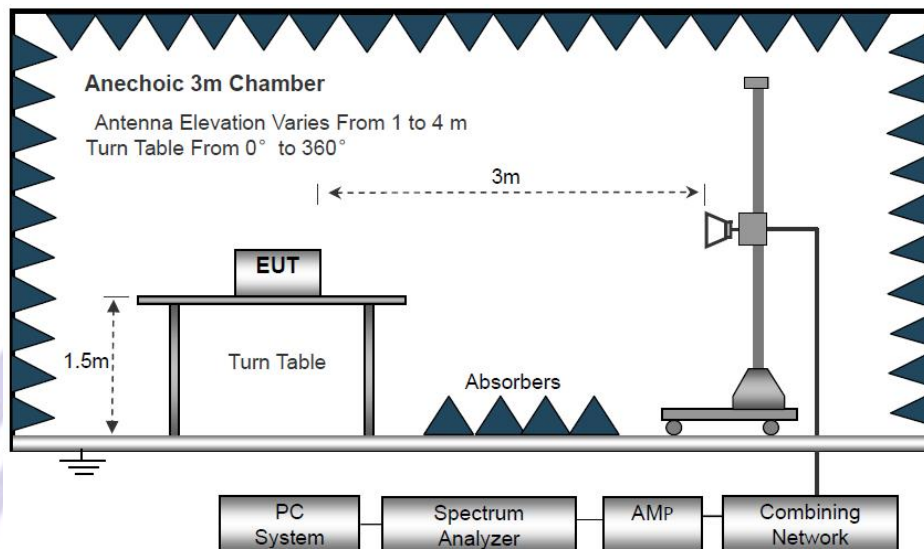

6.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value

6.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10:2020.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
8. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);
Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

Pass.

Please refer to the following test plots for the worst test mode (GFSK (CH1: 902.75MHz)).


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

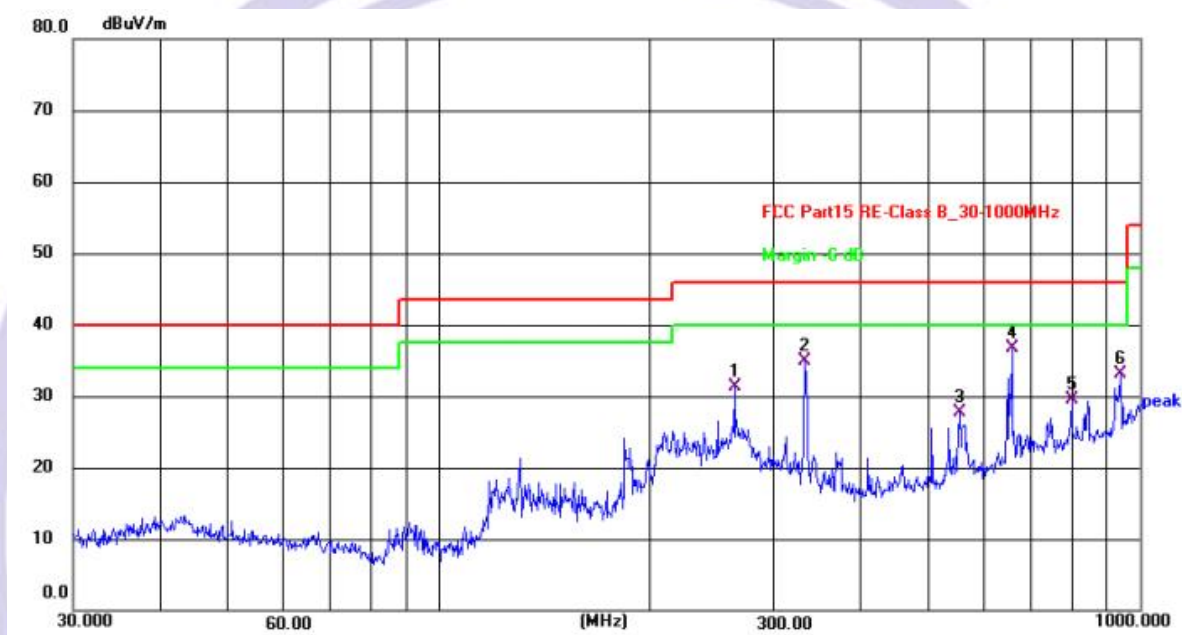

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	263.8190	48.79	-17.45	31.34	46.00	-14.66	QP
2	332.5187	50.24	-15.27	34.97	46.00	-11.03	QP
3	552.8832	37.49	-9.69	27.80	46.00	-18.20	QP
4 *	656.5300	44.37	-7.60	36.77	46.00	-9.23	QP
5	798.9797	33.88	-4.44	29.44	46.00	-16.56	QP
6	938.8326	36.03	-2.84	33.19	46.00	-12.81	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

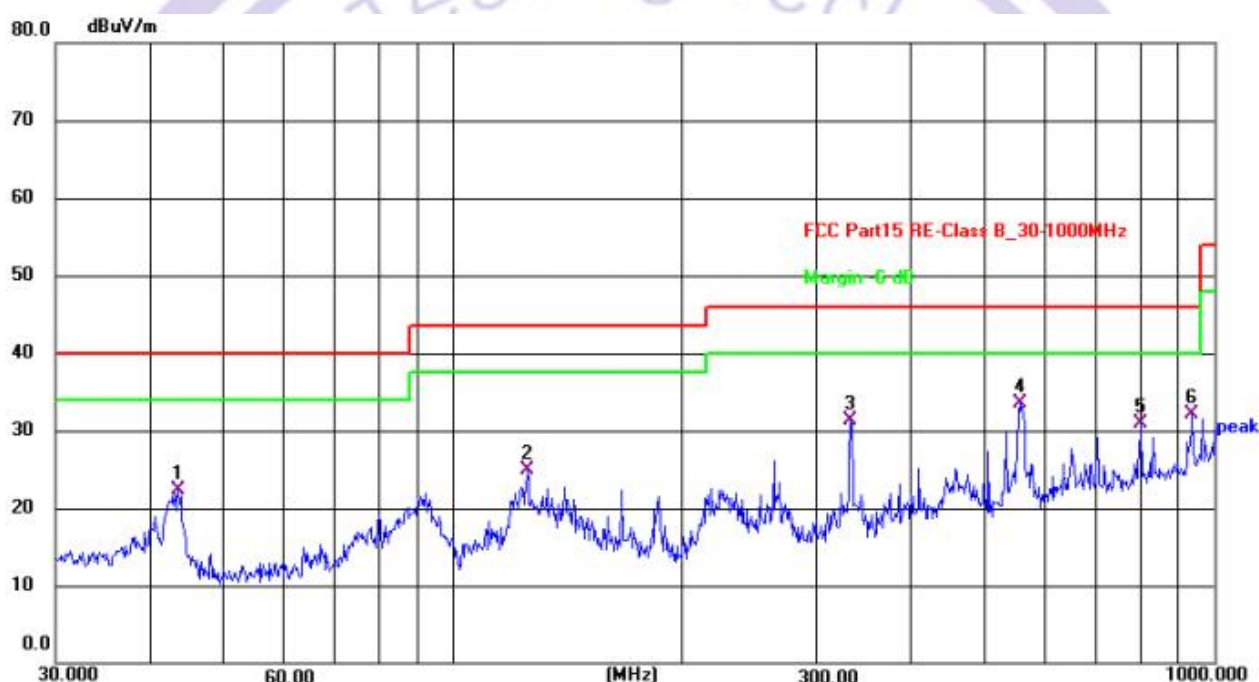

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	43.5057	38.11	-15.88	22.23	40.00	-17.77	QP
2	125.0066	42.77	-17.90	24.87	43.50	-18.63	QP
3	332.5187	46.67	-15.27	31.40	46.00	-14.60	QP
4 *	556.7744	43.03	-9.62	33.41	46.00	-12.59	QP
5	801.7863	35.22	-4.40	30.82	46.00	-15.18	QP
6	935.5463	34.91	-2.90	32.01	46.00	-13.99	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Test Frequency 1GHz-25GHz:

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:902.75MHz									
V	1805.50	53.62	30.55	5.77	24.66	53.50	74.00	-20.50	Pk
V	1805.50	43.98	30.55	5.77	24.66	43.86	54.00	-10.14	AV
V	2708.25	54.98	30.33	6.32	24.55	55.52	74.00	-18.48	Pk
V	2708.25	43.45	30.33	6.32	24.55	43.99	54.00	-10.01	AV
V	3611.00	53.99	30.85	7.45	24.69	55.28	74.00	-18.72	Pk
V	3611.00	43.41	30.85	7.45	24.69	44.70	54.00	-9.30	AV
V	4513.75	50.43	31.02	8.99	25.57	53.97	74.00	-20.03	Pk
V	4513.75	43.50	31.02	8.99	25.57	47.04	54.00	-6.96	AV
H	1805.50	50.16	30.55	5.77	24.66	50.04	74.00	-23.96	Pk
H	1805.50	43.79	30.55	5.77	24.66	43.67	54.00	-10.33	AV
H	2708.25	53.74	30.33	6.32	24.55	54.28	74.00	-19.72	Pk
H	2708.25	43.31	30.33	6.32	24.55	43.85	54.00	-10.15	AV
H	3611.00	51.85	30.85	7.45	24.69	53.14	74.00	-20.86	Pk
H	3611.00	43.88	30.85	7.45	24.69	45.17	54.00	-8.83	AV
H	4513.75	53.65	31.02	8.99	25.57	57.19	74.00	-16.81	Pk
H	4513.75	43.88	31.02	8.99	25.57	47.42	54.00	-6.58	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:914.75MHz									
V	1829.50	51.57	30.55	5.77	24.66	51.45	74.00	-22.55	Pk
V	1829.50	43.36	30.55	5.77	24.66	43.24	54.00	-10.76	AV
V	2744.25	51.93	30.33	6.32	24.55	52.47	74.00	-21.53	Pk
V	2744.25	43.01	30.33	6.32	24.55	43.55	54.00	-10.45	AV
V	3659.00	50.82	30.85	7.45	24.69	52.11	74.00	-21.89	Pk
V	3659.00	43.56	30.85	7.45	24.69	44.85	54.00	-9.15	AV
V	4573.75	53.47	31.02	8.99	25.57	57.01	74.00	-16.99	Pk
V	4573.75	43.42	31.02	8.99	25.57	46.96	54.00	-7.04	AV
H	1829.50	51.78	30.55	5.77	24.66	51.66	74.00	-22.34	Pk
H	1829.50	43.02	30.55	5.77	24.66	42.90	54.00	-11.10	AV
H	2744.25	53.43	30.33	6.32	24.55	53.97	74.00	-20.03	Pk
H	2744.25	43.81	30.33	6.32	24.55	44.35	54.00	-9.65	AV
H	3659.00	54.46	30.85	7.45	24.69	55.75	74.00	-18.25	Pk
H	3659.00	43.01	30.85	7.45	24.69	44.30	54.00	-9.70	AV
H	4573.75	53.28	31.02	8.99	25.57	56.82	74.00	-17.18	Pk
H	4573.75	43.45	31.02	8.99	25.57	46.99	54.00	-7.01	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:927.25MHz									
V	1854.50	51.33	30.55	5.77	24.66	51.21	74.00	-22.79	Pk
V	1854.50	43.22	30.55	5.77	24.66	43.10	54.00	-10.90	AV
V	2781.75	54.54	30.33	6.32	24.55	55.08	74.00	-18.92	Pk
V	2781.75	43.78	30.33	6.32	24.55	44.32	54.00	-9.68	AV
V	3709.00	52.52	30.85	7.45	24.69	53.81	74.00	-20.19	Pk
V	3709.00	43.43	30.85	7.45	24.69	44.72	54.00	-9.28	AV
V	4636.25	51.14	31.02	8.99	25.57	54.68	74.00	-19.32	Pk
V	4636.25	43.45	31.02	8.99	25.57	46.99	54.00	-7.01	AV
H	1854.50	52.67	30.55	5.77	24.66	52.55	74.00	-21.45	Pk
H	1854.50	43.79	30.55	5.77	24.66	43.67	54.00	-10.33	AV
H	2781.75	50.98	30.33	6.32	24.55	51.52	74.00	-22.48	Pk
H	2781.75	43.91	30.33	6.32	24.55	44.45	54.00	-9.55	AV
H	3709.00	54.18	30.85	7.45	24.69	55.47	74.00	-18.53	Pk
H	3709.00	43.32	30.85	7.45	24.69	44.61	54.00	-9.39	AV
H	4636.25	54.75	31.02	8.99	25.57	58.29	74.00	-15.71	Pk
H	4636.25	43.11	31.02	8.99	25.57	46.65	54.00	-7.35	AV

Note: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Spurious Emission in Restricted Band 900-902MHz and 928-930MHz

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 902.75MHz									
	H	900	32.17	30.22	4.85	23.98	30.78	46.00	QP	PASS
	H	900	36.12	30.22	4.85	23.98	34.73	46.00	QP	PASS
	H	902	33.45	30.22	4.85	23.98	32.06	46.00	QP	PASS
	H	902	35.62	30.22	4.85	23.98	34.23	46.00	QP	PASS
	V	900	37.66	30.22	4.85	23.98	36.27	46.00	QP	PASS
	V	900	35.88	30.22	4.85	23.98	34.49	46.00	QP	PASS
	V	902	36.71	30.22	4.85	23.98	35.32	46.00	QP	PASS
	V	902	37.29	30.22	4.85	23.98	35.90	46.00	QP	PASS
	High Channel: 927.25MHz									
	H	928	35.44	30.22	4.85	23.98	34.05	46.00	QP	PASS
	H	928	35.98	30.22	4.85	23.98	34.59	46.00	QP	PASS
	H	930	36.21	30.22	4.85	23.98	34.82	46.00	QP	PASS
	H	930	36.88	30.22	4.85	23.98	35.49	46.00	QP	PASS
	V	928	35.93	30.22	4.85	23.98	34.54	46.00	QP	PASS
	V	928	36.02	30.22	4.85	23.98	34.63	46.00	QP	PASS
	V	930	36.99	30.22	4.85	23.98	35.60	46.00	QP	PASS
	V	930	37.02	30.22	4.85	23.98	35.63	46.00	QP	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										
2. . The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.										

Field Strength of The Fundamental Signal Data

Low CH

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
Low Channel: 902.75MHz									
902.75	108.60	PK	200	1.5	V	-4.06	104.54	114.00	-9.46
902.75	88.99	Ave	200	1.5	V	-4.06	84.93	94.00	-9.07
902.75	109.38	PK	347	1.7	H	-4.06	105.32	114.00	-8.68
902.75	87.66	Ave	347	1.7	H	-4.06	83.60	94.00	-10.40

Mid CH

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
Middle Channel: 914.75MHz									
914.75	102.77	PK	322	1.7	V	-3.97	98.80	114.00	-15.20
914.75	83.69	Ave	322	1.7	V	-3.97	79.72	94.00	-14.28
914.75	105.65	PK	181	1.3	H	-3.97	101.68	114.00	-12.32
914.75	82.88	Ave	181	1.3	H	-3.97	78.91	94.00	-15.09

High CH

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
High Channel: 927.25MHz									
927.25	103.21	PK	98	1.6	V	-3.90	99.31	114.00	-14.69
927.25	83.35	Ave	98	1.6	V	-3.90	79.45	94.00	-14.55
927.25	101.95	PK	319	1.4	H	-3.90	98.05	114.00	-15.95
927.25	85.32	Ave	319	1.4	H	-3.90	81.42	94.00	-12.58


7 Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.249 (d)/15.205

Test Method : ANSI C63.10:2020

FCC Part15 (15.249) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.249	Bandwidth	(-20dB bandwidth)	902.75-927.25	PASS

7.1 Test Setup



7.2 Test Procedure

For 6dB Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 2.7kHz, VBW = 3*RBW

For 99% Bandwidth Measurement


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1%-5% OBW, VBW $\geq$ 3RBW

7.3 Test Result


Channel number	Channel frequency (MHz)	-20dB Occupy Bandwidth (KHz)	Result
1	902.75	166.5	Pass
25	914.75	87.56	Pass
50	927.25	166.9	Pass

-20dB Occupy Bandwidth


CH1

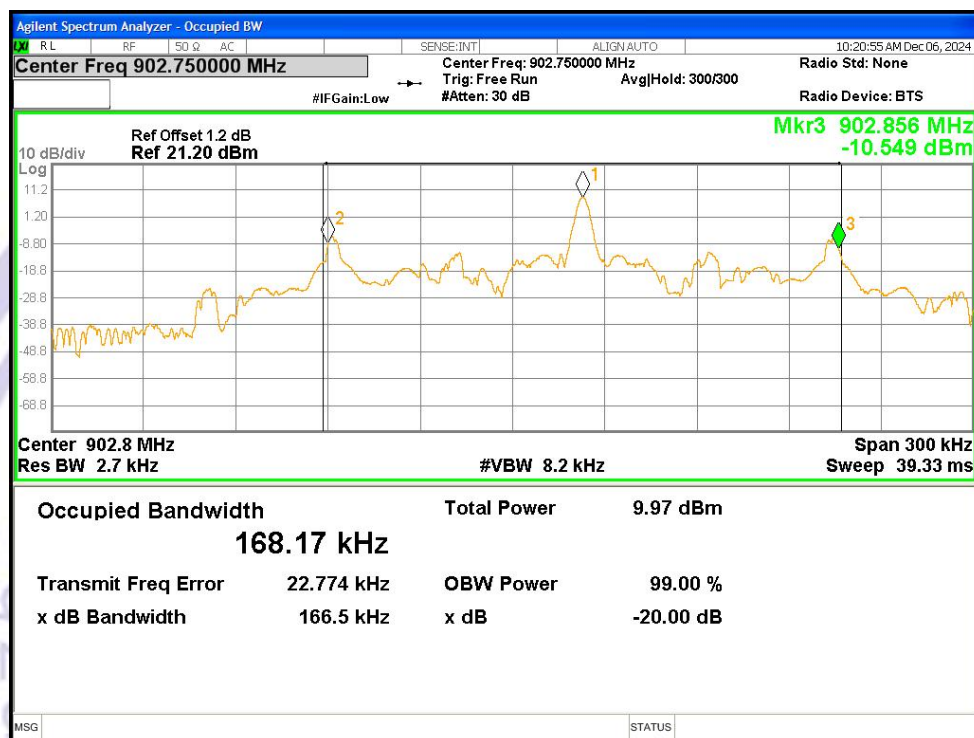

CH25

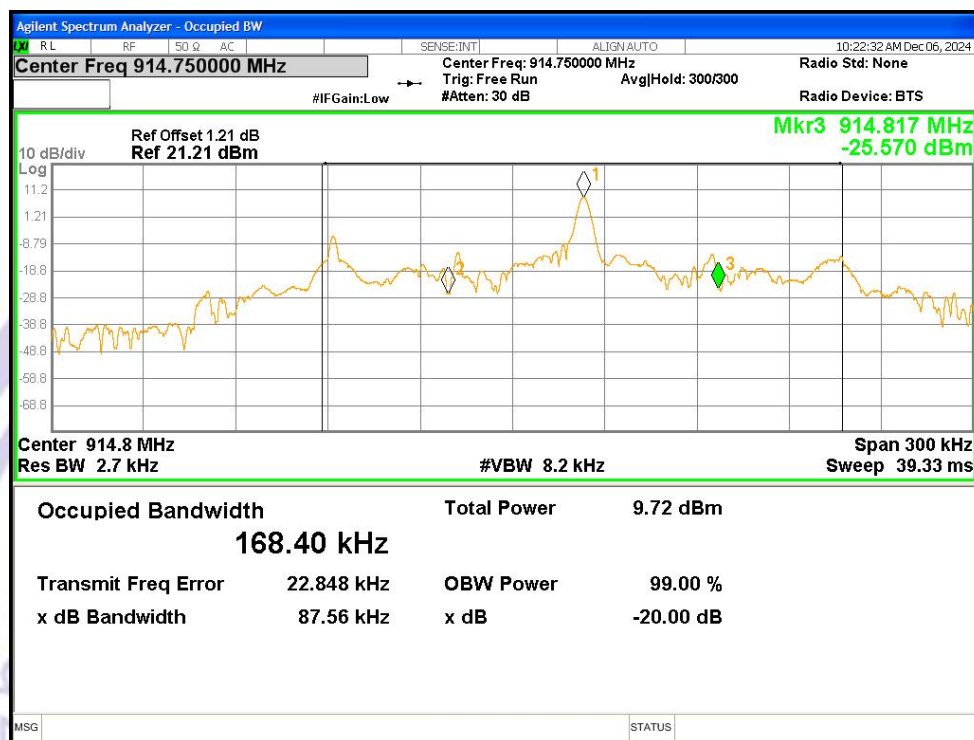

CH50

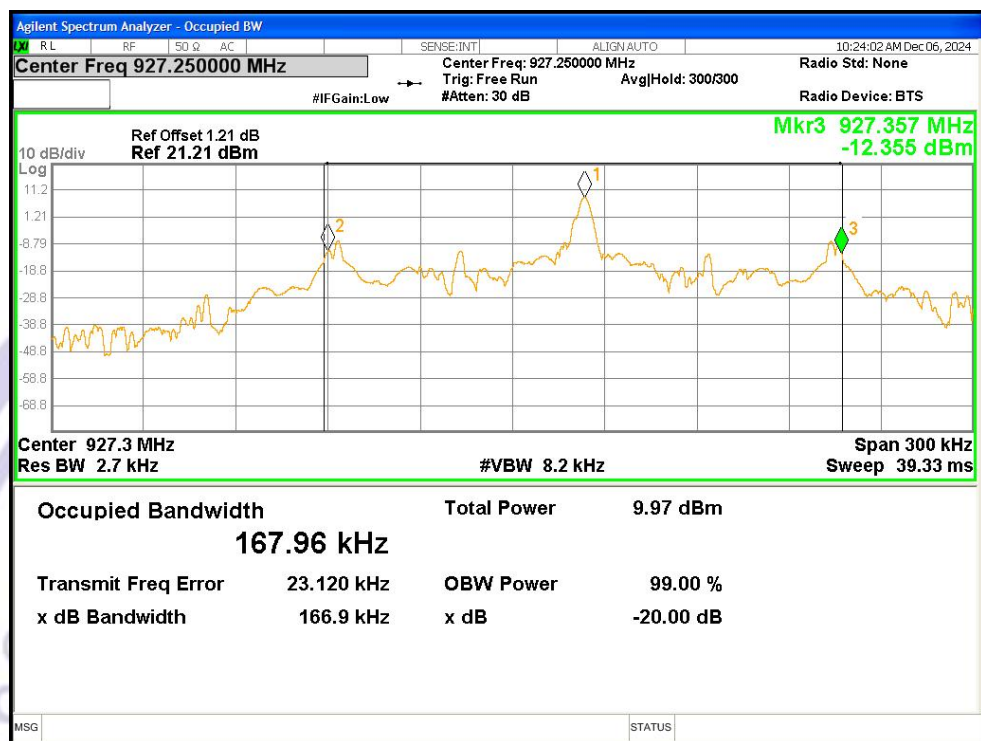

8 Antenna Application

8.1 Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

8.2 Result

The antenna is Internal Antenna, the best case gain of the antennas is 3.65 dBi, reference to the attachment for details.

9 Test Setup Photos and EUT Photos

Please see the attachment for details.

*****THE END REPORT*****

