

惠州启泰电子科技有限公司

Huizhou Qitai Electronic Technology Co., LTD



SPECIFICATIONS SHEET
规格图面

CUSTOMER :	
客户	
DESCRIPTION :	
品名描述	TX线圈
CUSTOMER P/N :	
客户品名	
PART NUMBER :	
制造商料号	
DATE OF APPLICATION :	
提出日期	2023-12-15

CLASSIFICATION OF SPEC. PRESENTATION. (Tick the relevant box "√") 规格图面提出区分

- ☐ New application 新规格
- ☒ New part is added to accepted specification 新产品规格追加记录
- ☐ Revision of accepted specification 既存规格图面变更

ACCEPTANCE STAMP (客户受领印)

APPROVAL BY 承认	CHECK BY 审查	PREPARE BY 制作
		陈斌

ADDRESS : 3rd Floor, No. 18, Xingyue 2nd Road, Shiwan Town, Boluo County, Huizhou city

TELPHONE : 0752-6668681

E-MAIL : 839689578@qq.com

Huizhou Qitai Electronic Technology Co., LTD

PART NUMBER :
制 造 商 料 号

1 of 3


Specification
规格内容

CUSTOMER P/N :
客户品名

PART NUMBER :
制造商料号

1. DIMENSIONS (外形尺寸) : (Unit: mm)

单位 (Unit) : 毫米 (mm) .

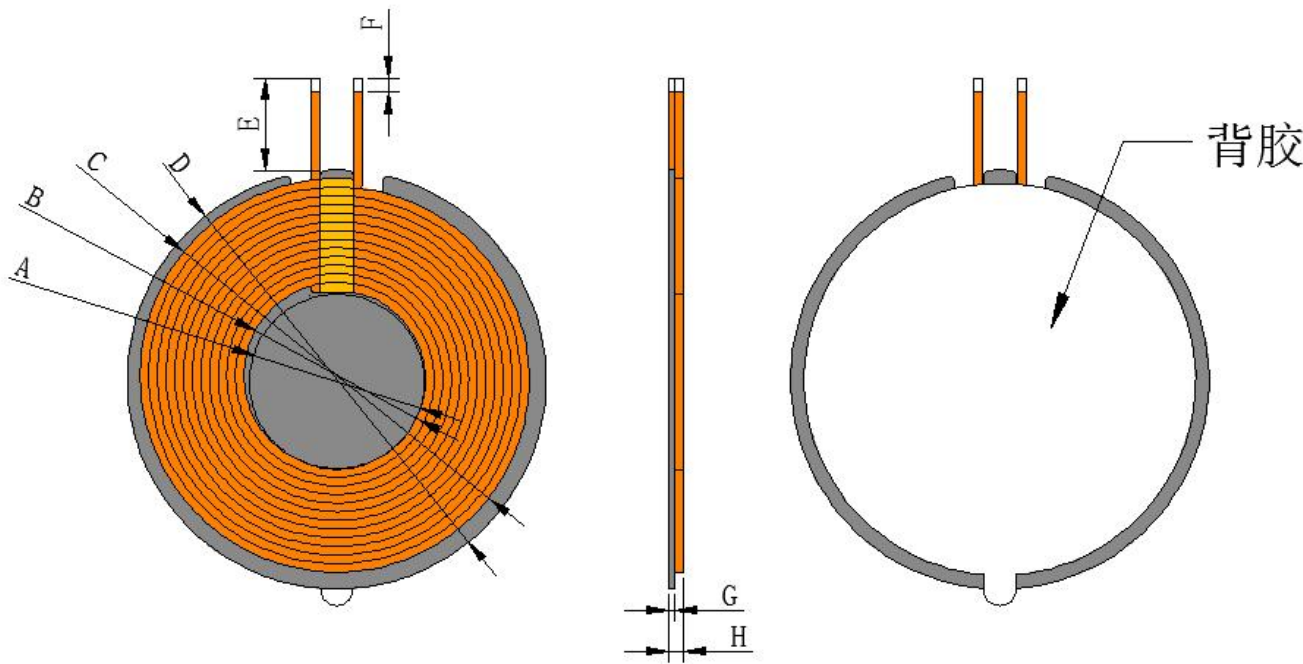


A	B	C	D	E	F	G	H
20±0.3	20.5±0.5	39±1	42.5±0.5	11±1	3±1	0.8±0.1	2.3max

1. 背胶为白色双面胶。
2. 线圈贴合位置居中。



APPROVED BY 承认	CHECKED BY 审查	PREPARED BY 制作	DATE 日期	PAGE 页码
昆子奇		陈骏	2023-12-15	2 of 3

惠州启泰电子科技有限公司					
Huizhou Qitai Electronic Technology Co., LTD					
Specification 规格内容			CUSTOMER P/N : 客 户 品 名		
			PART NUMBER : 制 造 商 料 号		
2. WINDING DETAILS(绕线详细说明) Coil1					
圈数 Turns	线径 Wire Dia	绕线方式疏/密 Wdg. Type Spred/Close	绕线方向 Wdg.Direction	相交 是/否 Intersect Yes/Not	
11TS	0.08*100P热风自粘线	密绕 (Close)	逆绕	是 (Yes)	
3. 电气特性 (ELECTRICAL CHARACTERISTICS) : 温度 TEMPERATURE:25±10℃,湿度 RELATIVE HUMIDITY:65±10%					
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
Coil 1					
1.	IND	S-F	7.9uh±10%	100kHz/V	UC2906A
2.	Q	S-F	40Min	100kHz/V	UC2906A
3.	DCR	S-F	80m Ω Max	100kHz/V	UC2906A
We statement that All measurements were performed radiated and therefore additional antenna gain documentation is not required.					
					
APPROVED BY 承 认	CHECKED BY 审 查	PREPARED BY 制 作	DATE 日期	PAGE 页 码	
昆子奇		陈璇	2023-12-15	3 of 3	