



TEST REPORT

Reference No...... : WTA24F11259443W
FCC ID : 2BMKS-PR6
Applicant..... : Zhuhai Invitop Technology Co.,Ltd.
Address..... : 4th Block, No.625 Xinshawu Road, Tangjiawan Town, High-Tech District, Zhuhai City, Guangdong, China
Manufacturer : The same as above
Address..... : The same as above
Product Name..... : CAR FRIDGE
Model No..... : Refer to section 3.2
Test specification..... : FCC CFR47 Part 15 Subpart C (Section 15.247)
Date of Receipt sample : 2024-11-11
Date of Test : 2024-11-11 to 2024-11-14
Date of Issue..... : 2024-12-18
Test Report Form No. : WEW-15247A-01B
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: 1/F., Building 19, Sunlink Machinery City, Xingye 4 Road,
Guanglong Industrial Park, Chihua Neighborhood Committee, Chencun Town,
Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398

Fax:+86-757-23811381

E-mail:info@waltek.com.cn

Tested by:

Kyrie Yun

Approved by:

Danny Zhou



1 Revision History

Test Report No.	Date of Issue	Description	Status
WTA24F11259443W	2024-12-18	Original	Valid

WALTEK



2 Contents

	Page
1 REVISION HISTORY.....	2
2 CONTENTS.....	3
3 GENERAL INFORMATION.....	4
3.1 GENERAL DESCRIPTION OF E.U.T	4
3.2 MODEL LIST.....	4
3.3 TECHNICAL CHARACTERISTICS OF EUT	4
3.4 STANDARDS APPLICABLE FOR TESTING.....	5
3.5 TEST FACILITY	5
3.6 SUBCONTRACTED	5
3.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
3.8 DISCLAIMER.....	6
4 EUT SETUP AND TEST MODE.....	7
5 EQUIPMENT USED DURING TEST.....	8
5.1 EQUIPMENT LIST.....	8
5.2 TEST SOFTWARE	9
5.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
5.4 MEASUREMENT UNCERTAINTY.....	9
6 SUMMARY OF TEST RESULT	10
6.1 ANTENNA REQUIREMENT.....	11
6.2 RADIATED SPURIOUS EMISSIONS	12
6.3 POWER SPECTRAL DENSITY	22
6.4 DTS BANDWIDTH.....	25
6.5 RF OUTPUT POWER.....	28
6.6 OUT OF BAND EMISSIONS.....	31
6.7 CONDUCTED EMISSIONS.....	39
7 PHOTOGRAPHS TEST SETUP.....	43
7.1 PHOTOGRAPHS - RADIATED EMISSION TEST SETUP.....	43
7.2 PHOTOGRAPHS – CONDUCTED EMISSION TEST SETUP	44
8 PHOTOGRAPHS – EUT CONSTRUCTIONAL DETAILS.....	45



3 General Information

3.1 General Description of E.U.T

Product Name : CAR FRIDGE

Model No. : Refer to section 3.2

Model Description : All models are identical except for the appearance and capacity. Therefore the full tests were performed on model PR6-RCZ55(C)-N8-3-03.

Rating : DC 12/24V

Battery Capacity : ---

Power Adapter : HCX6003-1454100M
Input: 100-240V~, 50-60Hz, 1.8A;
Output: DC 14.5V, 4.1A, 59.45W

3.2 Model List

Model	Capacity	Model	Capacity
PR1-RCZ45(C)-N8-3-01	45L	PR1-RCZ45(C)-N8-3-02	45L
PR4-RCZ45(C)-N8-3-01	45L	PR4-RCZ45(C)-N8-3-02	45L
PR4-RCZ45(C)-N8-3-03	45L	PR4-RCZ45(C)-N8-3-04	45L
PR2-RCZ35(C)-N8-3-01	35L	PR2-RCZ35(C)-N8-3-02	35L
PR5-RCZ35(C)-N8-3-01	35L	PR5-RCZ35(C)-N8-3-02	35L
PR5-RCZ35(C)-N8-3-03	35L	PR5-RCZ35(C)-N8-3-04	35L
PR3-RCZ55(C)-N8-3-01	55L	PR3-RCZ55(C)-N8-3-02	55L
PR6-RCZ55(C)-N8-3-01	55L	PR6-RCZ55(C)-N8-3-02	55L
PR6-RCZ55(C)-N8-3-03	55L	PR6-RCZ55(C)-N8-3-04	55L

3.3 Technical Characteristics of EUT

Bluetooth Version : Bluetooth LE

Frequency Range : 2402-2480MHz

RF Output Power : 3.21dBm (Conducted) @2Mbps

Modulation : GFSK

Data Rate : 1Mbps, 2Mbps

Quantity of Channels : 40

Channel Separation : 2MHz

Type of Antenna : PCB Antenna

Antenna Gain : 2.54dBi



3.4 Standards Applicable for Testing

The tests were performed according to following standards:

FCC Rules Part 15.247	Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
558074 D01 15.247 Meas Guidance v05r02	Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The FCC Rules
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.5 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science and Economic Development Canada (ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number: 21895, March 12, 2019

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **FCC – Designation No.: CN5034**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation No. CN5034.

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

3.6 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---



3.7 Abnormalities from Standard Conditions

None.

3.8 Disclaimer

The antenna gain information is provided by the customer. The laboratory is not responsible for the accuracy of the antenna gain information.

WALTEK



4 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List

Test Mode	Description	Remark
TM1	Low Channel	2402MHz
TM2	Middle Channel	2440MHz
TM3	High Channel	2480MHz

Test Conditions

Temperature:	22~25°C
Relative Humidity:	50~55%
Atmospheric pressure:	101.9kPa

WALTEK



5 Equipment Used during Test

5.1 Equipment List

☐ Conducted Emissions 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal Due Date
1.	EMI Test Receiver	R&S	ESR3	102423	2024-01-05	2025-01-04
2.	LISN	R&S	ENV216	101343	2024-01-05	2025-01-04
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	223NN624	2024-01-04	2025-01-03
4.	Switch	CD	RSU-A4 18G	RSUA4008	2024-01-04	2025-01-03
☒ Conducted Emissions 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal Due Date
1.	EMI Test Receiver	R&S	ESCI	101178	2024-01-06	2025-01-05
2.	LISN	R&S	ENV216	101215	2024-01-05	2025-01-04
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	6102701	2024-01-04	2025-01-03
4.	Switch	ESE	RSU/M2	---	2024-01-04	2025-01-03
☐ Conducted Emissions 3#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal Due Date
1.	EMI Test Receiver	R&S	ESR3	102842	2024-01-05	2025-01-04
2.	LISN	R&S	ENV216	101542	2024-01-05	2025-01-04
3.	Cable	YIHENG	LMR195UF-NMNM-2.5	---	2024-01-04	2025-01-03
4.	Manual RF Switch	YIHENG	SW-2	RSU0402	2024-01-04	2025-01-03
☒ Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	2024-01-05	2025-01-04
2.	EMI Test Receiver	RS	ESR7	101566	2024-01-06	2025-01-05
3.	EMC Analyzer	Agilent	N9020A	MY48011796	2024-01-04	2025-01-03
4.	Active Loop Antenna	SCHWARZBECK	FMZB1519B	00004	2024-01-05	2025-01-04
5.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	2024-01-05	2025-01-04
6.	Coaxial Cable (below 1GHz)	H+S	CBL3-NN-12+3 m	214NN320	2024-01-06	2025-01-05
7.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	01561	2024-01-05	2025-01-04
8.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	01119	2024-01-05	2025-01-04
9.	Coaxial Cable (above 1GHz)	Times-Microwave	CBL5-NN	-	2024-01-04	2025-01-03
10.	Amplifier	Lunar E M	LNA1G18-40	20160501002	2024-01-04	2025-01-03



☒ RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	Agilent	N9020A	MY48011796	2024-01-04	2025-01-03
2.	Analog Signal Generator	Agilent	N5181A	MY48180720	2024-01-04	2025-01-03
3.	RF Control Unit	CHANGCHUANG	JS0806-2	-	2024-01-04	2025-01-03

☐: Not Used

☒: Used

5.2 Test Software

Description	Manufacturer	Model	Version
EMI Test Software (Conducted Emission 1#)	FARATRONIC	EZ-EMC	EMEC-3A1
EMI Test Software (Conducted Emission 2#)	FARATRONIC	EZ-CON	FARAD-3A1.1+
EMI Test Software (Conducted Emission 3#)	FARATRONIC	EZ-EMC	EMC-CON 3A1.1+
EMI Test Software (Radiated Emission)	FARATRONIC	EZ-EMC	RA-03A1-2
RF Conducted Test Software	TONSCEND	JS1120-2	V2.6

5.3 Special Accessories and Auxiliary Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.
1.	/	/	/	/

5.4 Measurement Uncertainty

Parameter	Uncertainty
RF Output Power	±2.2dB
Occupied Bandwidth	±1.5%
Conducted Emission	±2.6dB
Transmitter Spurious Emission	±3.8dB (for 25MHz-1GHz)
	±5.0dB (for 1GHz-18GHz)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



6 Summary of Test Result

Test Items	FCC Rules	Result
Antenna Requirement	§15.203; §15.247(b)(4)(i)	Compliant
Restricted Band of Operation	§15.205	Compliant
Conducted Emissions	§15.207(a)	Compliant
Radiated Spurious Emissions	§15.209(a)	Compliant
Power Spectral Density	§15.247(e)	Compliant
DTS Bandwidth	§15.247(a)(2)	Compliant
RF Output Power	§15.247(b)(1)	Compliant
Band edge (Out of Band Emissions)	§15.247(d)	Compliant

Remark:

Pass Test item meets the requirement

Fail Test item does not meet the requirement

N/A Test case does not apply to the test object

WALTEK




6.1 Antenna Requirement

6.1.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

6.1.2 Evaluation Information

The EUT has a PCB Antenna, the gain is Pending dBi, fulfil the requirement of this section.

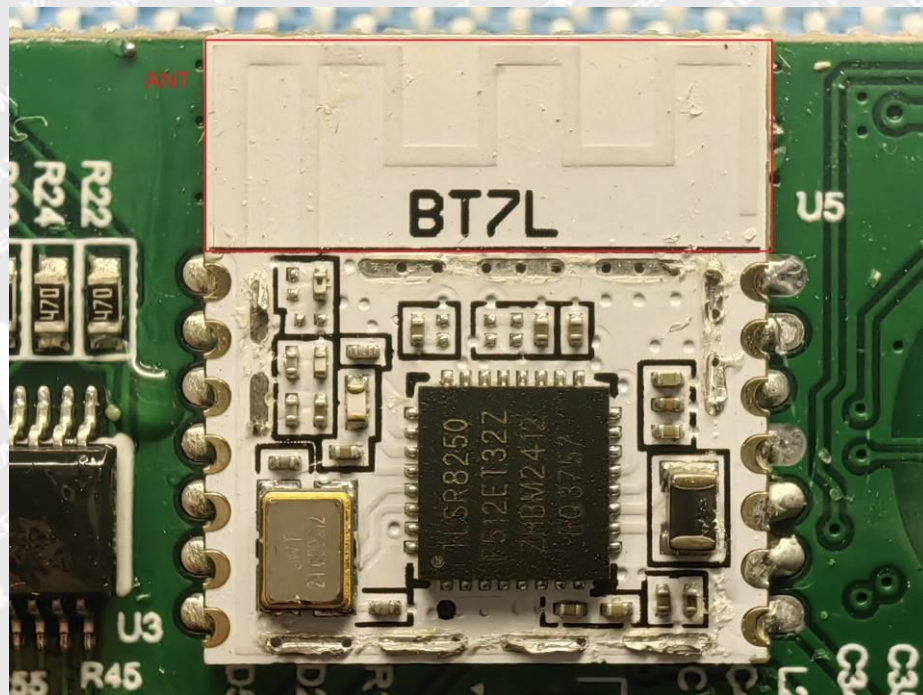



6.2 Radiated Spurious Emissions

6.2.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

6.2.2 Test Procedure

- 1) The EUT is placed on a turntable, which is 0.8m(Below 1G) 1.5m(above 1G)above ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- 4) Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5) And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6) Repeat above procedures until the measurements for all frequencies are complete.
- 7) The radiation measurements are tested under 3-axes(X, Y, Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.




6.2.3 Test Setup

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz.

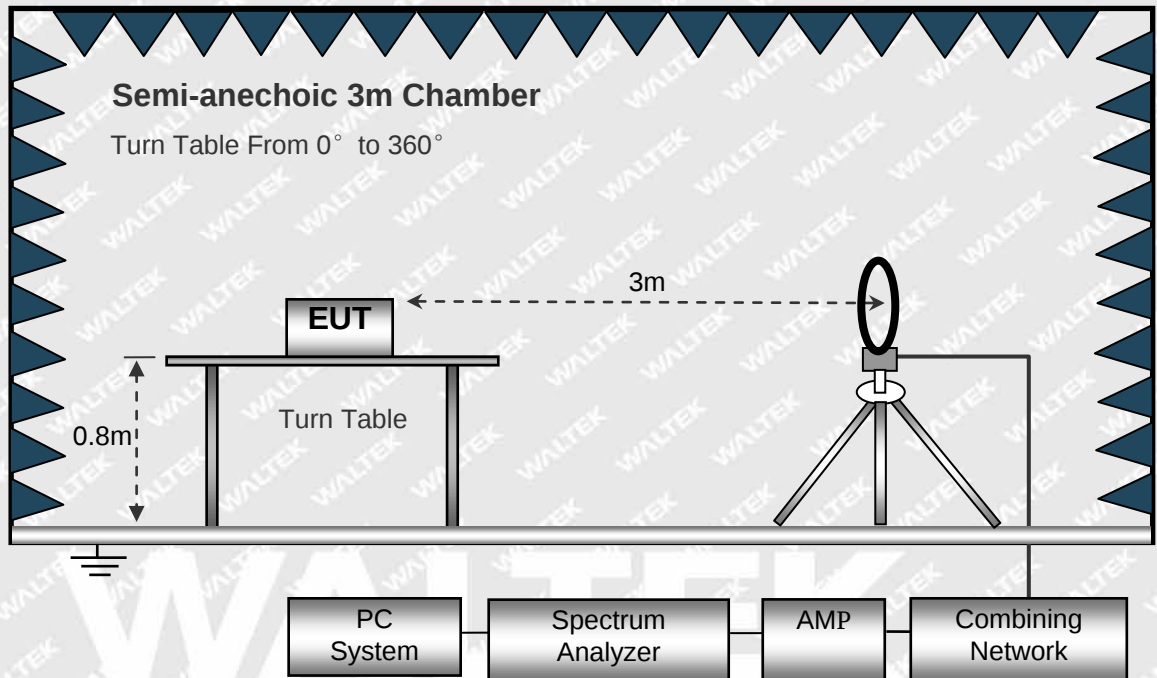


The test setup for emission measurement from 30 MHz to 1 GHz.

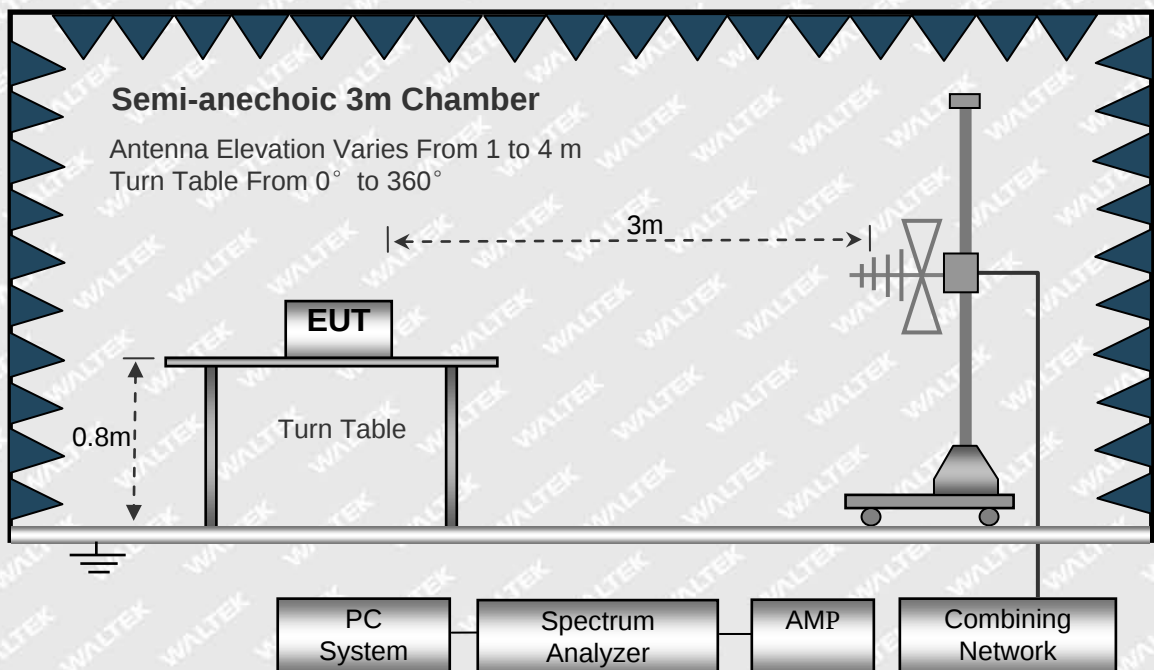



The test setup for emission measurement above 1 GHz.

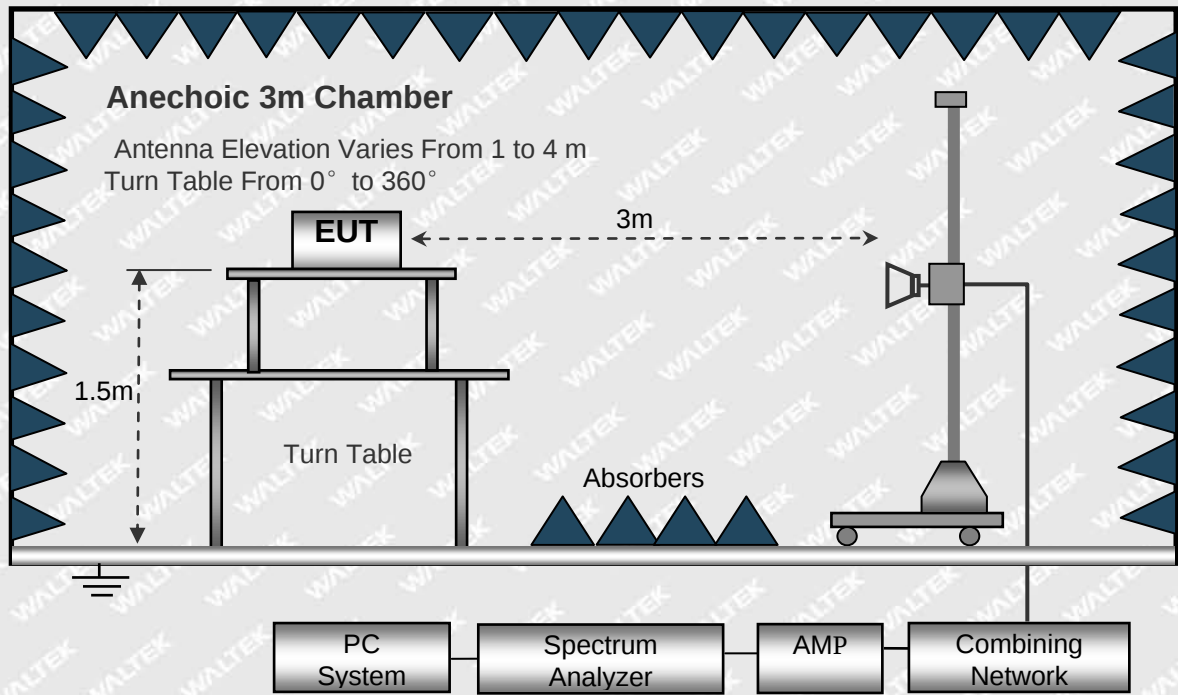

6.2.4 Spectrum Analyzer Setup

9KHz-30MHz

RBW=10kHz

VBW=30kHz

Sweep time=Auto

Trace=Max hold

Detector function=peak

30MHz-1GHz

RBW=120kHz

VBW=300kHz

Sweep time=Auto

Trace=Max hold

Detector function=peak, QP

Above 1GHz

RBW=1MHz

VBW=3MHz(Peak), 10MHz(AV)

Sweep time=Auto

Trace=Max hold

Detector function=peak, AV

6.2.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$



6.2.6 Test Results


Test Frequency: Below 1GHz

Worst case: 2Mbps

Test Channel Low Channel

Polarization


Vertical

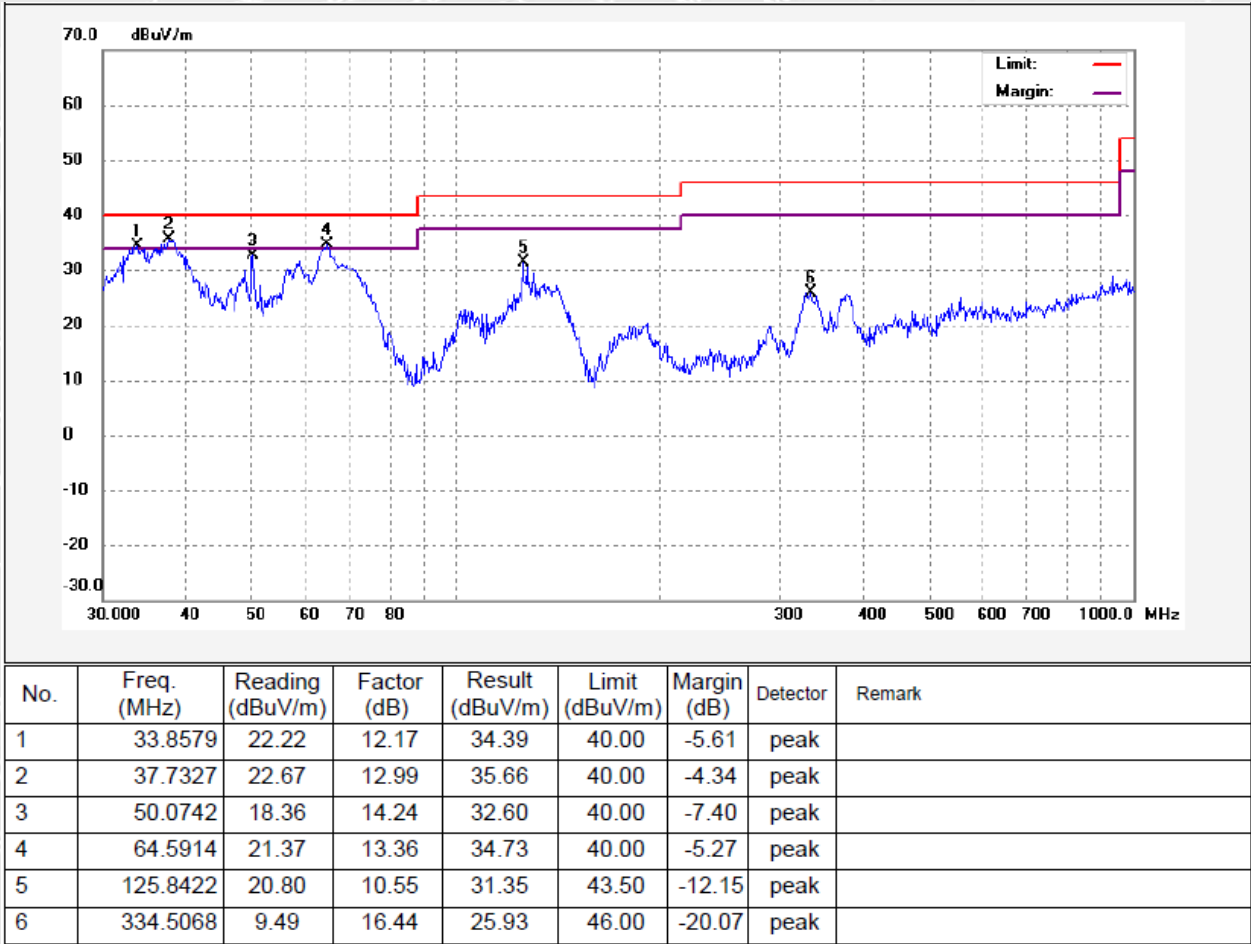



Test Channel Low Channel

Polarization Horizontal

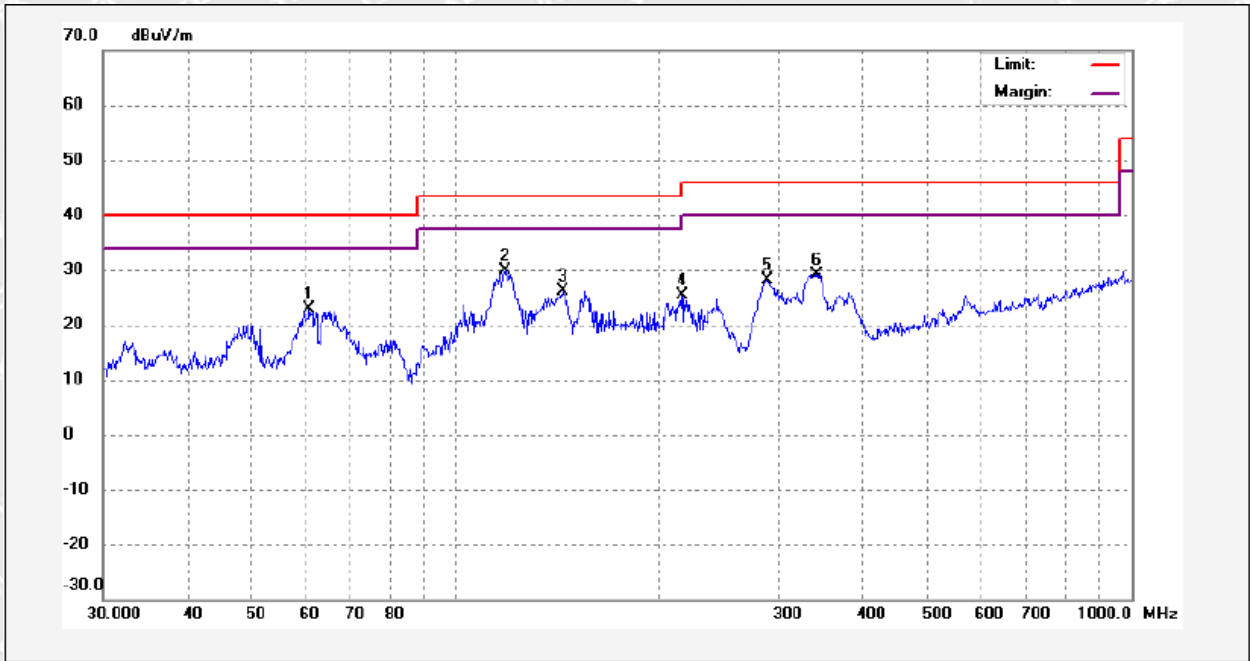


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	60.8749	9.01	13.75	22.76	40.00	-17.24	peak	
2	118.4351	18.43	11.51	29.94	43.50	-13.56	peak	
3	144.2336	16.85	9.18	26.03	43.50	-17.47	peak	
4	216.5549	11.10	14.20	25.30	46.00	-20.70	peak	
5	289.9156	12.65	15.55	28.20	46.00	-17.80	peak	
6	342.5788	12.27	16.84	29.11	46.00	-16.89	peak	



Test Channel Middle Channel

Polarization


Vertical

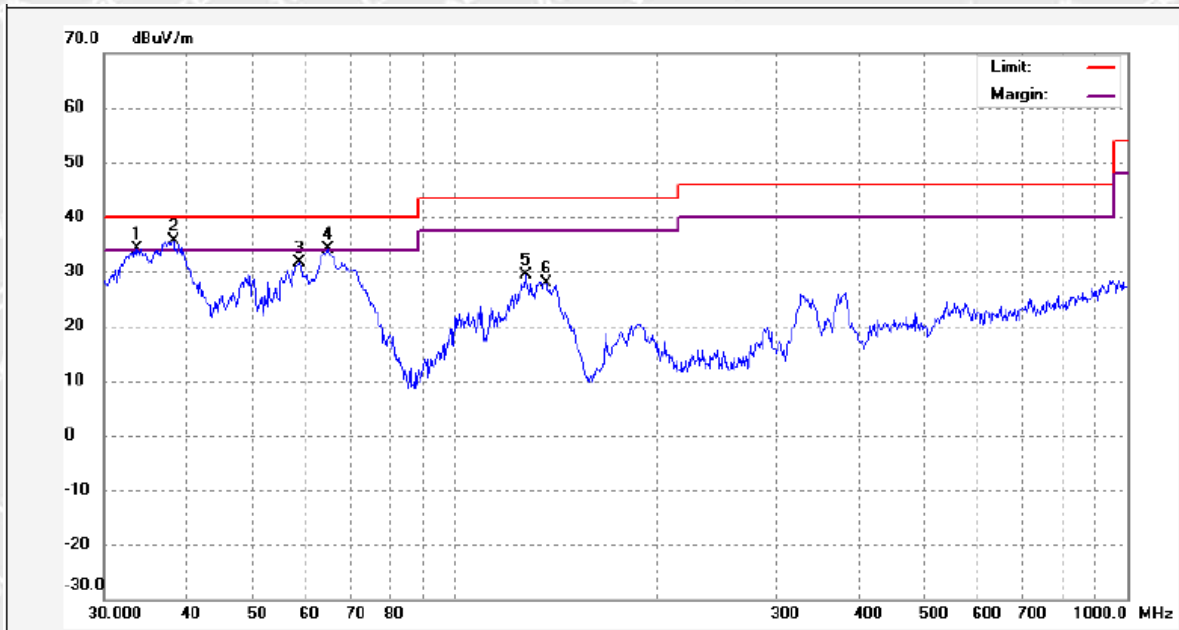

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	33.7040	21.95	12.17	34.12	40.00	-5.88	peak	
2	38.1718	22.46	13.10	35.56	40.00	-4.44	peak	
3	58.6537	17.36	14.18	31.54	40.00	-8.46	peak	
4	64.7502	20.83	13.34	34.17	40.00	-5.83	peak	
5	127.3515	18.98	10.29	29.27	43.50	-14.23	peak	
6	136.8432	18.17	9.66	27.83	43.50	-15.67	peak	



Test Channel Middle Channel Polarization Horizontal

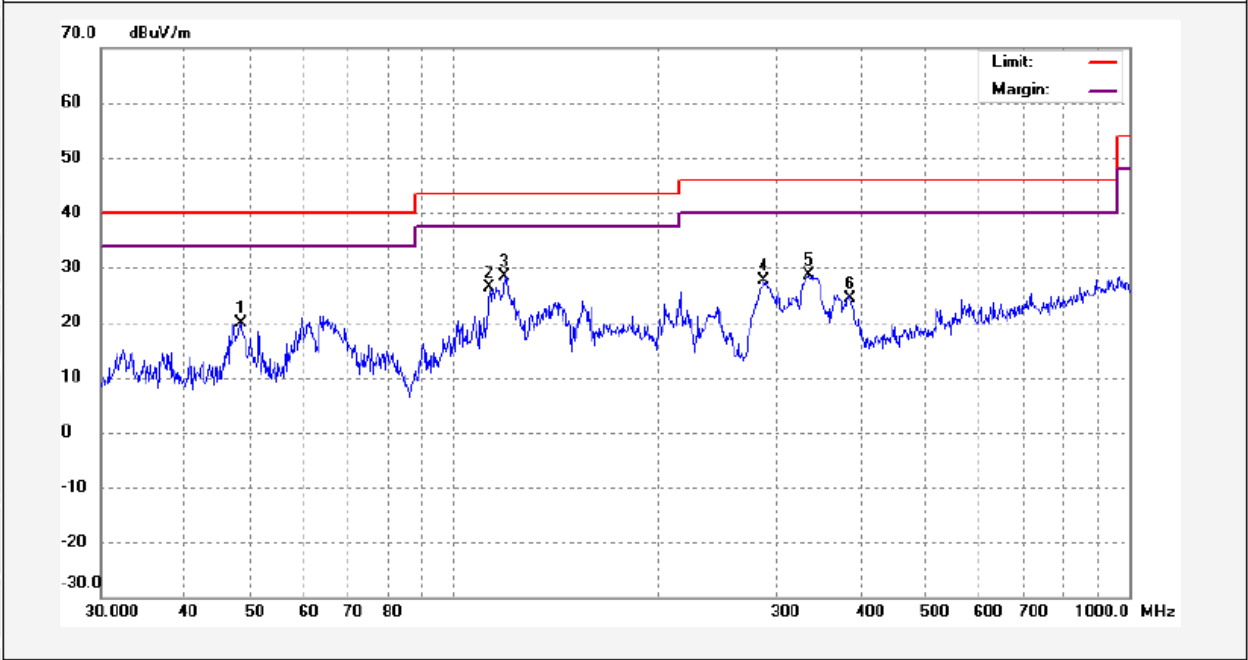

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	48.5016	5.56	14.39	19.95	40.00	-20.05	peak	
2	113.0385	14.05	12.31	26.36	43.50	-17.14	peak	
3	118.7678	17.02	11.46	28.48	43.50	-15.02	peak	
4	288.6981	12.05	15.49	27.54	46.00	-18.46	peak	
5	335.4465	12.26	16.48	28.74	46.00	-17.26	peak	
6	386.9050	6.44	17.93	24.37	46.00	-21.63	peak	



Test Channel High Channel

Polarization

Vertical




No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	32.7716	21.78	12.22	34.00	40.00	-6.00	peak	
2	38.9425	22.04	13.17	35.21	40.00	-4.79	peak	
3	63.8483	20.87	13.45	34.32	40.00	-5.68	peak	
4	125.9305	20.28	10.54	30.82	43.50	-12.68	peak	
5	336.2709	9.19	16.53	25.72	46.00	-20.28	peak	
6	380.8478	7.65	17.97	25.62	46.00	-20.38	peak	



Test Channel High Channel

Polarization Horizontal

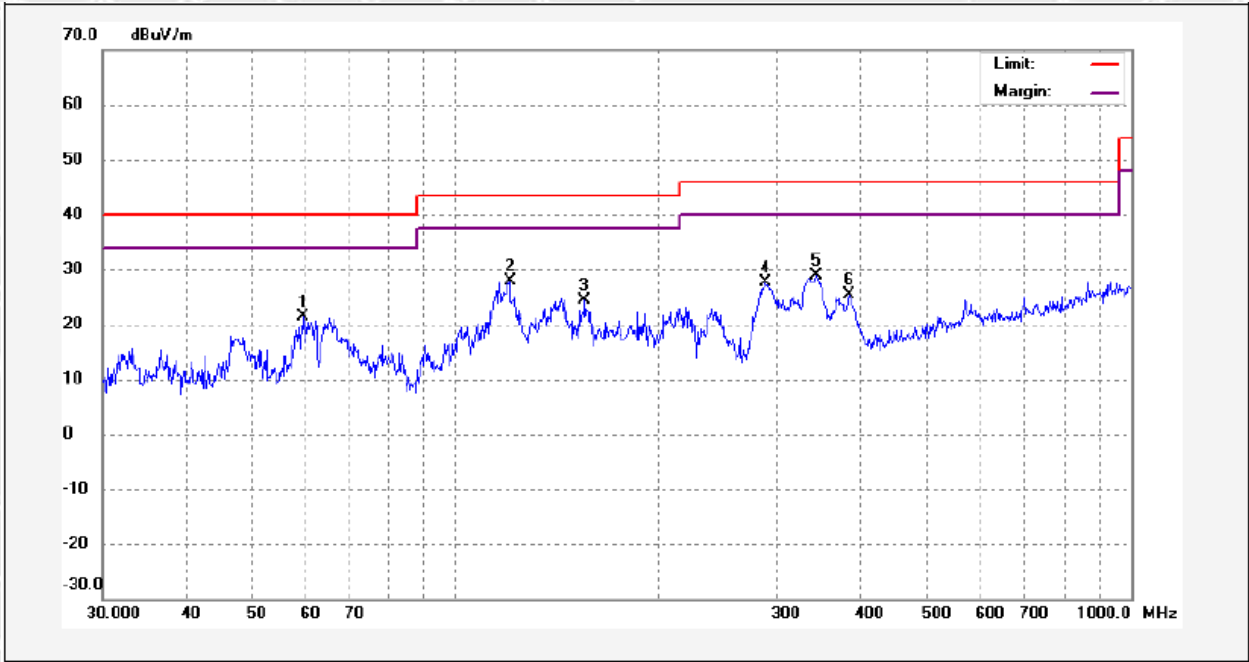

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	59.4822	7.29	13.98	21.27	40.00	-18.73	peak	
2	120.2766	16.71	11.24	27.95	43.50	-15.55	peak	
3	155.6370	14.44	10.00	24.44	43.50	-19.06	peak	
4	287.9904	12.08	15.46	27.54	46.00	-18.46	peak	
5	342.6990	12.03	16.85	28.88	46.00	-17.12	peak	
6	383.2593	7.38	17.96	25.34	46.00	-20.66	peak	

**Test Frequency: Above 1GHz****Worst case: 2Mbps**

Frequency (MHz)	Reading (dB μ V/m)	Detector	Polar (H/V)	Corrected Factor (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Low Channel_2Mbps							
4804	33.63	PK	H	-6.71	40.34	74	-33.66
4804	24.54	AV	H	-6.71	31.25	54	-22.75
7206	47.33	PK	H	-1.46	48.79	74	-25.21
7206	37.00	AV	H	-1.46	38.46	54	-15.54
4804	43.18	PK	V	-6.71	49.89	74	-24.11
4804	32.05	AV	V	-6.71	38.76	54	-15.24
7206	49.67	PK	V	-1.46	51.13	74	-22.87
7206	39.59	AV	V	-1.46	41.05	54	-12.95
Middle Channel_2Mbps							
4880	45.98	PK	H	-6.50	52.48	74	-21.52
4880	35.89	AV	H	-6.50	42.39	54	-11.61
7320	51.03	PK	H	-1.12	52.15	74	-21.85
7320	41.46	AV	H	-1.12	42.58	54	-11.42
4880	31.69	PK	V	-6.50	38.19	74	-35.81
4880	22.86	AV	V	-6.50	29.36	54	-24.64
7320	41.51	PK	V	-1.12	42.63	74	-31.37
7320	31.06	AV	V	-1.12	32.18	54	-21.82
High Channel_2Mbps							
4960	44.99	PK	H	-6.29	51.28	74	-22.72
4960	35.74	AV	H	-6.29	42.03	54	-11.97
7440	49.88	PK	H	-0.80	50.68	74	-23.32
7440	39.94	AV	H	-0.80	40.74	54	-13.26
4960	45.73	PK	V	-6.29	52.02	74	-21.98
4960	36.37	AV	V	-6.29	42.66	54	-11.34
7440	52.08	PK	V	-0.80	52.88	74	-21.12
7440	41.77	AV	V	-0.80	42.57	54	-11.43

Note:

1. Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
2. Average measurement was not performed if peak level is lower than average limit 54 dB μ V/m) for above 1GHz.



6.3 Power Spectral Density

6.3.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.




6.3.2 Test Procedure




According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3.3 Test Result

Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
BLE (1Mbps)	Low	-1.75	8
	Middle	-1.88	8
	High	-1.42	8
BLE (2Mbps)	Low	-6.31	8
	Middle	-6.32	8
	High	-6.04	8

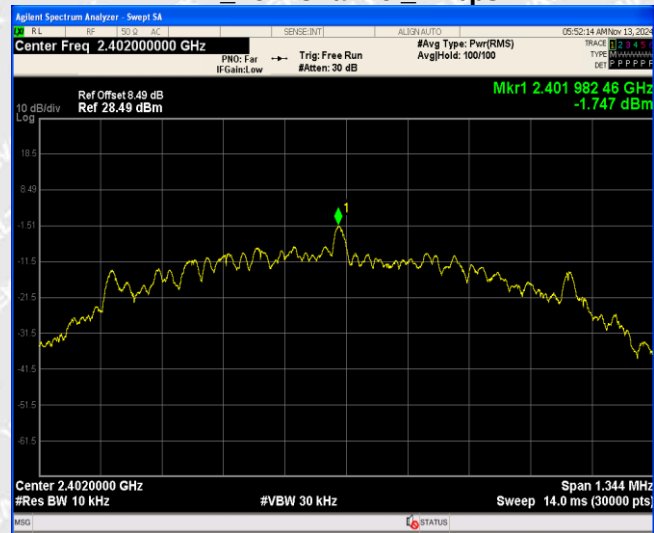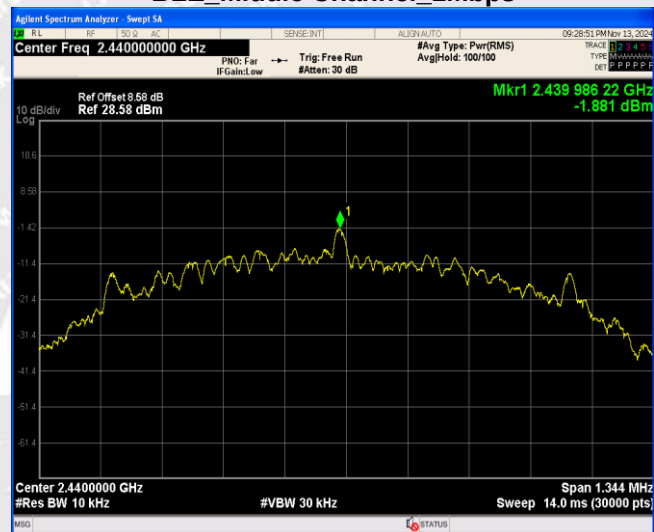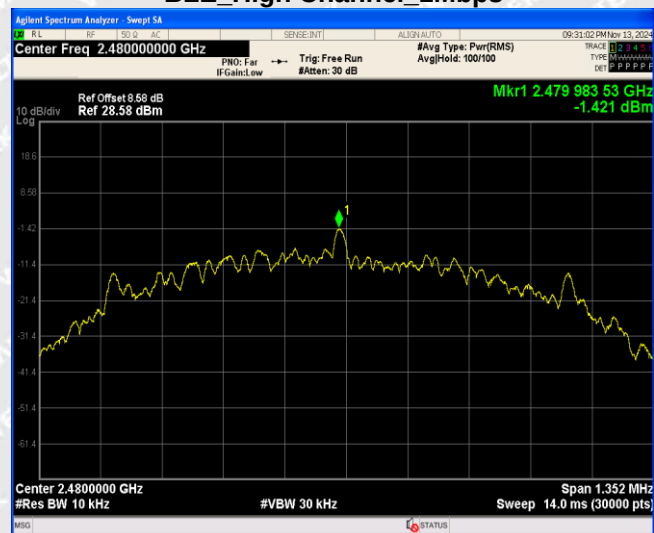**BLE Low Channel 1Mbps****BLE Middle Channel 1Mbps****BLE High Channel 1Mbps**

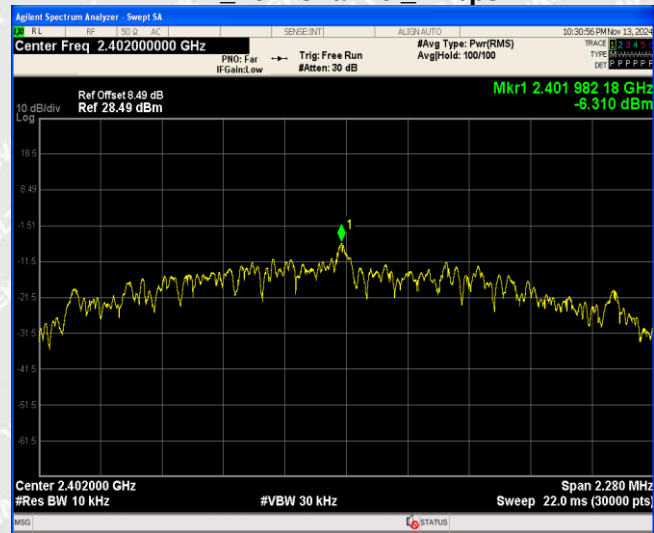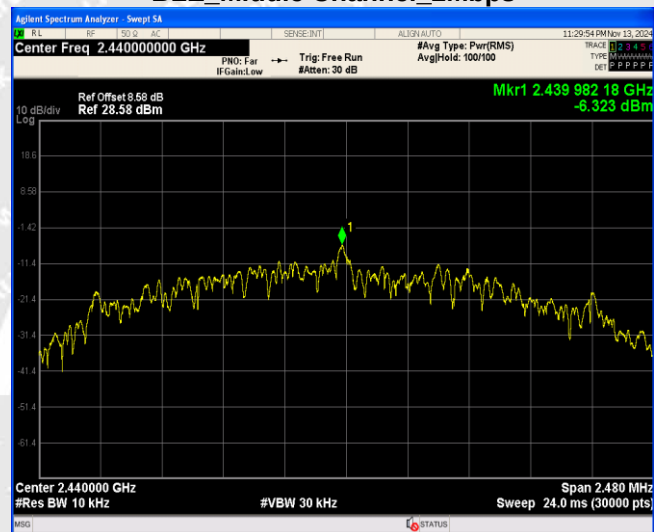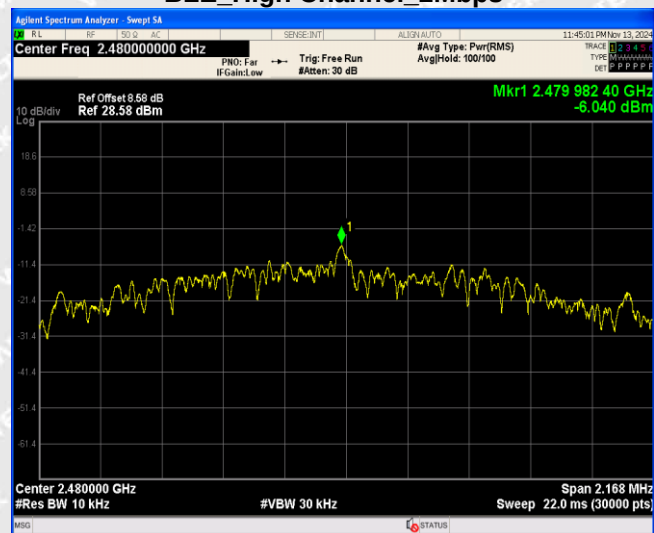**BLE Low Channel 2Mbps****BLE Middle Channel 2Mbps****BLE High Channel 2Mbps**



6.4 DTS Bandwidth

6.4.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.4.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4.3 Test Result


Test Mode	Test Channel	6dB Bandwidth MHz	Limit kHz
BLE (1Mbps)	Low	0.672	≥ 500
	Middle	0.672	≥ 500
	High	0.676	≥ 500
BLE (2Mbps)	Low	1.140	≥ 500
	Middle	1.240	≥ 500
	High	1.084	≥ 500




BLE Low Channel 1Mbps



BLE Middle Channel 1Mbps

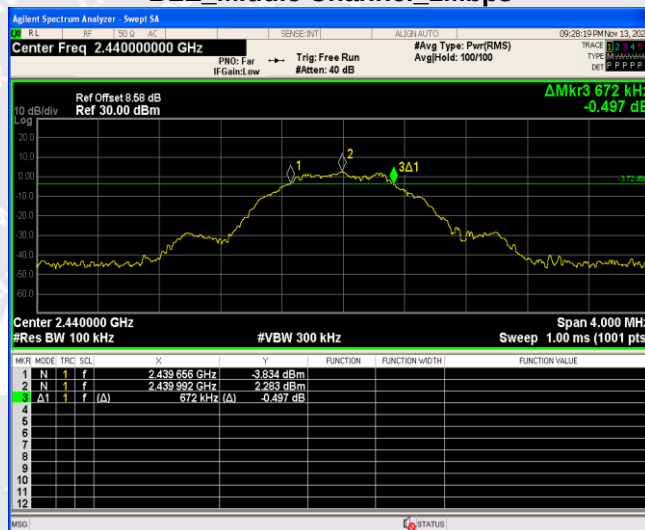

BLE High Channel 1Mbps

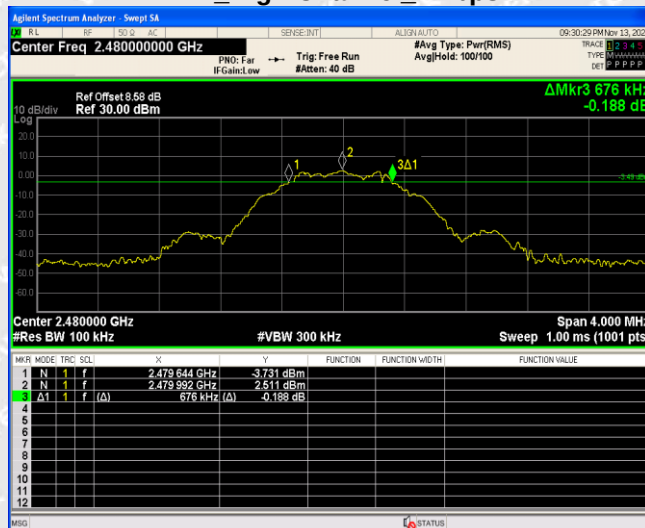



BLE Low Channel 2Mbps



BLE Middle Channel 2Mbps



BLE High Channel 2Mbps





6.5 RF Output Power

6.5.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.




6.5.2 Test Procedure




According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

6.5.3 Test Result

Modulation	Test Channel	Reading (dBm)	Output Power (mW)	Limit (mW)
BLE (1Mbps)	Low	2.89	1.945	1000
	Middle	2.91	1.954	1000
	High	3.15	2.065	1000
BLE (2Mbps)	Low	2.89	1.945	1000
	Middle	2.91	1.954	1000
	High	3.21	2.094	1000

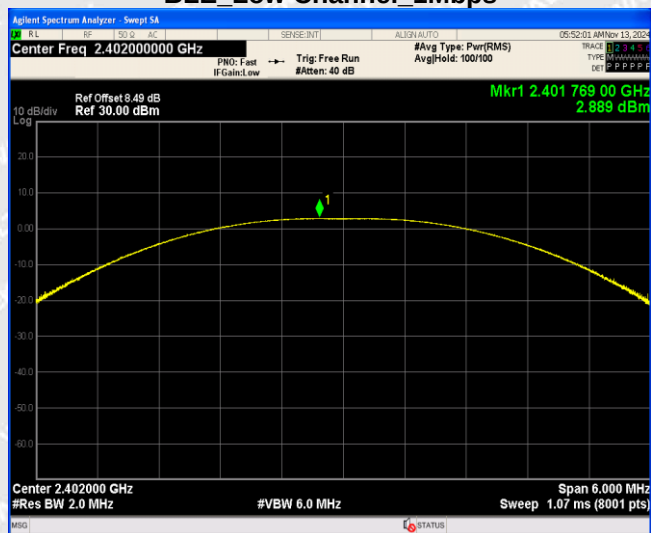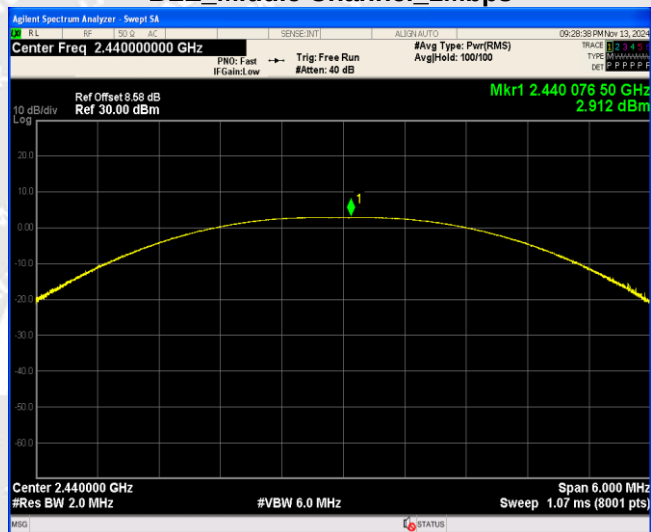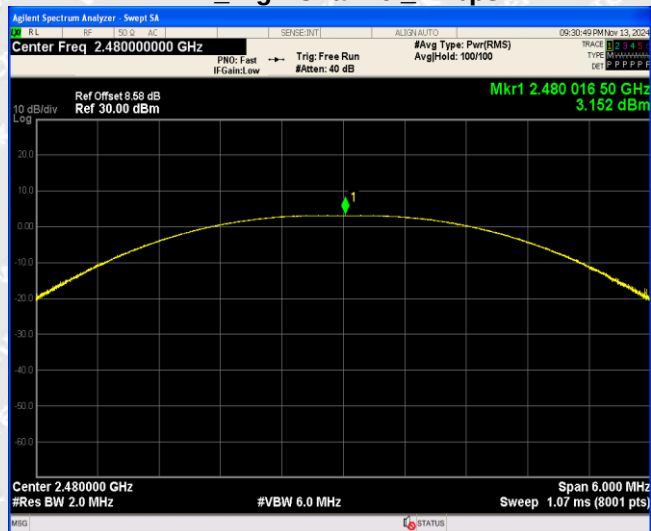**BLE Low Channel 1Mbps****BLE Middle Channel 1Mbps****BLE High Channel 1Mbps**

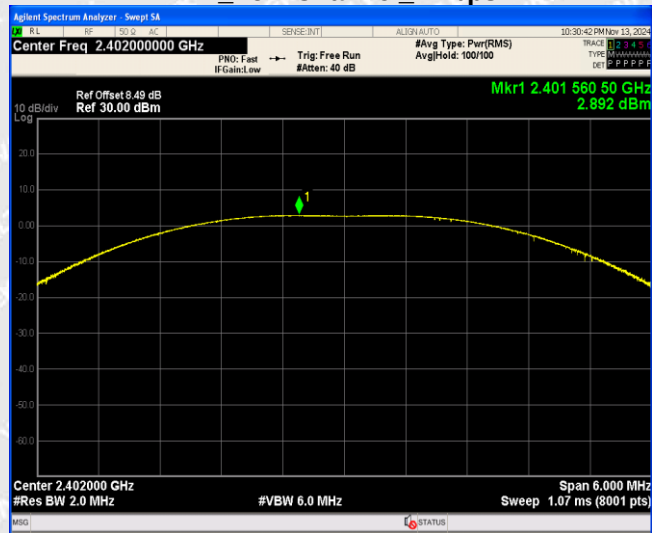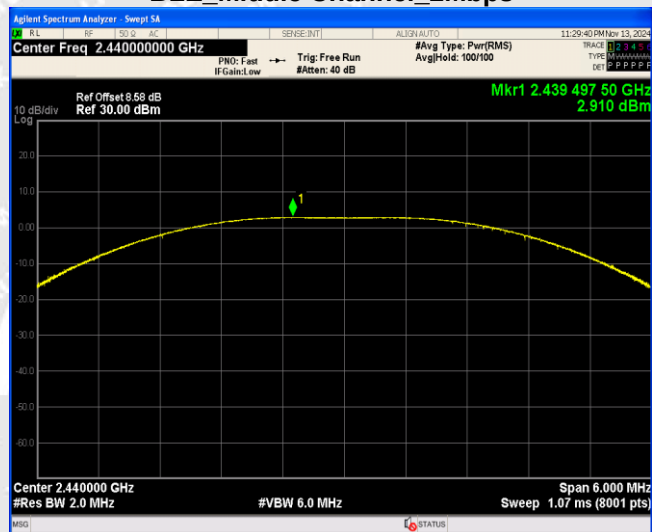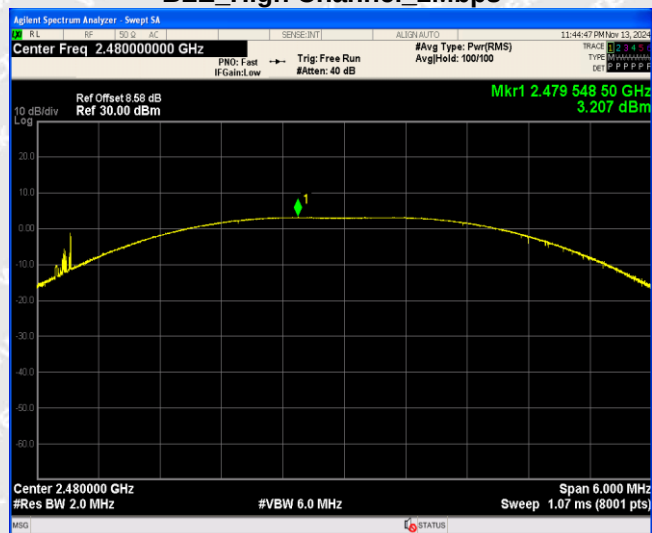**BLE Low Channel 2Mbps****BLE Middle Channel 2Mbps****BLE High Channel 2Mbps**



6.6 Out of Band Emissions

6.6.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

6.6.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge,

as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz

for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emissions must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205.



Note that the method of measurement KDB publication number: 913591 may be used for the radiated band edge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9/
- b) VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1.



6.6.3 Test Result

Radiated Test


Test Channel Low Channel (1Mbps) Polarization Horizontal (worst case)

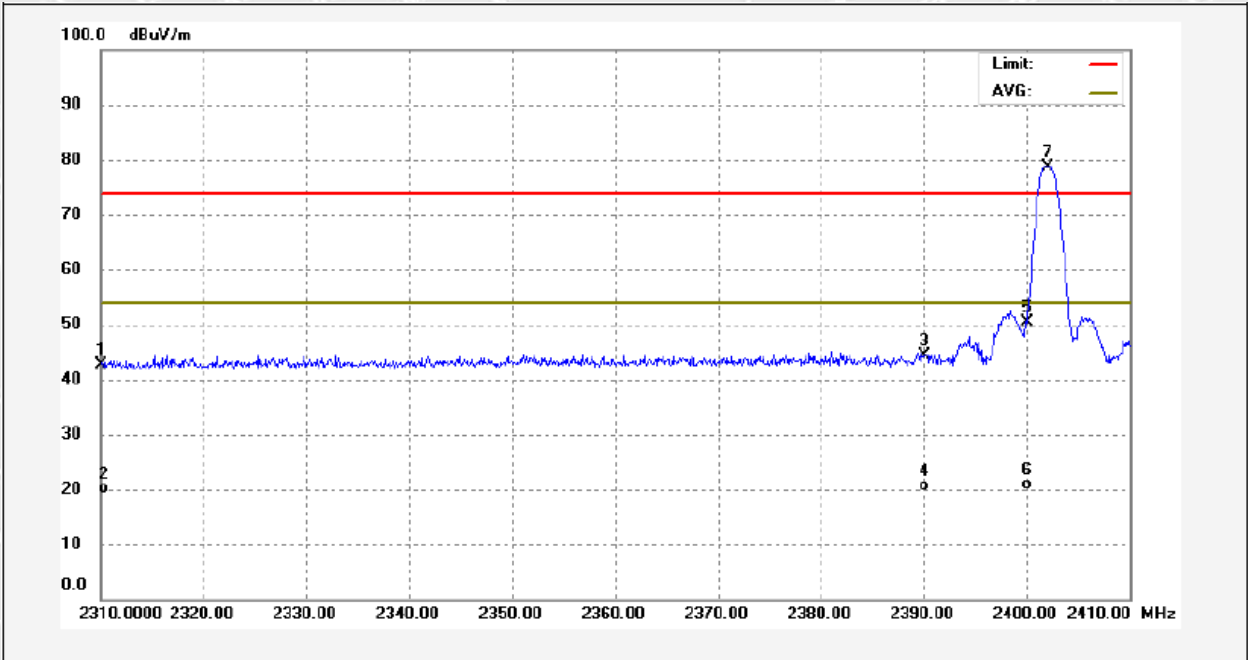

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2310.000	10.48	32.17	42.65	74.00	-31.35	peak	
2	2310.000	-12.16	32.17	20.01	54.00	-33.99	AVG	
3	2390.000	11.92	32.50	44.42	74.00	-29.58	peak	
4	2390.000	-11.86	32.50	20.64	54.00	-33.36	AVG	
5	2400.000	17.79	32.54	50.33	74.00	-23.67	peak	
6	2400.000	-11.77	32.54	20.77	54.00	-33.23	AVG	
7	2402.000	46.14	32.55	78.69	74.00	4.69	peak	




Test Channel High Channel (1Mbps) Polarization Horizontal (worst case)

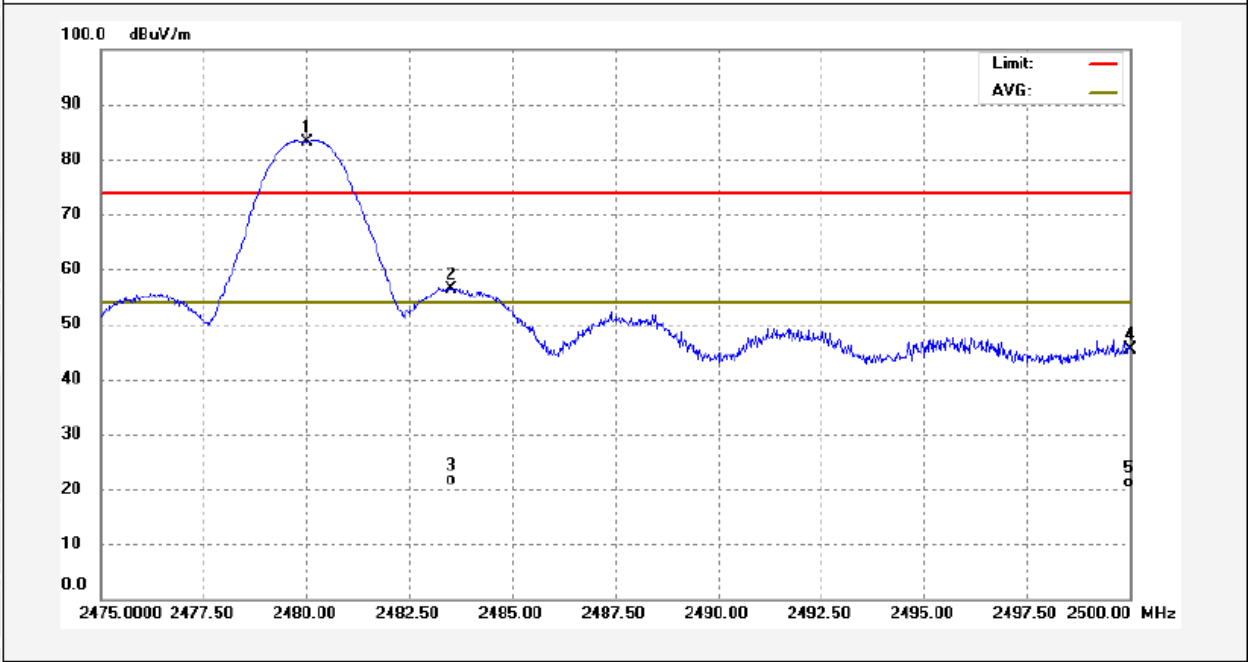

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.000	50.31	32.88	83.19	74.00	9.19	peak	
2	2483.500	23.42	32.89	56.31	74.00	-17.69	peak	
3	2483.500	-11.31	32.89	21.58	54.00	-32.42	AVG	
4	2500.000	12.33	32.96	45.29	74.00	-28.71	peak	
5	2500.000	-11.72	32.96	21.24	54.00	-32.76	AVG	




Test Channel Low Channel (2Mbps) Polarization Horizontal (worst case)

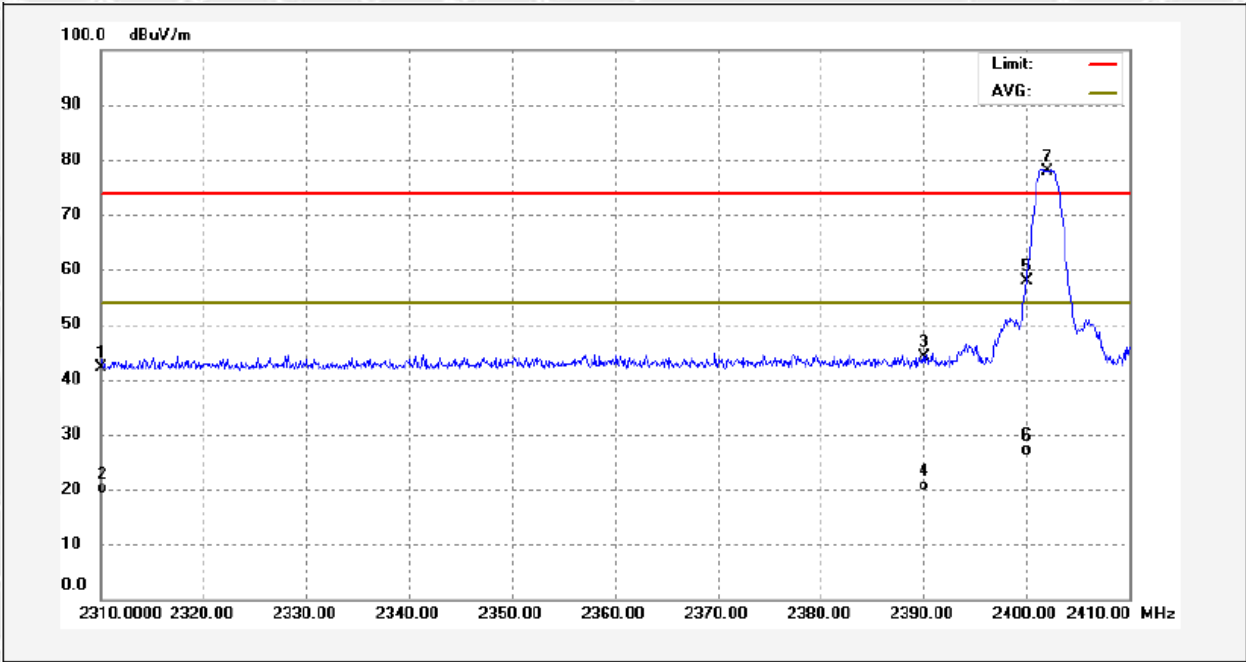

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2310.000	10.01	32.17	42.18	74.00	-31.82	peak	
2	2310.000	-12.13	32.17	20.04	54.00	-33.96	AVG	
3	2390.000	11.59	32.50	44.09	74.00	-29.91	peak	
4	2390.000	-11.82	32.50	20.68	54.00	-33.32	AVG	
5	2400.000	25.28	32.54	57.82	74.00	-16.18	peak	
6	2400.000	-5.39	32.54	27.15	54.00	-26.85	AVG	
7	2402.000	45.22	32.55	77.77	74.00	3.77	peak	



Test Channel High Channel (2Mbps) Polarization Horizontal (worst case)

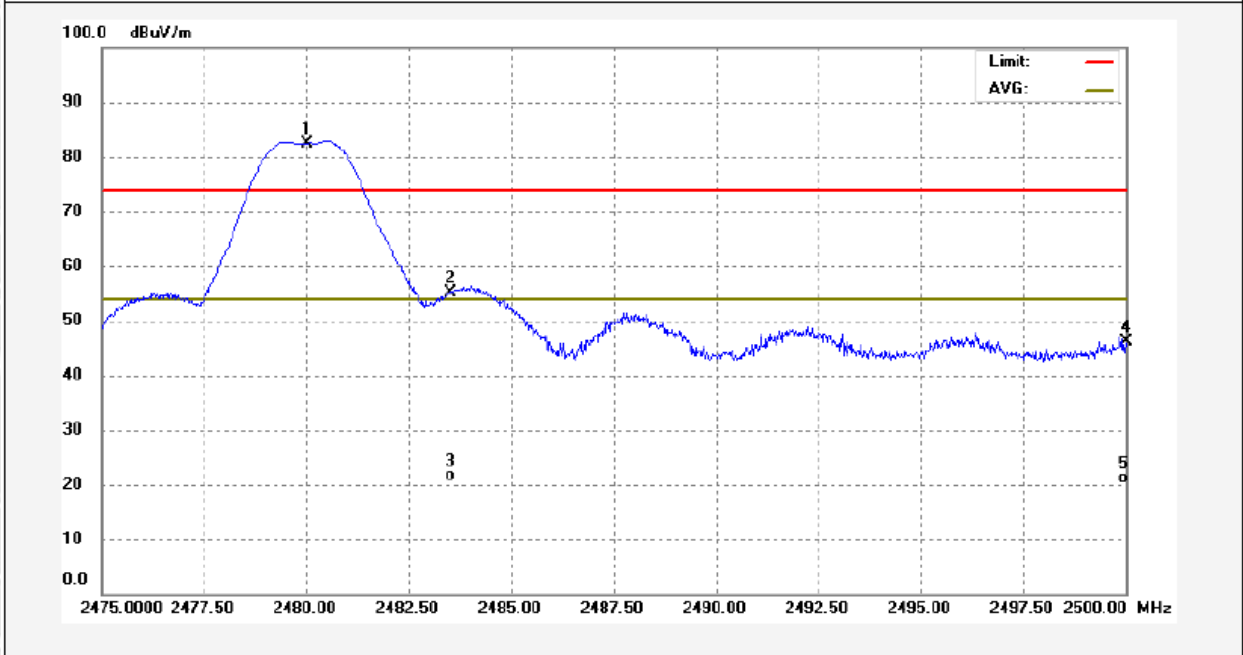


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.000	49.54	32.88	82.42	74.00	8.42	peak	
2	2483.500	22.24	32.89	55.13	74.00	-18.87	peak	
3	2483.500	-11.29	32.89	21.60	54.00	-32.40	AVG	
4	2500.000	13.24	32.96	46.20	74.00	-27.80	peak	
5	2500.000	-11.73	32.96	21.23	54.00	-32.77	AVG	




Conducted Test

BLE_Low Channel_1Mbps

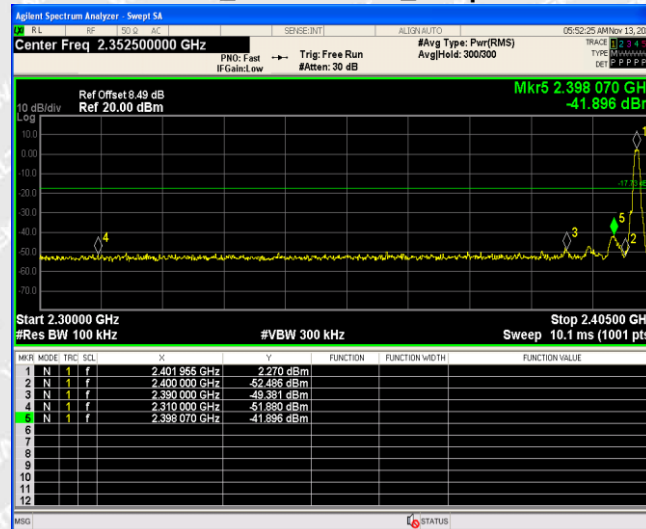


BLE_High Channel_1Mbps

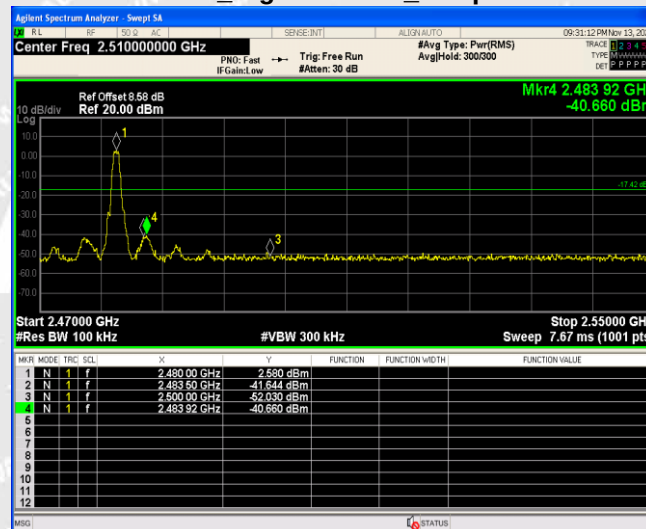




BLE_Low Channel_2Mbps

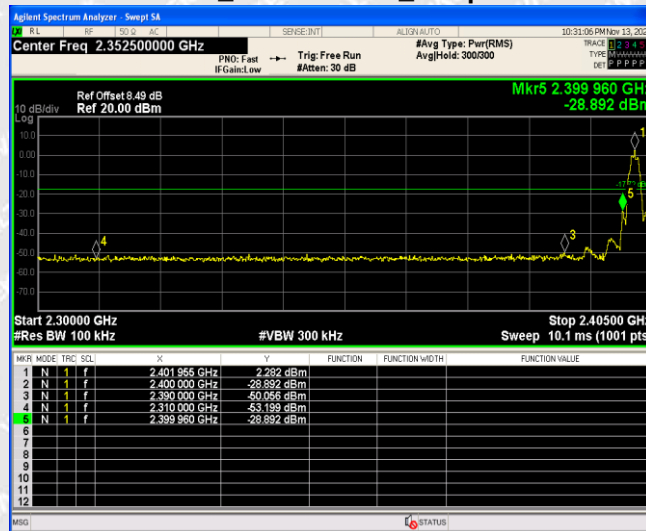

BLE_High Channel_2Mbps

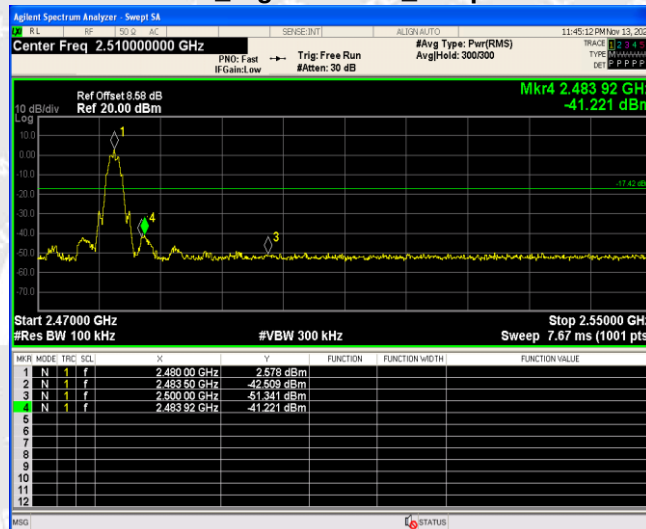



6.7 Conducted Emissions


6.7.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

6.7.2 Basic Test Setup Block Diagram

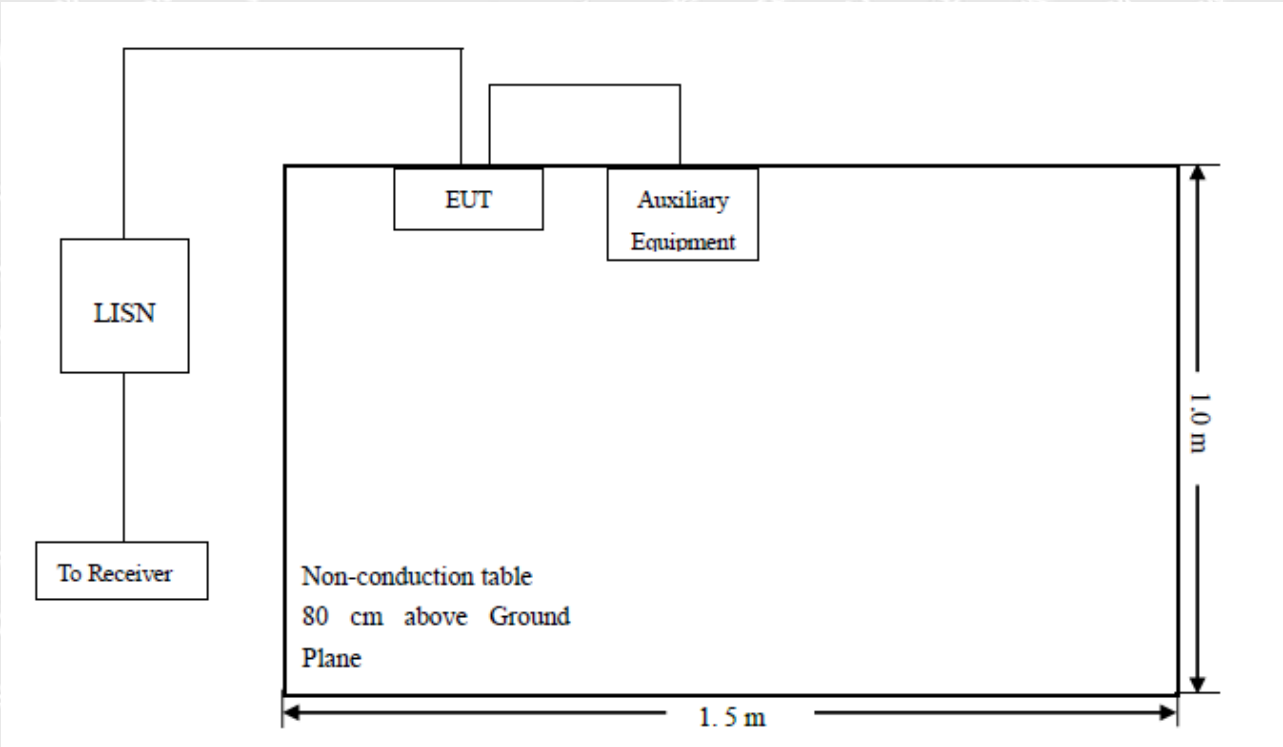

6.7.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal



6.7.4 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.7.5 Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF(Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Measurement} = \text{Reading Level} + \text{Correct Factor}$$

$$\text{Correct Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Measurement} - \text{Limit}$$

WALTEK



6.7.6 Test Result

Test Mode Communication mode (AC 120V/60Hz) Polarity Line

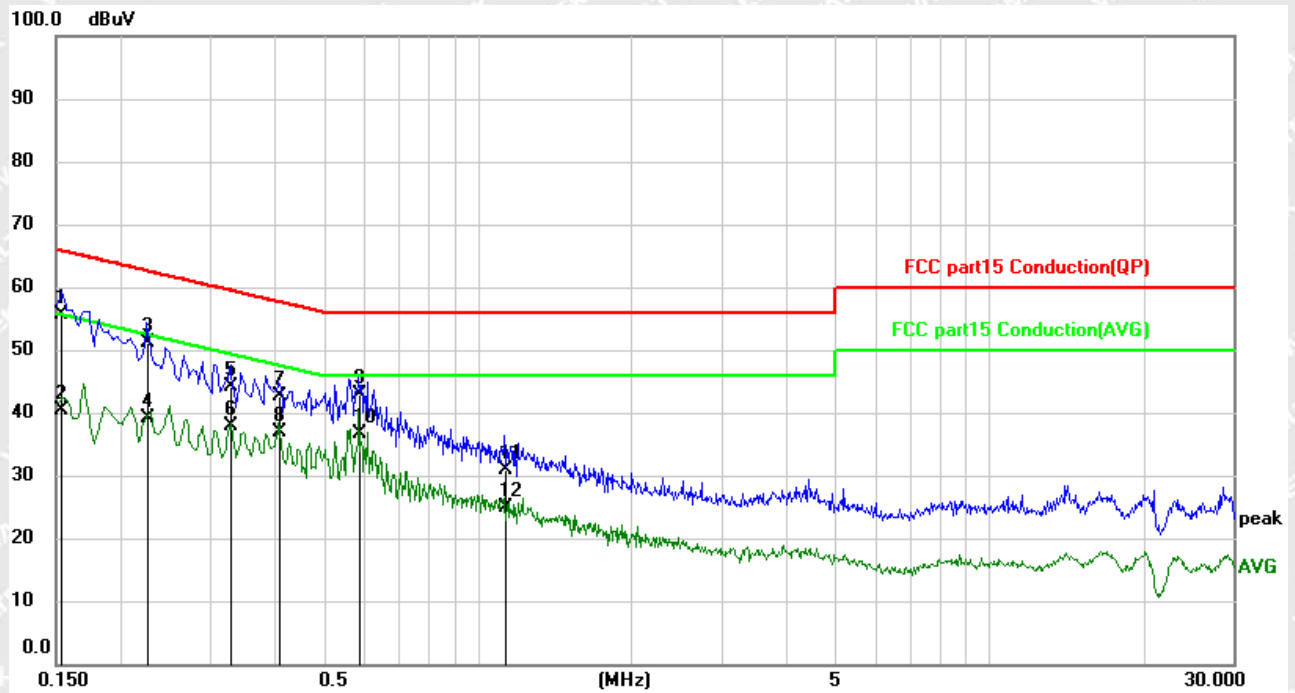


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1539	45.92	9.71	55.63	65.79	-10.16	QP	
2		0.1539	30.67	9.71	40.38	55.79	-15.41	AVG	
3		0.2260	41.29	9.73	51.02	62.60	-11.58	QP	
4		0.2260	29.52	9.73	39.25	52.60	-13.35	AVG	
5		0.3300	34.48	9.75	44.23	59.45	-15.22	QP	
6		0.3300	28.13	9.75	37.88	49.45	-11.57	AVG	
7		0.4100	32.80	9.76	42.56	57.65	-15.09	QP	
8		0.4100	27.10	9.76	36.86	47.65	-10.79	AVG	
9		0.5860	33.03	9.76	42.79	56.00	-13.21	QP	
10	*	0.5860	26.76	9.76	36.52	46.00	-9.48	AVG	
11		1.1300	21.09	9.78	30.87	56.00	-25.13	QP	
12		1.1300	15.02	9.78	24.80	46.00	-21.20	AVG	

**Test Mode**

Communication mode (AC 120V/60Hz)

Polarity

Neutral

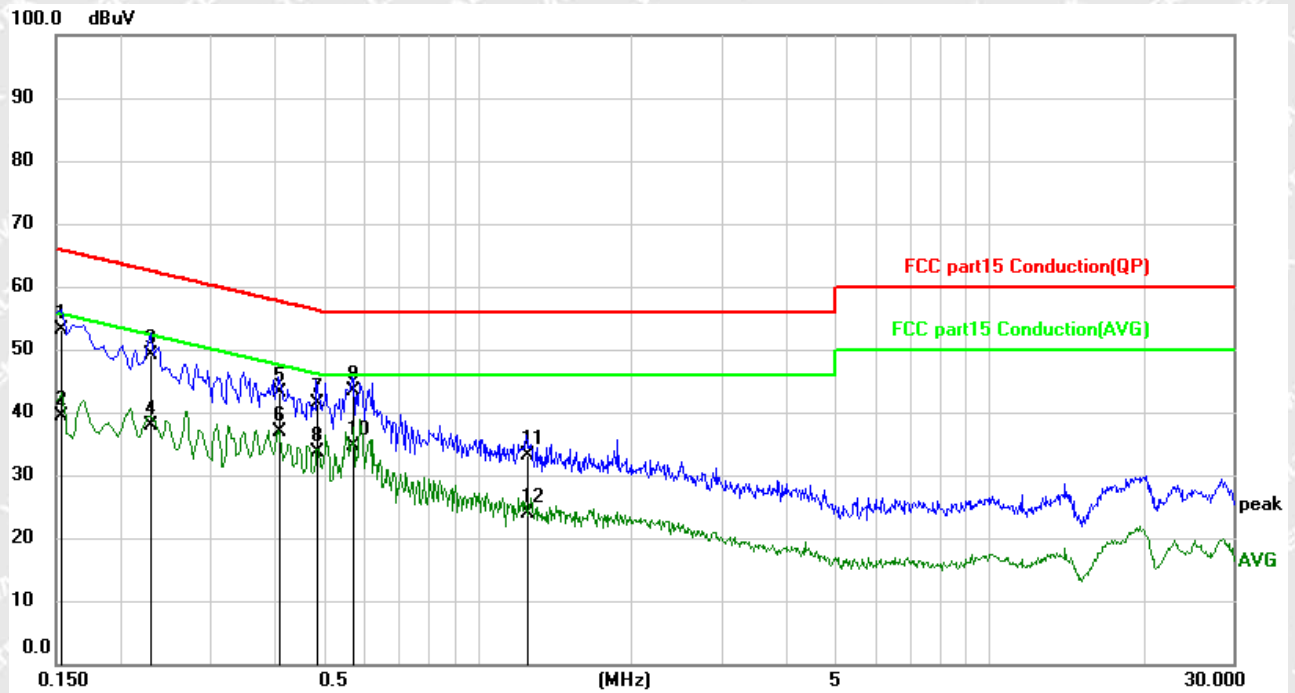

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1539	43.37	9.65	53.02	65.79	-12.77	QP	
2		0.1539	29.77	9.65	39.42	55.79	-16.37	AVG	
3		0.2300	39.58	9.67	49.25	62.45	-13.20	QP	
4		0.2300	28.33	9.67	38.00	52.45	-14.45	AVG	
5		0.4100	33.51	9.70	43.21	57.65	-14.44	QP	
6	*	0.4100	27.21	9.70	36.91	47.65	-10.74	AVG	
7		0.4860	31.61	9.71	41.32	56.24	-14.92	QP	
8		0.4860	23.92	9.71	33.63	46.24	-12.61	AVG	
9		0.5700	33.57	9.71	43.28	56.00	-12.72	QP	
10		0.5700	24.85	9.71	34.56	46.00	-11.44	AVG	
11		1.2460	23.38	9.74	33.12	56.00	-22.88	QP	
12		1.2460	14.26	9.74	24.00	46.00	-22.00	AVG	



7 Photographs Test Setup

7.1 Photographs - Radiated Emission Test Setup

30MHz-1GHz



Above 1GHz





7.2 Photographs – Conducted Emission Test Setup



WALTEK



8 Photographs – EUT Constructional Details

Please refer to “ANNEX”.

=====End of Report=====

WALTEK