



SAR Test Report

Report No.: STS2507172H01

Issued for

Duoping Technologies HK Limited

Unit 1003, 10/F., Tower 2, Silvercord 30 Canton Road, Tsim
Sha Tsui Kowloon, HONG KONG, China

Product Name: INAIR Pod

Brand Name: INAIR

Model Name: Sol-A02

Series Model(s): N/A

FCC ID: 2BMKZ-SOL-A02

Test Standard: ANSI/IEEE Std. C95.1
FCC 47 CFR Part 2 (2.1093)
IEEE Std. 1528-2013

Max. Report
SAR (1g) Body: 1.401 W/kg(1g)

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT CERTIFICATION**

Applicant's name : Duoping Technologies HK Limited
Address : Unit 1003, 10/F., Tower 2, Silvercord 30 Canton Road, Tsim Sha Tsui Kowloon, HONG KONG, China
Manufacturer's Name : Duoping Technologies HK Limited
Address : Unit 1003, 10/F., Tower 2, Silvercord 30 Canton Road, Tsim Sha Tsui Kowloon, HONG KONG, China

Product description

Product name : INAIR Pod
Brand name : INAIR
Model name : Sol-A02
Series Model(s) : N/A

Standards : ANSI/IEEE Std. C95.1
FCC 47 CFR Part 2 (2.1093)
IEEE Std. 1528-2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of Test

Date (s) of performance of tests..... : 06 Sep. 2025 ~ 08 Sep. 2025

Date of Issue..... : 10 Sep. 2025

Test Result..... : **Pass**

Testing Engineer :

Xin Liu

(Xin.Liu)

Technical Manager :

Shi fan-long

(Shifan. Long)

Authorized Signatory :

Bovey Yang

(Bovey Yang)





Table of Contents

1. General Information	5
1.1 EUT Description	5
1.2 Test Environment	6
1.3 Test Factory	6
2. Test Standards and Limits	7
3. SAR Measurement System	8
3.1 Definition of Specific Absorption Rate (SAR)	8
3.2 SAR System	8
4. Tissue Simulating Liquids	11
4.1 Simulating Liquids Parameter Check	11
5. SAR System Validation	14
5.1 Validation System	14
5.2 Validation Result	15
6. SAR Evaluation Procedures	16
7. EUT Antenna Location Sketch	17
7.1 SAR test exclusion consider table	18
8. EUT Test Position	21
8.1 Body-worn Position Conditions	21
9. Uncertainty	22
9.1 Measurement Uncertainty	22
10. Conducted Power Measurement	25
10.1 Test Result	25
11. EUT and Test Setup Photo	27
11.1 EUT Photo	27
11.2 Setup Photo	30
12. SAR Result Summary	34
12.1 Body SAR	34
13. Equipment List	36
Appendix A. System Validation Plots	37
Appendix B. SAR Test Plots	43
Appendix C. Probe Calibration and Dipole Calibration Report	69

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	10 Sep. 2025	STS2507172H01	ALL	Initial Issue



1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	INAIR Pod		
Brand Name	INAIR		
Model Name	Sol-A02		
Series Model	N/A		
Model Difference	N/A		
Battery	Rated Voltage: 3.85V Charge Limit Voltage: 4.4V Capacity: 5000mAh		
Device Category	Portable		
Product stage	Production unit		
RF Exposure Environment	General Population / Uncontrolled		
Hardware Version	N/A		
Software Version	N/A		
Frequency Range	2.4GHz WLAN IEEE 802.11b/g/n/ax(20MHz): 2412 MHz to 2462 MHz 2.4GHz WLAN IEEE 802.11n/ax(HT40): 2422 MHz to 2452 MHz 5.2GHz WLAN IEEE 802.11a/n/ac/ax(20MHz): 5180~5240MHz 5.2GHz WLAN IEEE 802.11n /ac/ax(40MHz):5190~5230MHz 5.2GHz WLAN IEEE 802.11ac/ax (80MHz):5210MHz 5.8GHz WLAN IEEE 802.11a/n/ac/ax (20MHz): 5745~5825MHz 5.8GHz WLAN IEEE 802.11n /ac/ax (40MHz):5755~5795MHz 5.8GHz WLAN IEEE 802.11ac/ax (80MHz):5775MHz Bluetooth: 2402 MHz to 2480 MHz		
Max. Reported SAR(1g): (Limit:1.6W/kg) Test distance: Body:0mm	Band	Mode	Body Worn (W/kg)
	DSS	BT	0.100
	DTS	2.4G WLAN ANT A	0.306
	DTS	2.4G WLAN ANT B	0.293
	DTS	2.4G WLAN ANT A+B	1.401
	NII	5.2G WLAN ANT A	0.552
	NII	5.2G WLAN ANT B	0.539
	NII	5.2G WLAN ANT A+B	1.060
	NII	5.8G WLAN ANT A	0.762
	NII	5.8G WLAN ANT B	0.441
	NII	5.8G WLAN ANT A+B	1.233
Limit			1.6W/kg
FCC Equipment Class	Digital Transmission System (DTS) Unlicensed National Information Infrastructure TX(NII) Part 15 Spread Spectrum Transmitter (DSS)		



Operating Mode:	2.4G WLAN : 802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11ax(OFDM, OFDMA): BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM 5G WLAN: 802.11a(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM):BPSK,QPSK,16-QAM,64-QAM,256-QAM 802.11ax(OFDM, OFDMA): BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM Bluetooth: GFSK + π /4DQPSK+8DPSK BLE: GFSK
Antenna Specification:	WLAN/BT: FPC Antenna
Hotspot Mode	Not Support
DTM Mode	Not Support
Note: 1. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power	

1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

ShenZhen STS Test Services Co.,Ltd.

101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration No.: 625569

IC Registration No.: 12108A

A2LA Certificate No.: 4338.01



2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	IEEE Std C95.1, 2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D04 v01	RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
10	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE

GENERAL POPULATION/UNCONTROLLED EXPOSURE

PARTIAL BODY LIMIT

1.6 W/kg

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

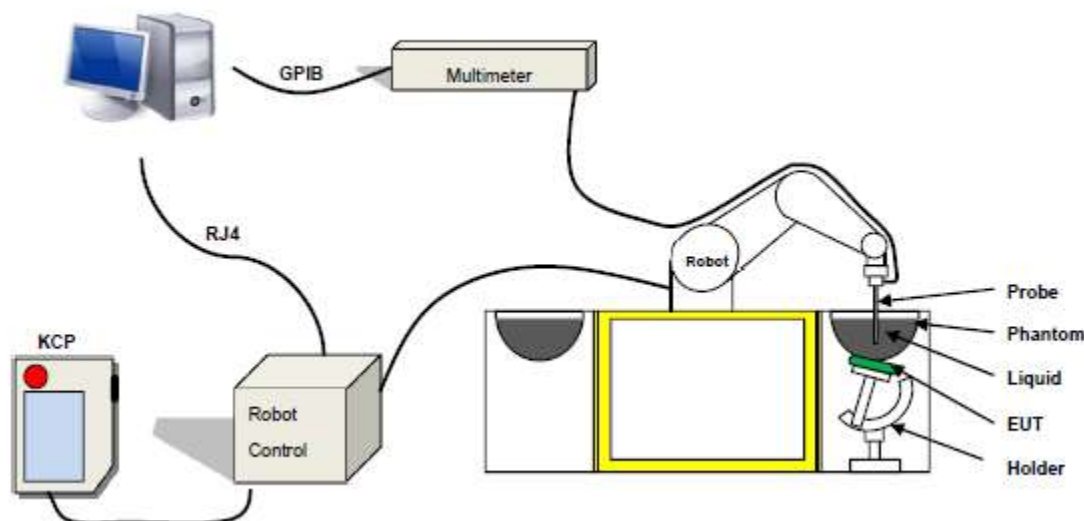
SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
 ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:



COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The Open SAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 08/21 EPGO352 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 150 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Dipole

3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

SN 32/14 SAM115



Figure-SN 21/21 ELLI48



3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

4. Tissue Simulating Liquids



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The uncertainty due to the liquid conductivity and permittivity arises from two different sources. The first source of error is the deviation of the liquid conductivity from its target value (max _ 5 %) and the second source of error arises from the measurement procedures used to assess conductivity. The uncertainty shall be assessed using a rectangular probability For 1 g averaging, the maximum weighting coefficient for SAR is 0,5.

IEEE SCC-34/SC-2 RECOMMENDED TISSUE DIELECTRIC PARAMETERS

The head and body tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table.

Frequency	ϵ_r	σ 10g S/m
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 to 2000	40.0	1.40
2100	39.8	1.49
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27



The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40			/		5.30	49.00
5800	78.50	21.40			0.1		6.00	48.20

**LIQUID MEASUREMENT RESULTS**

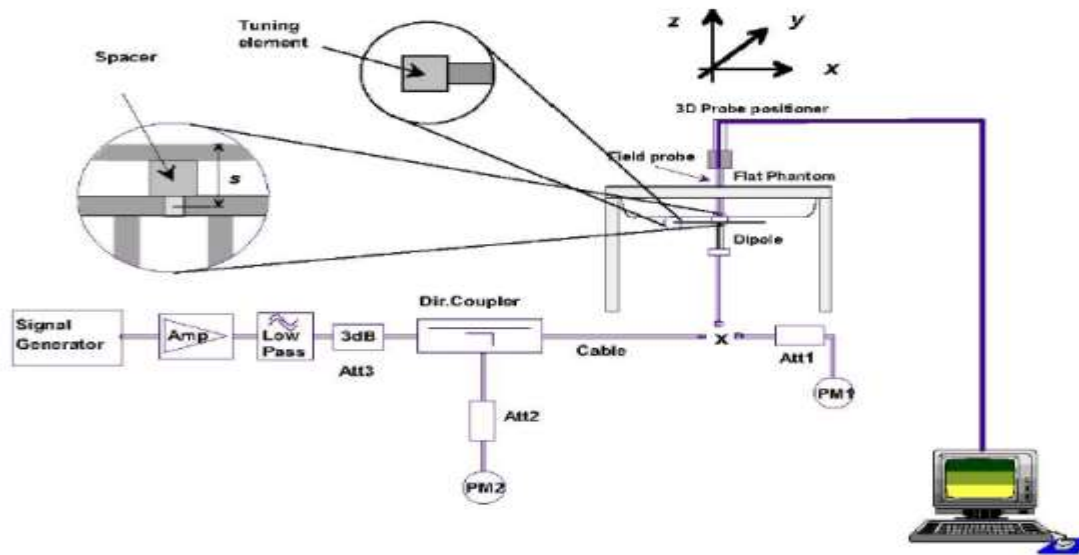
Date	Ambient		Simulating Liquid		Parameters	Target	Measured	Deviation %	Limited %
	Temp. [°C]	Humidity %	Frequency (MHz)	Temp. [°C]					
2025-09-06	22.1	52	2412	21.8	Permittivity	39.27	40.00	1.87	±10
					Conductivity	1.77	1.82	3.04	±10
2025-09-06	22.2	52	2441	21.9	Permittivity	39.22	39.60	0.98	±10
					Conductivity	1.79	1.83	2.12	±10
2025-09-06	22.3	52	2450	22.0	Permittivity	39.20	40.01	2.07	±10
					Conductivity	1.80	1.81	0.56	±10
2025-09-06	22.3	53	2462	22.0	Permittivity	39.18	39.66	1.23	±10
					Conductivity	1.81	1.82	0.52	±10
2025-09-08	20.5	44	5200	20.1	Permittivity	36.00	36.07	0.19	±10
					Conductivity	4.66	4.69	0.64	±10
2025-09-08	20.5	44	5240	20.1	Permittivity	35.96	36.41	1.25	±10
					Conductivity	4.70	4.68	-0.47	±10
2025-09-08	20.5	44	5745	20.2	Permittivity	35.36	35.48	0.35	±10
					Conductivity	5.21	5.18	-0.62	±10
2025-09-08	20.6	44	5775	20.3	Permittivity	35.33	36.14	2.31	±10
					Conductivity	5.24	5.25	0.12	±10
2025-09-08	20.7	44	5785	20.4	Permittivity	35.32	36.07	2.14	±10
					Conductivity	5.25	5.24	-0.27	±10
2025-09-08	20.6	44	5800	20.4	Permittivity	35.30	35.97	1.90	±10
					Conductivity	5.27	5.33	1.14	±10

5. SAR System Validation

5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.





5.2 Validation Result

Justification for Extended SAR Dipole Calibrations

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %.

Date	Frequency (MHz)	Power	SAR _{1g} (W/Kg)	SAR _{10g} (W/Kg)	Drift (%)	1W Target		Difference percentage		Limited %
						SAR _{1g} (W/Kg)	SAR _{10g} (W/Kg)	1g	10g	
2025-09-06	2450	100 mW	5.328	2.271	-1.19	54.70	24.11	-2.60%	-5.81%	10
		Normalize to 1 Watt	53.28	22.71						
2025-09-08	5200	10 mW	1.615	0.570	-0.78	163.88	57.29	-1.46%	-0.58%	10
		Normalize to 1 Watt	161.49	56.96						
2025-09-08	5800	10 mW	1.813	0.624	-0.47	188.95	63.45	-4.06%	-1.59%	10
		Normalize to 1 Watt	181.27	62.44						

Note:

- (1) We use a CW signal of 20dBm(2450MHz) and 10dBm(5000-6000MHz) for system check, and then all SAR values are normalized to 1W forward power. The result must be within $\pm 10\%$ of target value.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

➤ Area Scan& Zoom Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below. When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

7. EUT Antenna Location Sketch

It is a INAIR Pod, support WLAN mode.

Right side

Top side

Bottom side



Left Side



WLAN ANT A Antenna: BT/2.4/5.2/5.8G WIFI



WLAN ANT B Antenna: 2.4/5.2/5.8G WIFI

Antenna Separation Distance(cm)						
ANT	Back Side	Front Side	Left Side	Right Side	Top Side	Bottom Side
ANT A WLAN/BT	≤ 0.5	≤ 0.5	5	≤ 0.5	≤ 0.5	10
ANT B WLAN	≤ 0.5	≤ 0.5	≤ 0.5	5	≤ 0.5	10

Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



7.1 SAR test exclusion consider table

The WLAN SAR evaluation of Maximum power (dBm) summing tolerance.

Exposure Position	Wireless Interface	BT	2.4G WLAN ANT A	2.4G WLAN ANT B	5.2G WLAN ANT A	5.2G WLAN ANT B	5.8G WLAN ANT A	5.8G WLAN ANT B
	Calculated Frequency(GHz)	2.441	2.412	2.412	5.2	5.24	5.775	5.785
	Maximum Turn-up power (dBm)	5	19.5	21	13.5	13.5	13.5	13.5
	Maximum rated power(mW)	3.16	89.13	125.89	22.39	22.39	22.39	22.39
	Maximum rated power(mW)	3.16	89.13	125.89	22.39	22.39	22.39	22.39
Back Side	Separation distance (cm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	2.75	2.78	2.78	1.50	1.49	1.38	1.38
	Testing required?	YES	YES	YES	YES	YES	YES	YES
Front Side	Separation distance (cm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	2.75	2.78	2.78	1.50	1.49	1.38	1.38
	Testing required?	YES	YES	YES	YES	YES	YES	YES
Left Side	Separation distance (cm)	5	5	0.5	5	0.5	5	0.5
	exclusion threshold(mW)	219.28	220.07	2.78	174.63	1.49	169.20	1.38
	Testing required?	NO	NO	YES	NO	YES	NO	YES
Right Side	Separation distance (cm)	0.5	0.5	5	0.5	5	0.5	5
	exclusion threshold(mW)	2.75	2.78	220.07	1.50	174.23	1.38	169.12
	Testing required?	YES	YES	NO	YES	NO	YES	NO
Top Side	Separation distance (cm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	2.75	2.78	2.78	1.50	1.49	1.38	1.38
	Testing required?	YES	YES	YES	YES	YES	YES	YES
Bottom Side	Separation distance (cm)	10	10	10	10	10	10	10
	exclusion threshold(mW)	819.14	820.61	820.61	731.01	730.17	719.56	719.37
	Testing required?	NO	NO	NO	NO	NO	NO	NO

Note:

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. Per KDB 447498 D04, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. Per KDB 447498 D04, if the maximum time-averaged power available does not exceed 1 mW. This stand-alone SAR exemption test.



4. Per KDB 447498 D04, the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

5. Per KDB 447498 D04, An alternative to the SAR-based exemption is using below table and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in below table to apply, R must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

RF Source frequency (MHz)	Threshold ERP(watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2R^2$.



6. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8. for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode, thus the SAR can be excluded.
7. Per KDB 616217 D04, SAR evaluation for the front surface of tablet display screens are generally not necessary.
8. Per KDB 248227, as maximum rated power for U-NII-1 > U-NII-2A, U-NII-1 was chosen for SAR evaluation. Based on the measurements obtained, SAR measurements on U-NII-2A are not required as highest reported SAR from U-NII-1 band is $\leq 1.2\text{W/Kg}$.

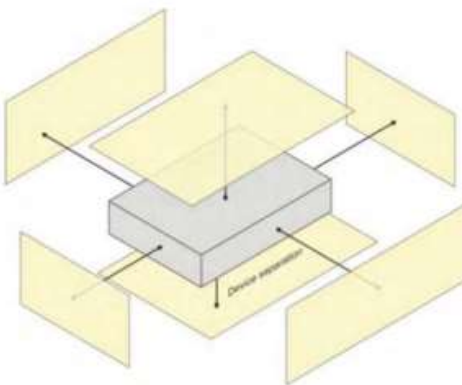
8. EUT Test Position

This EUT was tested in Back Side, Front Side, Left Side, Right Side, Top Side

8.1 Body-worn Position Conditions

Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D04 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported SAR* for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest *reported SAR* configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.





9. Uncertainty

9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

SATIMO Uncertainty- SN 08/21 EPG0352									
Measurement uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+ - %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+ %)	10g Ui (+ %)	vi
Measurement System									
Probe calibration	E.2.1	5.72	N	1.00	1.00	1.00	5.72	5.72	∞
Axial Isotropy	E.2.2	0.18	R	1.73	0.71	0.71	0.07	0.07	∞
Hemispherical Isotropy	E.2.2	1.04	R	1.73	0.71	0.71	0.42	0.42	∞
Boundary effect	E.2.3	0.80	R	1.73	1.00	1.00	0.46	0.46	∞
Linearity	E.2.4	1.25	R	1.73	1.00	1.00	0.72	0.72	∞
System detection limits	E.2.4	1.20	R	1.73	1.00	1.00	0.69	0.69	∞
Modulation response	E.2.5	3.42	R	1.73	1.00	1.00	1.97	1.97	∞
Readout Electronics	E.2.6	0.26	N	1.00	1.00	1.00	0.26	0.26	∞
Response Time	E.2.7	0.17	R	1.73	1.00	1.00	0.10	0.10	∞
Integration Time	E.2.8	1.43	R	1.73	1.00	1.00	0.83	0.83	∞
RF ambient conditions-Noise	E.6.1	3.51	R	1.73	1.00	1.00	2.03	2.03	∞
RF ambient conditions- reflections	E.6.1	3.15	R	1.73	1.00	1.00	1.82	1.82	∞
Probe positioner mechanical tolerance	E.6.2	1.20	R	1.73	1.00	1.00	0.69	0.69	∞
Probe positioning with respect to phantom shell	E.6.3	1.40	R	1.73	1.00	1.00	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.10	R	1.73	1.00	1.00	1.21	1.21	∞
Test sample Related									
Test sample positioning	E.4.2	3.10	N	1.00	1.00	1.00	3.10	3.10	∞
Device holder uncertainty	E.4.1	3.80	N	1.00	1.00	1.00	3.80	3.80	∞
Output power variation— SAR drift measurement	E.2.9	4.50	R	1.73	1.00	1.00	2.60	2.60	∞
SAR scaling	E.6.5	1.80	R	1.73	1.00	1.00	1.04	1.04	∞
Phantom and tissue parameters									
Phantom shell uncertainty— shape, thickness, and permittivity	E.3.1	3.70	R	1.73	1.00	1.00	2.14	2.14	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.90	N	1.00	1.00	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	2.40	R	1.73	0.78	0.71	1.08	0.98	M
Liquid permittivity measurement	E.3.3	4.10	N	1.00	0.78	0.71	3.20	2.91	M
Liquid conductivity— temperature uncertainty	E.3.4	2.70	R	1.73	0.23	0.26	0.36	0.41	∞
Liquid permittivity— temperature uncertainty	E.3.4	4.80	N	1.00	0.23	0.26	1.10	1.25	∞
Combined Standard Uncertainty			RSS				10.08	9.59	
Expanded Uncertainty (95% Confidence interval)			K=2				19.58	19.18	



SATIMO Uncertainty- SN 08/21 EPG0352									
System Validation uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration	E.2.1	5.72	N	1.00	1.00	1.00	5.72	5.72	∞
Axial Isotropy	E.2.2	0.18	R	1.73	1.00	1.00	0.10	0.10	∞
Hemispherical Isotropy	E.2.2	1.04	R	1.73	0.00	0.00	0.00	0.00	∞
Boundary effect	E.2.3	0.80	R	1.73	1.00	1.00	0.46	0.46	∞
Linearity	E.2.4	1.25	R	1.73	1.00	1.00	0.72	0.72	∞
System detection limits	E.2.4	1.20	R	1.73	1.00	1.00	0.69	0.69	∞
Modulation response	E.2.5	3.42	R	1.73	0.00	0.00	0.00	0.00	∞
Readout Electronics	E.2.6	0.26	N	1.00	1.00	1.00	0.26	0.26	∞
Response Time	E.2.7	0.17	R	1.73	0.00	0.00	0.00	0.00	∞
Integration Time	E.2.8	1.43	R	1.73	0.00	0.00	0.00	0.00	∞
RF ambient conditions-Noise	E.6.1	3.51	R	1.73	1.00	1.00	2.03	2.03	∞
RF ambient conditions-reflections	E.6.1	3.15	R	1.73	1.00	1.00	1.82	1.82	∞
Probe positioner mechanical tolerance	E.6.2	1.20	R	1.73	1.00	1.00	0.69	0.69	∞
Probe positioning with respect to phantom shell	E.6.3	1.40	R	1.73	1.00	1.00	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.10	R	1.73	1.00	1.00	1.21	1.21	∞
System validation source									
Deviation of experimental dipole from numerical dipole	E.6.4	4.80	N	1.00	1.00	1.00	4.80	4.80	∞
Input power and SAR drift measurement	8,6.6.4	5.10	R	1.73	1.00	1.00	2.94	2.94	∞
Dipole axis to liquid distance	8,E.6.6	2.40	R	1.73	1.00	1.00	1.39	1.39	∞
Phantom and set-up									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	3.70	R	1.73	1.00	1.00	2.14	2.14	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.90	N	1.00	1.00	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	E.3.3	2.40	R	1.73	0.78	0.71	1.08	0.98	∞
Liquid conductivity (measured)	E.3.3	4.10	N	1.00	0.78	0.71	3.20	2.91	M
Liquid permittivity (temperature uncertainty)	E.3.4	2.70	R	1.73	0.23	0.26	0.36	0.41	∞
Liquid permittivity (measured)	E.3.4	4.80	N	1.00	0.23	0.26	1.10	1.25	M
Combined Standard Uncertainty			RSS				9.72	9.52	
Expanded Uncertainty (95% Confidence interval)			K=2				19.44	19.03	



SATIMO Uncertainty- SN 08/21 EPG0352									
• System Check uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+ - %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+- %)	10g Ui (+-%)	vi
Measurement System									
Probe calibration drift	E.2.1.3	5.72	N	1.00	1.00	1.00	5.72	5.72	∞
Axial Isotropy	E.2.2	0.18	R	1.73	0.00	0.00	0.00	0.00	∞
Hemispherical Isotropy	E.2.2	1.04	R	1.73	0.00	0.00	0.00	0.00	∞
Boundary effect	E.2.3	0.8	R	1.73	0.00	0.00	0.00	0.00	∞
Linearity	E.2.4	1.25	R	1.73	0.00	0.00	0.00	0.00	∞
System detection limits	E.2.4	1.20	R	1.73	0.00	0.00	0.00	0.00	∞
Modulation response	E.2.5	3.42	R	1.73	0.00	0.00	0.00	0.00	∞
Readout Electronics	E.2.6	0.26	N	1.00	0.00	0.00	0.00	0.00	∞
Response Time	E.2.7	0.17	R	1.73	0.00	0.00	0.00	0.00	∞
Integration Time	E.2.8	1.43	R	1.73	0.00	0.00	0.00	0.00	∞
RF ambient conditions- Noise	E.6.1	3.51	R	1.73	0.00	0.00	0.00	0.00	∞
RF ambient conditions- reflections	E.6.1	3.15	R	1.73	0.00	0.00	0.00	0.00	∞
Probe positioner mechanical tolerance	E.6.2	1.2	R	1.73	1.00	1.00	0.69	0.69	∞
Probe positioning with respect to phantom shell	E.6.3	1.4	R	1.73	1.00	1.00	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	3.9	R	1.73	0.00	0.00	0.00	0.00	∞
System check source (dipole)									
Deviation of experimental dipoles	E.6.4	4.8	N	1.00	1.00	1.00	4.80	4.80	∞
Input power and SAR drift measurement	8,6.6.4	5.1	R	1.73	1.00	1.00	2.94	2.94	∞
Dipole axis to liquid distance	8,E.6.6	2.4	R	1.73	1.00	1.00	1.39	1.39	∞
Phantom and tissue parameters									
Phantom shell uncertainty— shape, thickness, and permittivity	E.3.1	3.7	R	1.73	1.00	1.00	2.14	2.14	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1.00	1.00	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	2.4	R	1.73	0.78	0.71	1.08	0.98	∞
Liquid permittivity measurement	E.3.3	4.1	N	1.00	0.78	0.71	3.20	2.91	M
Liquid conductivity— temperature uncertainty	E.3.4	2.7	R	1.73	0.23	0.26	0.36	0.41	∞
Liquid permittivity— temperature uncertainty	E.3.4	4.8	N	1.00	0.23	0.26	1.10	1.25	M
Combined Standard Uncertainty			RSS				5.56	5.20	
Expanded Uncertainty (95% Confidence interval)			K=2				11.12	10.41	



10. Conducted Power Measurement

10.1 Test Result

BT

BT				
Mode	Channel Number	Frequency (MHz)	Peak Output Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	3.864	2.43
	39	2441	3.856	2.43
	78	2480	3.942	2.48
$\pi/4$ -QPSK(2Mbps)	0	2402	4.123	2.58
	39	2441	4.228	2.65
	78	2480	4.150	2.60
8DPSK(3Mbps)	0	2402	4.401	2.75
	39	2441	4.583	2.87
	78	2480	4.350	2.72

BLE

BLE				
Mode	Channel Number	Frequency (MHz)	Peak Output Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	-4.024	0.40
	19	2440	-4.136	0.39
	39	2480	-4.435	0.36

2.4G WLAN

2.4GWIFI					
Mode	Channel Number	Frequency (MHz)	Peak Output Power (dBm) ANT A	Peak Output Power (dBm) ANT B	Peak Output Power (dBm) ANT A+B
802.11b	1	2412	16.584	17.398	N/A
	7	2437	16.012	17.464	N/A
	11	2462	16.255	17.613	N/A
802.11g	1	2412	18.852	20.124	N/A
	7	2437	18.369	19.802	N/A
	11	2462	18.764	19.932	N/A
802.11 n-HT20	1	2412	18.000	19.052	21.568
	7	2437	17.343	18.815	21.151
	11	2462	17.885	19.071	21.529
802.11 n-HT40	3	2422	17.480	18.798	21.199
	6	2437	17.241	18.614	20.992
	9	2452	17.257	18.514	20.941
802.11ax-HE20	1	2412	19.397	20.642	23.074
	7	2437	18.646	20.136	22.465
	11	2462	18.972	20.454	22.786
802.11ax-HE40	3	2422	18.882	20.591	22.830
	6	2437	18.613	20.220	22.501
	9	2452	18.553	20.192	22.460

**5.2G WLAN**

5.2GWIFI					
Mode	Channel Number	Frequency (MHz)	Total power (dBm) ANT A	Total power (dBm) ANT B	Total power (dBm) ANT A+B
802.11a	36	5180	13.315	13.393	N/A
	40	5200	13.406	13.434	N/A
	48	5240	13.405	13.480	N/A
802.11 n-HT20	36	5180	12.357	12.627	15.504
	40	5200	12.579	12.490	15.545
	48	5240	12.489	12.517	15.513
802.11 n-HT40	38	5190	12.506	11.435	15.014
	46	5230	12.428	11.374	14.943
802.11ac-VHT20	36	5180	13.380	13.068	16.237
	40	5200	13.497	13.167	16.345
	48	5240	13.326	12.708	16.038
802.11ac-VHT40	38	5190	12.284	11.872	15.093
	46	5230	12.292	11.758	15.044
802.11ac-VHT80	42	5210	12.040	11.579	14.621
802.11ax-HE20	36	5180	13.101	12.870	15.997
	40	5200	13.150	12.960	16.066
	48	5240	13.138	12.904	16.033
802.11ax-HE40	38	5190	12.137	11.058	14.641
	46	5230	12.371	11.901	15.153
802.11ax-HE80	42	5210	11.857	11.556	14.719

5.8G WLAN

5.8G WLAN					
Mode	Channel Number	Frequency (MHz)	Total power (dBm) ANT A	Total power (dBm) ANT B	Total power (dBm) ANT A+B
802.11a	149	5745	13.382	13.000	N/A
	157	5785	13.421	13.150	N/A
	165	5825	13.348	13.080	N/A
802.11 n-HT20	149	5745	13.180	12.703	15.958
	157	5785	13.394	12.388	15.930
	165	5825	13.294	12.519	15.934
802.11 n-HT40	151	5755	12.353	11.514	14.964
	159	5795	12.276	11.962	15.132
802.11ac-VHT20	149	5745	13.244	12.909	16.090
	157	5785	13.336	12.795	16.084
	165	5825	13.136	12.978	16.068
802.11ac-VHT40	151	5755	12.319	11.501	14.940
	159	5795	12.221	11.868	15.058
802.11ac-VHT80	155	5775	12.757	11.453	15.164
802.11ax-HE20	149	5745	13.137	12.504	15.842
	157	5785	13.160	12.682	15.938
	165	5825	13.100	12.535	15.837
802.11ax-HE40	151	5755	12.600	11.151	14.946
	159	5795	12.496	11.442	15.011
802.11ax-HE80	155	5775	12.488	11.976	15.250

11. EUT and Test Setup Photo

11.1 EUT Photo

Front side



Back side





Top side



Bottom side



Left side



Right side





11.2 Setup Photo

Front side(separation distance is 0mm)



Back Side (separation distance is 0mm)





Left side(separation distance is 0mm)



Right Side (separation distance is 0mm)



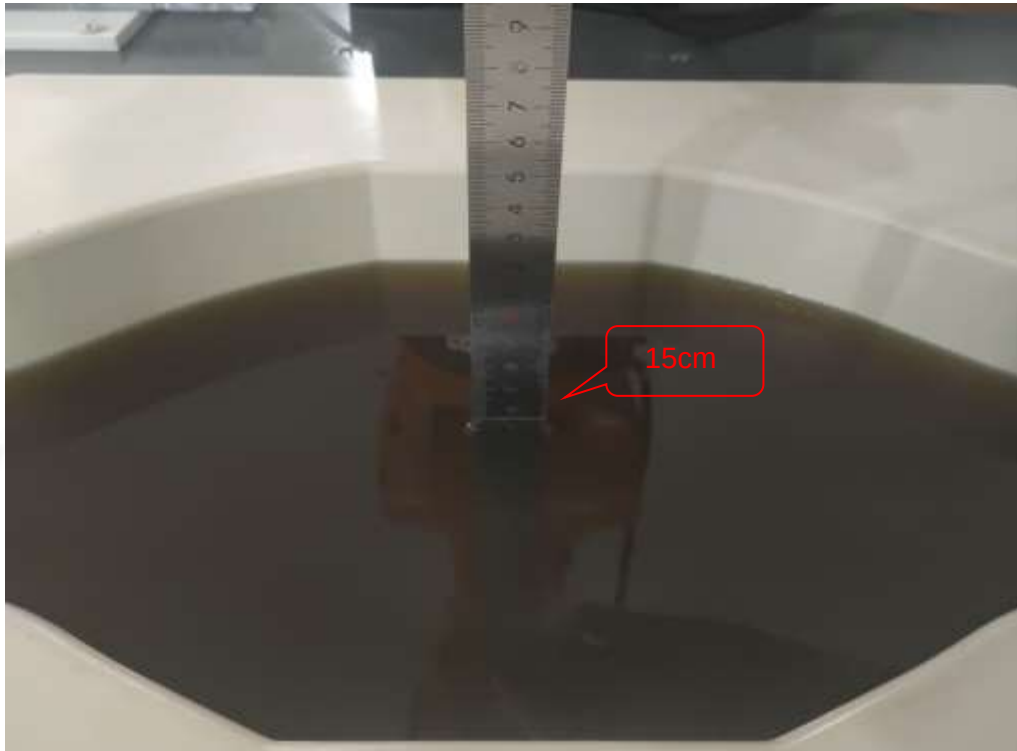


Top side(separation distance is 0mm)





Liquid depth (15 cm)





12. SAR Result Summary

12.1 Body SAR

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaling Factor	Scaled SAR (W/Kg)	Meas. No.
BT	8DPSK(3Mbps)	Front Side	2441	0.085	-2.45	5.00	4.583	1.101	0.094	/
		Back Side	2441	0.091	2.97	5.00	4.583	1.101	0.100	1
		Right Side	2441	0.076	-2.10	5.00	4.583	1.101	0.084	/
		Top Side	2441	0.052	-3.16	5.00	4.583	1.101	0.057	/
2.4GHz WLAN ANT A	802.11b	Front Side	2412	0.266	-3.88	17.00	16.584	1.101	0.293	/
		Back Side	2412	0.278	-2.85	17.00	16.584	1.101	0.306	2
		Right Side	2412	0.210	-3.01	17.00	16.584	1.101	0.231	/
		Top Side	2412	0.152	0.09	17.00	16.584	1.101	0.167	/
2.4GHz WLAN ANT B	802.11b	Front Side	2462	0.201	3.52	18.00	17.613	1.093	0.220	/
		Back Side	2462	0.268	1.89	18.00	17.613	1.093	0.293	3
		Left Side	2462	0.136	-1.17	18.00	17.613	1.093	0.149	/
		Top Side	2462	0.152	-1.93	18.00	17.613	1.093	0.166	/
2.4GHz WLAN MIMO ANT A	802.11a x-HE20	Front Side	2412	0.569	2.95	19.50	19.397	1.024	0.583	/
		Back Side	2412	0.662	3.69	19.50	19.397	1.024	0.678	4
		Left Side	2412	0.458	-0.37	19.50	19.397	1.024	0.469	/
		Right Side	2412	0.411	1.40	19.50	19.397	1.024	0.421	/
		Top Side	2412	0.369	-3.33	19.50	19.397	1.024	0.378	/
2.4GHz WLAN MIMO ANT B	802.11a x-HE20	Front Side	2412	0.517	-0.95	21.00	20.642	1.086	0.561	/
		Back Side	2412	0.666	-0.28	21.00	20.642	1.086	0.723	5
		Left Side	2412	0.445	0.78	21.00	20.642	1.086	0.483	/
		Right Side	2412	0.102	-1.56	21.00	20.642	1.086	0.111	/
		Top Side	2412	0.526	1.04	21.00	20.642	1.086	0.571	/
5.2GHz WLAN ANT A	802.11a c- VHT20	Front Side	5200	0.352	-0.46	13.50	13.497	1.001	0.352	/
		Back Side	5200	0.552	0.89	13.50	13.497	1.001	0.552	6
		Right Side	5200	0.469	1.76	13.50	13.497	1.001	0.469	/
		Top Side	5200	0.332	-3.45	13.50	13.497	1.001	0.332	/
5.2GHz WLAN ANT B	802.11a	Front Side	5240	0.415	3.28	13.50	13.480	1.005	0.417	/
		Back Side	5240	0.537	-0.52	13.50	13.480	1.005	0.539	7
		Left Side	5240	0.320	2.31	13.50	13.480	1.005	0.321	/
		Top Side	5240	0.352	-3.25	13.50	13.480	1.005	0.354	/
5.2GHz WLAN MIMO ANT A	802.11a c- VHT20	Front Side	5200	0.301	2.04	13.50	13.497	1.001	0.301	/
		Back Side	5200	0.448	-1.14	13.50	13.497	1.001	0.448	8
		Right Side	5200	0.369	2.06	13.50	13.497	1.001	0.369	/
		Top Side	5200	0.331	1.60	13.50	13.497	1.001	0.331	/
5.2GHz WLAN MIMO ANT B	802.11a c- VHT20	Front Side	5200	0.405	3.32	13.50	13.167	1.080	0.437	/
		Back Side	5200	0.567	-2.55	13.50	13.167	1.080	0.612	9
		Left Side	5200	0.415	-3.63	13.50	13.167	1.080	0.448	/
		Top Side	5200	0.432	-0.89	13.50	13.167	1.080	0.466	/



Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaling Factor	Scaled SAR (W/Kg)	Meas. No.
5.8GHz WLAN ANT A	802.11a	Front Side	5785	0.652	-0.50	13.50	13.421	1.018	0.664	/
		Back Side	5785	0.748	-2.63	13.50	13.421	1.018	0.762	10
		Right Side	5785	0.633	0.75	13.50	13.421	1.018	0.645	/
		Top Side	5785	0.598	-0.13	13.50	13.421	1.018	0.609	/
5.8GHz WLAN ANT B	802.11a	Front Side	5785	0.306	0.88	13.50	13.150	1.084	0.332	/
		Back Side	5785	0.407	0.12	13.50	13.150	1.084	0.441	11
		Left Side	5785	0.332	2.41	13.50	13.150	1.084	0.360	/
		Top Side	5785	0.289	1.51	13.50	13.150	1.084	0.313	/
5.8GHz WLAN MIMO ANT A	802.11a c- VHT20	Front Side	5745	0.458	1.74	13.50	13.244	1.061	0.486	/
		Back Side	5745	0.608	-2.73	13.50	13.244	1.061	0.645	12
		Right Side	5745	0.502	-1.79	13.50	13.244	1.061	0.532	/
		Top Side	5745	0.336	-2.02	13.50	13.244	1.061	0.356	/
5.8GHz WLAN MIMO ANT B	802.11a c- VHT20	Front Side	5745	0.463	-3.05	13.00	12.909	1.021	0.473	/
		Back Side	5745	0.576	1.98	13.00	12.909	1.021	0.588	13
		Left Side	5745	0.360	0.18	13.00	12.909	1.021	0.368	/
		Top Side	5745	0.396	-2.18	13.00	12.909	1.021	0.404	/

Band	ANT	Max SAR	2.4G WLAN_ANT_A+B
		(W/Kg)	
2.4G WLAN_ANT_A+B	ANT-A	0.678	1.401
	ANT-B	0.723	
Band	ANT	Max SAR	5.2G WLAN_ANT_A+B
		(W/Kg)	
5.2G WLAN_ANT_A+B	ANT-A	0.448	1.060
	ANT-B	0.612	
Band	ANT	Max SAR	5.8G WLAN_ANT_A+B
		(W/Kg)	
5.8G WLAN_ANT_A+B	ANT-A	0.645	1.233
	ANT-B	0.588	

Note:

- The test separation of all above table is 0mm.
- Per KDB 447498 D04, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.585** W/Kg for ANT A)
- Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.589** W/Kg for ANT B)
- Per KDB 865664 D01, Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg
- Bluetooth (BT) and Wi-Fi cannot transmit simultaneously.
- 2.4GHz WiFi and 5GHz WiFi cannot transmit simultaneously.



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
2450MHzDipole	MVG	SID2450	SN 30/14 DIP2G450-335	2023.07.04	2026.07.03
Waveguide	MVG	SWG5500	SN 13/14 WGA32	2023.07.04	2026.07.03
E-Field Probe	MVG	SSE2	SN 08/21 EPGO352	2024.09.18	2025.09.17
Dielectric Probe Kit	MVG	SCLMP	SN 32/14 OCPG67	2024.09.18	2025.09.17
Antenna	MVG	ANTA3	SN 07/13 ZNTA52	N/A	N/A
Phantom1	MVG	SAM	SN 32/14 SAM115	N/A	N/A
Phantom3	MVG	SAM	SN 21/21 ELLI48	N/A	N/A
Phone holder	MVG	N/A	SN 32/14 MSH97	N/A	N/A
Laptop holder	MVG	N/A	SN 32/14 LSH29	N/A	N/A
Attenuator	Agilent	HXT-10-8-SMA	240327017	2025-02-22	2026-02-21
Directional coupler	Xi'an Xingbo	XBOH-OA08- 20dB	211123-4-3	2025-02-22	2026-02-21
Network Analyzer	Agilent	E5071C	MY46520378	2024-09-25	2025-09-26
Multi Meter	Keithley	Multi Meter 2000	4050073	2024-09-25	2025-09-26
Signal Generator	Agilent	N5182A	MY50140530	2024-09-25	2025-09-26
Wireless Communication Test Set	Agilent	8960-E5515C	MY48360751	2025-02-22	2026-02-21
Wireless Communication Test Set	R&S	CMW500	156324	2024-09-25	2025-09-26
Power Amplifier	DESAY	ZHL-42W	9638	2024-09-25	2025-09-26
Power Meter	R&S	NRP	100510	2024-09-25	2025-09-26
Power Sensor	R&S	NRP-Z11	101919	2024-09-25	2025-09-26
Power Sensor	Keysight	U2021XA	MY56280002	2024-09-25	2025-09-26
Temperature hygrometer	SuWei	SW-108	N/A	2024.10.15	2025.10.14
Thermograph	Elitech	RC-4	S/N EF7176501537	2024.10.15	2025.10.14



Appendix A. System Validation Plots

System Performance Check Data (2450MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2025-09-06

Experimental conditions.

Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity	40.01
Conductivity (S/m)	1.81
Probe	SN 08/21 EPGO352
ConvF	1.80
Crest factor:	1:1


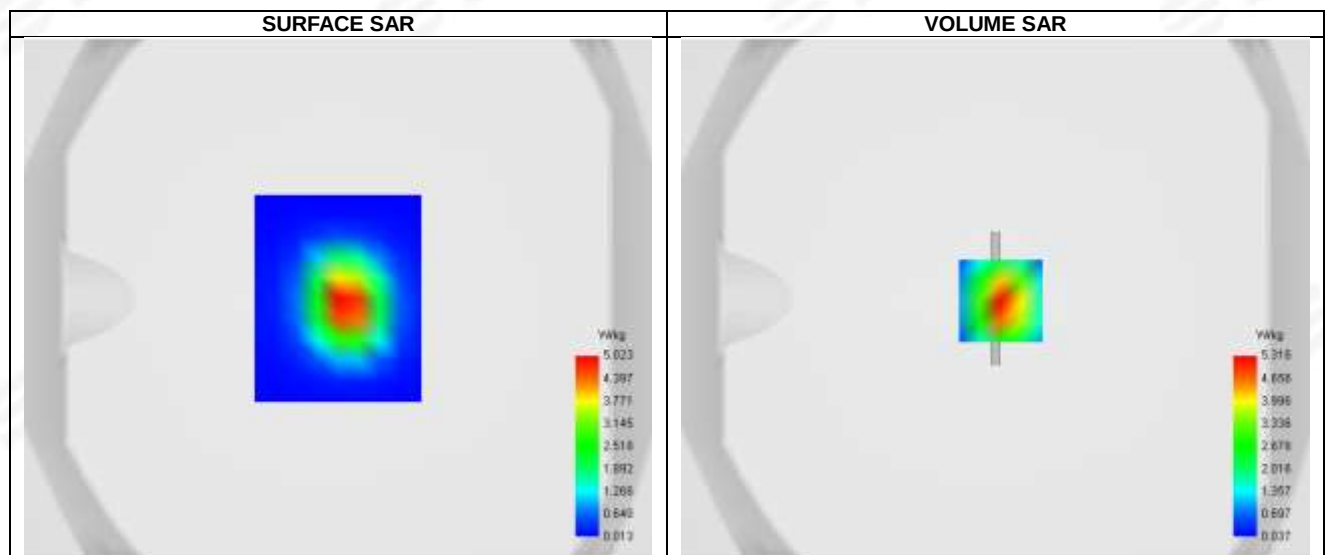


D. SAR 1g & 10g

SAR 10g (W/Kg)	2.271
SAR 1g (W/Kg)	5.328
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	51.600524

**E. Z Axis Scan**

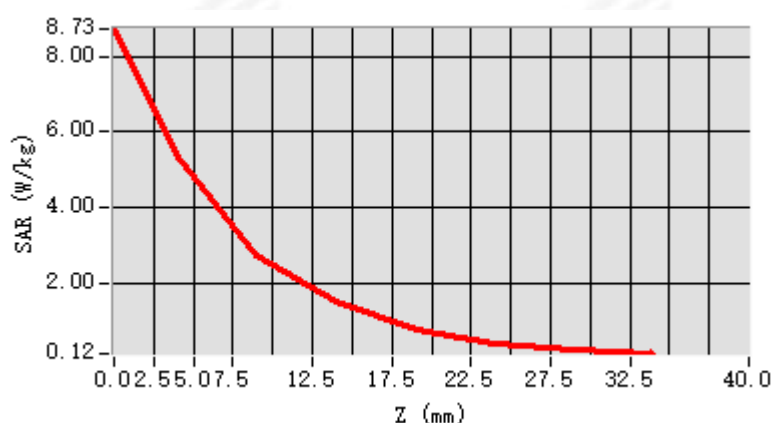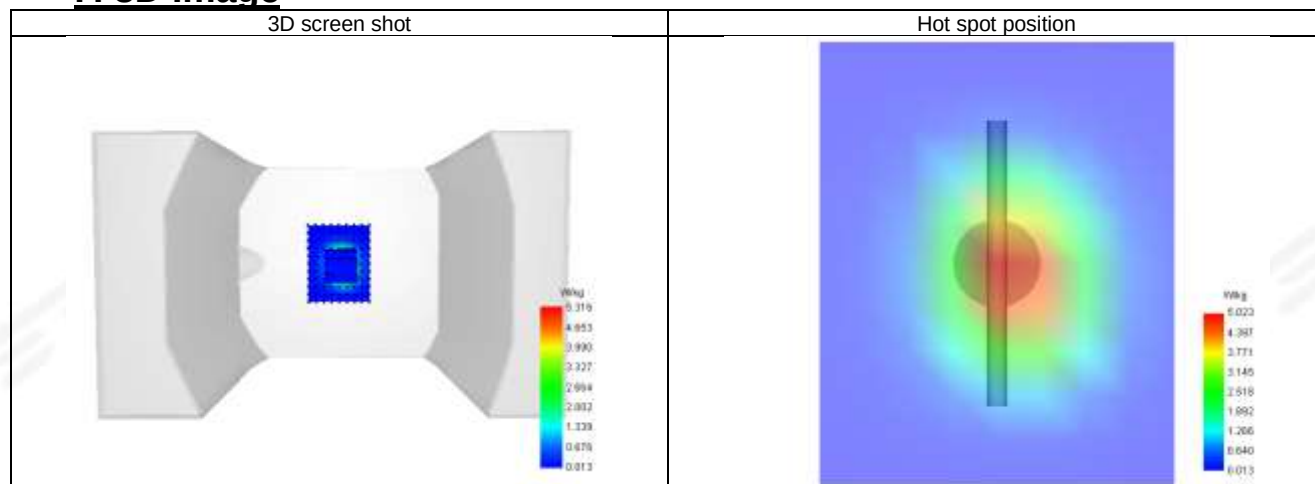Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	8.735	5.316	2.743	1.480	0.784	0.415	0.220

**F. 3D Image**

**System Performance Check Data (5200MHz)**

Type: Dipole measurement (Complete)

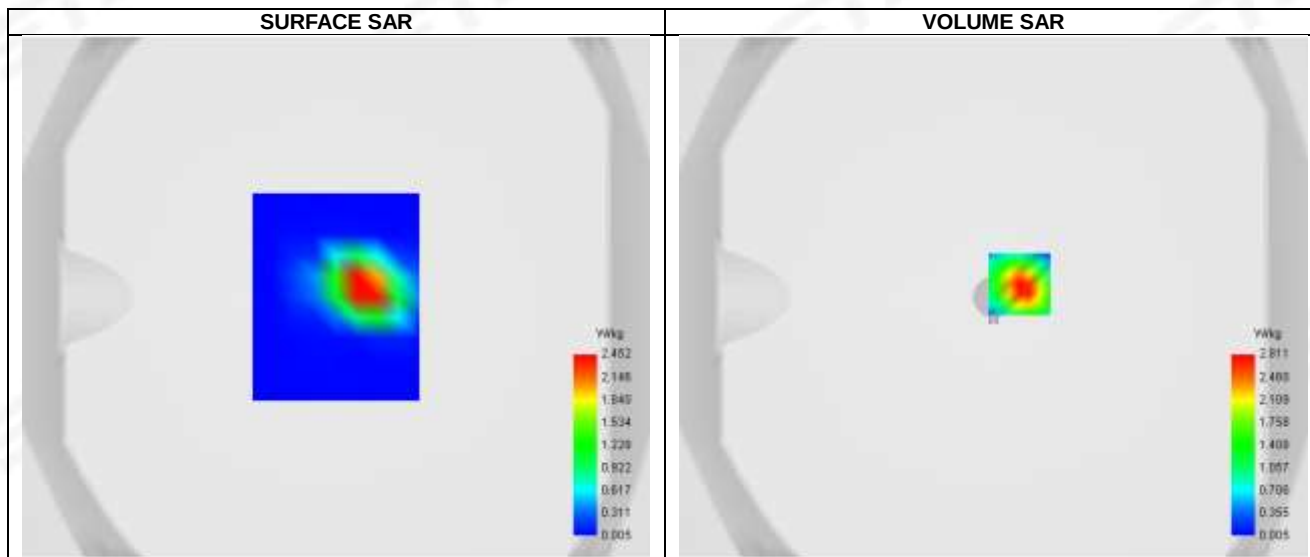
Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2025-09-08

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	5200MHz
Channels	Middle
Signal	CW
Frequency (MHz)	5200
Relative permittivity	36.07
Conductivity (S/m)	4.69
Probe	SN 08/21 EPGO352
ConvF	1.33
Crest factor:	1:1





Maximum location: X=10.00, Y=5.00 ; SAR Peak: 4.74 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.570
SAR 1g (W/Kg)	1.615
Horizontal validation criteria: minimum distance (mm)	8.944272
Vertical validation criteria: SAR ratio M2/M1 (%)	56.629874

**E. Z Axis Scan**

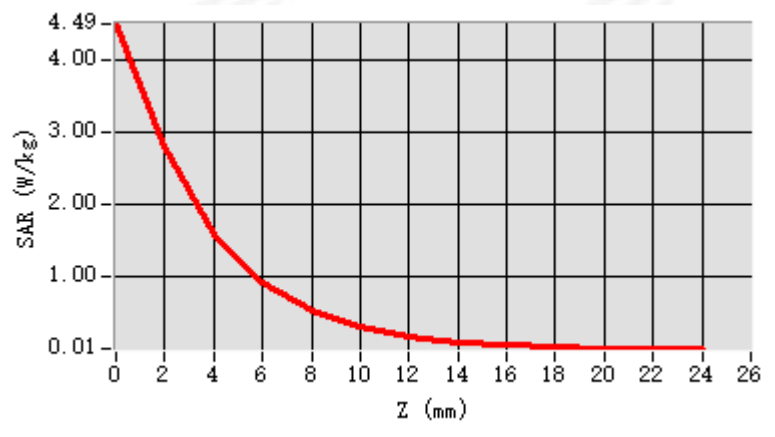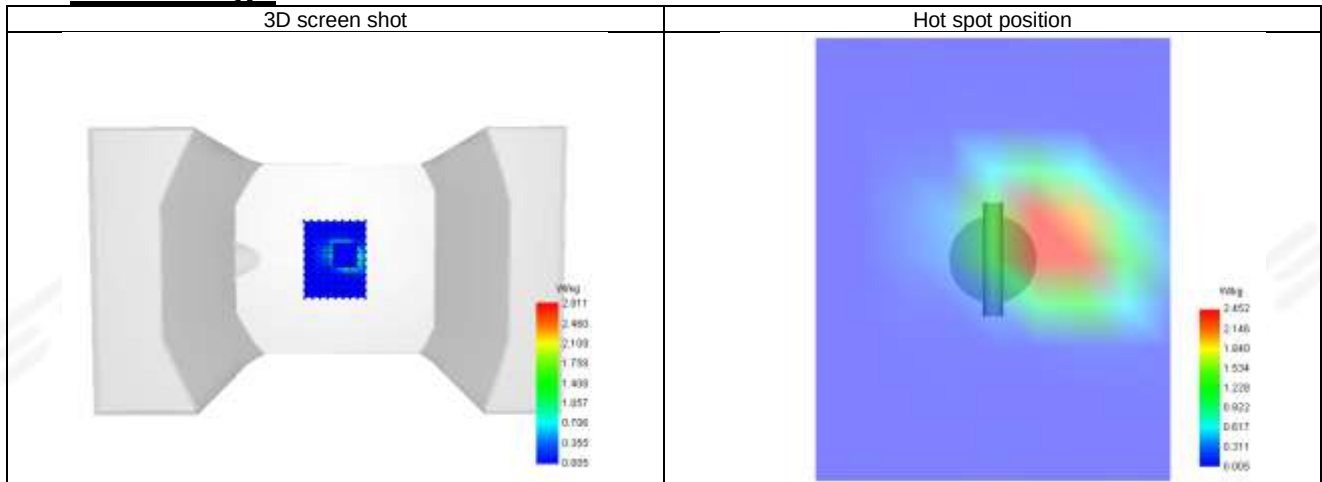Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	4.490	2.811	1.592	0.915	0.541	0.314	0.182	0.105	0.061	0.035	0.021	0.012

**F. 3D Image**

**System Performance Check Data (5800MHz)**

Type: Dipole measurement (Complete)

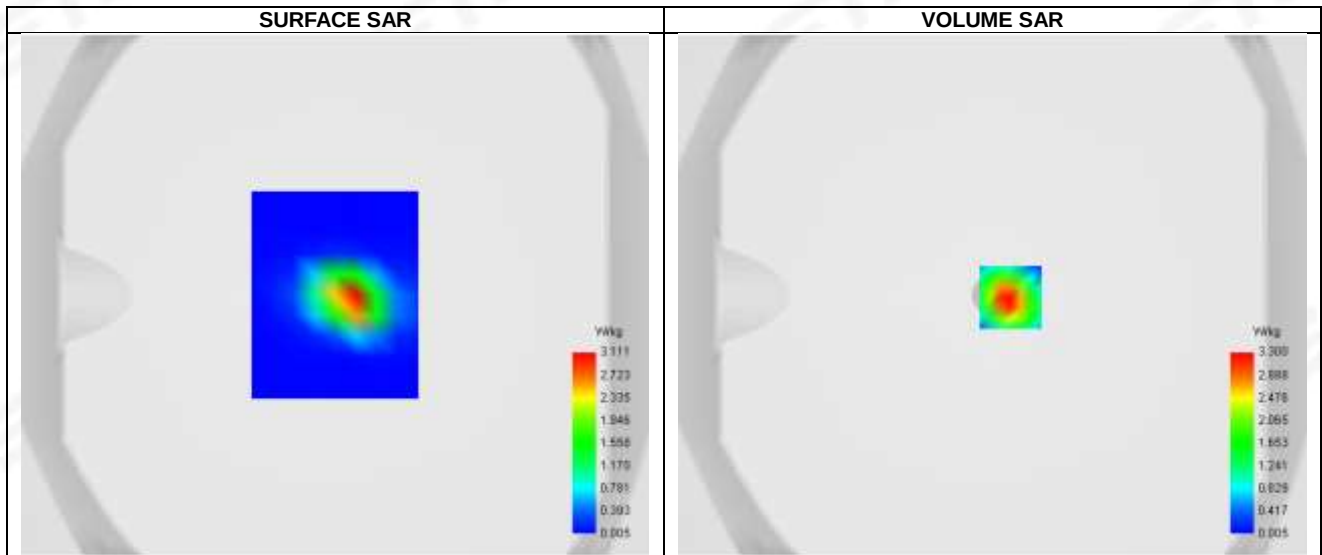
Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2025-09-08

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	5800MHz
Channels	Middle
Signal	CW
Frequency (MHz)	5800
Relative permittivity	35.97
Conductivity (S/m)	5.33
Probe	SN 08/21 EPGO352
ConvF	1.35
Crest factor:	1:1





Maximum location: X=7.00, Y=-1.00 ; SAR Peak: 5.88 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.624
SAR 1g (W/Kg)	1.813
Horizontal validation criteria: minimum distance (mm)	8.944272
Vertical validation criteria: SAR ratio M2/M1 (%)	52.971443

**E. Z Axis Scan**

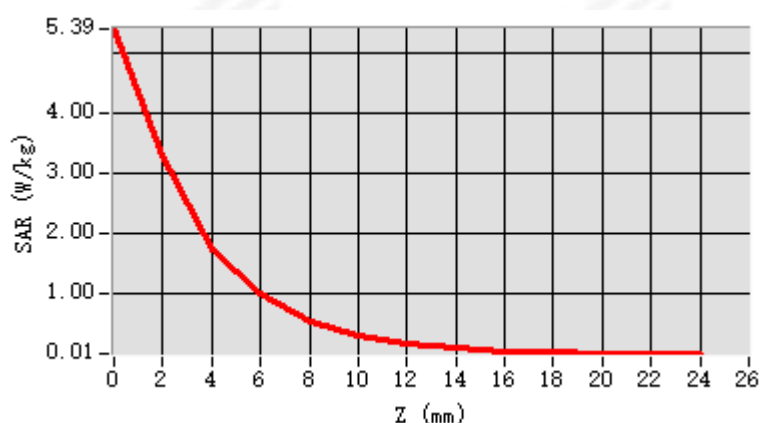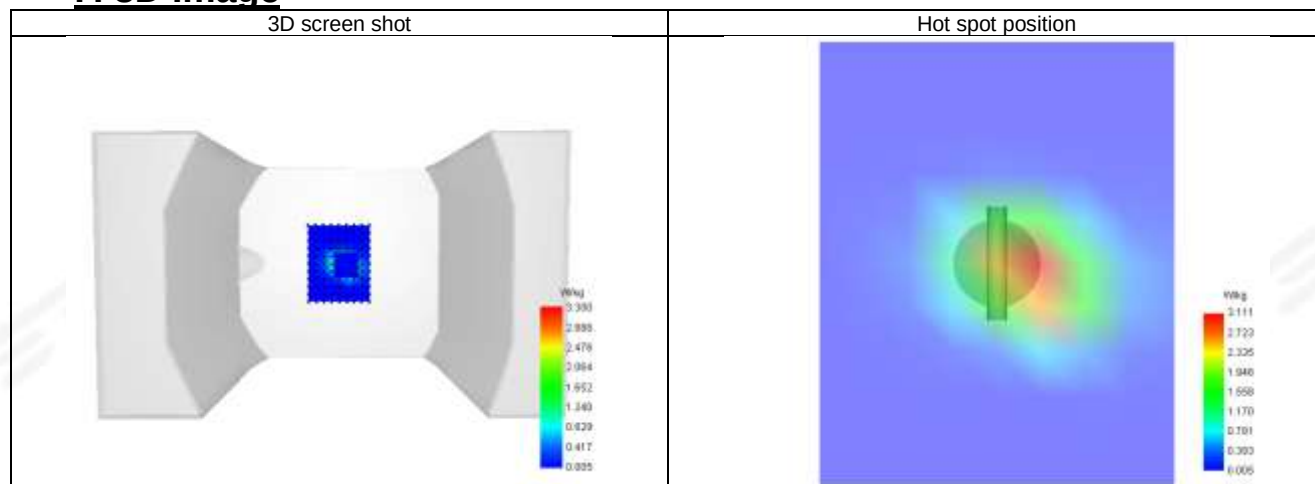Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	5.394	3.300	1.748	0.994	0.549	0.303	0.168	0.093	0.051	0.028	0.016	0.009


**F. 3D Image**



Appendix B. SAR Test Plots

Plot 1: DUT: INAIR Pod; EUT Model: Sol-A02

Test Date	2025-09-06
ConvF	1.80
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Back Side
Band	BT
Signal	8DPSK (Crest factor: 1.0)
Frequency (MHz)	2441
Relative permittivity (real part)	39.60
Conductivity (S/m)	1.83

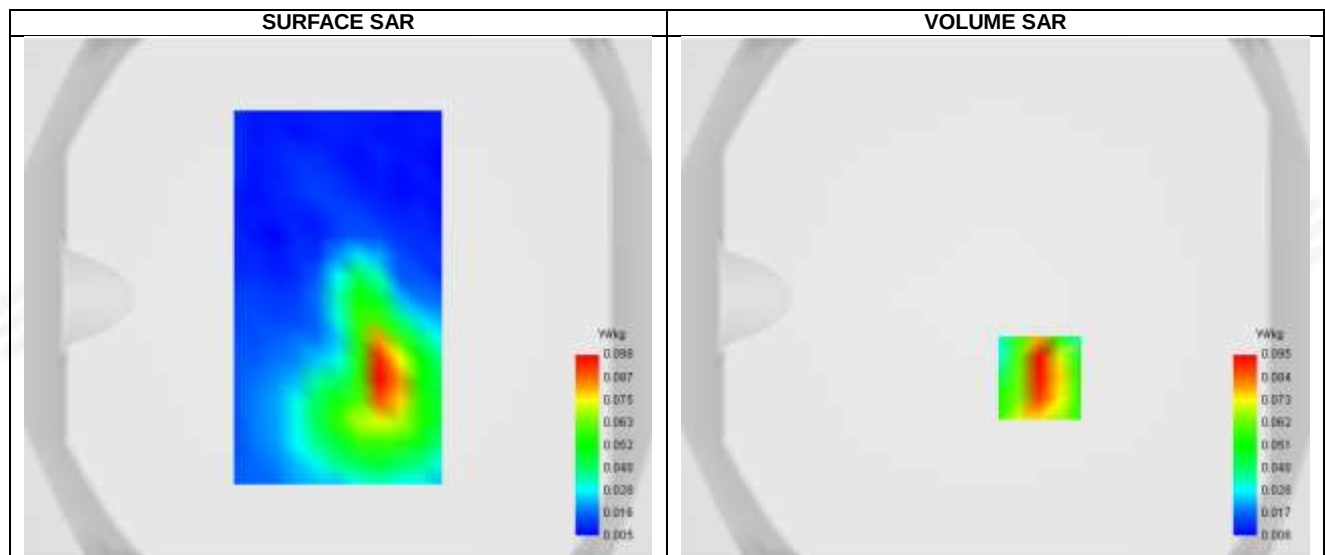



Maximum location: X=17.00, Y=-31.00 ; SAR Peak: 0.16 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.049
SAR 1g (W/Kg)	0.091
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	58.144824

**E. Z Axis Scan**

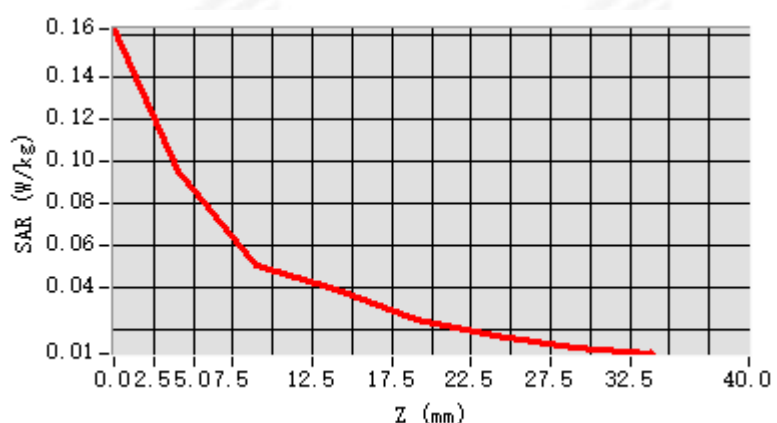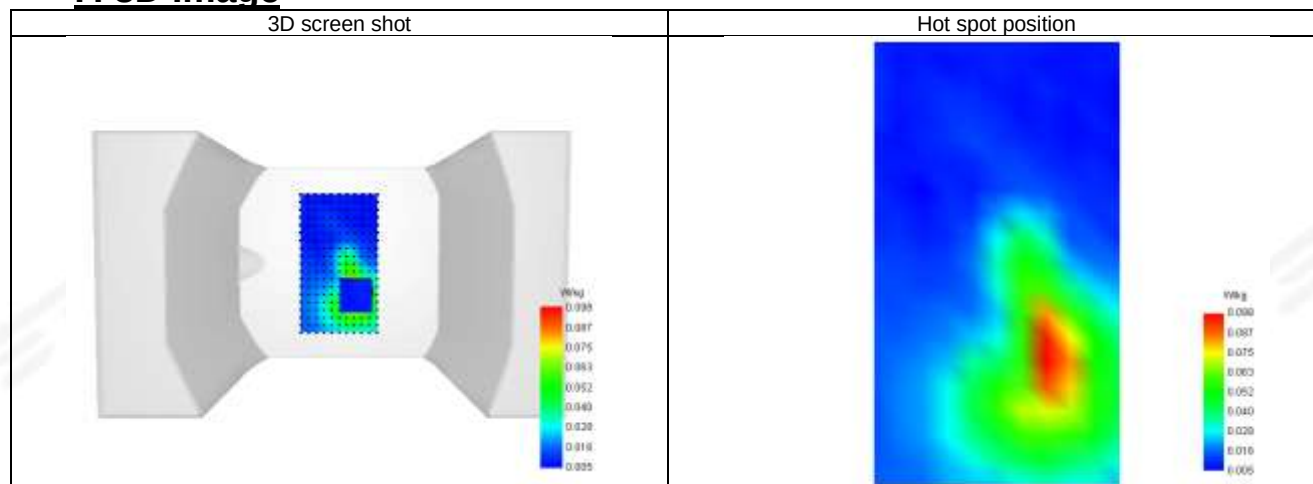
Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.163	0.095	0.050	0.039	0.025	0.017	0.011

**F. 3D Image**



Plot 2: DUT: INAIR Pod; EUT Model: Sol-A02

Test Date	2025-09-06
ConvF	1.80
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Back Side
Band	2.4GHz WLAN ANT A
Signal	802.11b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.82

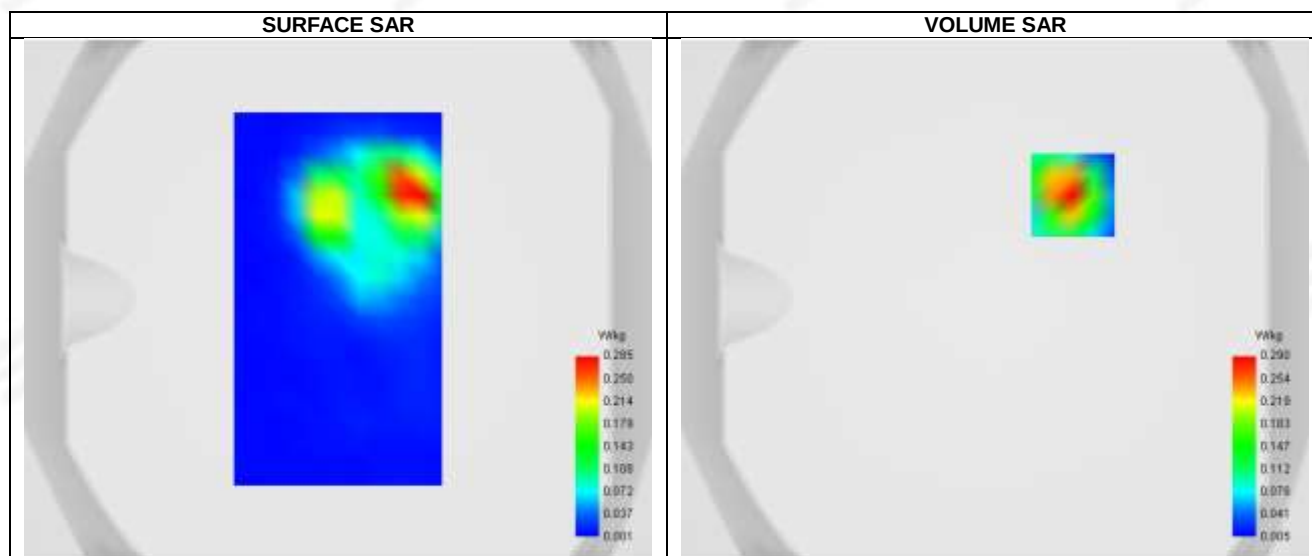



Maximum location: X=30.00, Y=40.00 ; SAR Peak: 0.52 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.126
SAR 1g (W/Kg)	0.278
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	51.056133

**E. Z Axis Scan**

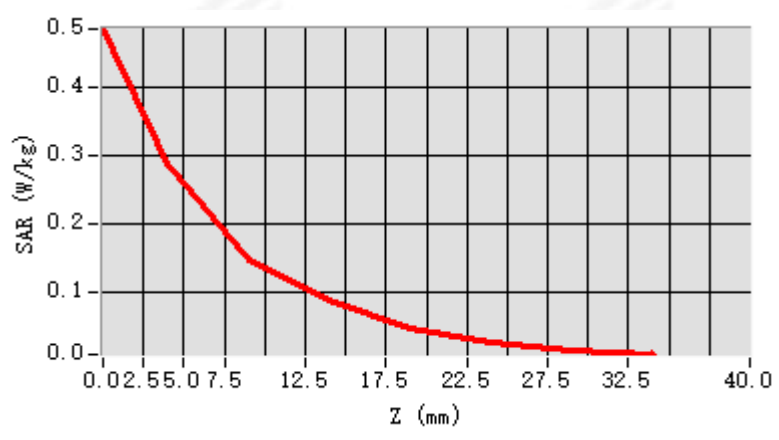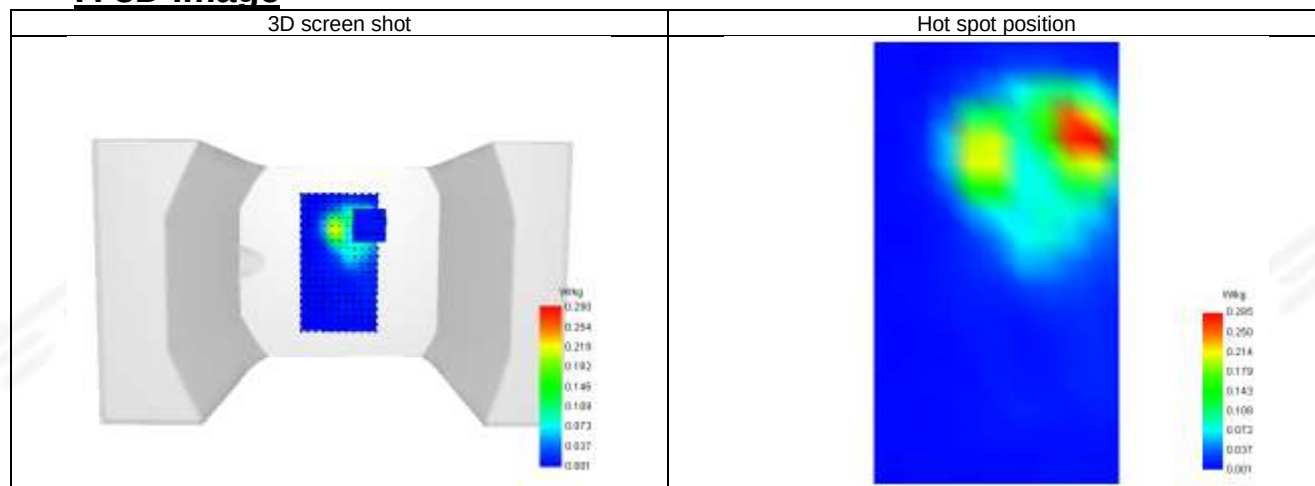
Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.486	0.290	0.148	0.088	0.049	0.028	0.015

**F. 3D Image**



Plot 3: DUT: INAIR Pod; EUT Model: Sol-A02

Test Date	2025-09-06
ConvF	1.80
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Back Side
Band	2.4GHz WLAN ANT B
Signal	802.11b (Crest factor: 1.0)
Frequency (MHz)	2462
Relative permittivity (real part)	39.66
Conductivity (S/m)	1.82

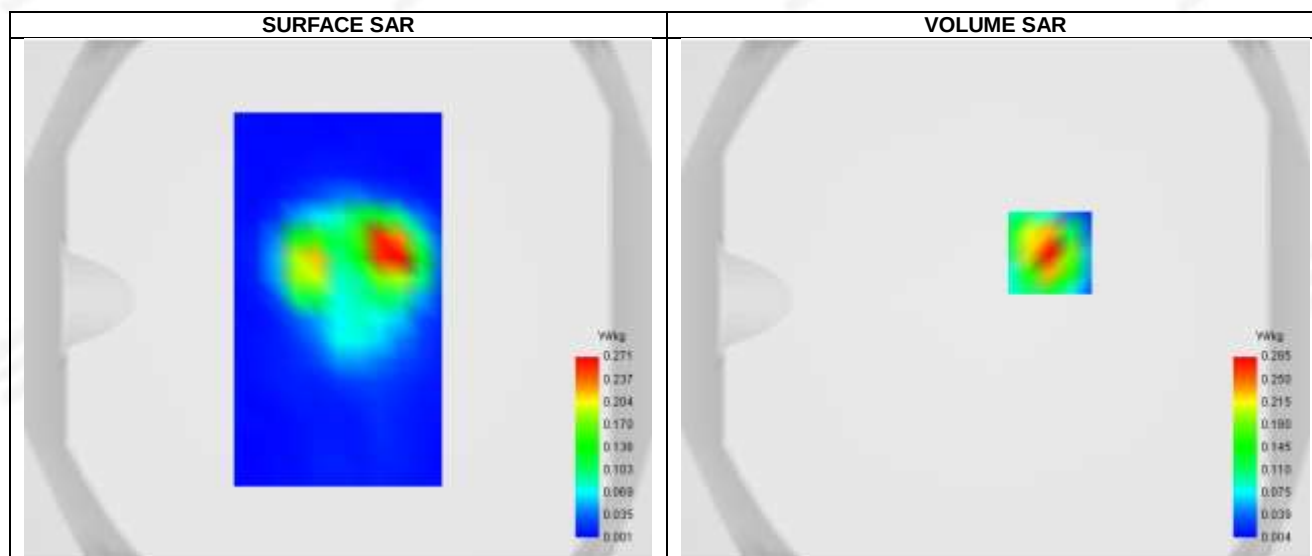



Maximum location: X=21.00, Y=18.00 ; SAR Peak: 0.49 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.122
SAR 1g (W/Kg)	0.268
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	48.813703

**E. Z Axis Scan**

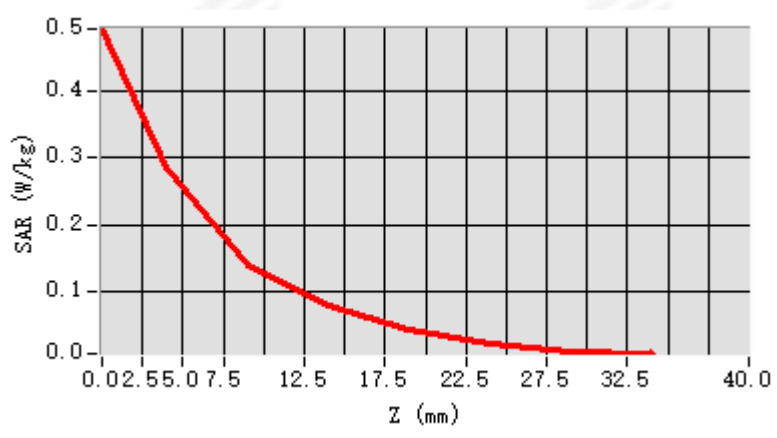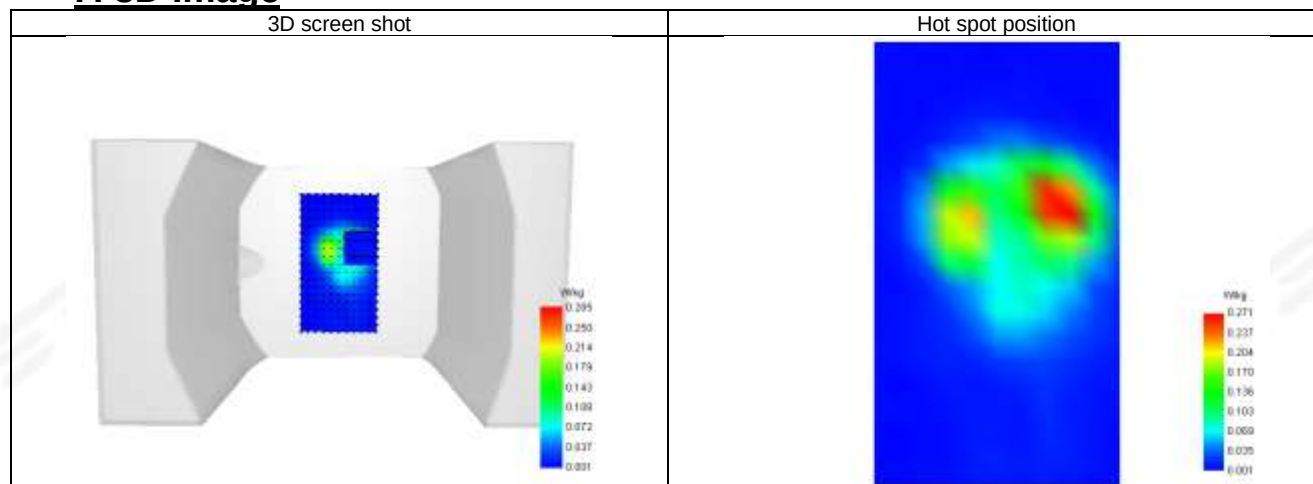
Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.491	0.285	0.139	0.081	0.044	0.024	0.013

**F. 3D Image**



Plot 4: DUT: INAIR Pod; EUT Model: Sol-A02

Test Date	2025-09-06
ConvF	1.80
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Back Side
Band	2.4GHz WLAN MIMO ANT A
Signal	802.11ax-HE20 (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.82

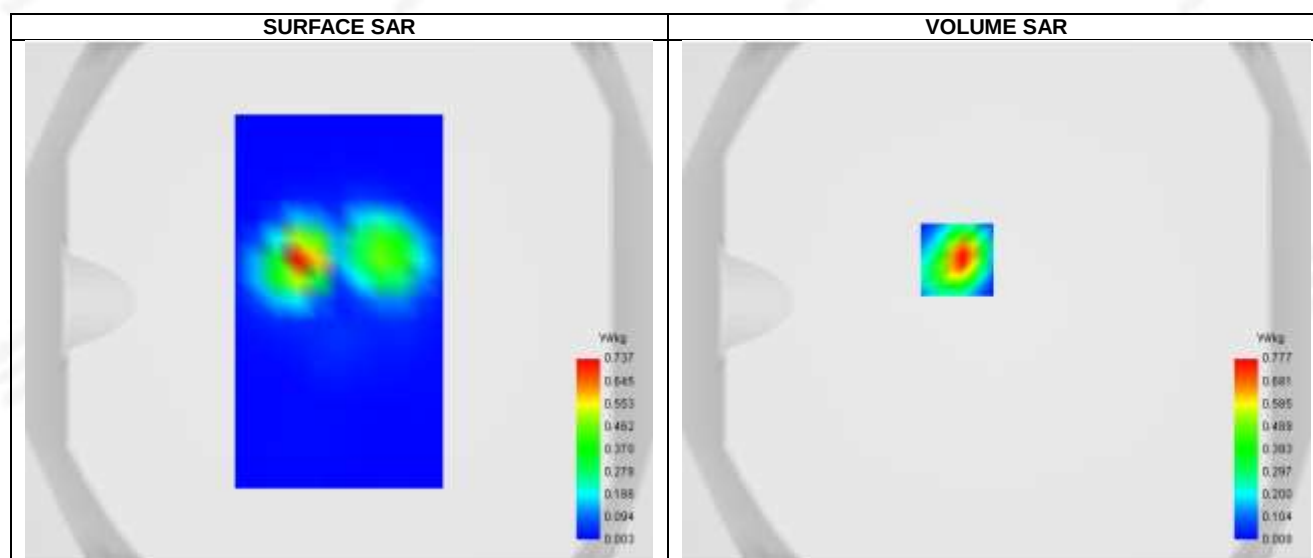



Maximum location: X=-15.00, Y=16.00 ; SAR Peak: 1.32 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.264
SAR 1g (W/Kg)	0.662
Horizontal validation criteria: minimum distance (mm)	12.360141
Vertical validation criteria: SAR ratio M2/M1 (%)	48.597720

**E. Z Axis Scan**

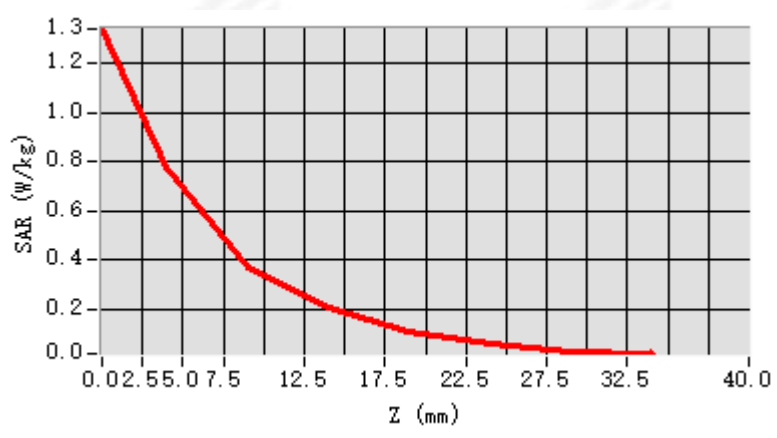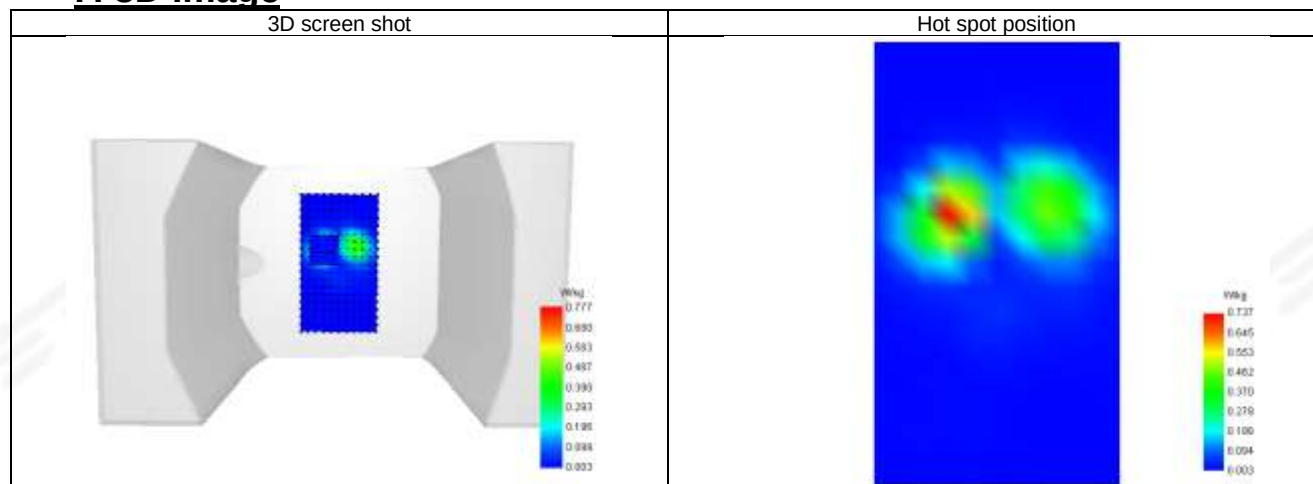
Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.340	0.777	0.373	0.209	0.106	0.057	0.029

**F. 3D Image**



Plot 5: DUT: INAIR Pod; EUT Model: Sol-A02

Test Date	2025-09-06
ConvF	1.80
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Back Side
Band	2.4GHz WLAN MIMO ANT B
Signal	802.11ax-HE20 (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.82

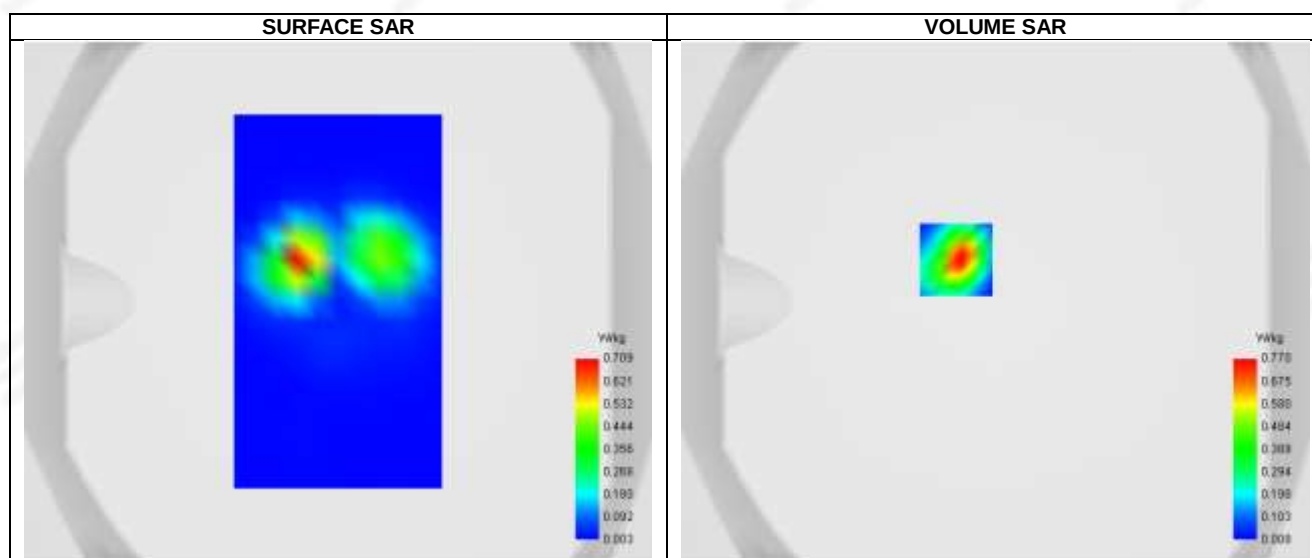



Maximum location: X=-15.00, Y=16.00 ; SAR Peak: 1.34 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.265
SAR 1g (W/Kg)	0.666
Horizontal validation criteria: minimum distance (mm)	9.362520
Vertical validation criteria: SAR ratio M2/M1 (%)	48.679409

**E. Z Axis Scan**

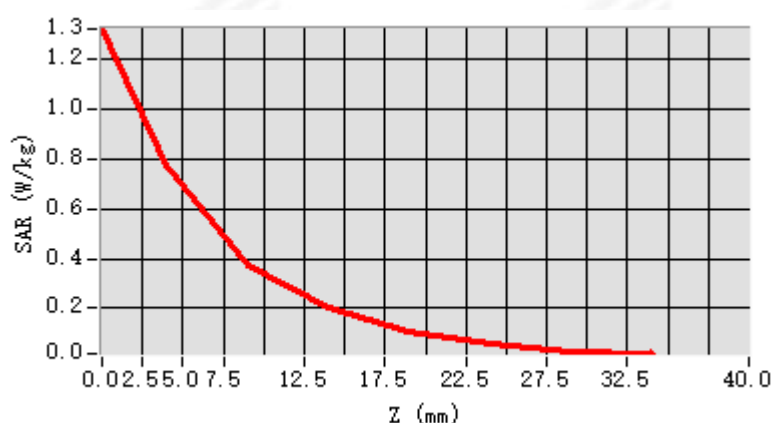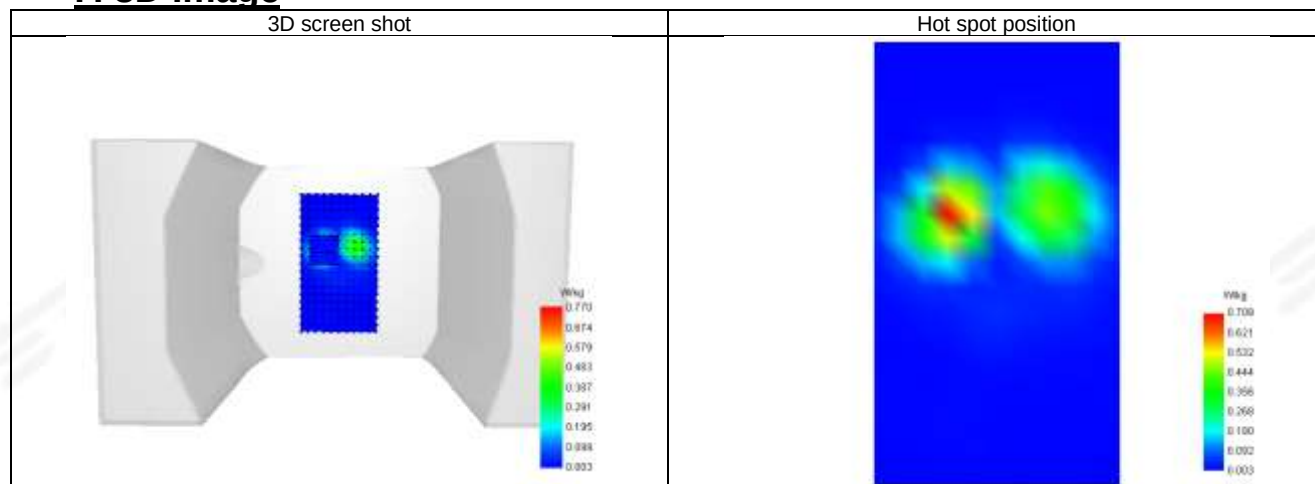
Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.320	0.770	0.375	0.203	0.108	0.055	0.030

**F. 3D Image**



Plot 6: DUT: INAIR Pod; EUT Model: Sol-A02

Test Date	2025-09-08
ConvF	1.33
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm, Complete
Phantom	Validation plane
Device Position	Back Side
Band	5.2GHz WLAN ANT A
Signal	802.11ac-VHT20 (Crest factor: 1.0)
Frequency (MHz)	5200
Relative permittivity (real part)	36.07
Conductivity (S/m)	4.69

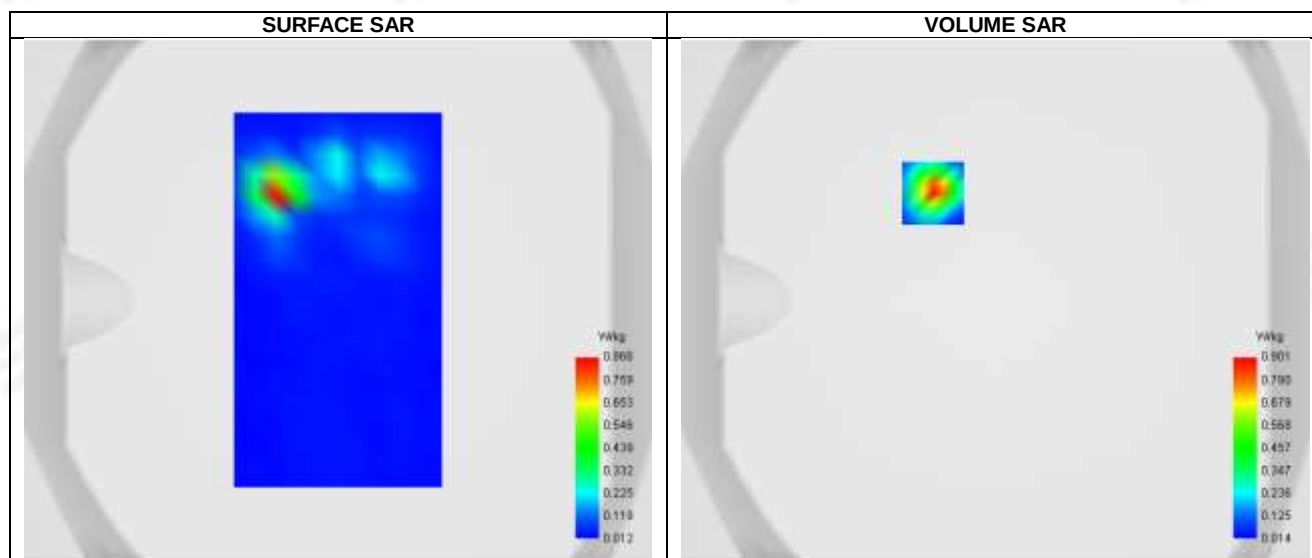



Maximum location: X=-24.00, Y=41.00 ; SAR Peak: 1.65 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.174
SAR 1g (W/Kg)	0.552
Horizontal validation criteria: minimum distance (mm)	10.362570
Vertical validation criteria: SAR ratio M2/M1 (%)	57.434608

**E. Z Axis Scan**

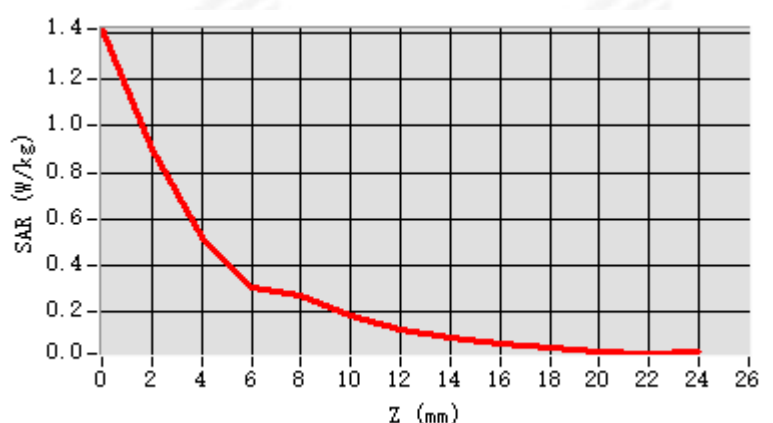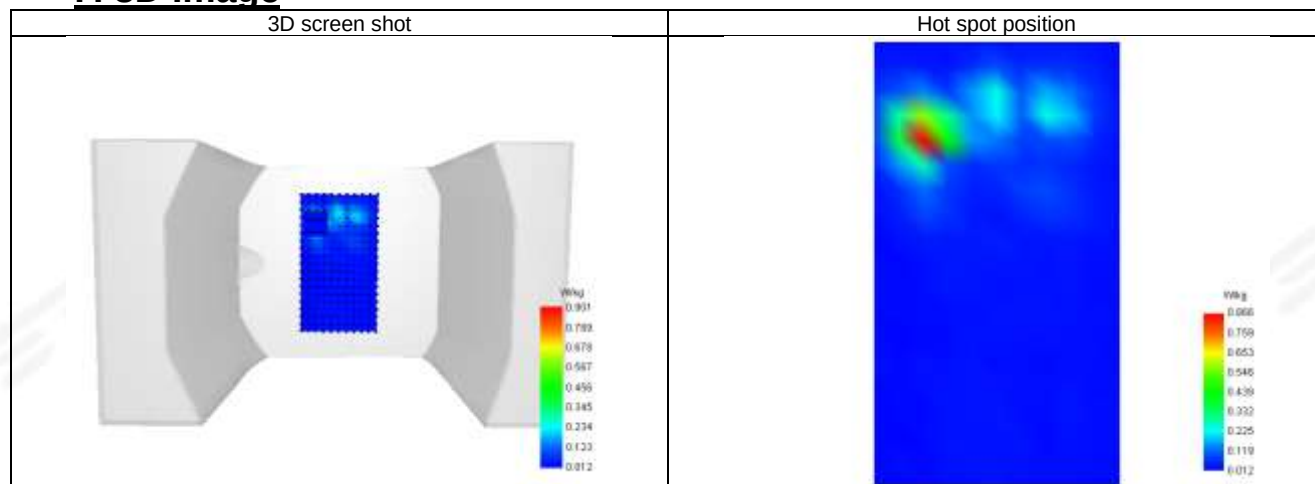
Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	1.417	0.901	0.517	0.304	0.267	0.185	0.128	0.088	0.061	0.042	0.029	0.020

**F. 3D Image**



Plot 7: DUT: INAIR Pod; EUT Model: Sol-A02

Test Date	2025-09-08
ConvF	1.33
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm, Complete
Phantom	Validation plane
Device Position	Back Side
Band	5.2GHz WLAN ANT B
Signal	802.11a (Crest factor: 1.0)
Frequency (MHz)	5240
Relative permittivity (real part)	36.41
Conductivity (S/m)	4.68

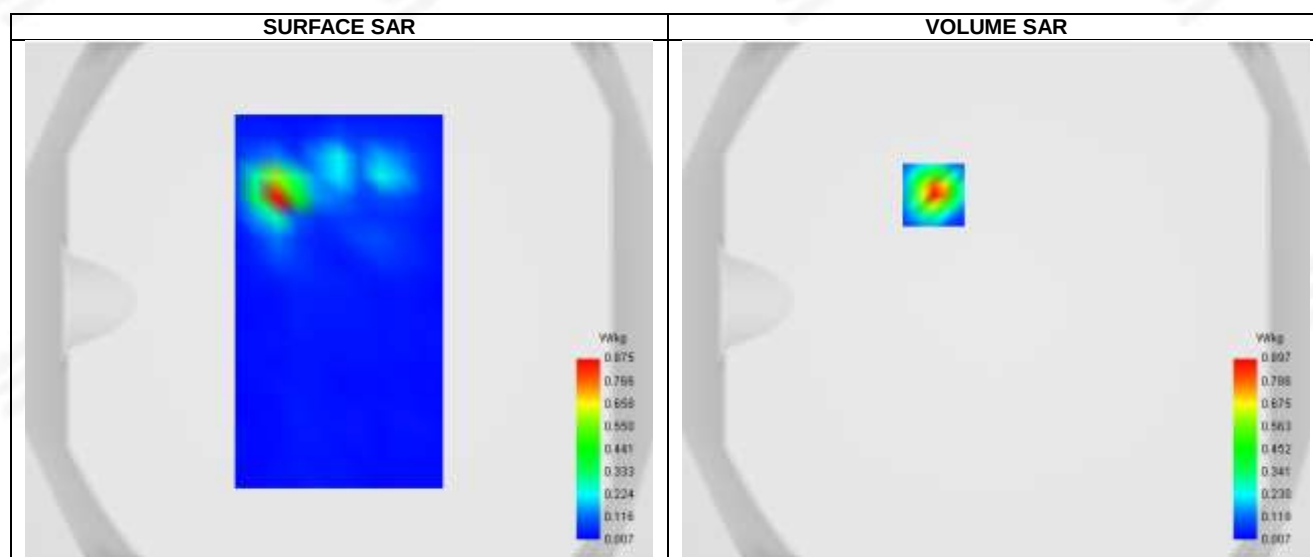



Maximum location: X=-24.00, Y=41.00 ; SAR Peak: 1.61 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.168
SAR 1g (W/Kg)	0.537
Horizontal validation criteria: minimum distance (mm)	11.250144
Vertical validation criteria: SAR ratio M2/M1 (%)	57.639763

**E. Z Axis Scan**

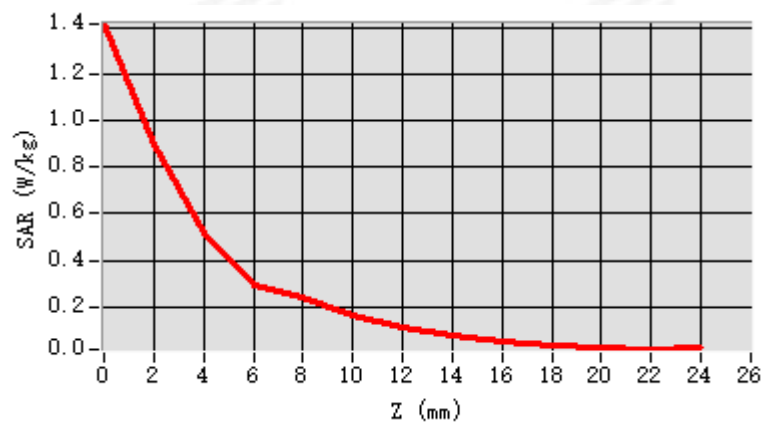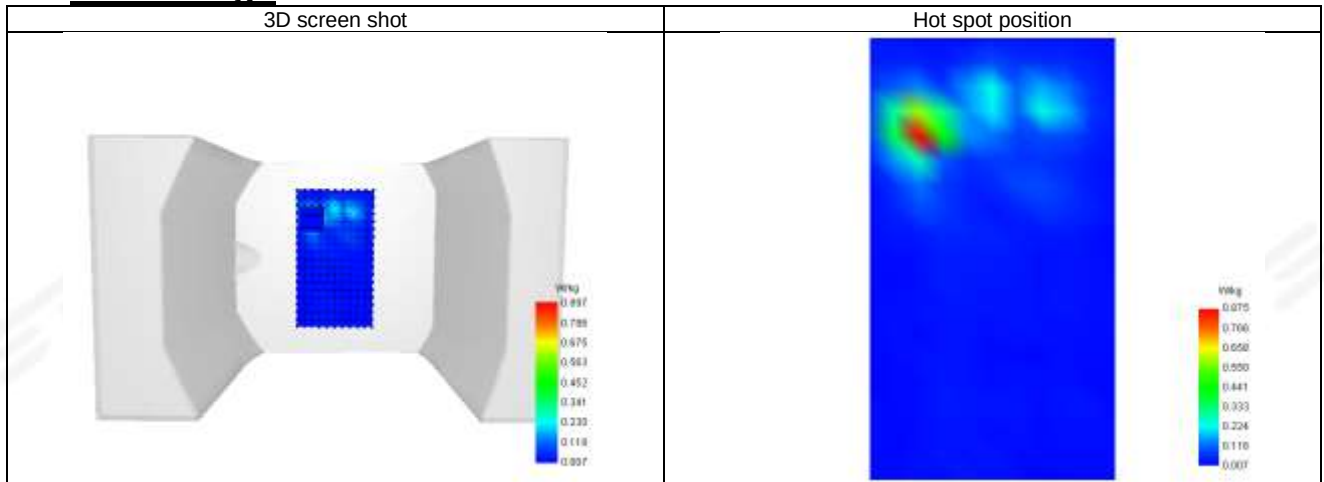
Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	1.420	0.897	0.517	0.294	0.243	0.162	0.108	0.072	0.048	0.032	0.021	0.014

**F. 3D Image**



Plot 8: DUT: INAIR Pod; EUT Model: Sol-A02


Test Date	2025-09-08
ConvF	1.33
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm, Complete
Phantom	Validation plane
Device Position	Back Side
Band	5.2GHz WLAN MIMO ANT A
Signal	802.11ac-VHT20 (Crest factor: 1.0)
Frequency (MHz)	5200
Relative permittivity (real part)	36.07
Conductivity (S/m)	4.69

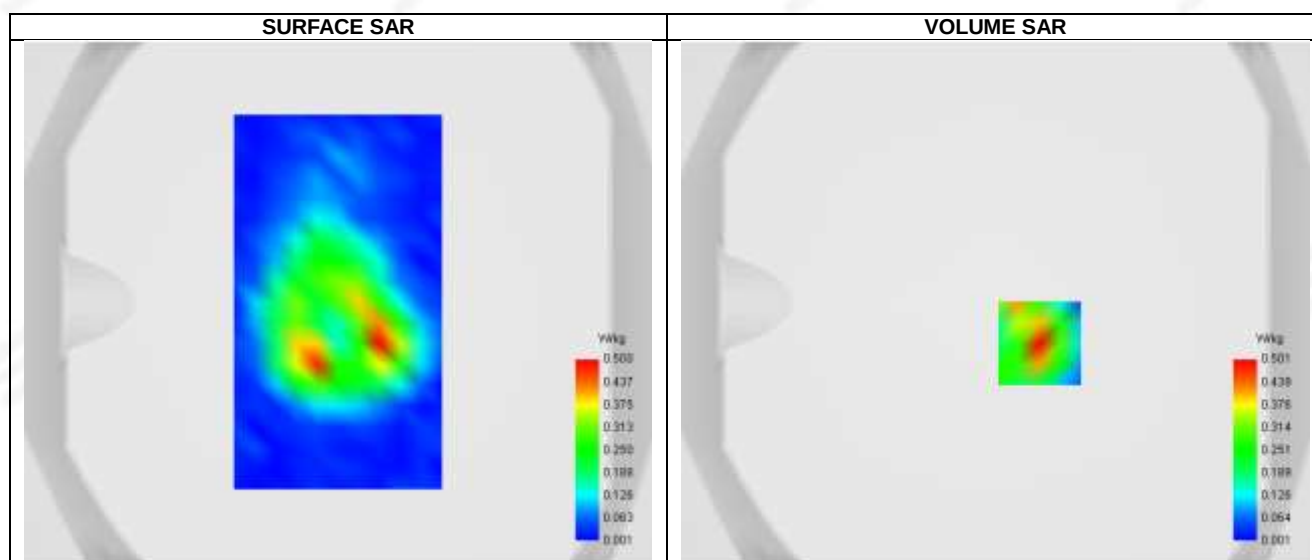


Maximum location: X=17.00, Y=-16.00 ; SAR Peak: 0.78 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.220
SAR 1g (W/Kg)	0.448
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	57.996348

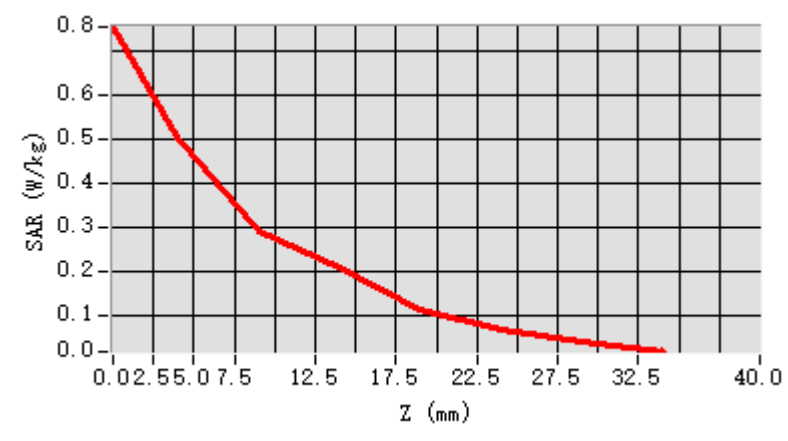

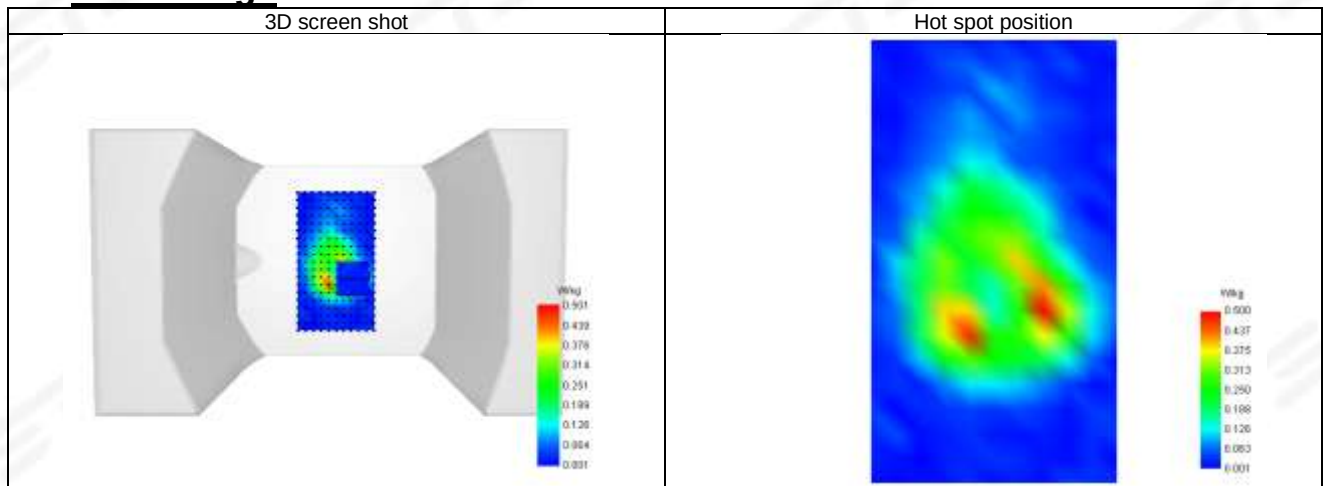
F. 3D Image





Plot 9: DUT: INAIR Pod; EUT Model: Sol-A02

Test Date	2025-09-08
ConvF	1.33
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm, Complete
Phantom	Validation plane
Device Position	Back Side
Band	5.2GHz WLAN MIMO ANT B
Signal	802.11ac-VHT20 (Crest factor: 1.0)
Frequency (MHz)	5200
Relative permittivity (real part)	36.07
Conductivity (S/m)	4.69

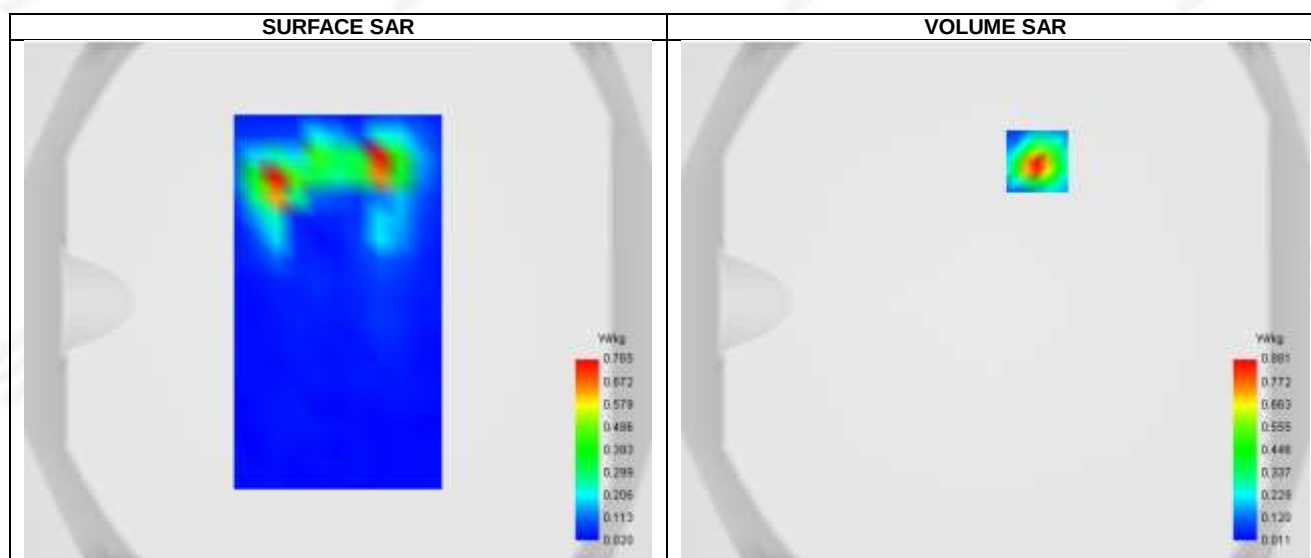



Maximum location: X=16.00, Y=54.00 ; SAR Peak: 1.81 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.174
SAR 1g (W/Kg)	0.567
Horizontal validation criteria: minimum distance (mm)	13.662010
Vertical validation criteria: SAR ratio M2/M1 (%)	52.751871

**E. Z Axis Scan**

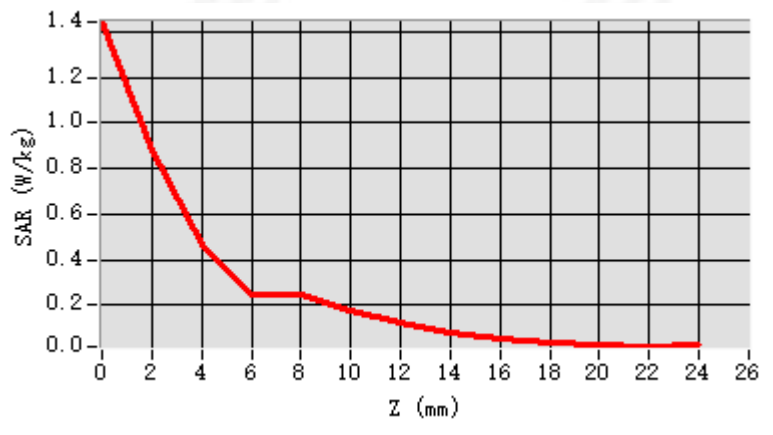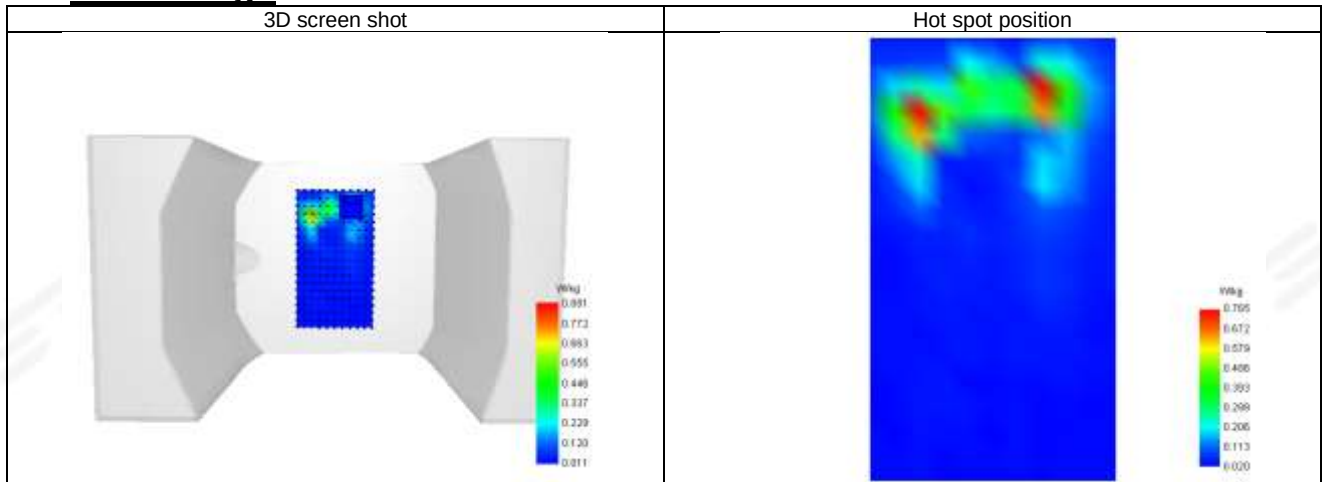
Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	1.443	0.881	0.465	0.247	0.252	0.174	0.120	0.083	0.058	0.040	0.028	0.019

**F. 3D Image**



Plot 10: DUT: INAIR Pod; EUT Model: Sol-A02

Test Date	2025-09-08
ConvF	1.35
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm, Complete
Phantom	Validation plane
Device Position	Back Side
Band	5.8GHz WLAN ANT A
Signal	802.11ac-VHT80 (Crest factor: 1.0)
Frequency (MHz)	5775
Relative permittivity (real part)	36.14
Conductivity (S/m)	5.25

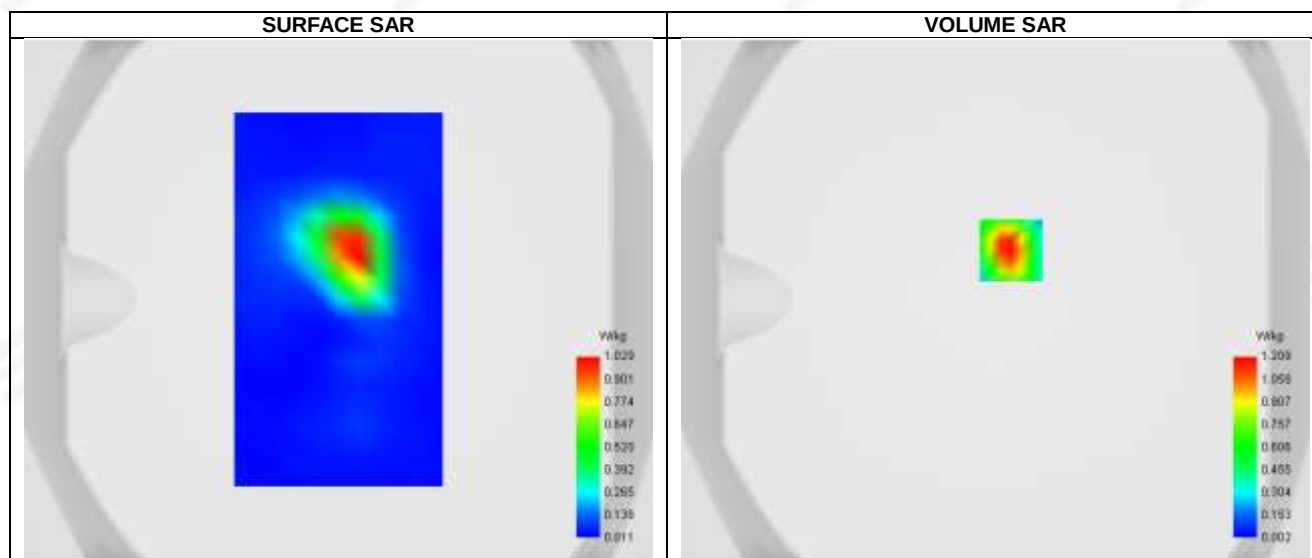



Maximum location: X=6.00, Y=19.00 ; SAR Peak: 2.23 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.280
SAR 1g (W/Kg)	0.748
Horizontal validation criteria: minimum distance (mm)	8.944272
Vertical validation criteria: SAR ratio M2/M1 (%)	53.184797

**E. Z Axis Scan**

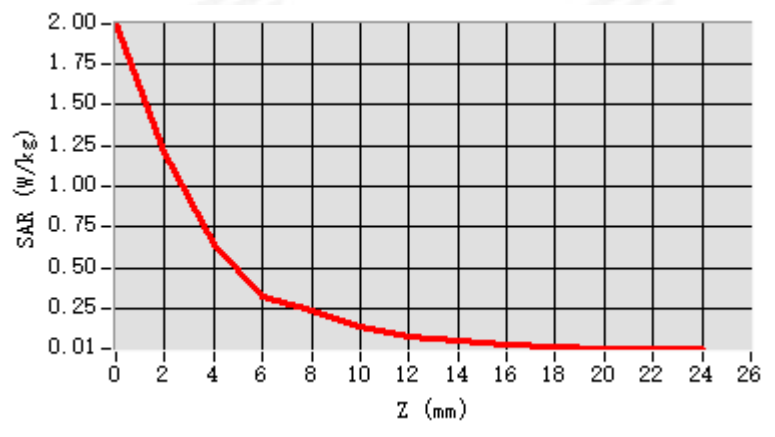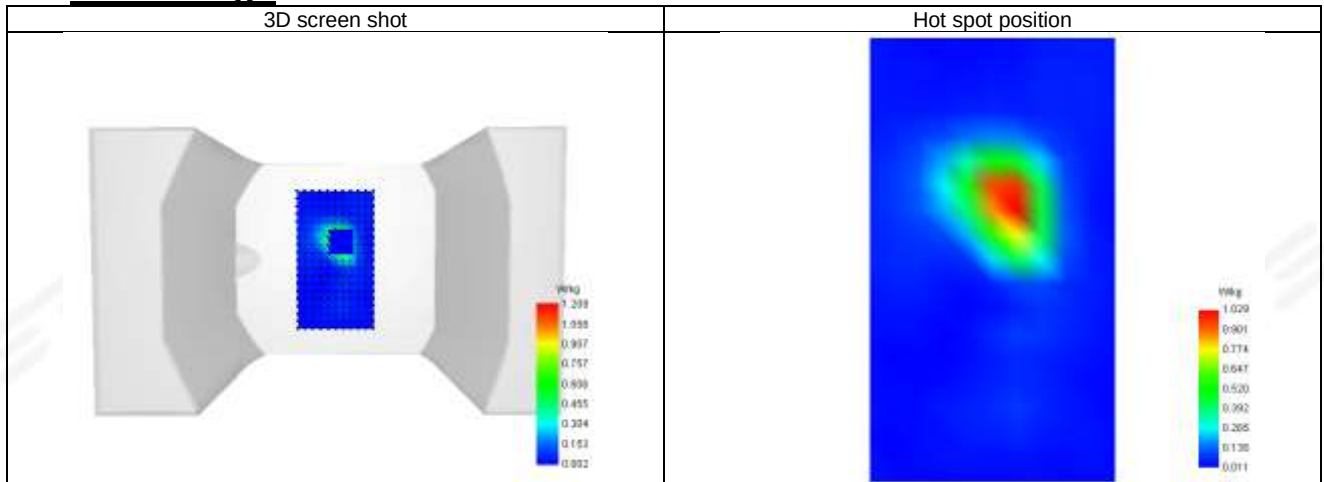
Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	1.997	1.209	0.643	0.331	0.240	0.143	0.086	0.051	0.030	0.018	0.011	0.006

**F. 3D Image**



Plot 11: DUT: INAIR Pod; EUT Model: Sol-A02

Test Date	2025-09-08
ConvF	1.35
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm, Complete
Phantom	Validation plane
Device Position	Back Side
Band	5.8GHz WLAN ANT B
Signal	802.11 a (Crest factor: 1.0)
Frequency (MHz)	5785
Relative permittivity (real part)	36.07
Conductivity (S/m)	5.24


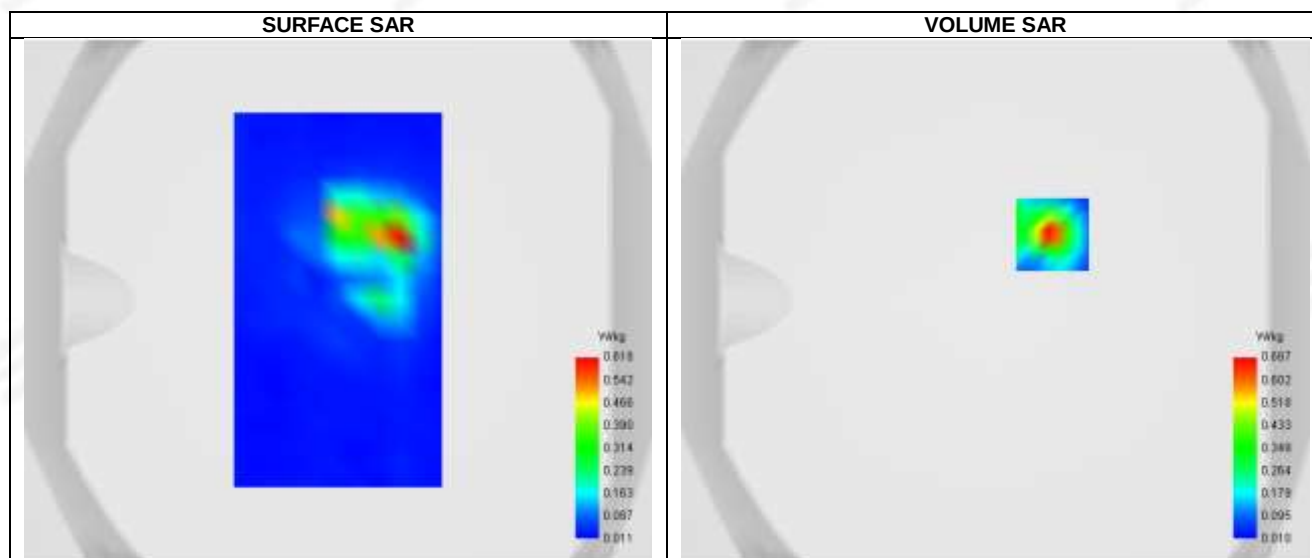


D. SAR 1g & 10g

SAR 10g (W/Kg)	0.165
SAR 1g (W/Kg)	0.407
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	49.322951

**E. Z Axis Scan**

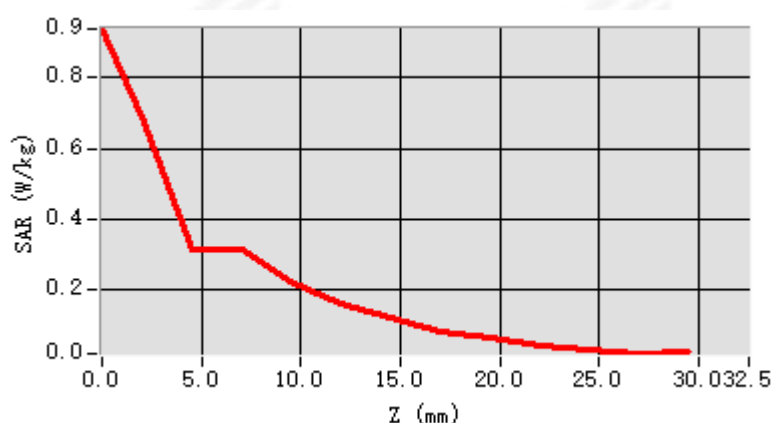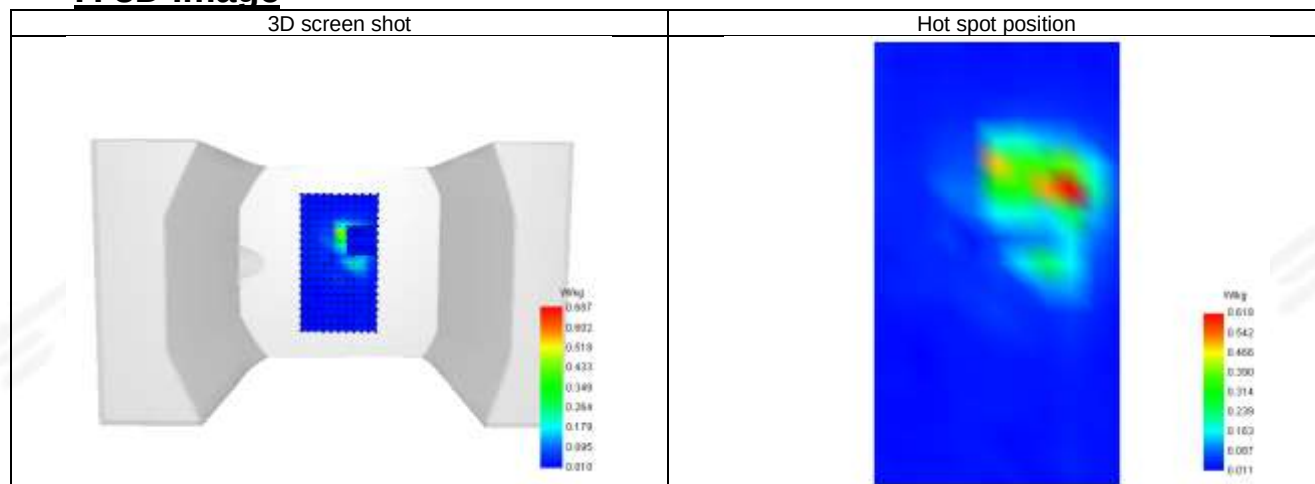
Z (mm)	0.00	2.00	4.50	7.00	9.50	12.00	14.50	17.00	19.50	22.00	24.50	27.00
SAR (W/Kg)	0.936	0.687	0.315	0.315	0.225	0.162	0.121	0.083	0.065	0.043	0.035	0.022

**F. 3D Image**



Plot 12: DUT: INAIR Pod; EUT Model: Sol-A02

Test Date	2025-09-08
ConvF	1.35
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm, Complete
Phantom	Validation plane
Device Position	Back Side
Band	5.8GHz WLAN MIMO ANT A
Signal	802.11ac-VHT20 (Crest factor: 1.0)
Frequency (MHz)	5745
Relative permittivity (real part)	35.48
Conductivity (S/m)	5.18

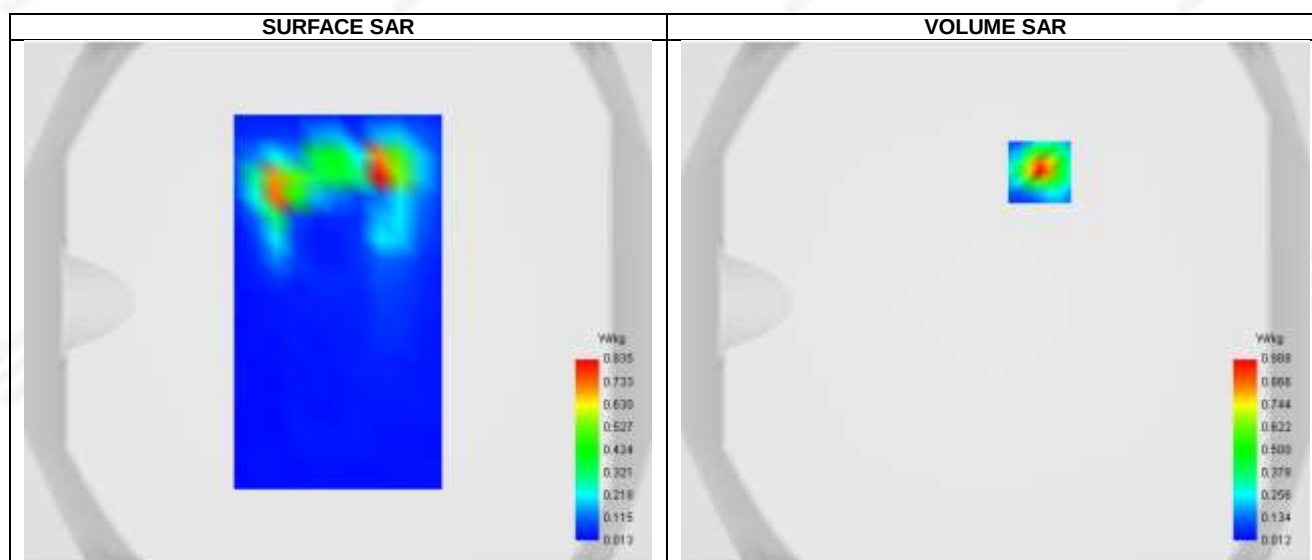



Maximum location: X=17.00, Y=50.00 ; SAR Peak: 1.92 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.191
SAR 1g (W/Kg)	0.608
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	52.132961

**E. Z Axis Scan**

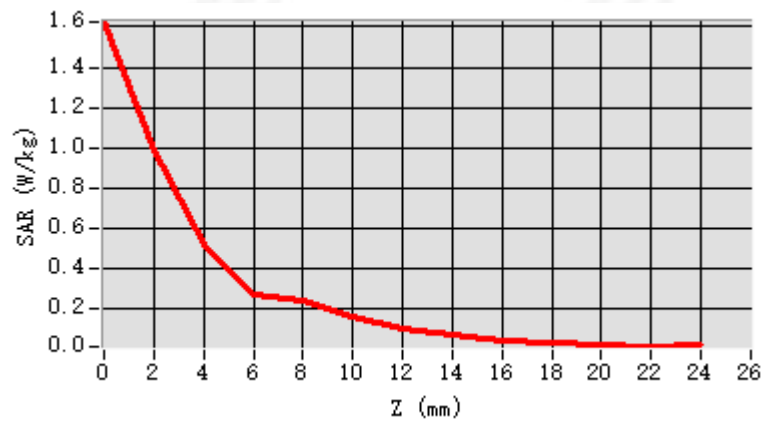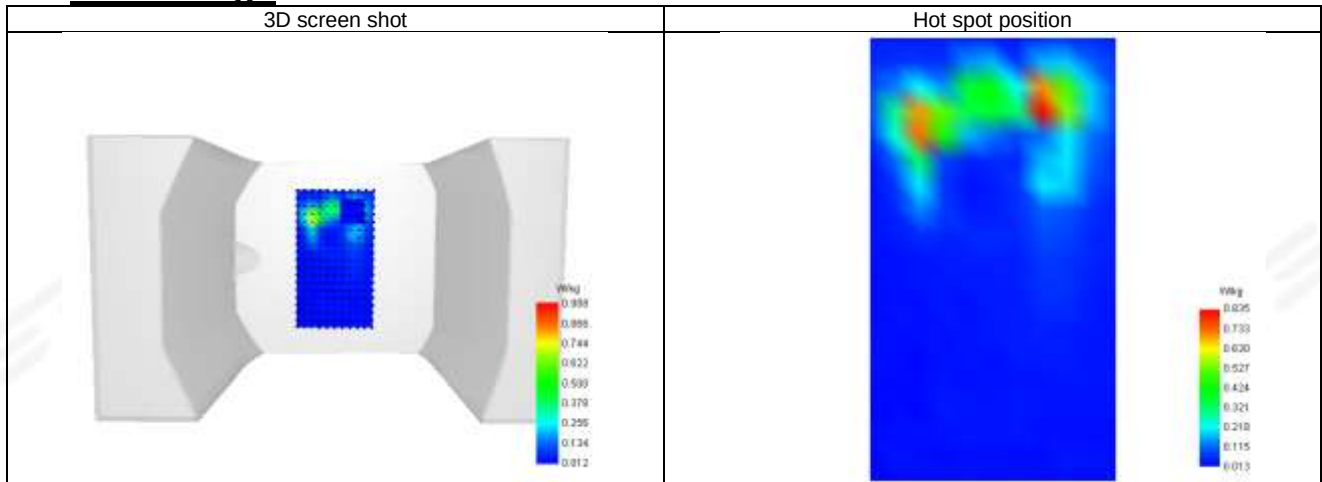
Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	1.625	0.988	0.515	0.274	0.242	0.158	0.103	0.067	0.044	0.028	0.019	0.012

**F. 3D Image**



Plot 13: DUT: INAIR Pod; EUT Model: Sol-A02

Test Date	2025-09-08
ConvF	1.35
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm, Complete
Phantom	Validation plane
Device Position	Back Side
Band	5.8GHz WLAN MIMO ANT B
Signal	802.11ac-VHT20 (Crest factor: 1.0)
Frequency (MHz)	5745
Relative permittivity (real part)	35.48
Conductivity (S/m)	5.18


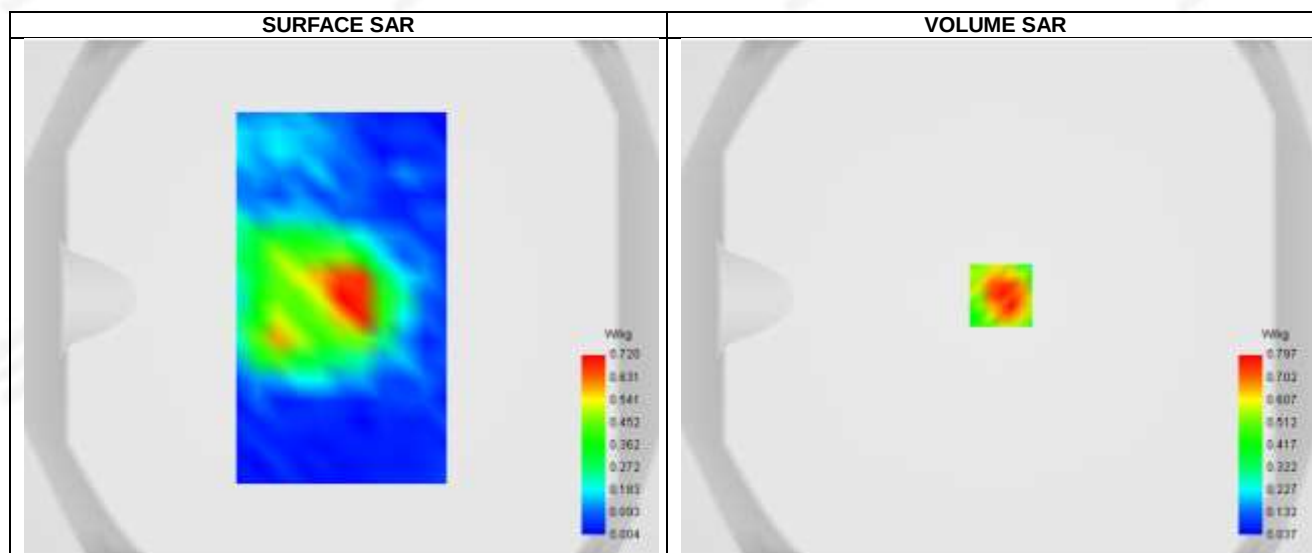


D. SAR 1g & 10g

SAR 10g (W/Kg)	0.301
SAR 1g (W/Kg)	0.576
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	84.157317

**E. Z Axis Scan**

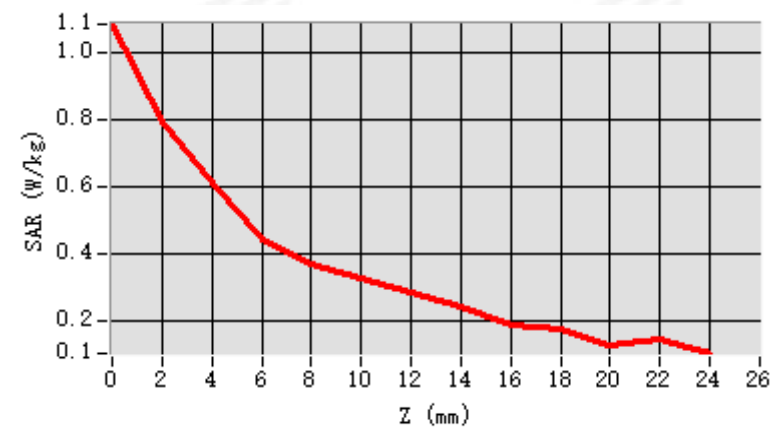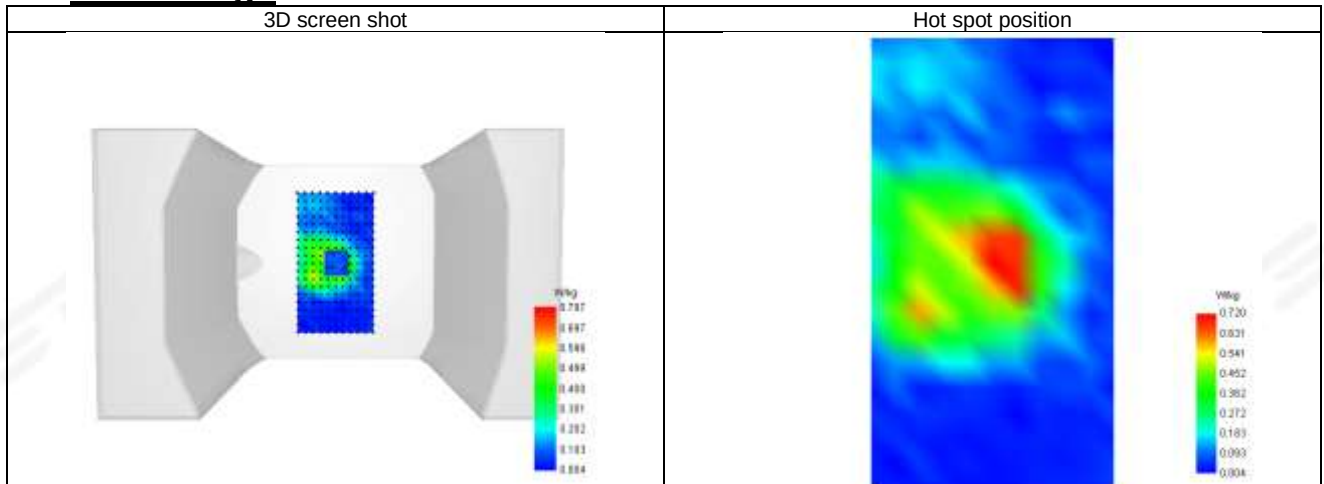Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	1.087	0.797	0.615	0.445	0.374	0.329	0.285	0.242	0.193	0.180	0.129	0.146

**F. 3D Image**



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※