


802.11ax HE20_2462_106Tone_RU54



802.11be EHT20_2412_26Tone_RU0



802.11be EHT20_2412_52Tone_RU37

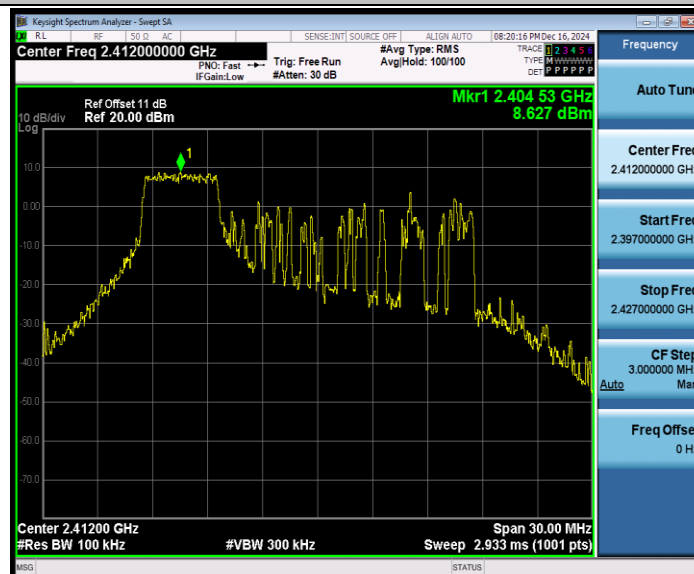

802.11be EHT20_2412_106Tone_RU53



802.11be EHT20_2437_26Tone_RU4




802.11be EHT20_2437_52Tone_RU39




802.11be EHT20_2462_26Tone_RU8




802.11ax HE20_2412_26Tone_RU0_30~1000

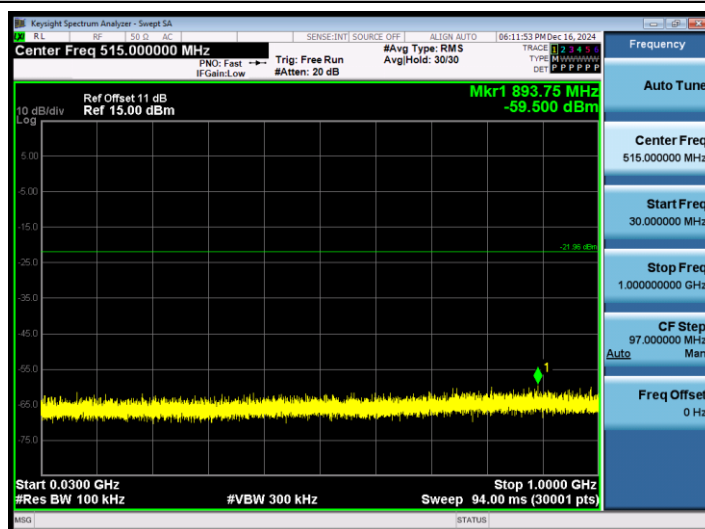


802.11ax HE20_2412_26Tone_RU0_1000~26500

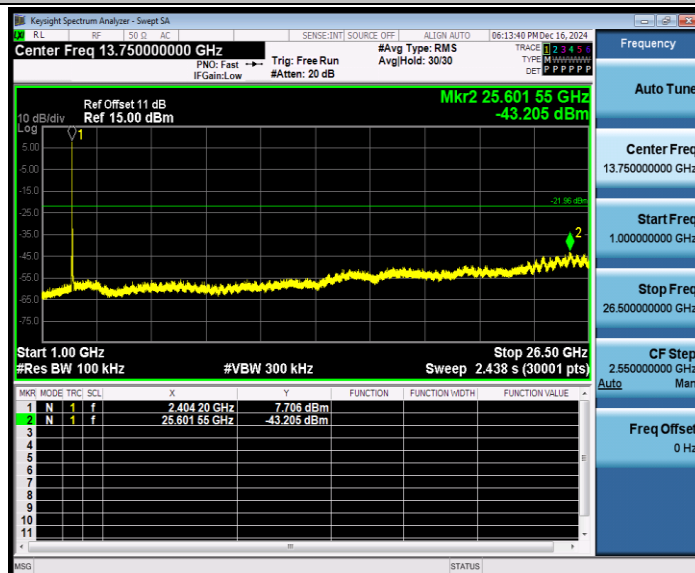


802.11ax HE20_2412_52Tone_RU37_30~1000

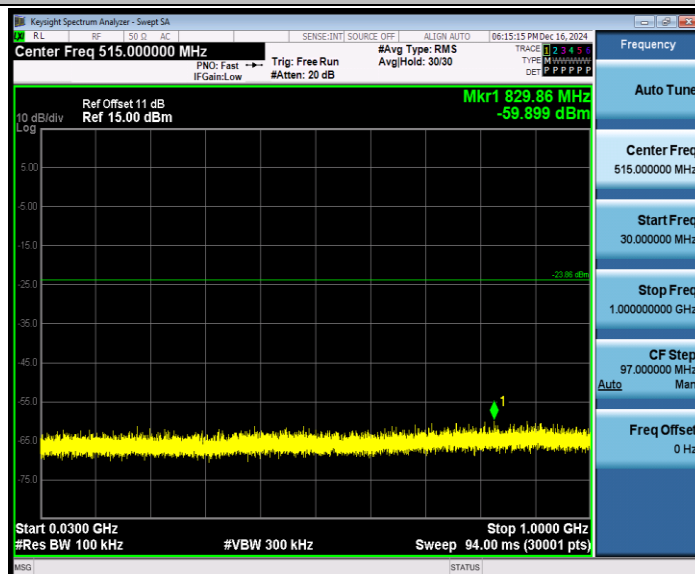


802.11ax HE20_2412_52Tone_RU37_1000~26500

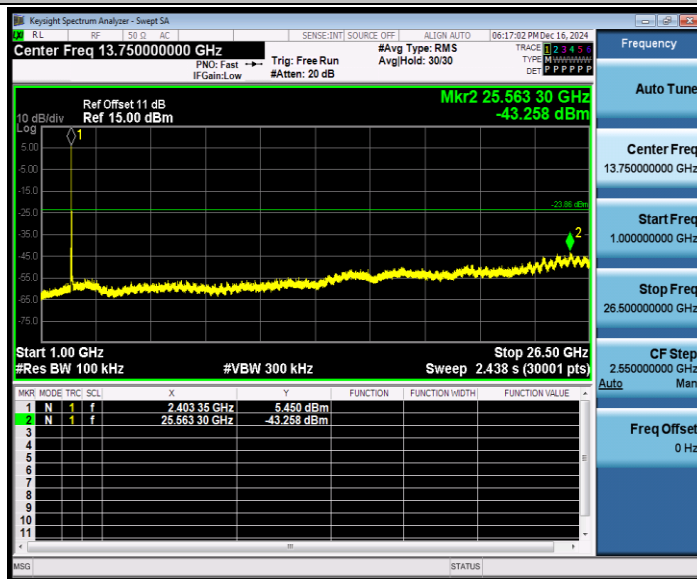


802.11ax HE20_2412_106Tone_RU53_30~1000

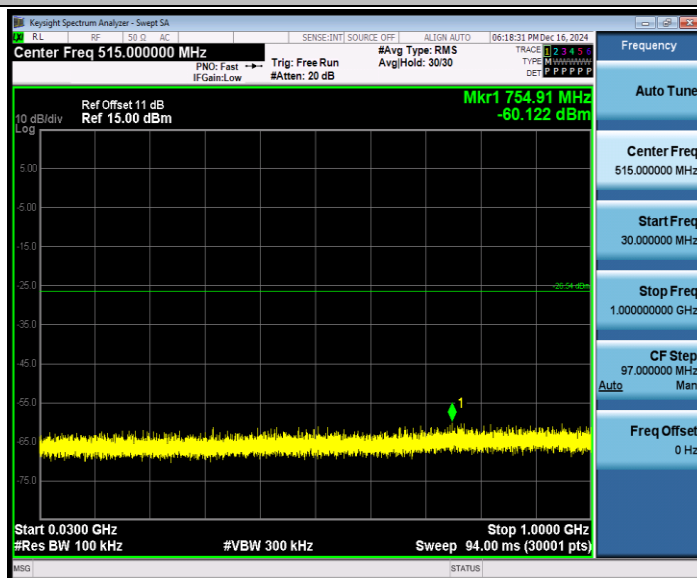


802.11ax HE20_2412_106Tone_RU53_1000~26500

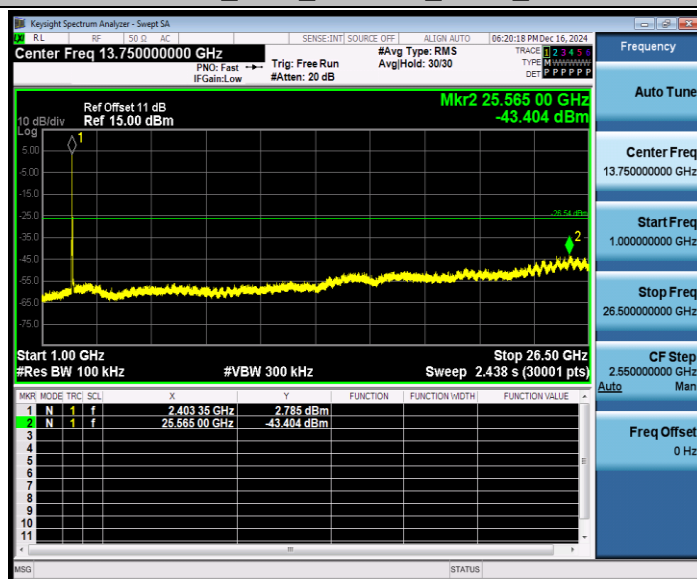


802.11ax HE20_2437_52Tone_RU39_30~1000

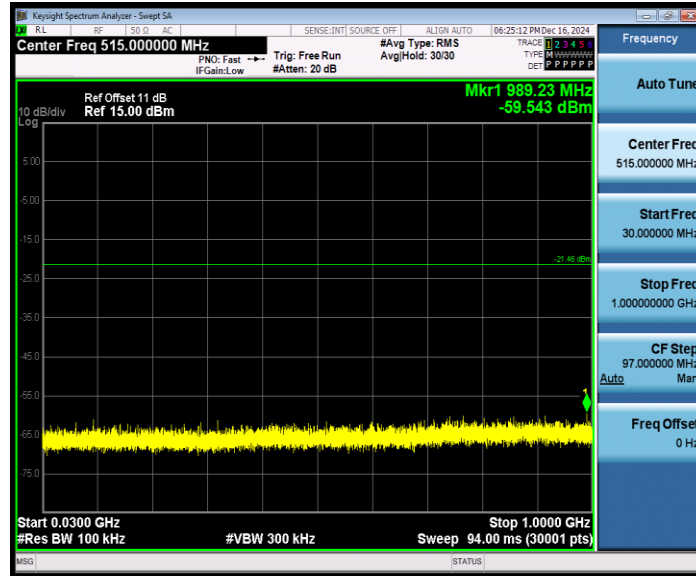


802.11ax HE20_2437_52Tone_RU39_1000~26500

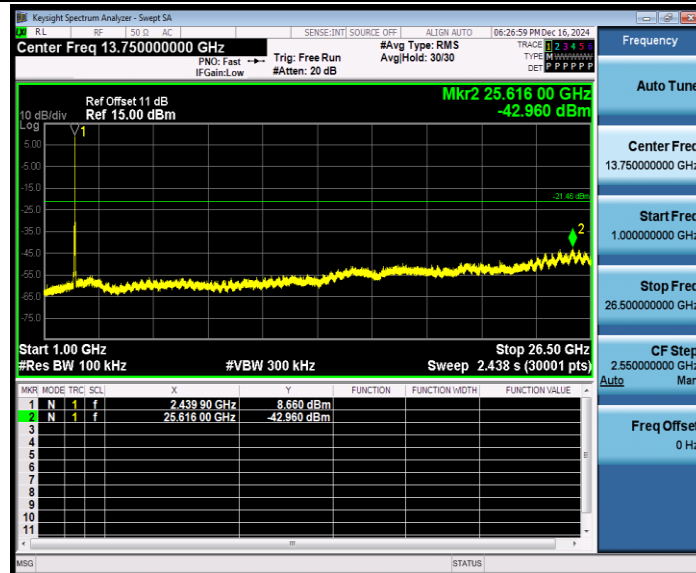


802.11ax HE20_2462_26Tone_RU8_30~1000

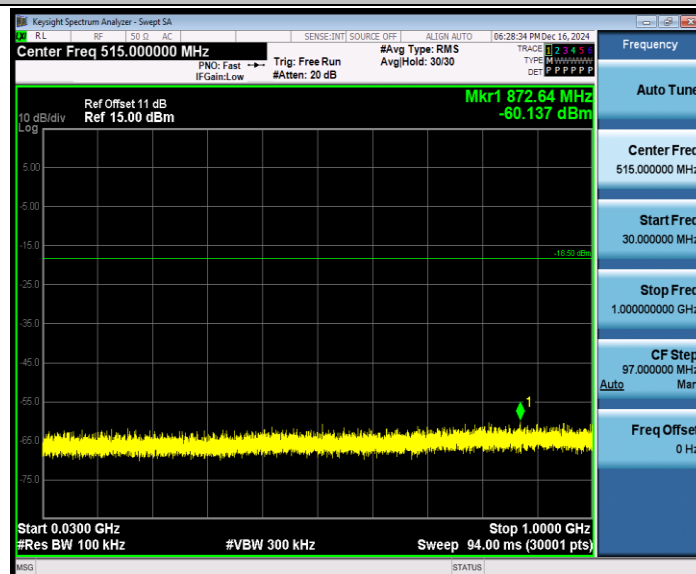


802.11ax HE20_2462_26Tone_RU8_1000~26500

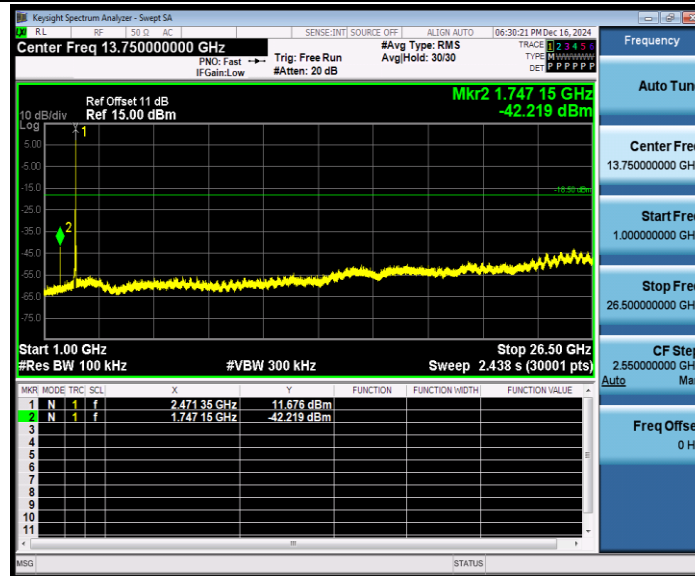


802.11ax HE20_2462_52Tone_RU40_30~1000

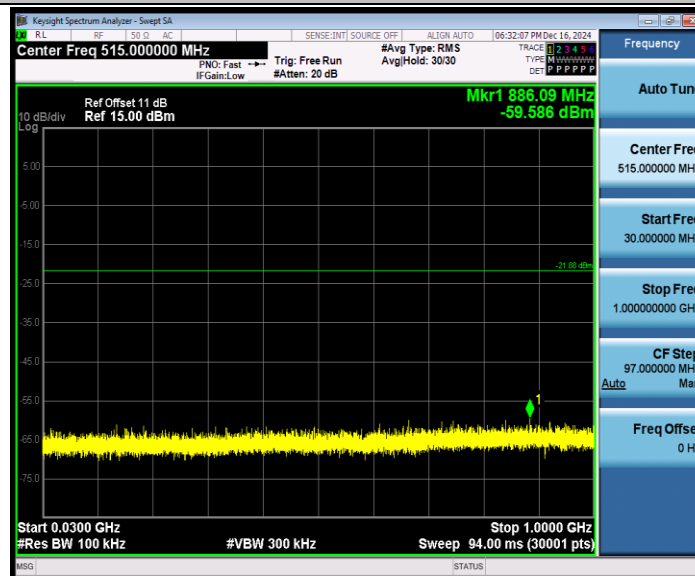


802.11ax HE20_2462_52Tone_RU40_1000~26500

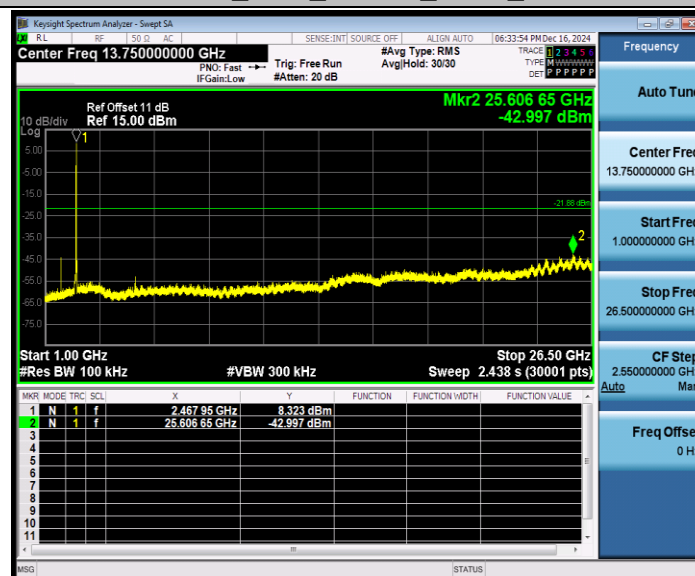


802.11ax HE20_2462_106Tone_RU54_30~1000

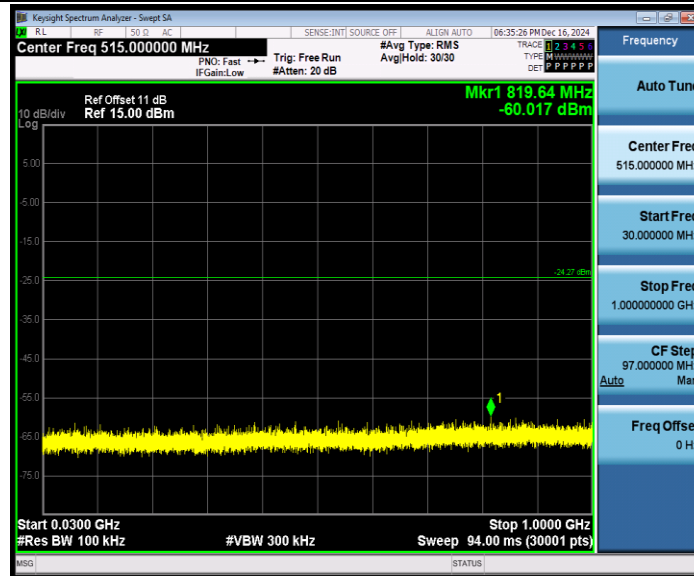


802.11ax HE20_2462_106Tone_RU54_1000~26500

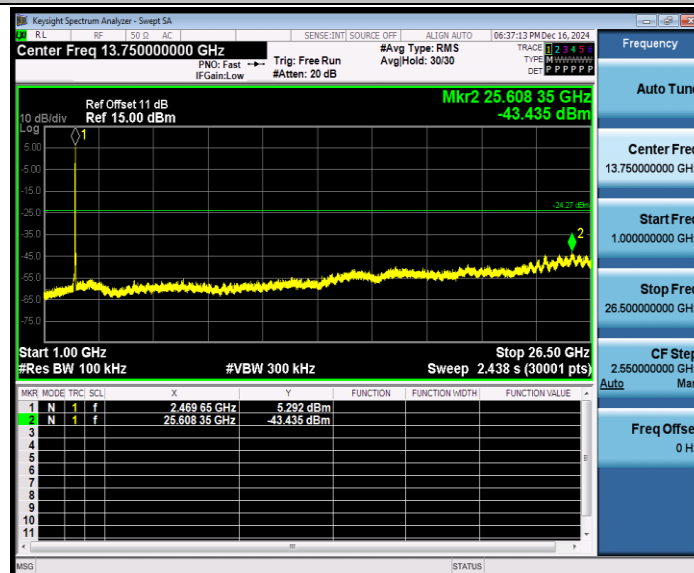


802.11be EHT20_2412_26Tone_RU0_30~1000

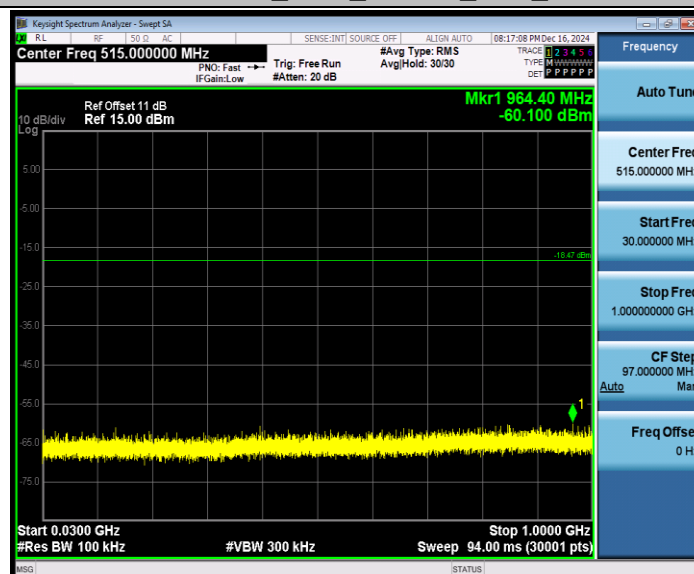


802.11be EHT20_2412_26Tone_RU0_1000~26500

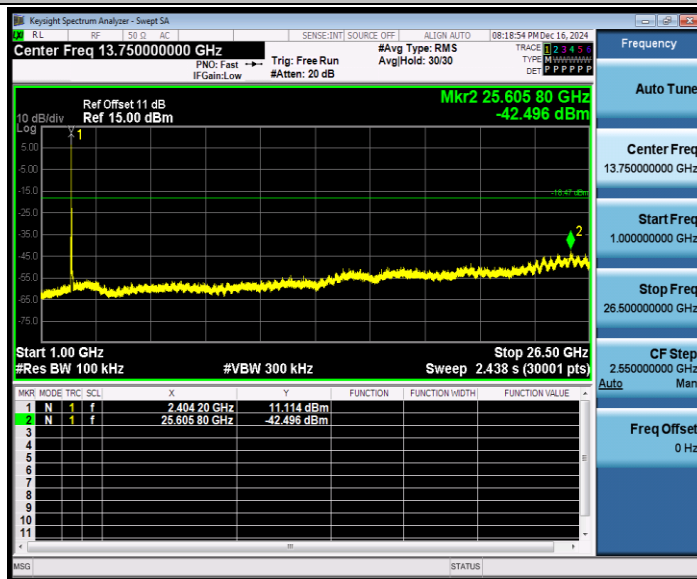


802.11be EHT20_2412_52Tone_RU37_30~1000

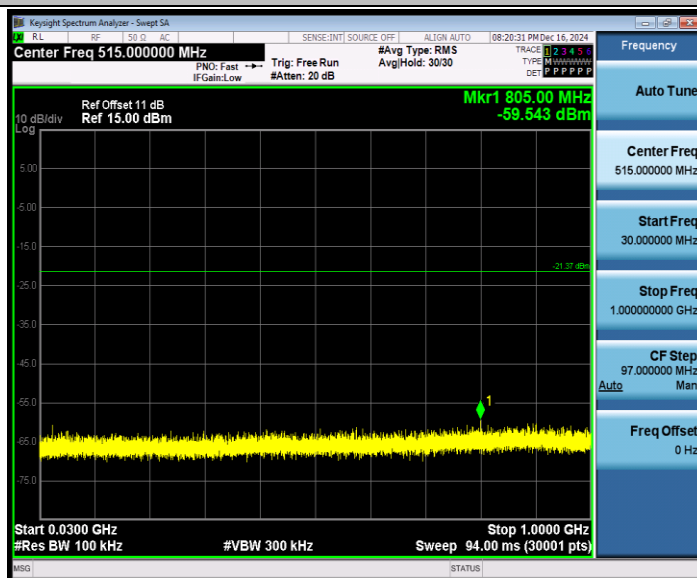

802.11be EHT20_2412_52Tone_RU37_1000~26500

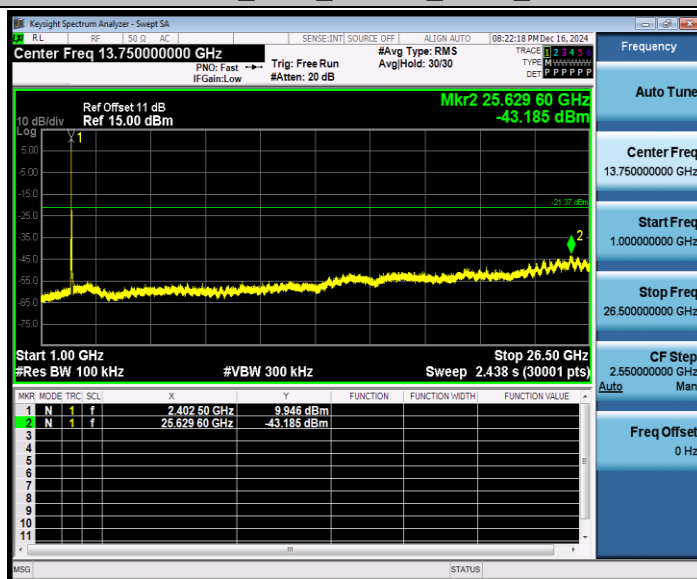


802.11be EHT20_2412_106Tone_RU53_30~1000

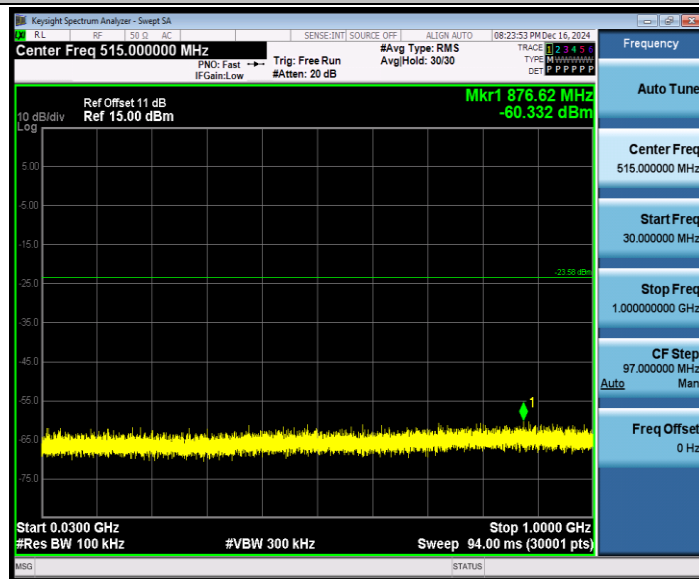


802.11be EHT20_2412_106Tone_RU53_1000~26500




802.11be EHT20_2437_26Tone_RU4_30~1000

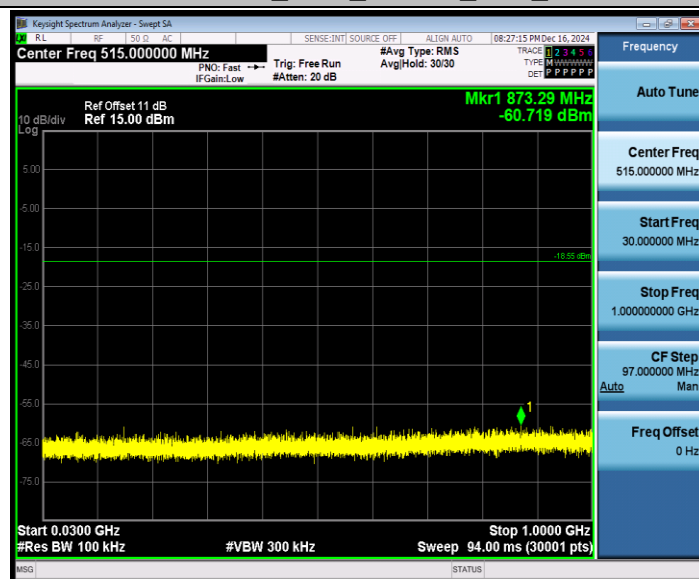


802.11be EHT20_2437_26Tone_RU4_1000~26500

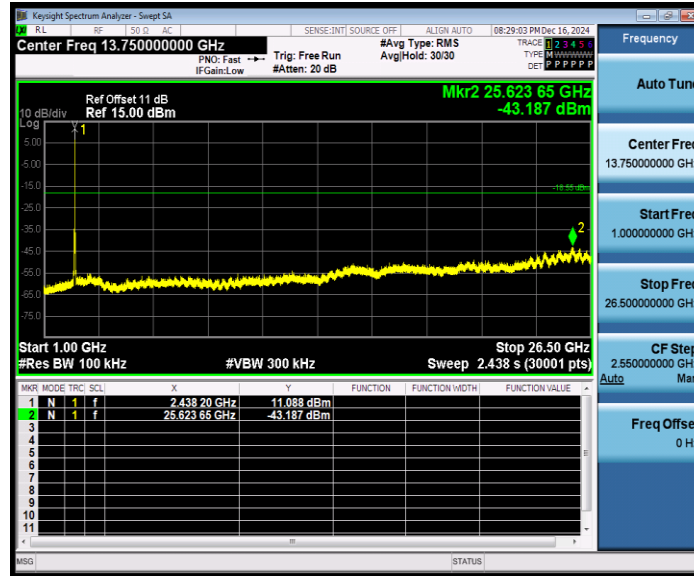


802.11be EHT20_2437_52Tone_RU39_30~1000

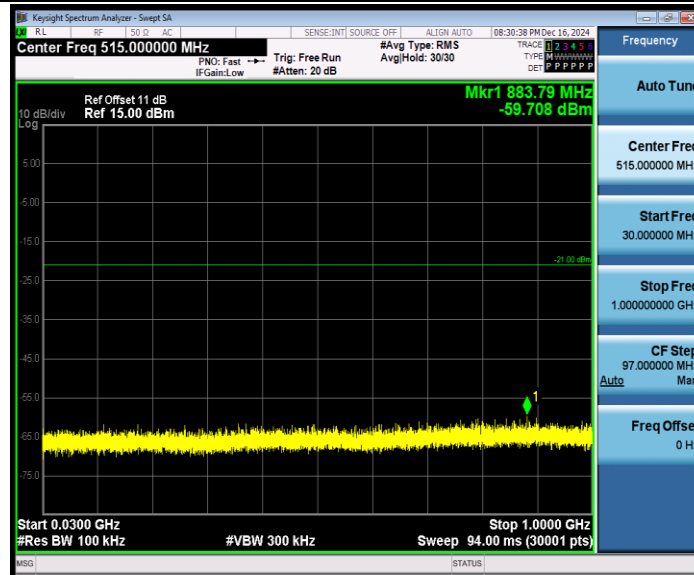


802.11be EHT20_2437_52Tone_RU39_1000~26500

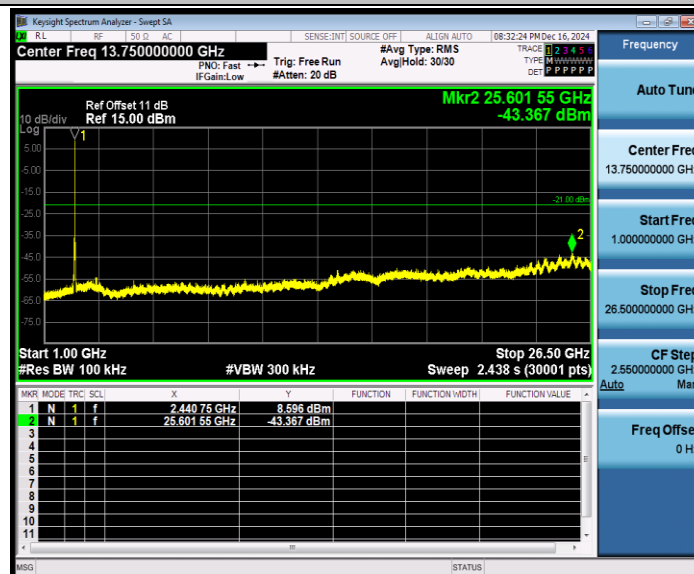


802.11be EHT20_2462_26Tone_RU8_30~1000

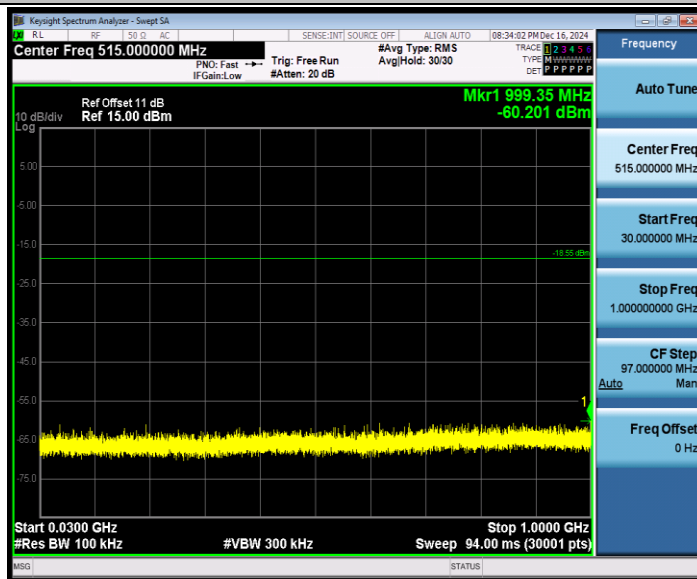


802.11be EHT20_2462_26Tone_RU8_1000~26500

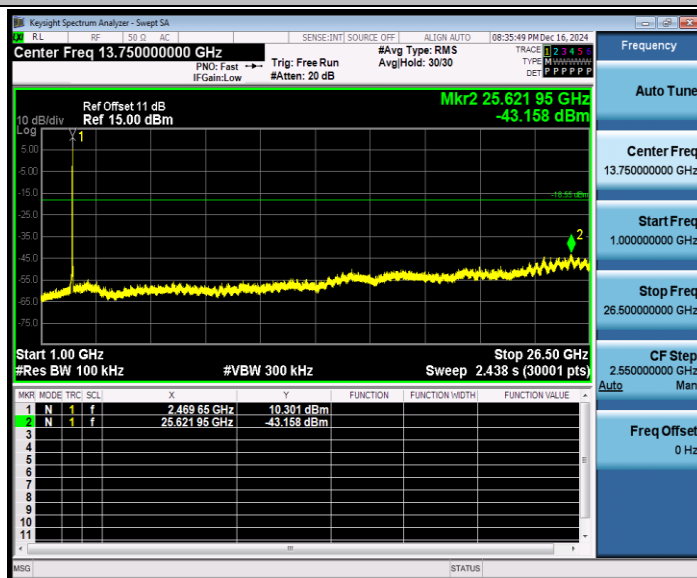


Tx. Spurious 802.11ax(HE20) 106-Tones Index53 2437MHz Ref

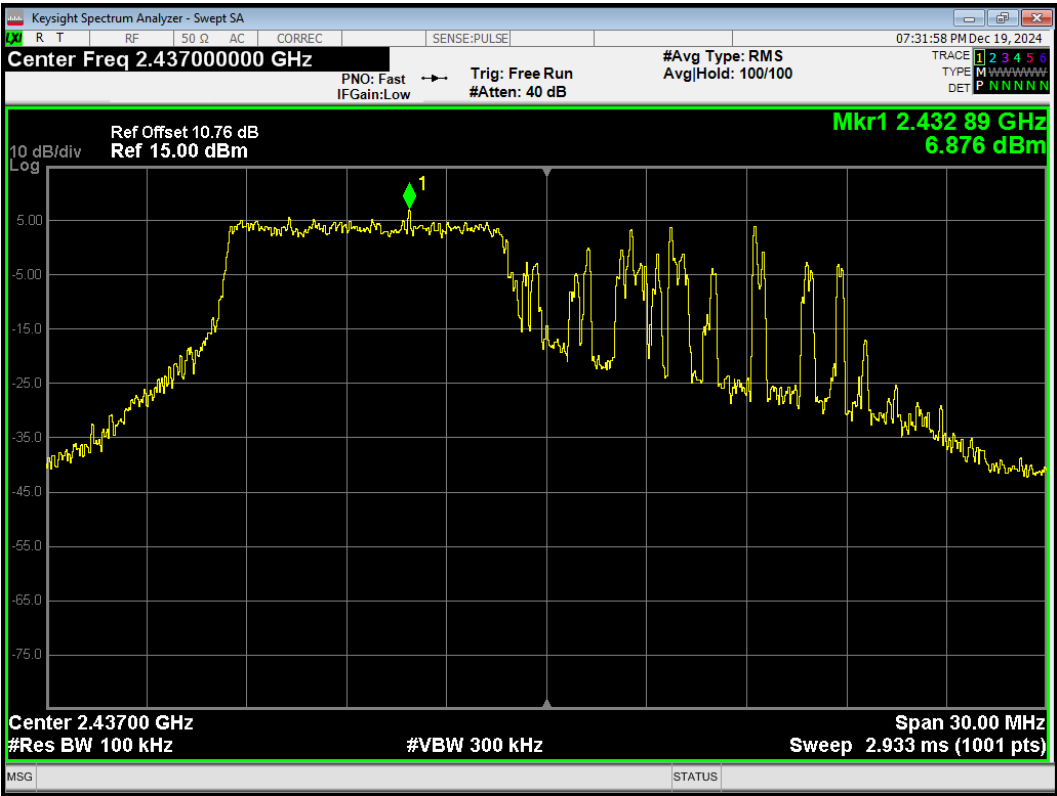


Tx. Spurious 802.11ax(HE20) 106-Tones Index53 2437MHz Emission

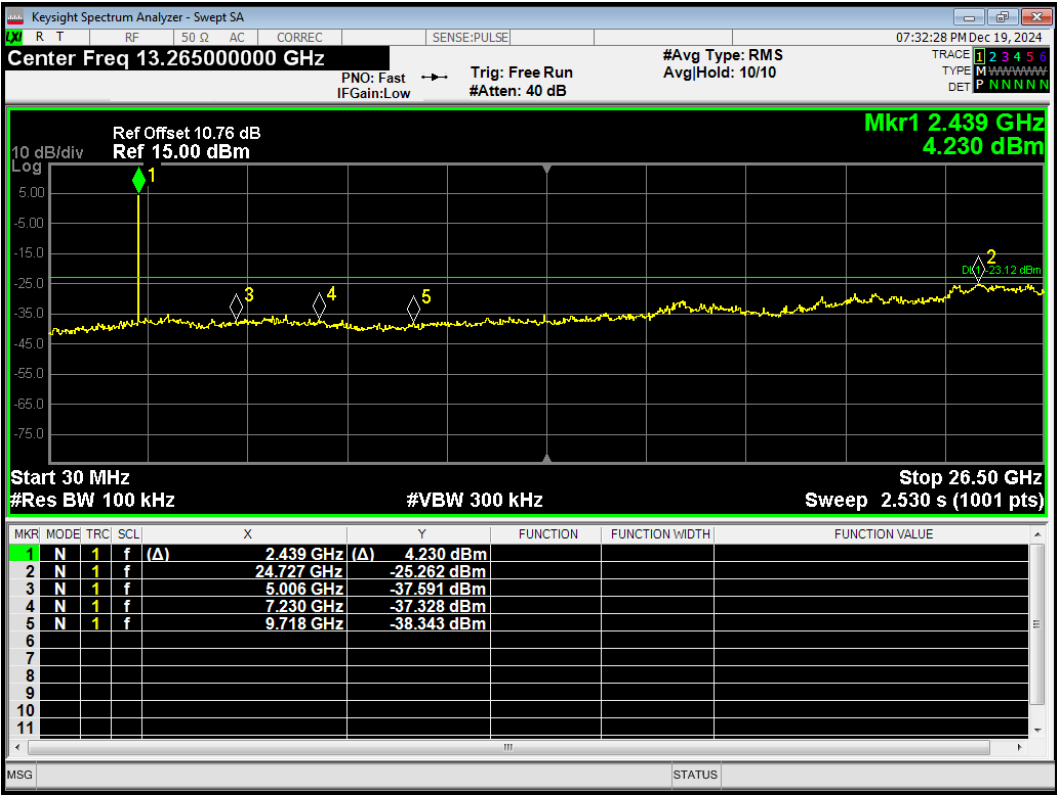


Tx. Spurious 802.11ax(HE20) 242-Tones Index61 2412MHz Ref

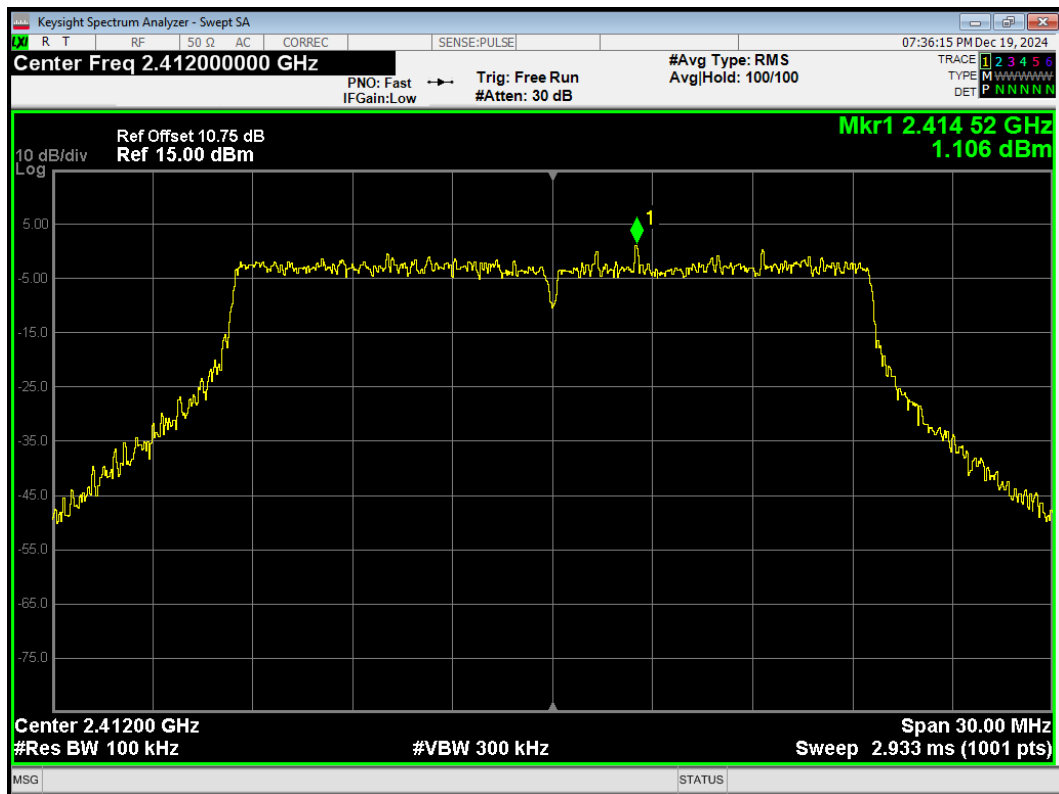


Tx. Spurious 802.11ax(HE20) 242-Tones Index61 2412MHz Emission

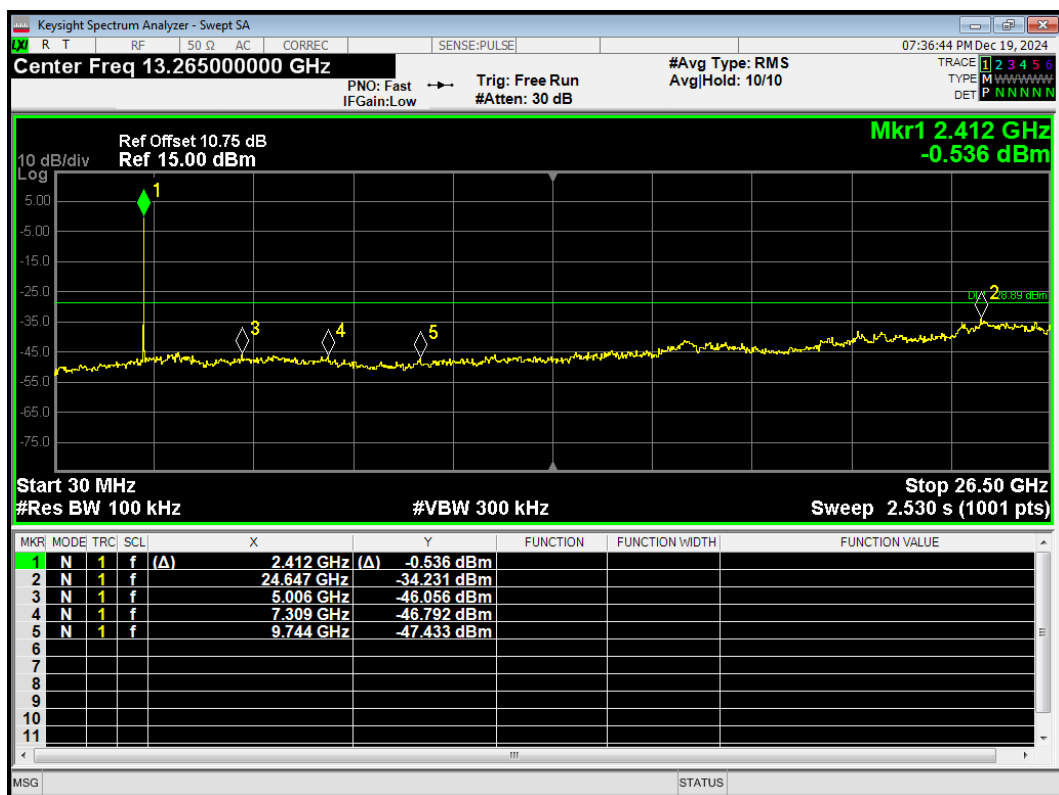


Tx. Spurious 802.11ax(HE20) 242-Tones Index61 2437MHz Ref

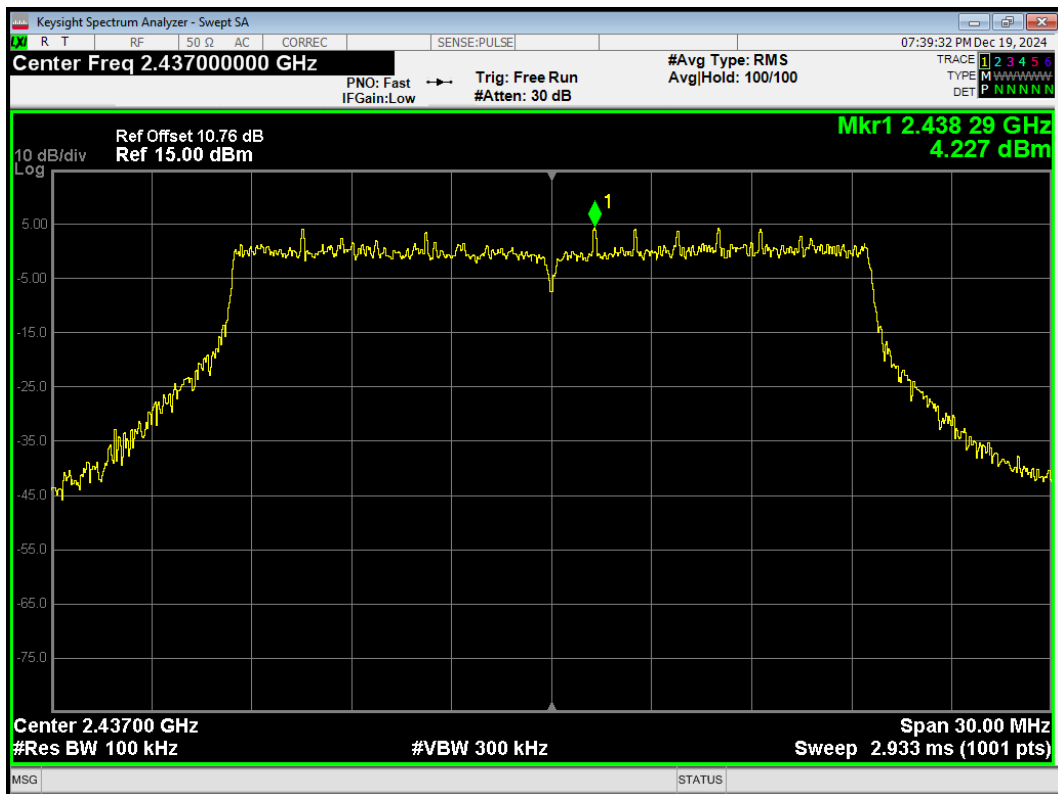


Tx. Spurious 802.11ax(HE20) 242-Tones Index61 2437MHz Emission

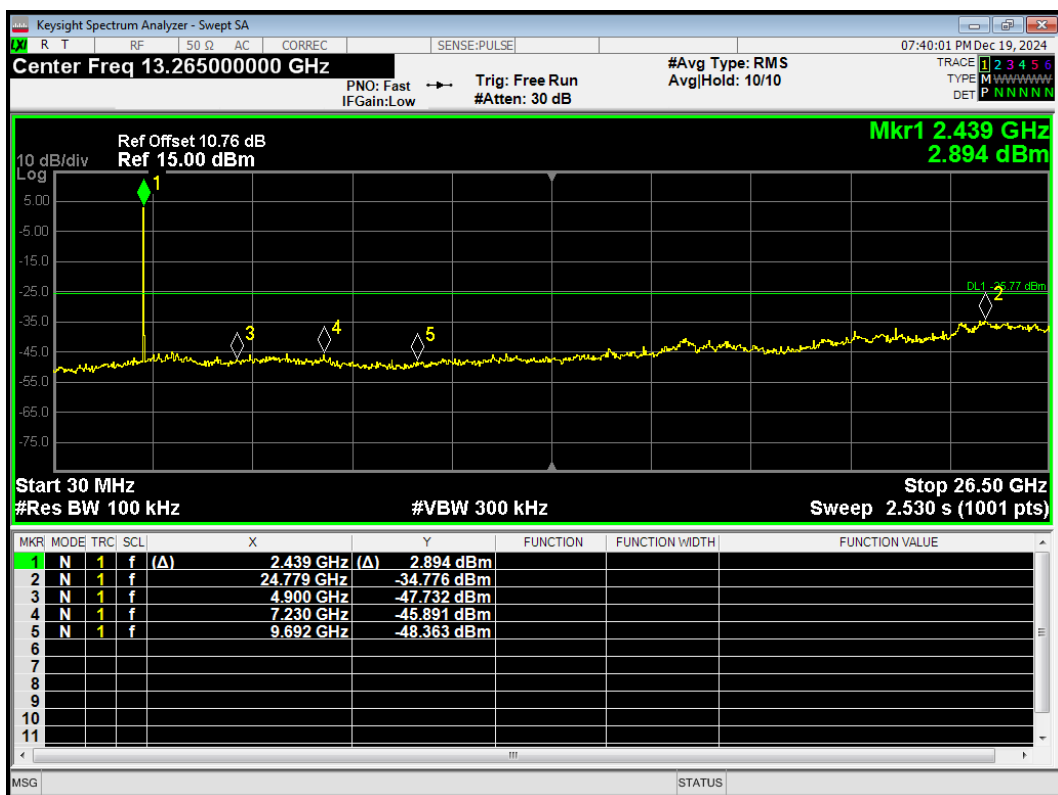


Tx. Spurious 802.11ax(HE20) 242-Tones Index61 2462MHz Ref

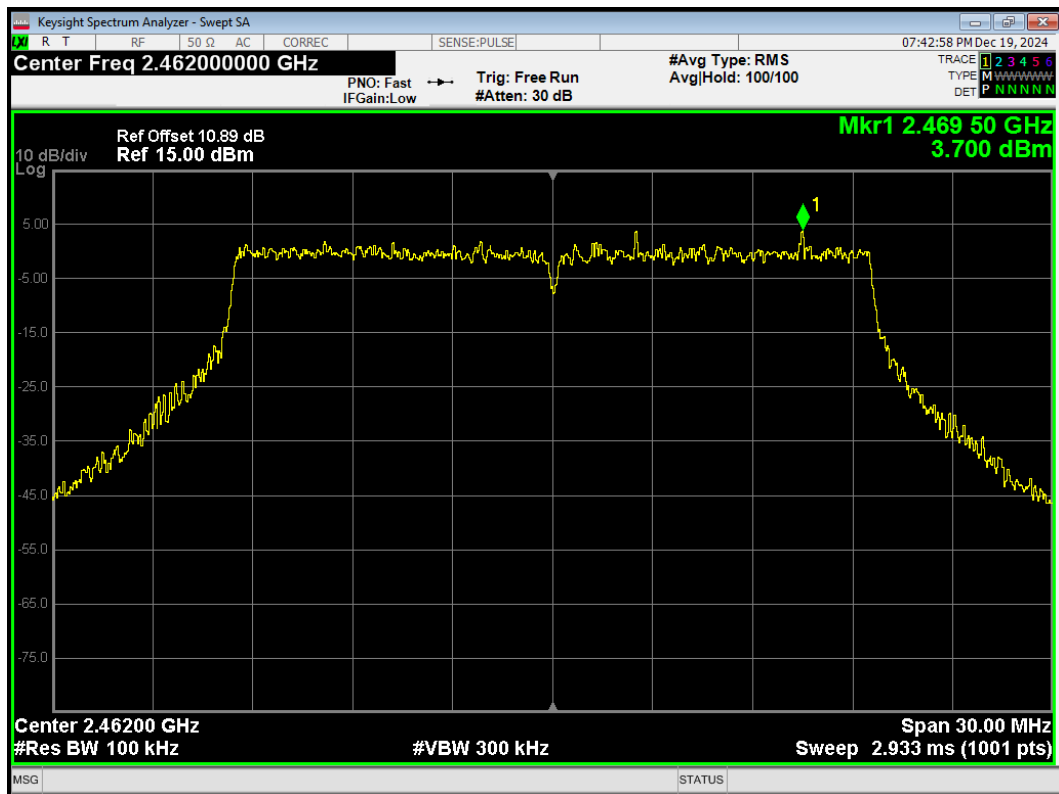


Tx. Spurious 802.11ax(HE20) 242-Tones Index61 2462MHz Emission

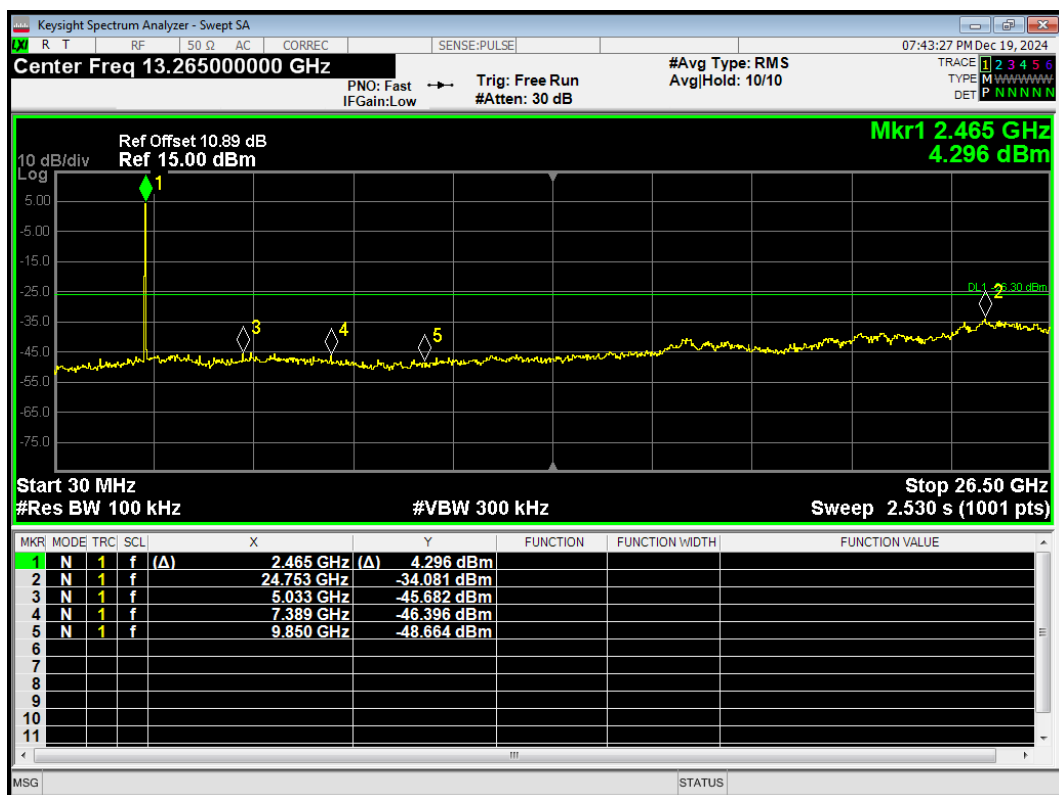


Tx. Spurious 802.11ax(HE20) 26-Tones Index4 2437MHz Ref

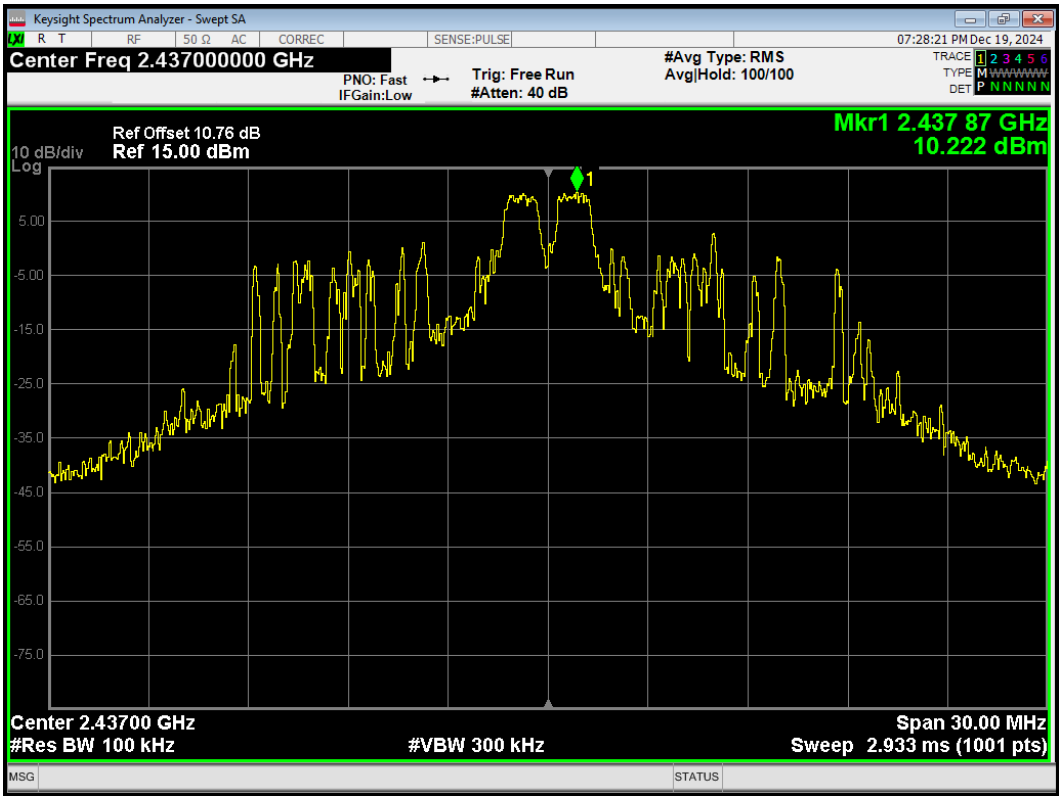


Tx. Spurious 802.11ax(HE20) 26-Tones Index4 2437MHz Emission

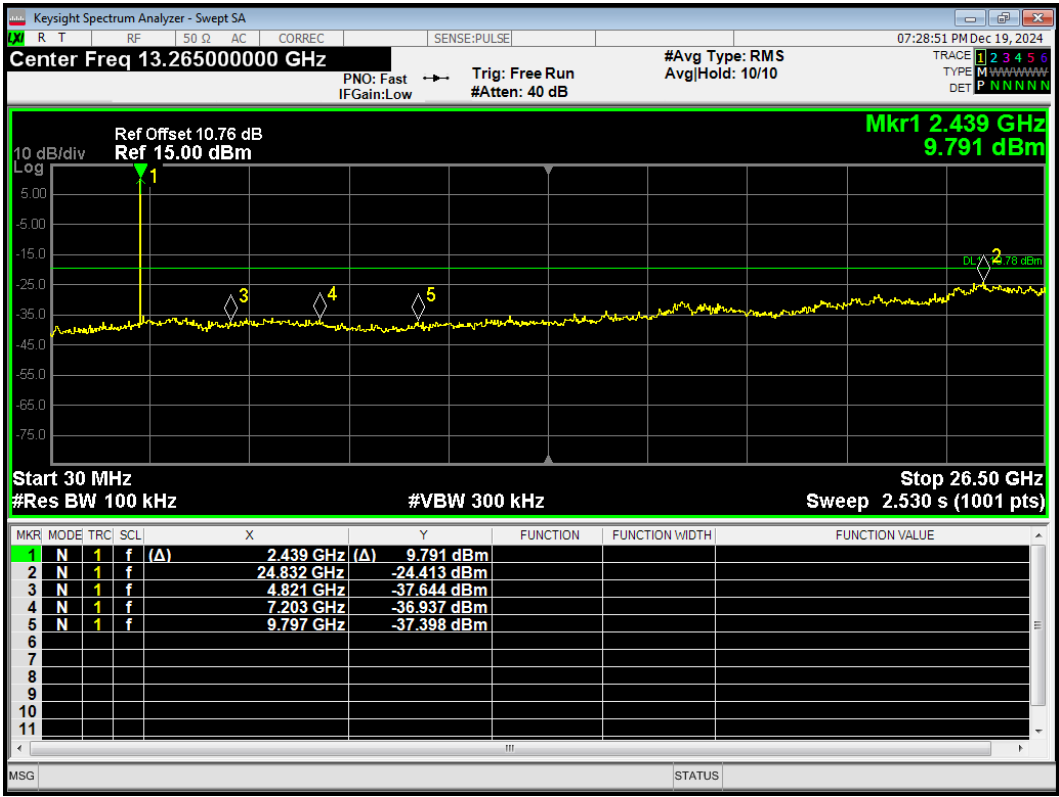


Tx. Spurious 802.11ax(HE40) 26-Tones Index0 2422MHz Ref

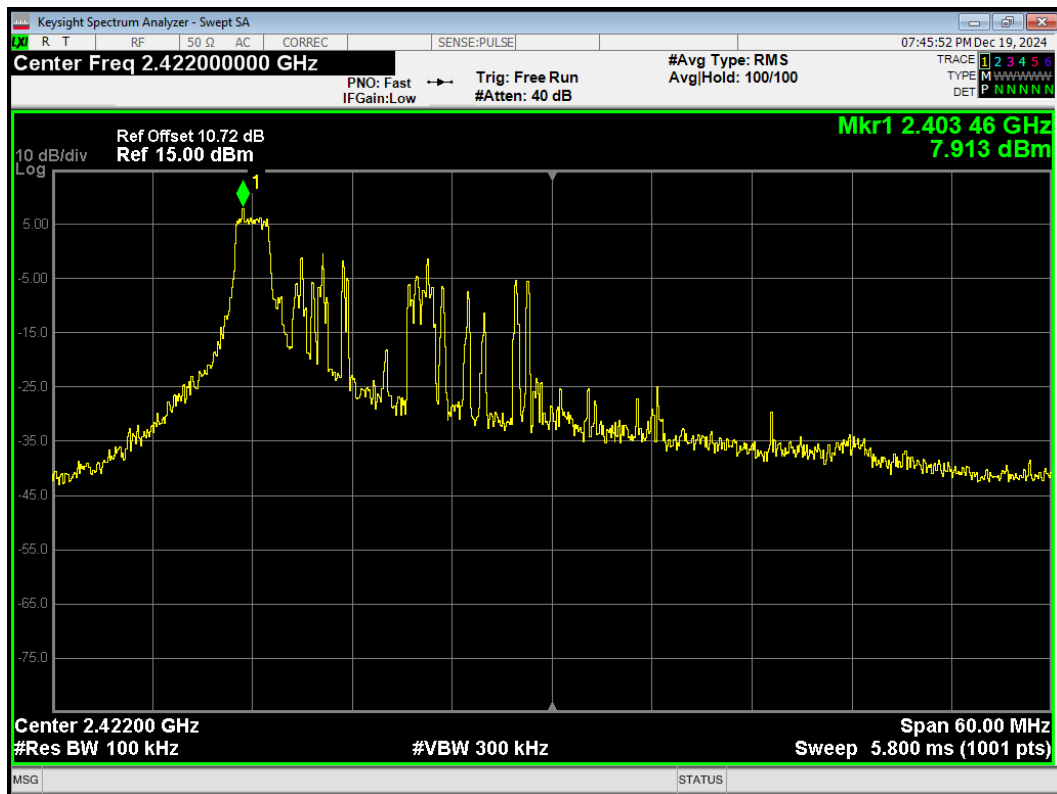


Tx. Spurious 802.11ax(HE40) 26-Tones Index0 2422MHz Emission

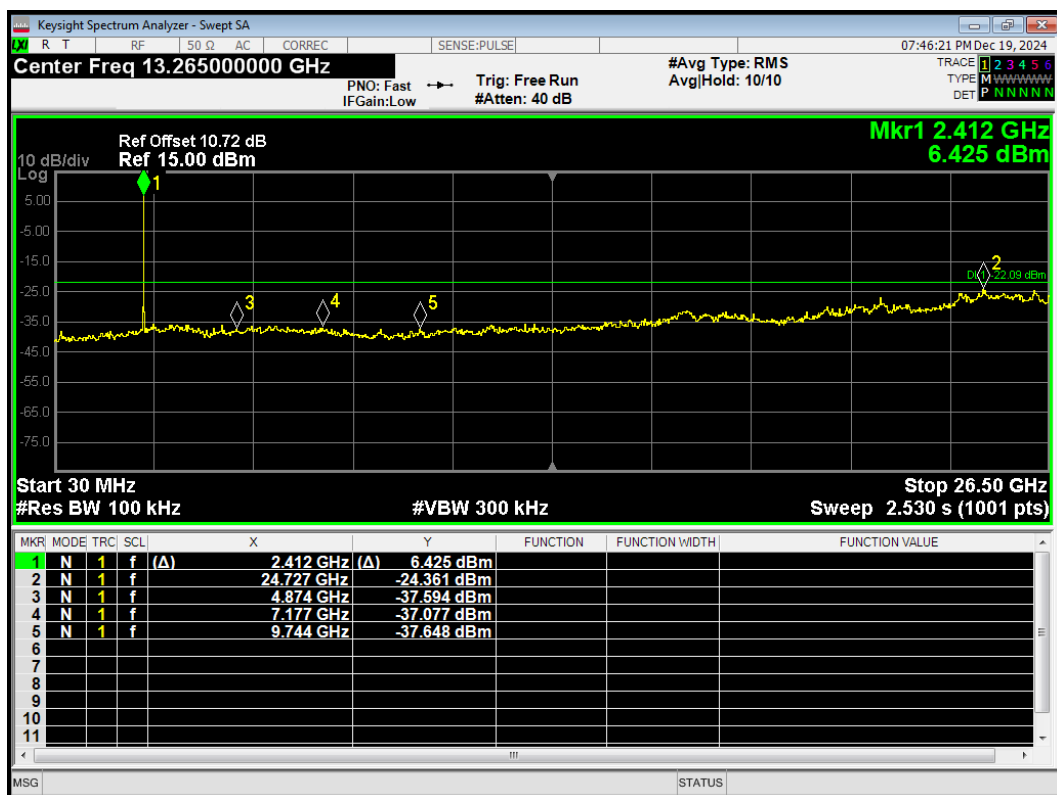


Tx. Spurious 802.11ax(HE40) 26-Tones Index17 2452MHz Ref

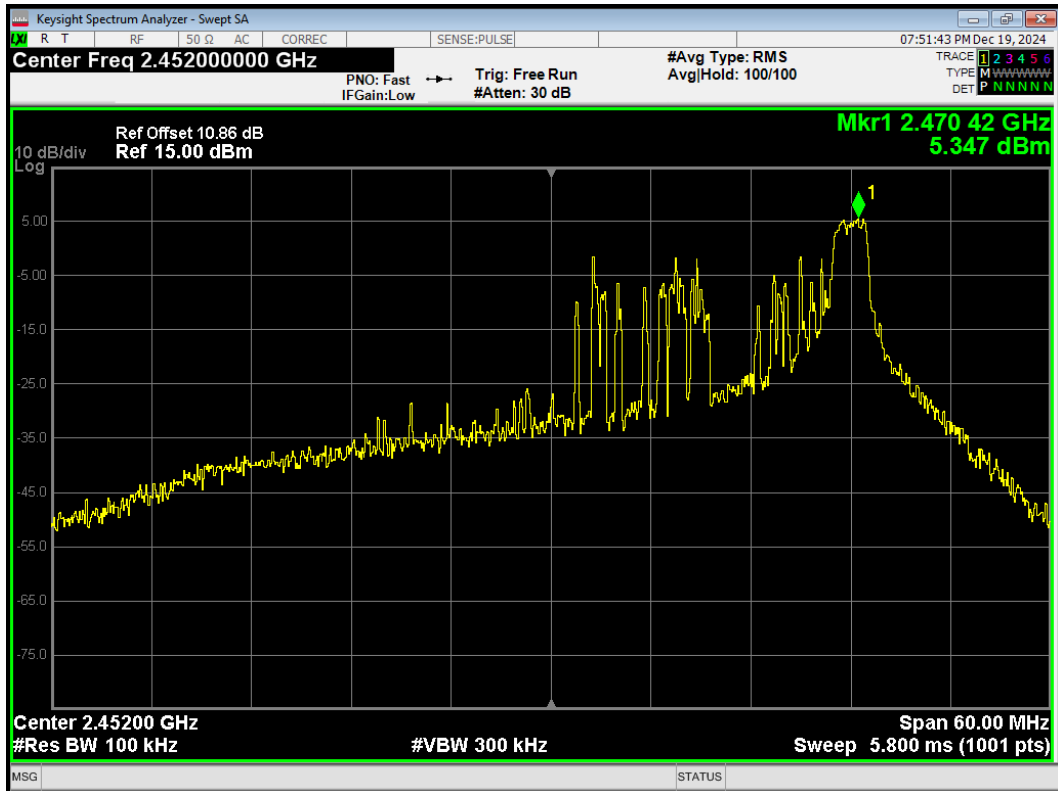


Tx. Spurious 802.11ax(HE40) 26-Tones Index17 2452MHz Emission

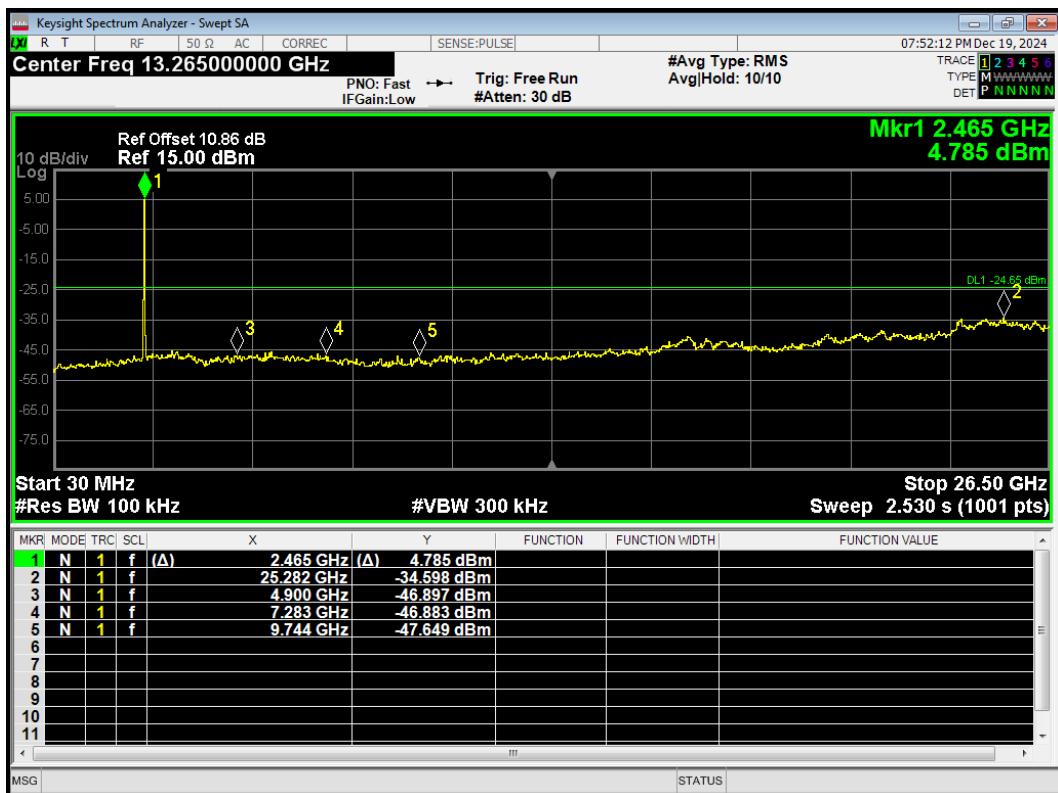


Tx. Spurious 802.11ax(HE40) 484-Tones Index65 2422MHz Ref

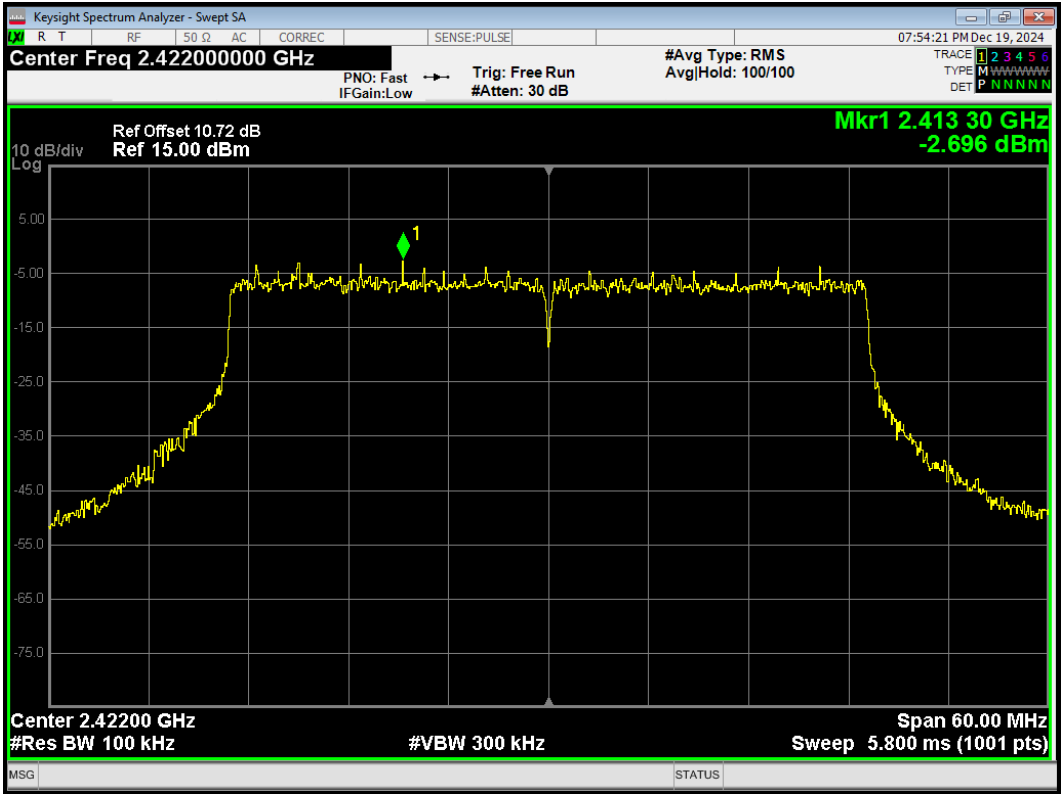


Tx. Spurious 802.11ax(HE40) 484-Tones Index65 2422MHz Emission

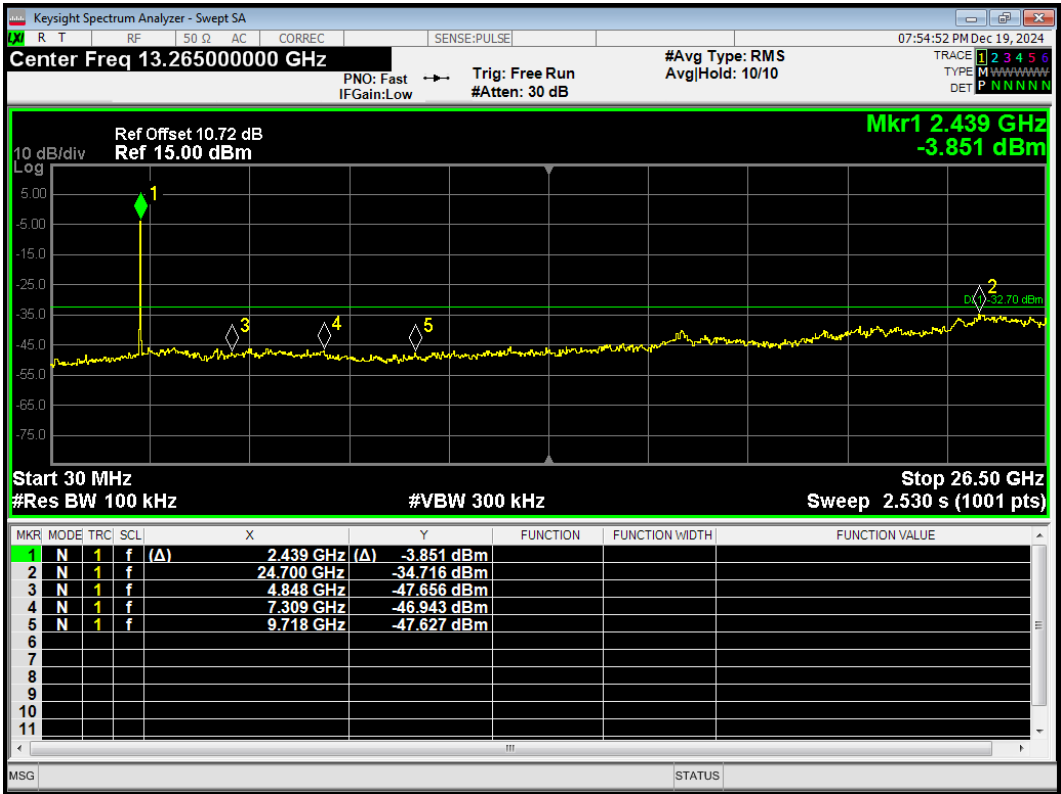


Tx. Spurious 802.11be(20) 106-Tones Index53 2437MHz Ref

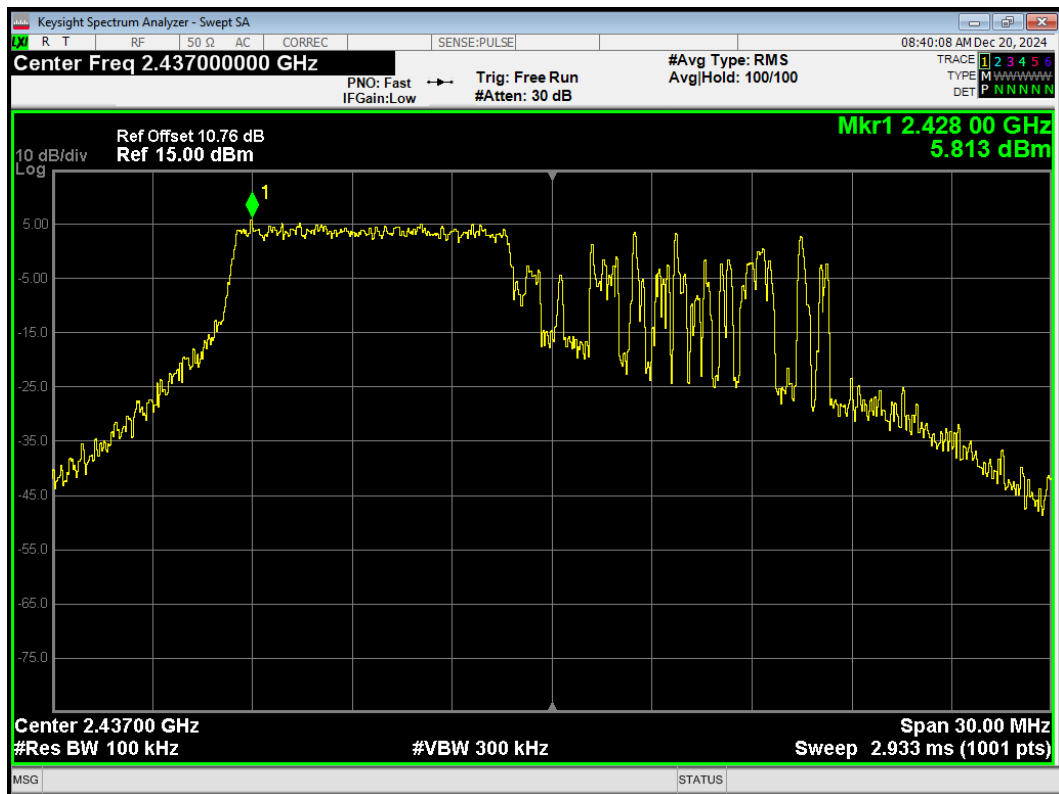


Tx. Spurious 802.11be(20) 106-Tones Index53 2437MHz Emission

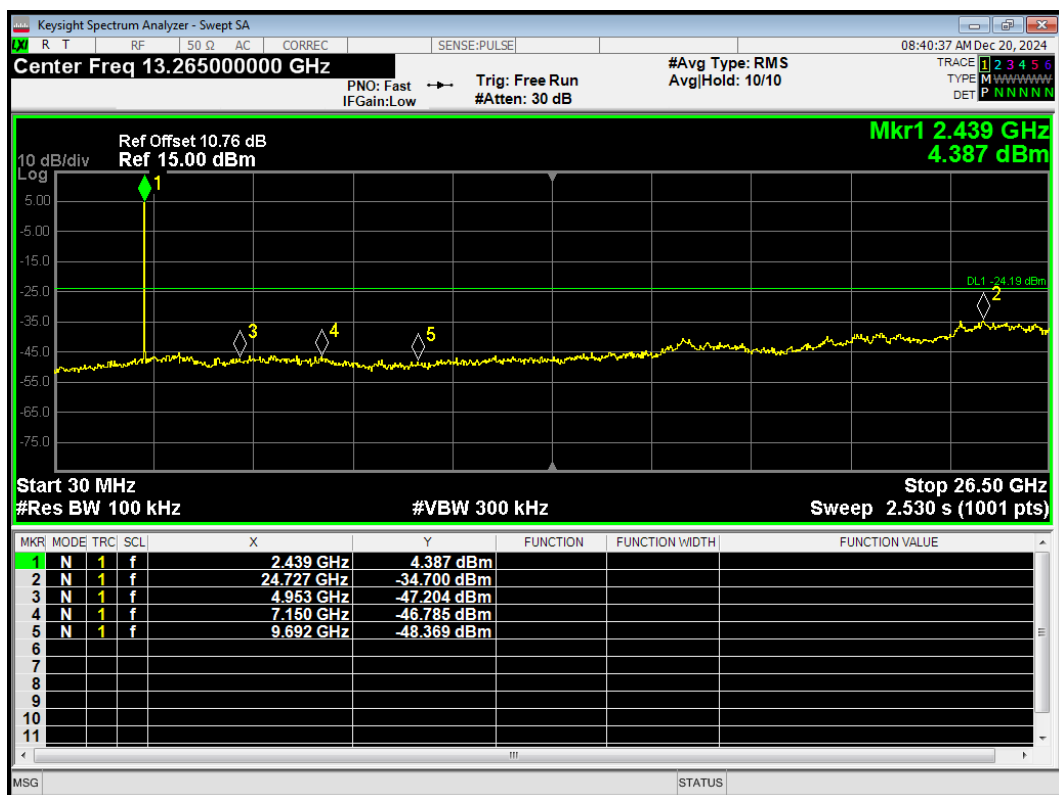


Tx. Spurious 802.11be(20) 106-Tones Index54 2462MHz Ref

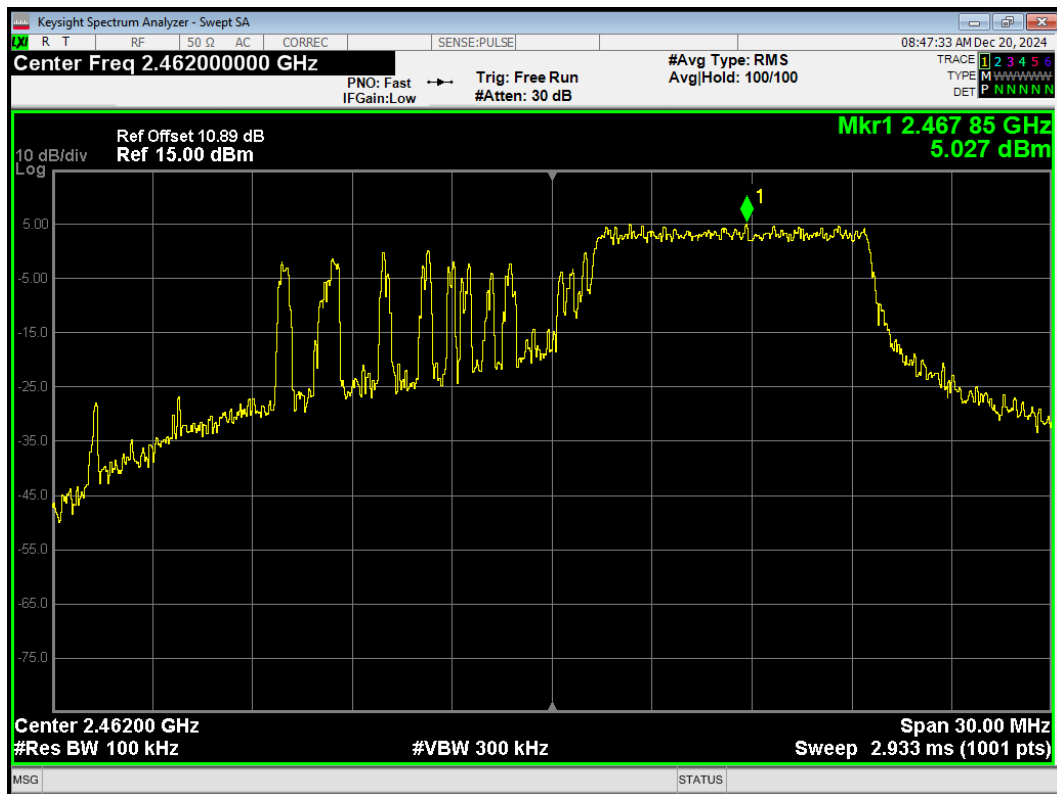


Tx. Spurious 802.11be(20) 106-Tones Index54 2462MHz Emission

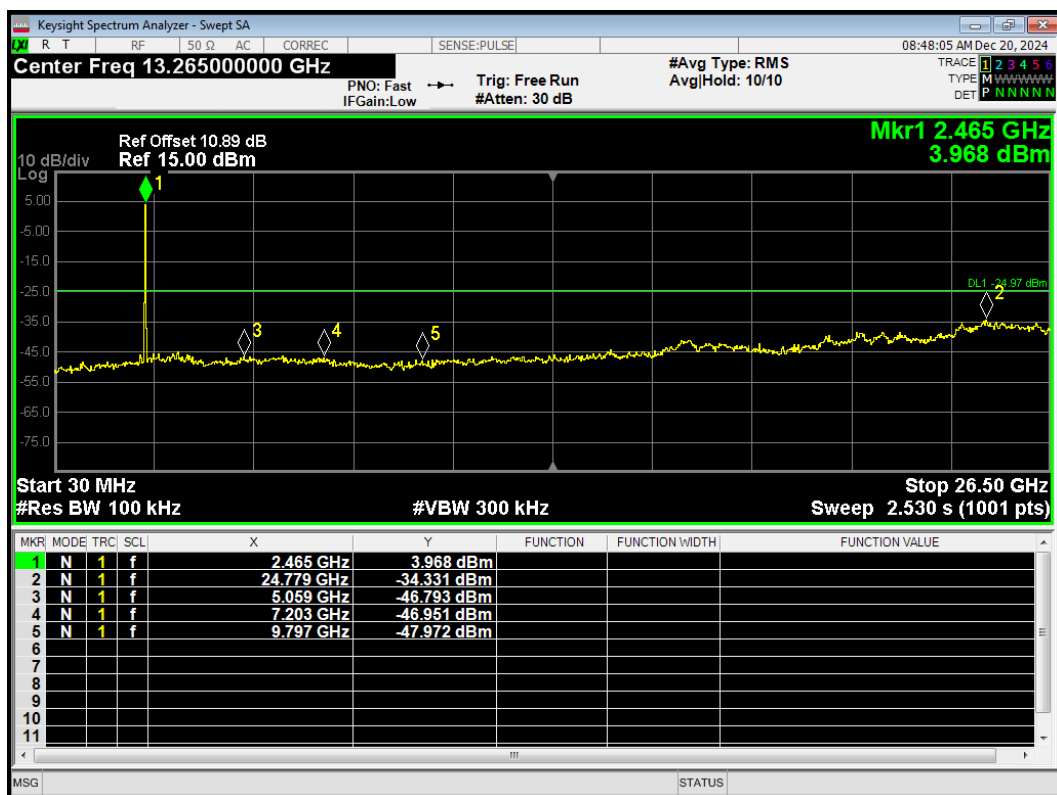


Tx. Spurious 802.11be(20) 242-Tones Index61 2412MHz Ref

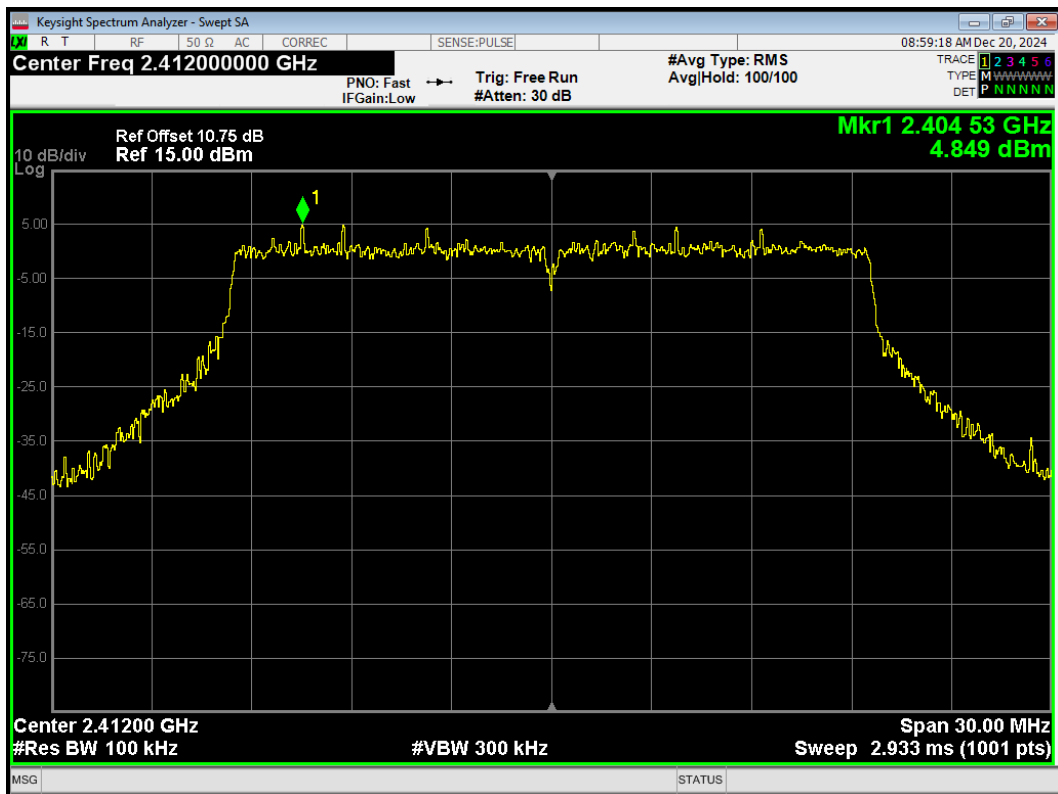


Tx. Spurious 802.11be(20) 242-Tones Index61 2412MHz Emission

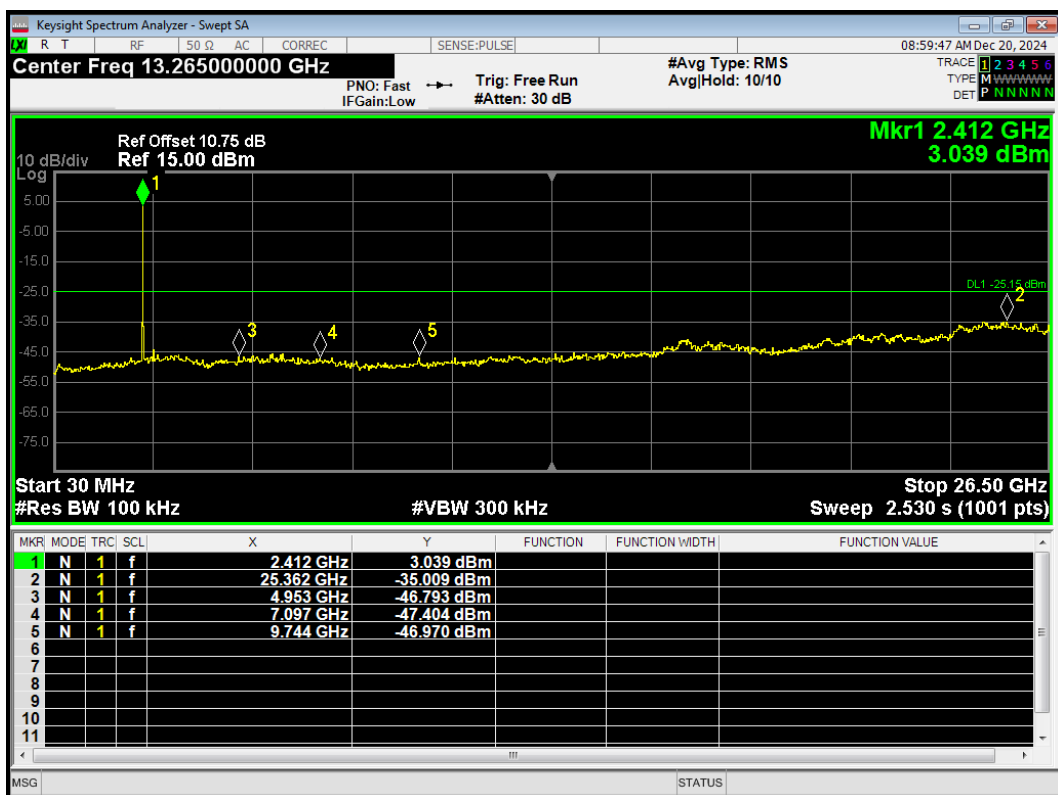


Tx. Spurious 802.11be(20) 242-Tones Index61 2437MHz Ref

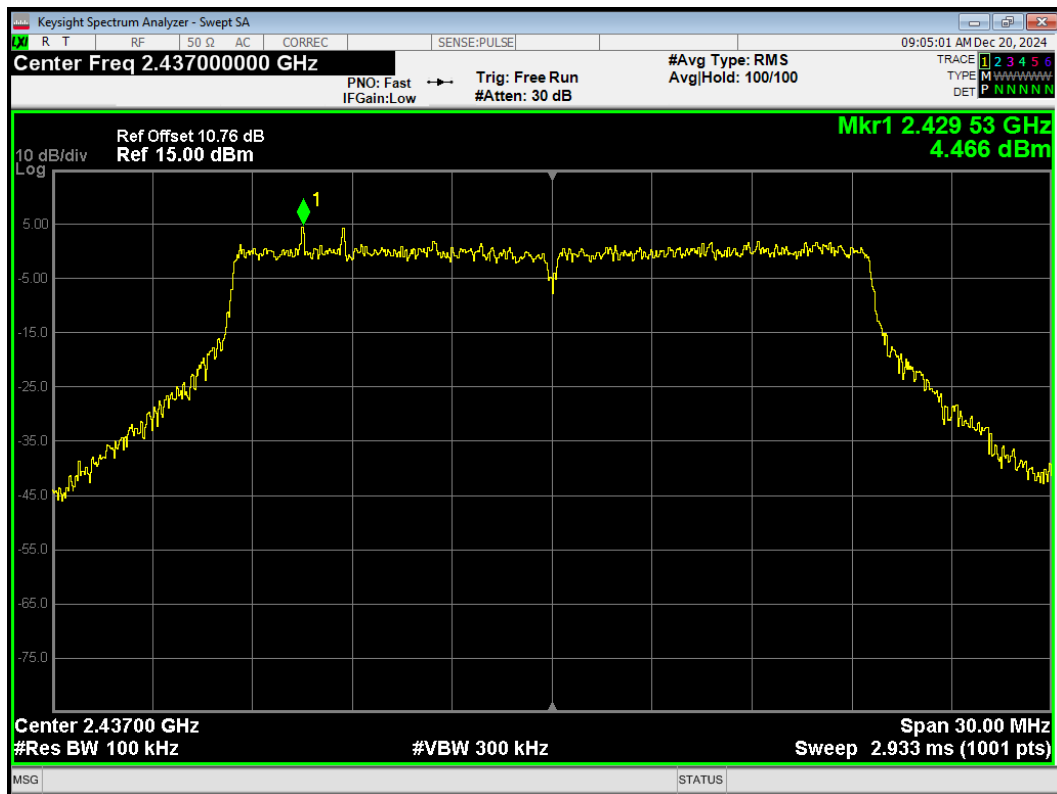


Tx. Spurious 802.11be(20) 242-Tones Index61 2437MHz Emission

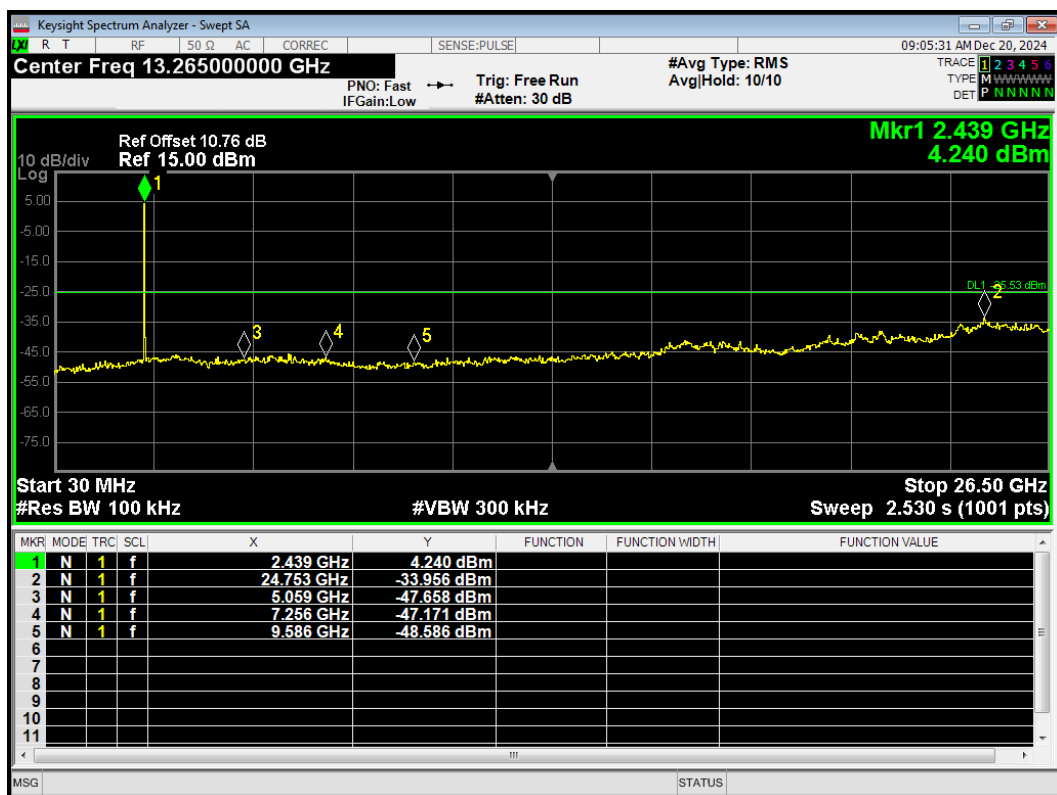


Tx. Spurious 802.11be(20) 242-Tones Index61 2462MHz Ref

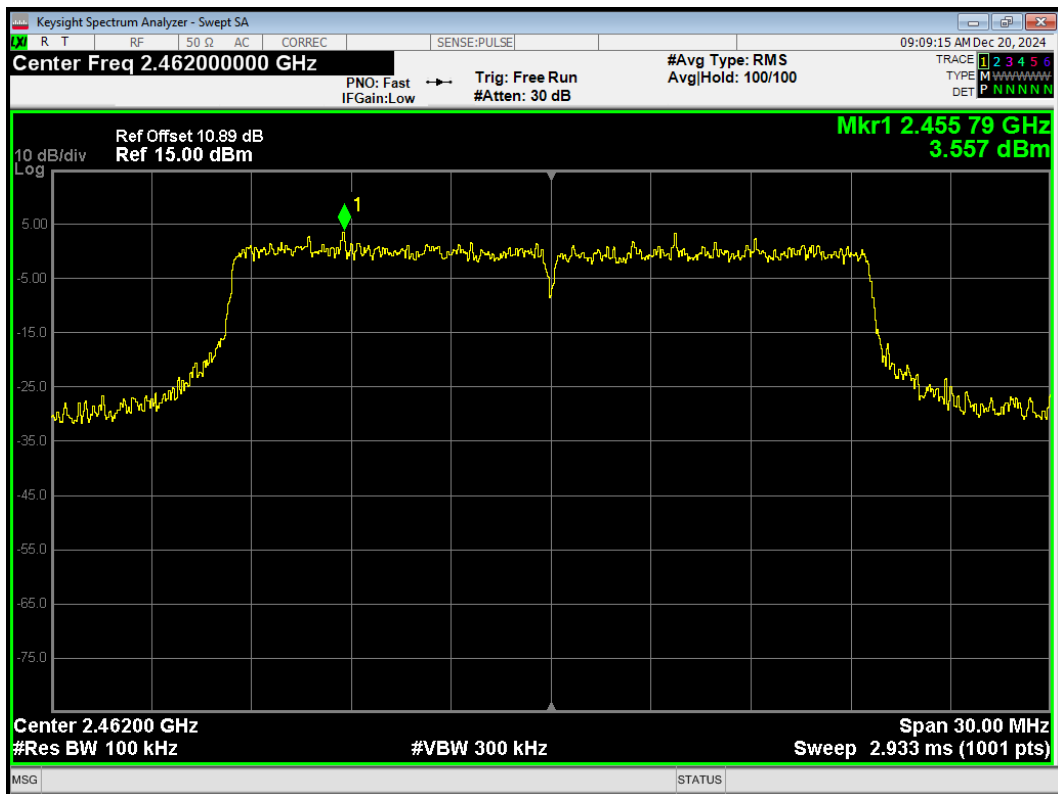


Tx. Spurious 802.11be(20) 242-Tones Index61 2462MHz Emission

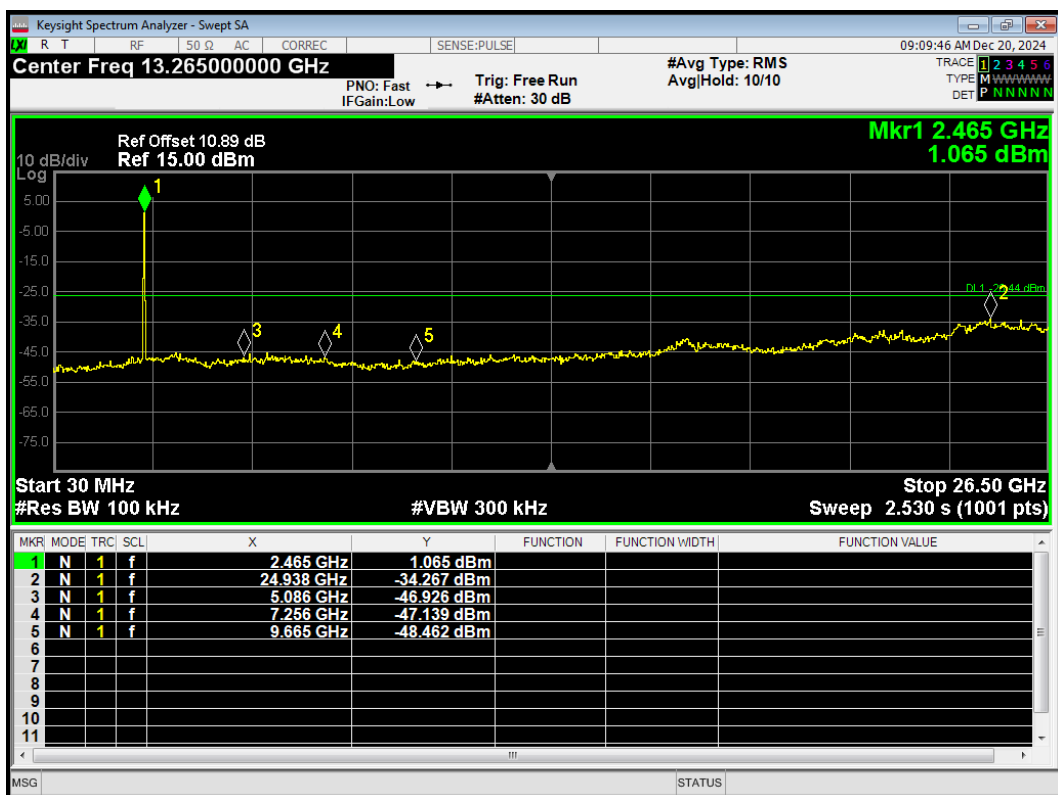


Tx. Spurious 802.11be(20) 52-Tones Index40 2462MHz Ref

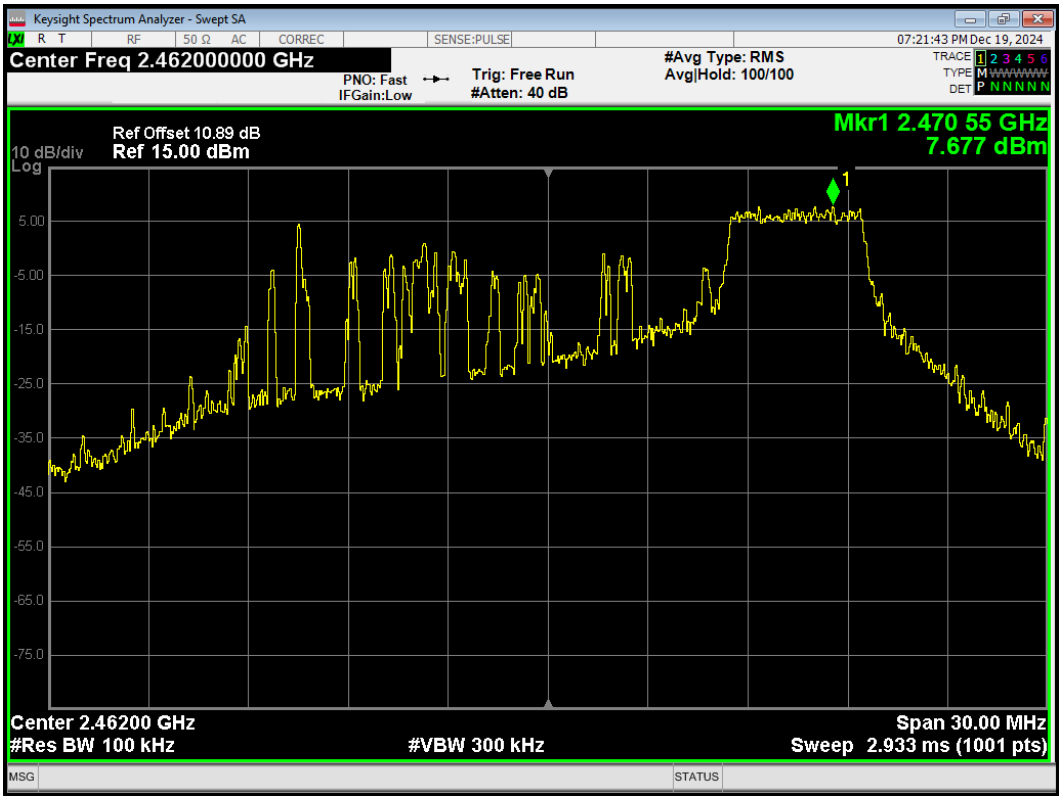


Tx. Spurious 802.11be(20) 52-Tones Index40 2462MHz Emission

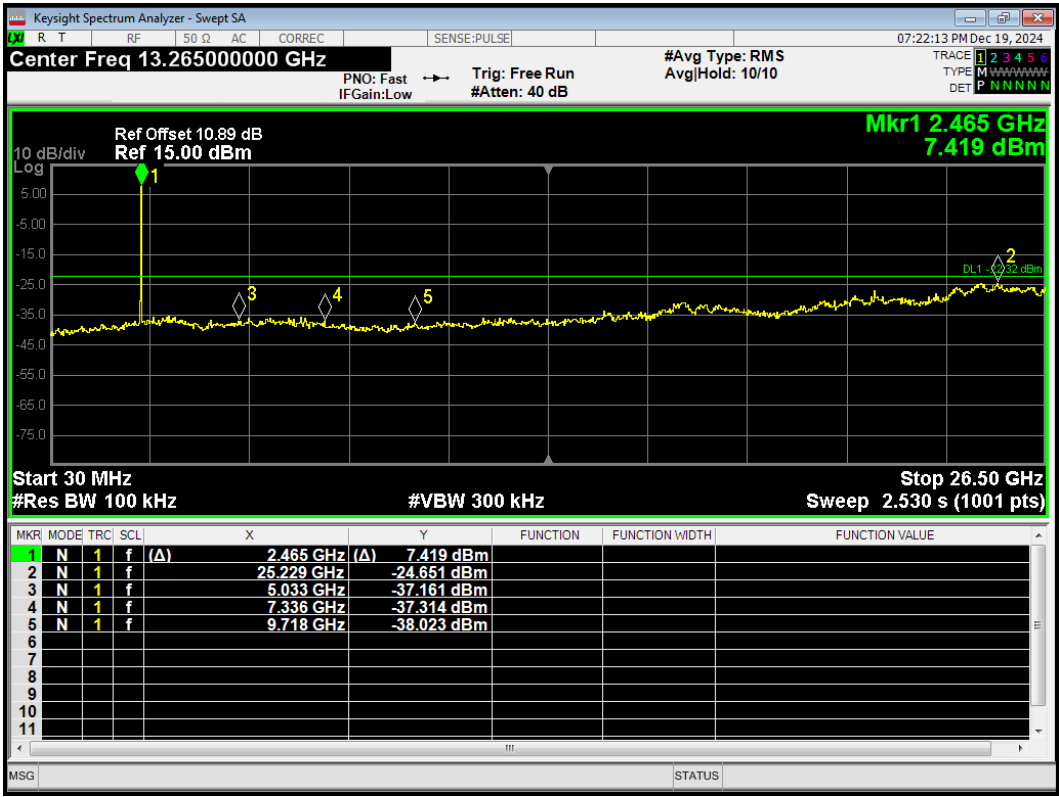


Tx. Spurious 802.11be(40) 26-Tones Index0 2422MHz Ref

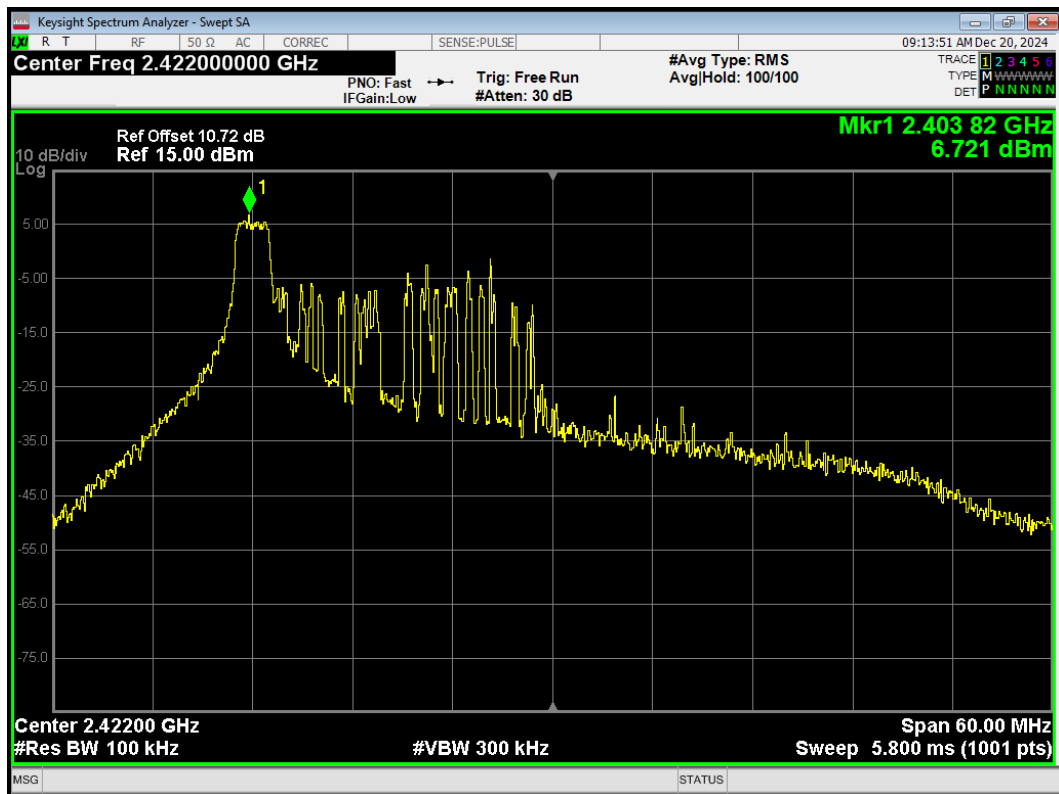


Tx. Spurious 802.11be(40) 26-Tones Index0 2422MHz Emission

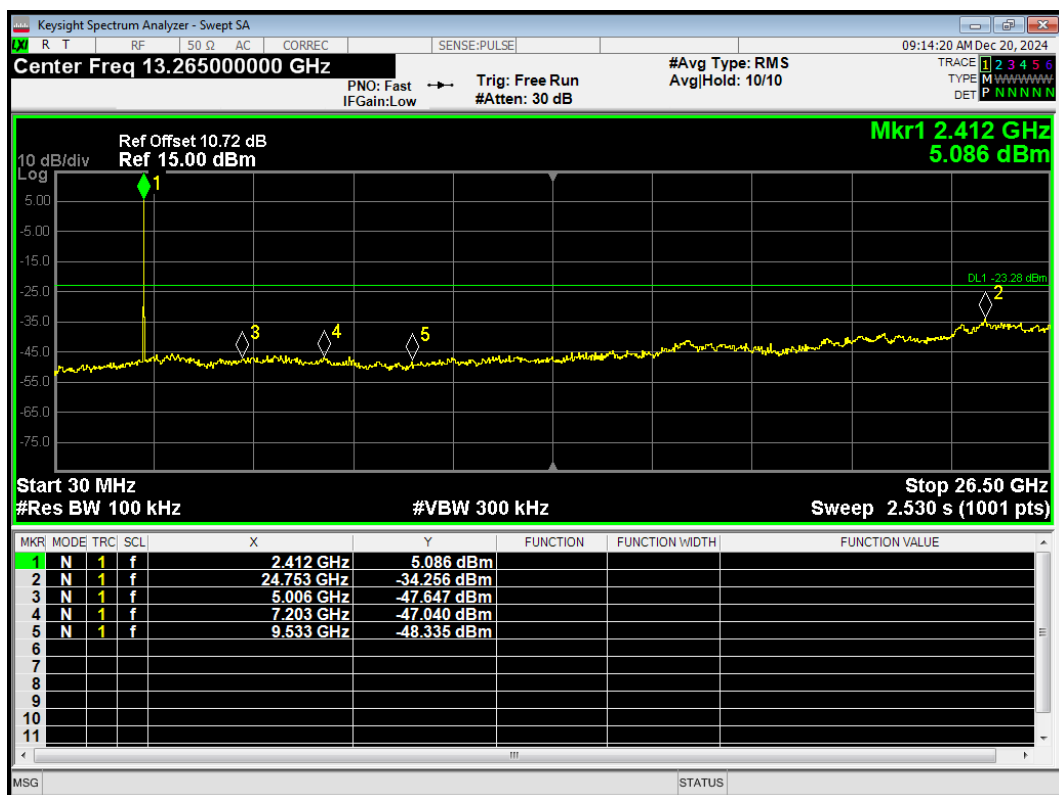


Tx. Spurious 802.11be(40) 26-Tones Index17 2452MHz Ref

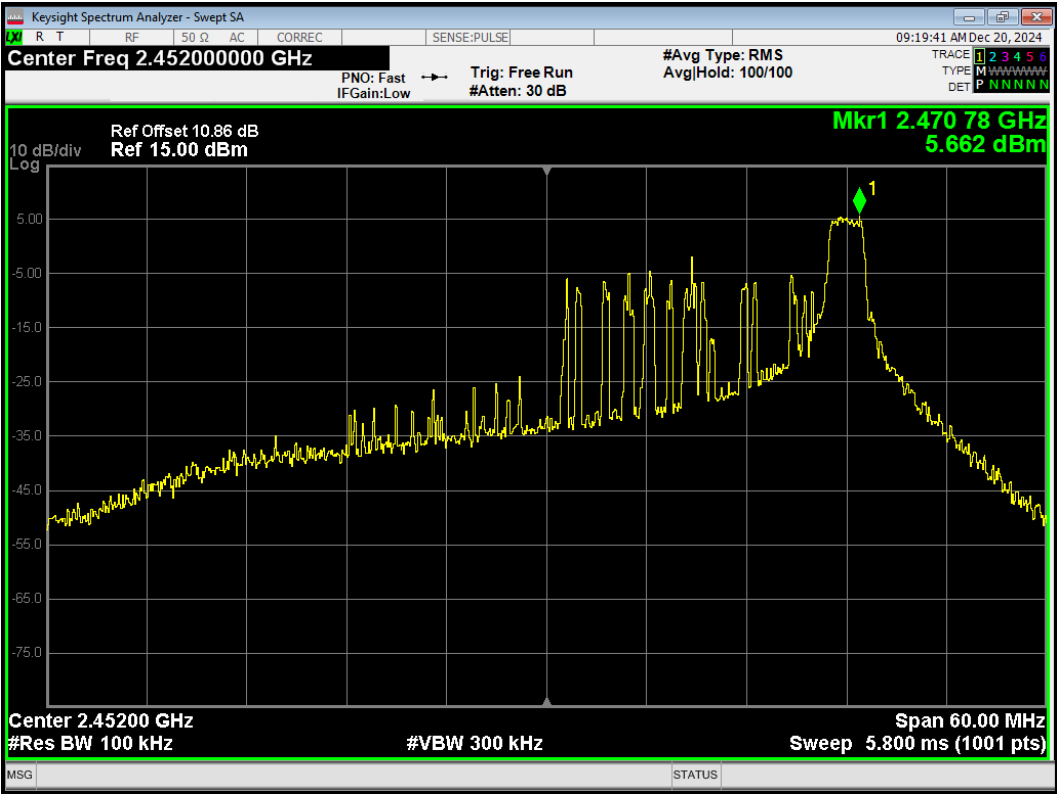


Tx. Spurious 802.11be(40) 26-Tones Index17 2452MHz Emission

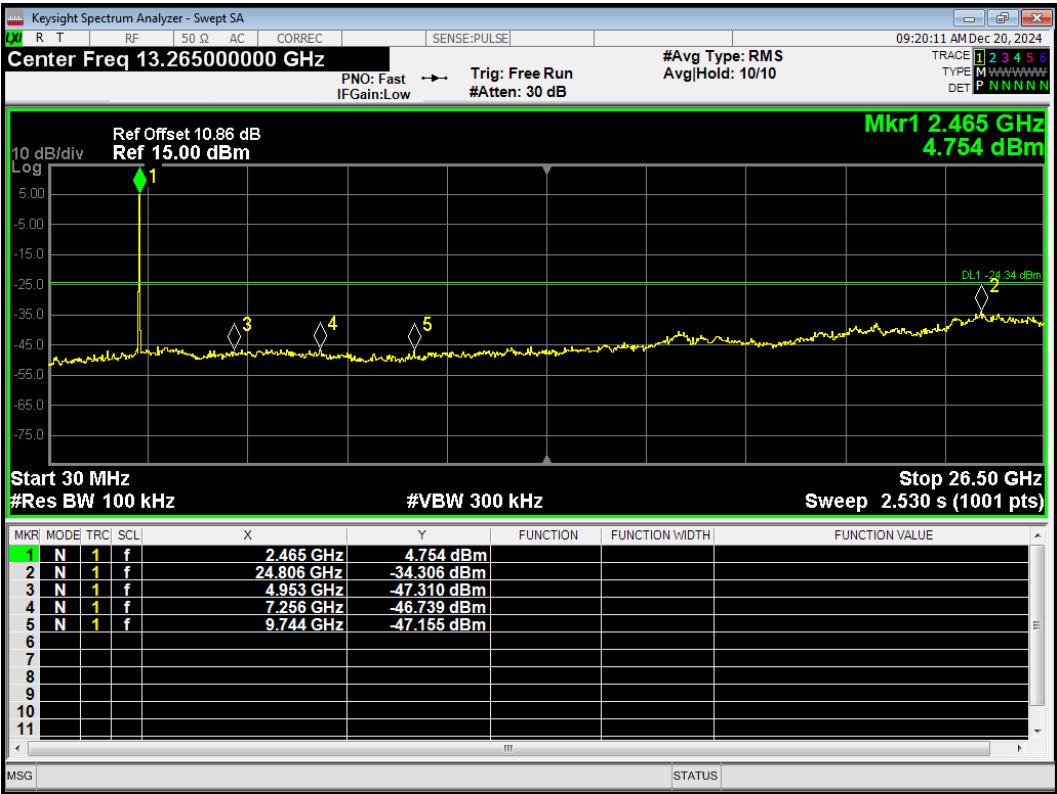

Tx. Spurious 802.11be(40) 484-Tones Index65 2422MHz Ref

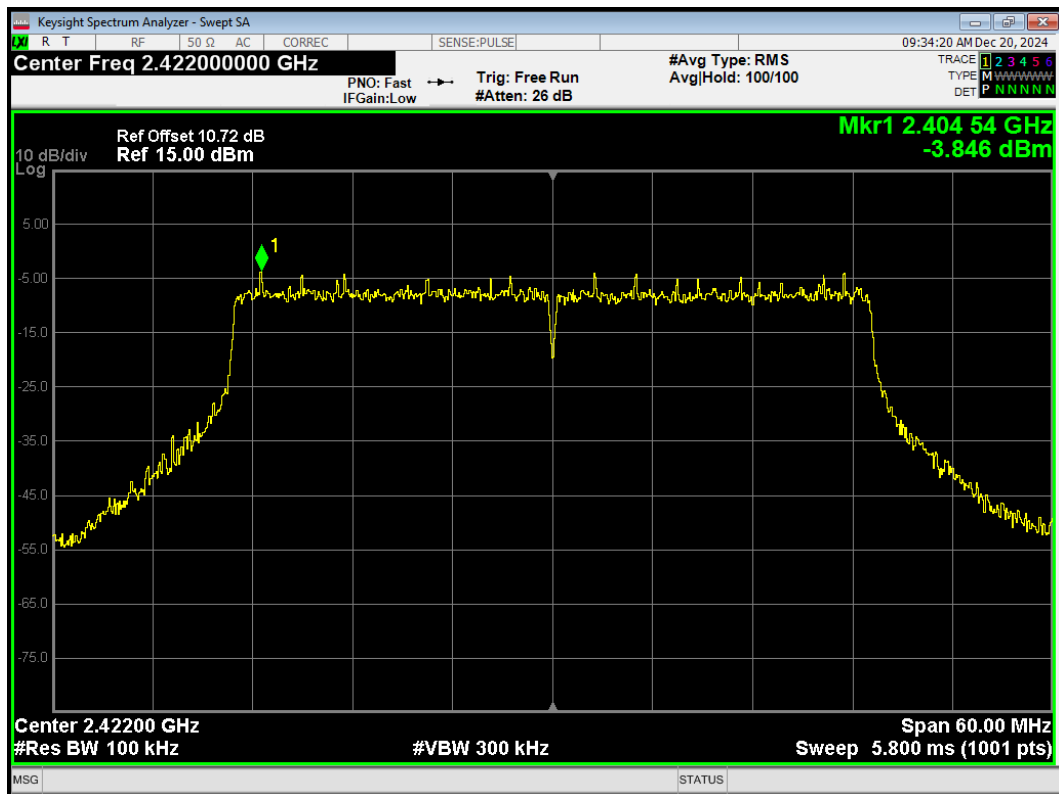

Tx. Spurious 802.11be(40) 484-Tones Index65 2422MHz Emission

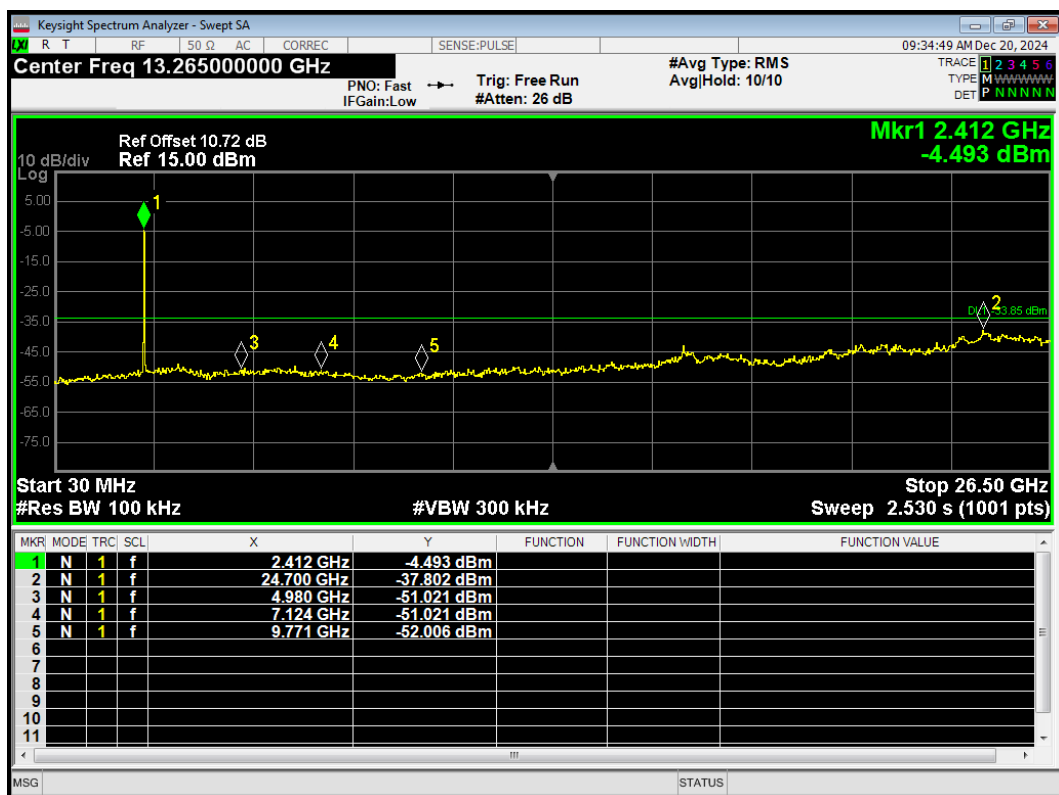

5.6. Unwanted Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9kHz, VBW=30kHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage

averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.


2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


The test is in transmitting mode.

Test Setup


9kHz~ 30MHz

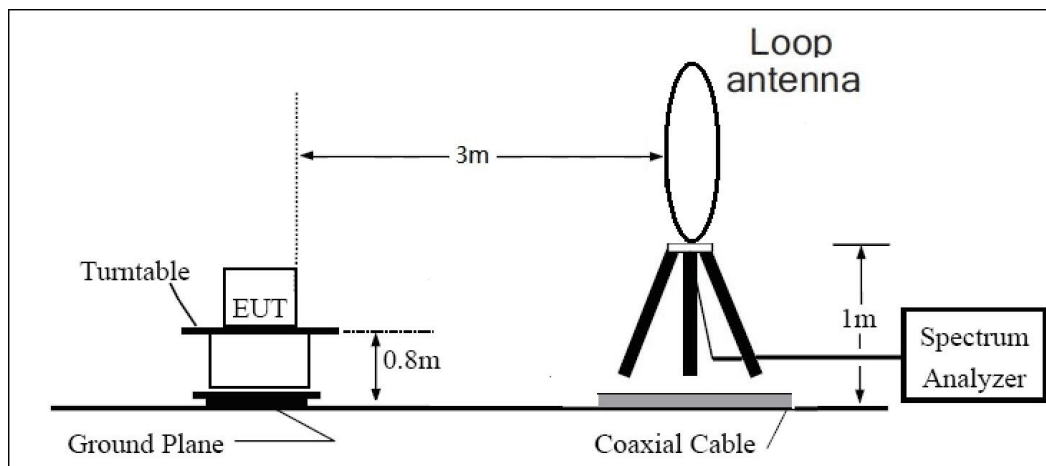

30MHz~ 1GHz

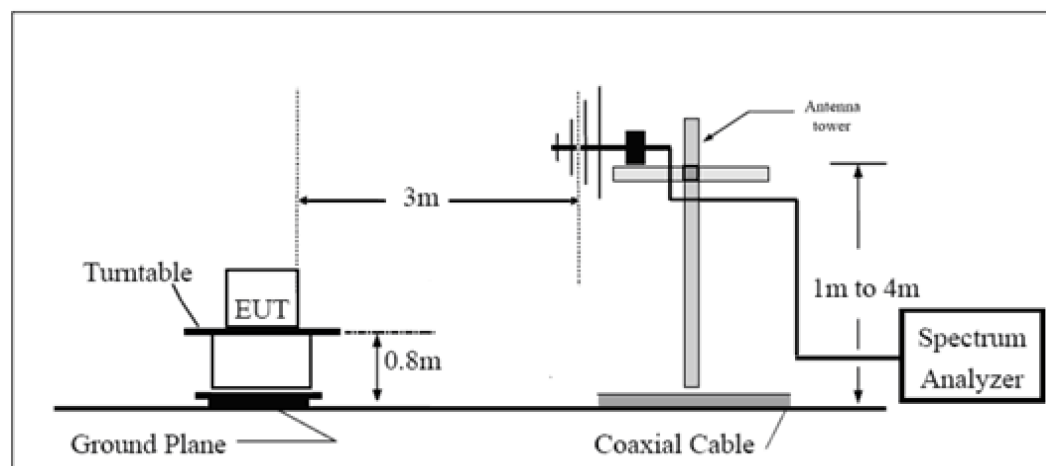

Above 1GHz

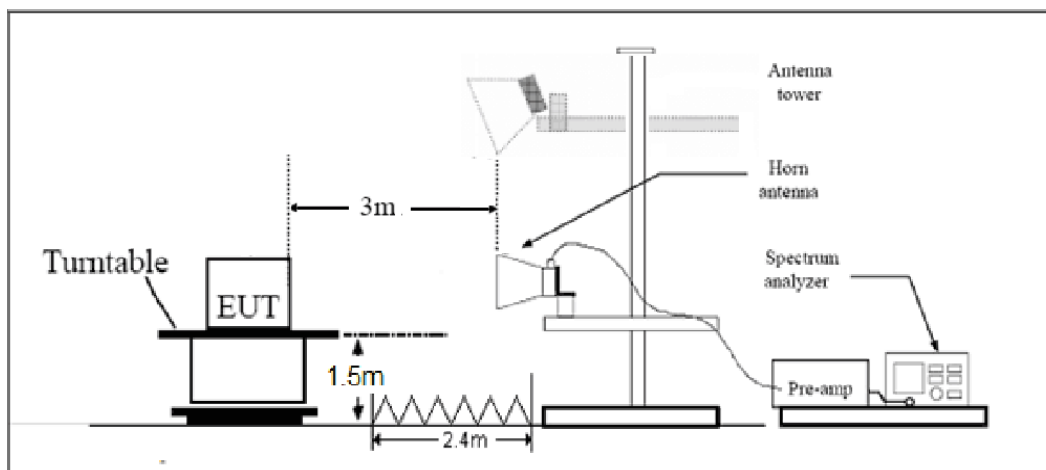

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength($\mu\text{V/m}$)	Field strength($\text{dB}\mu\text{V/m}$)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30–88	100	40
88–216	150	43.5
216–960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 $\text{dB}\mu\text{V/m}$

Average Limit=54 $\text{dB}\mu\text{V/m}$

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB

Test Results:


The following graphs display the maximum values of horizontal and vertical by software.

Blue trace uses the peak detection, Green trace uses the average detection.


nRF 2.4G power is less than Wi-Fi 2.4G, after pre-selection Unwanted Emission only test worse case (Wi-Fi 2.4G).

A symbol ($\text{dB } \mu\text{V/m}$) in the test plot below means (dB $\mu\text{V/m}$)


The signal beyond the limit is carrier.

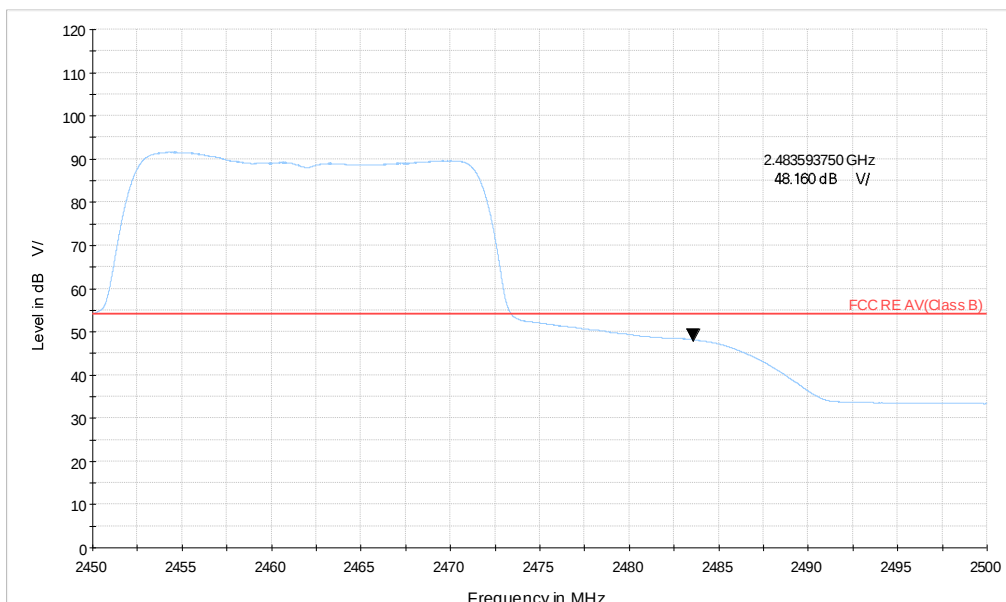


Wi-Fi 2.4G_ax20 CH11_2.45-2.5GHz_MCS13_MIMO_AV

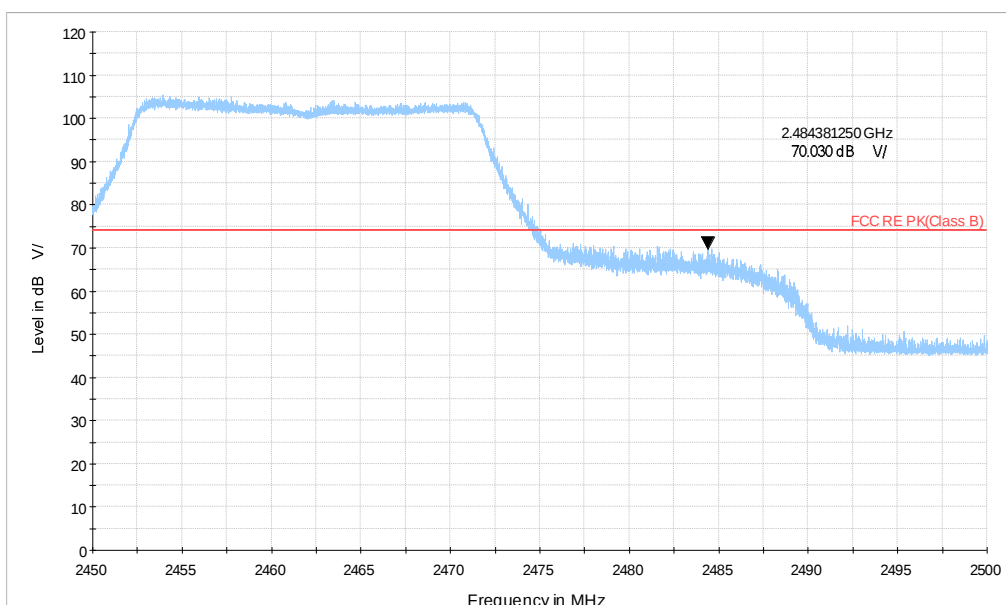


Wi-Fi 2.4G_ax20 CH11_2.45-2.5GHz_MCS13_MIMO_PK

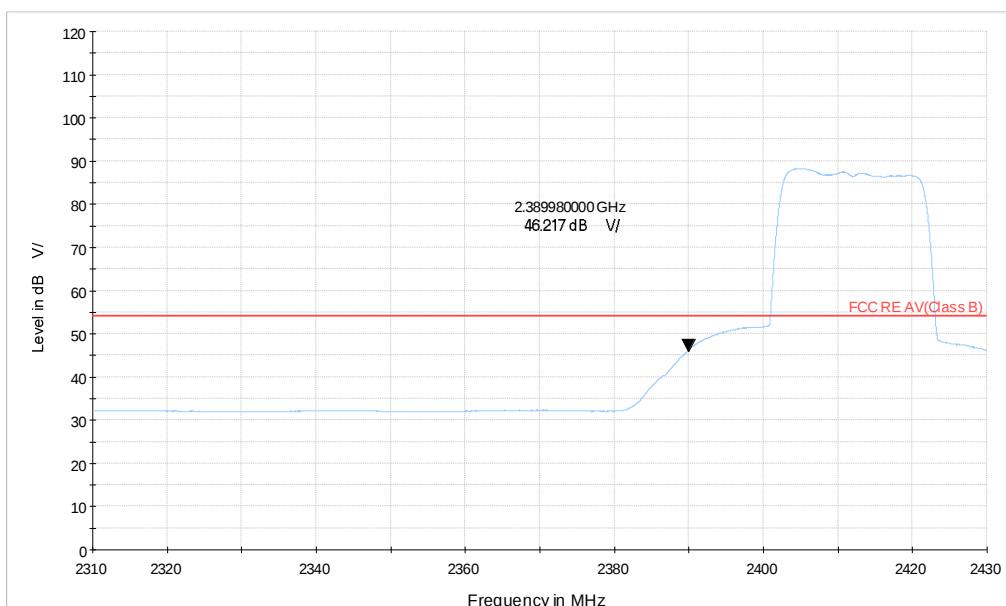


Wi-Fi 2.4G_ax20 CH1_2.31-2.43GHz_MCS13_MIMO_AV

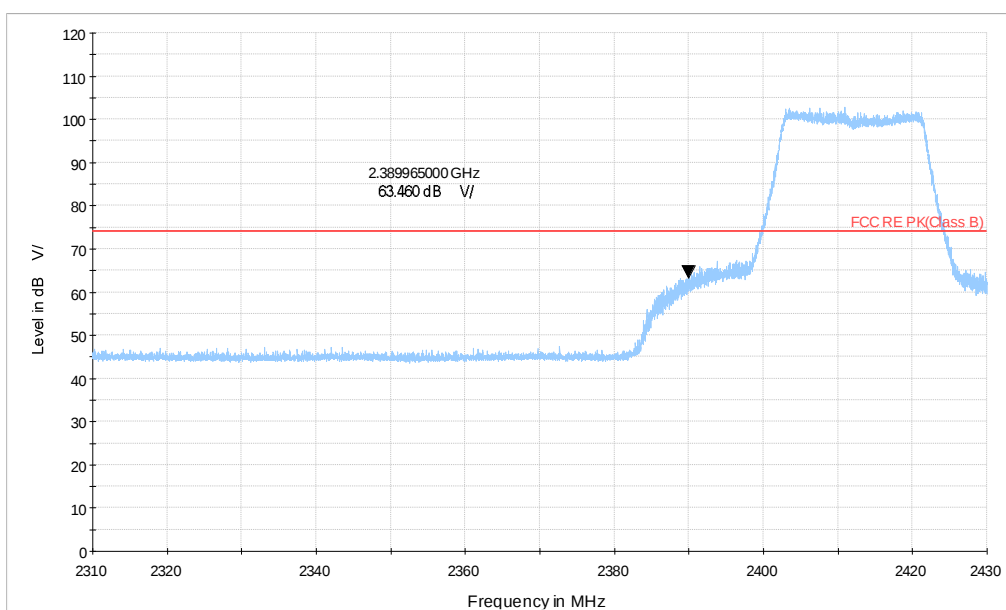


Wi-Fi 2.4G_ax20 CH1_2.31-2.43GHz_MCS13_MIMO_PK

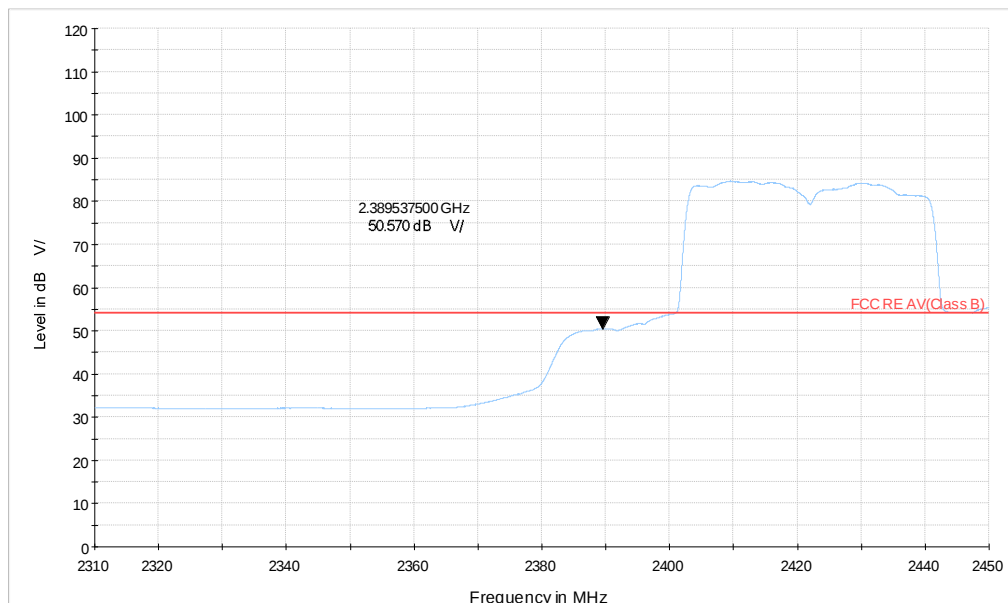


Wi-Fi 2.4G_ax40 CH3_2.31-2.45GHz_MCS13_MIMO_AV

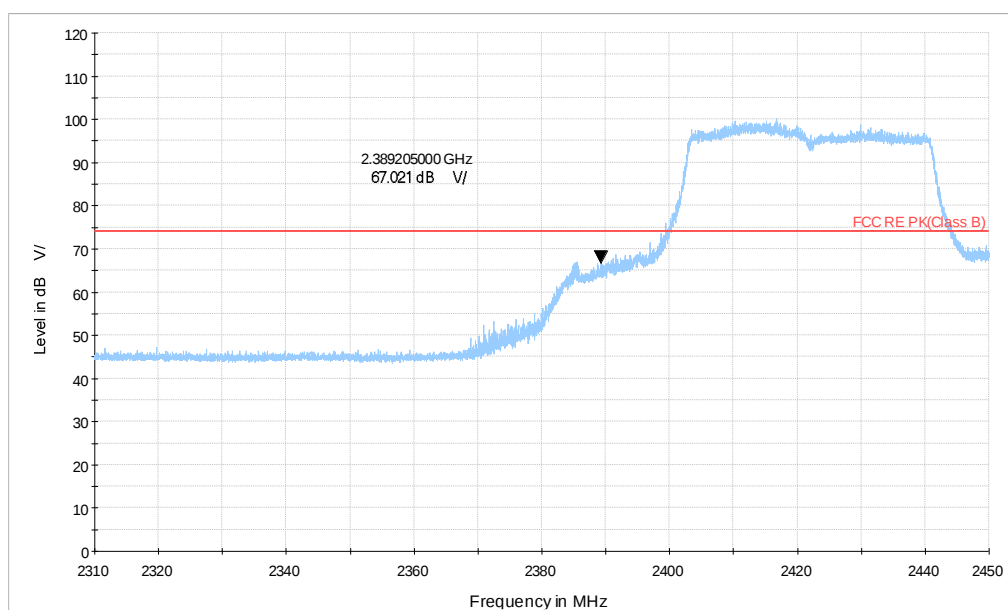


Wi-Fi 2.4G_ax40 CH3_2.31-2.45GHz_MCS13_MIMO_PK

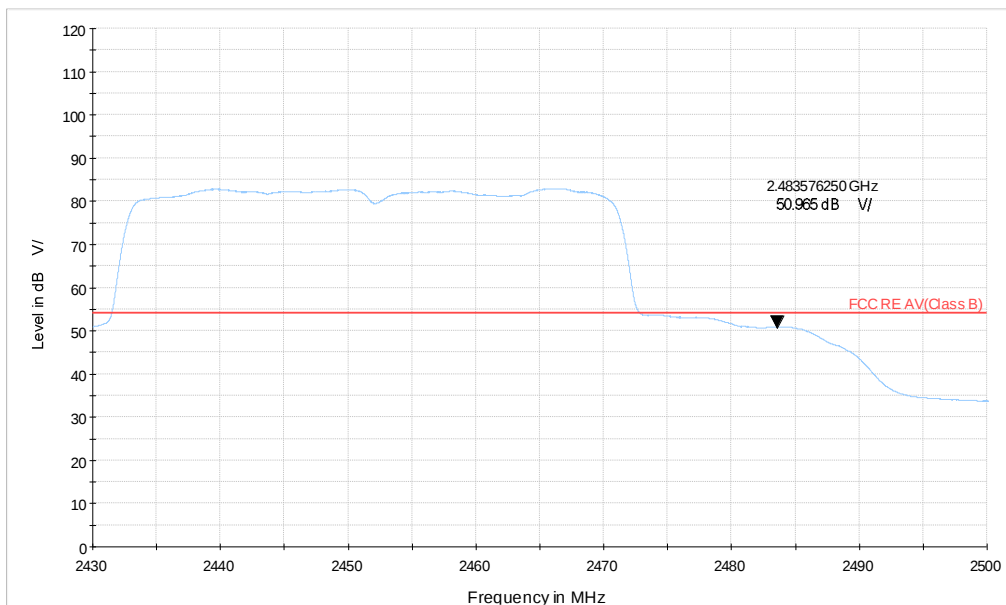


Wi-Fi 2.4G_ax40 CH9_2.43-2.5GHz_MCS13_MIMO_AV

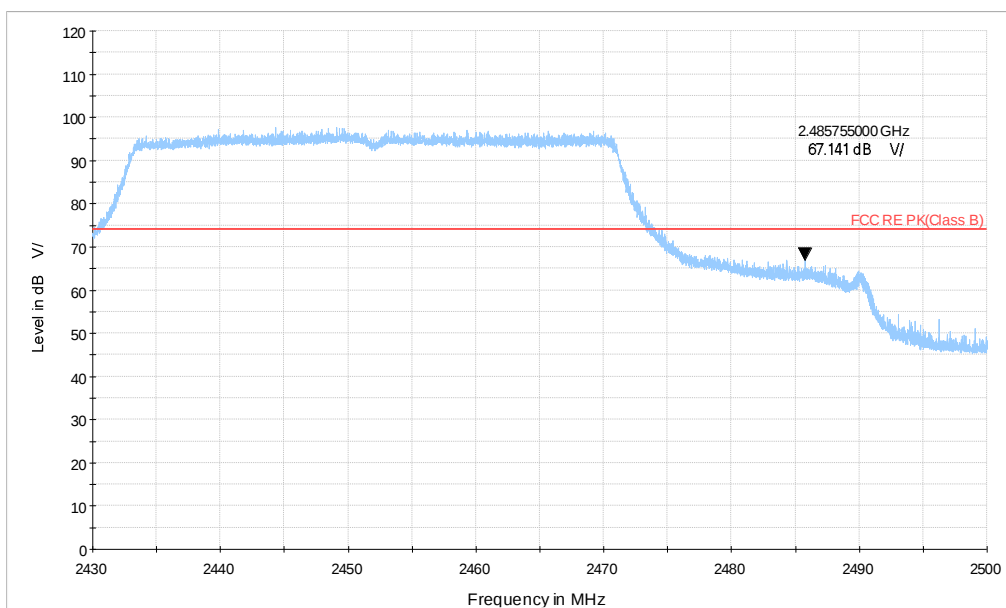


Wi-Fi 2.4G_ax40 CH9_2.43-2.5GHz_MCS13_MIMO_PK

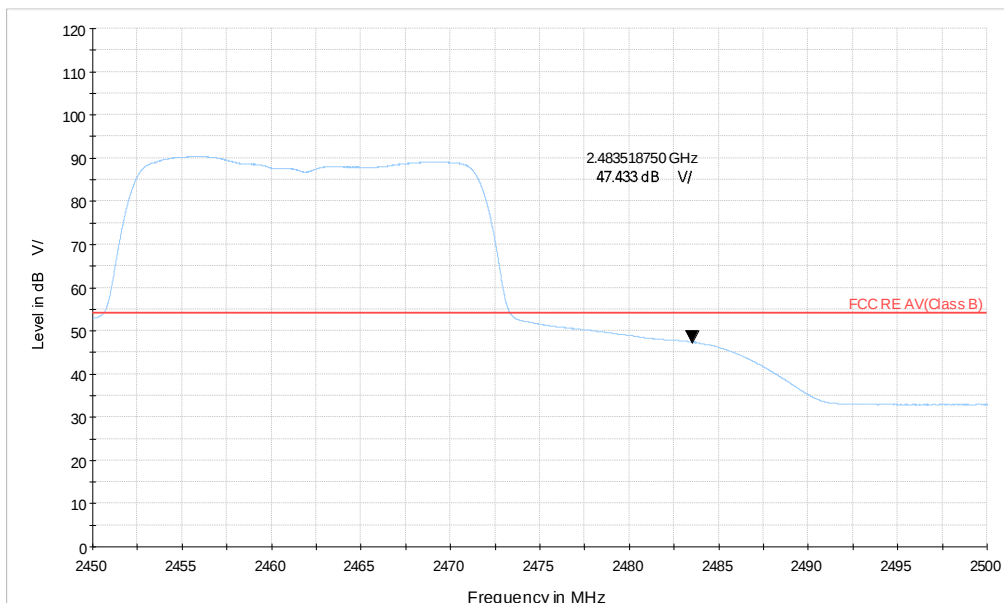


Wi-Fi 2.4G_BE20 CH11_2.45-2.5GHz_MCS13_MIMO_AV

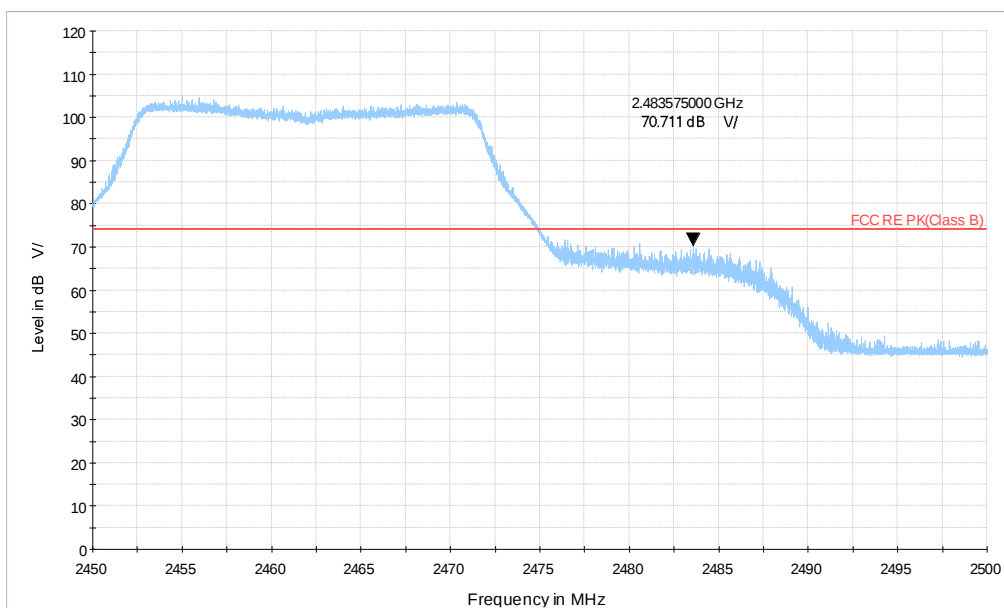

Wi-Fi 2.4G_BE20 CH11_2.45-2.5GHz_MCS13_MIMO_PK

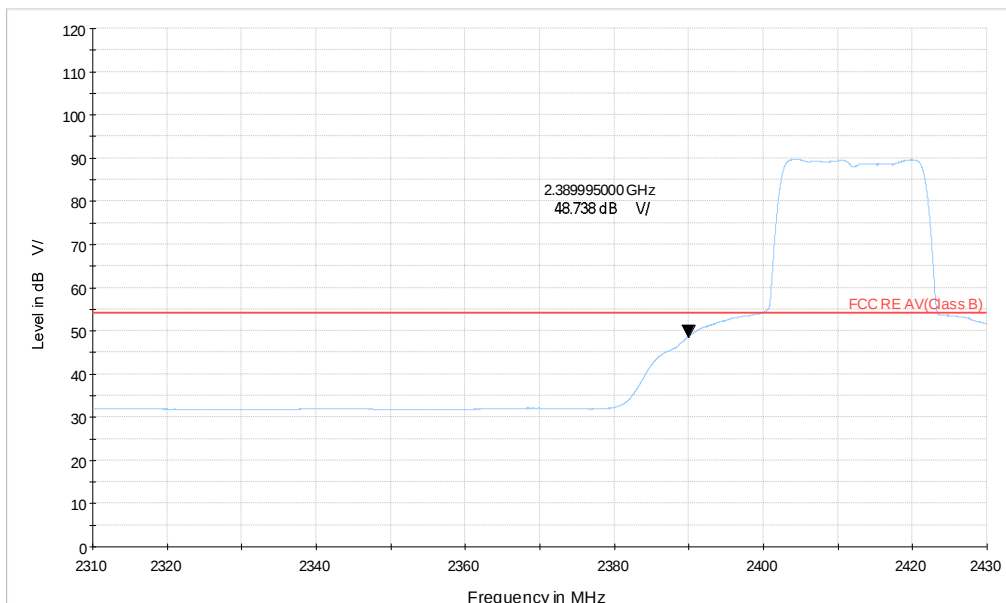

Wi-Fi 2.4G_BE20 CH1_2.31-2.43GHz_MCS13_MIMO_AV

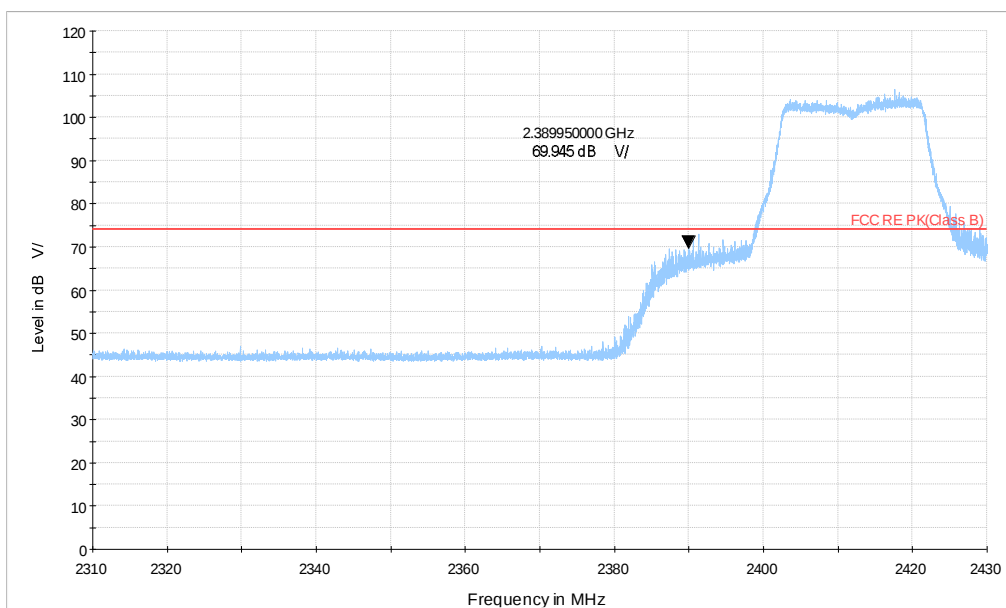

Wi-Fi 2.4G_BE20 CH1_2.31-2.43GHz_MCS13_MIMO_PK