

Appendix Test Data for BLE (Conducted Measurement)

Product Name: Page turning remote control

Trade Mark: N/A

Test Model: B02

FCC ID: 2BMNI-B02

Environmental Conditions

Temperature:	24.2°C
Relative Humidity:	52%
ATM Pressure:	100.0 kPa
Test Engineer:	Tony luo
Supervised by:	Max zhang
NOTE	N/A

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	2.814	7.988	35.23	4.53	0.04
		2440	2.813	7.990	35.21	4.53	0.04
		2480	2.814	7.988	35.23	4.53	0.04

1.2 Test Graph


1.2.1 Ant1

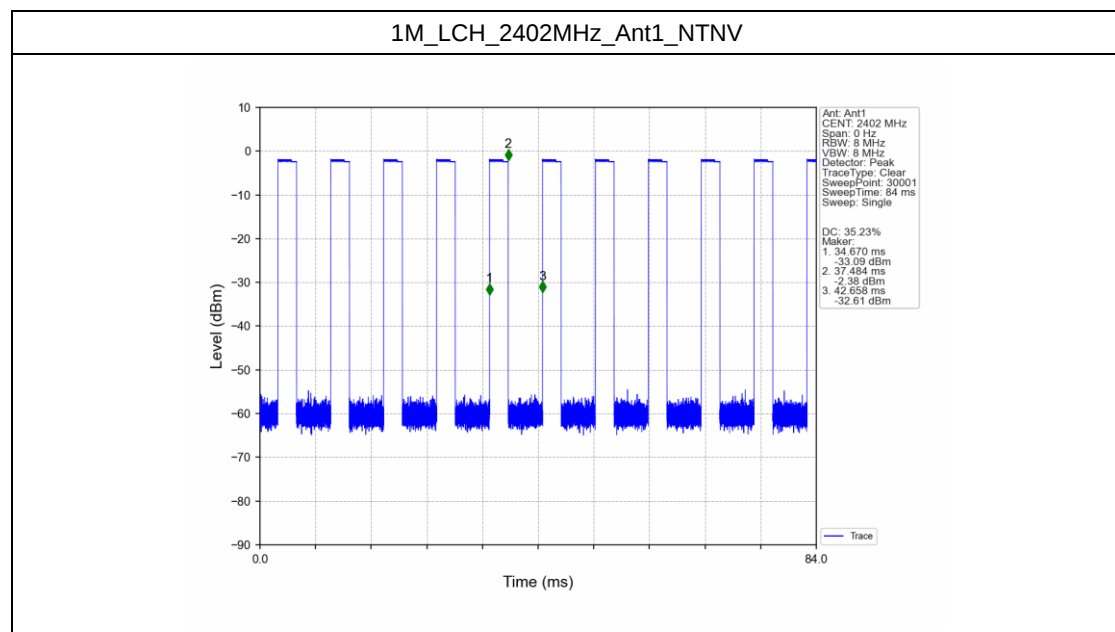

1M_MCH_2440MHz_Ant1_NTNV

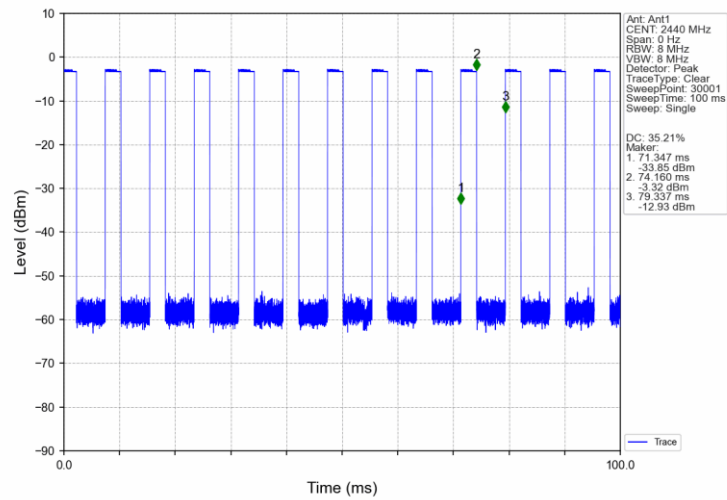

1M_HCH_2480MHz_Ant1_NTNV

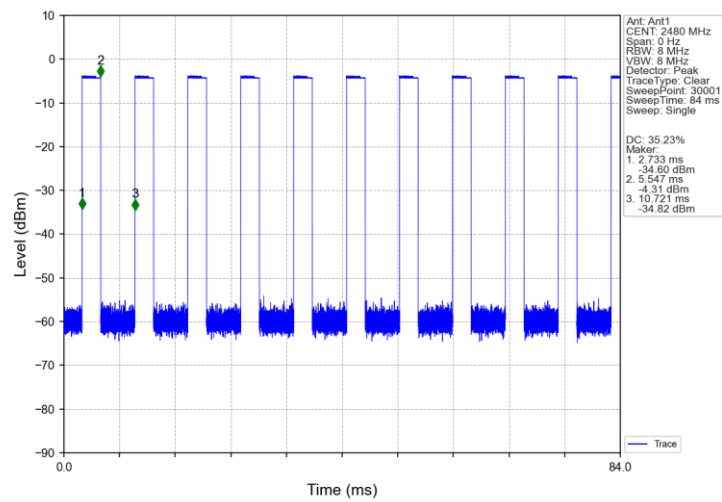

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.031	/	Pass
		2440	1	1.026	/	Pass
		2480	1	1.035	/	Pass

2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.690	≥ 0.5	Pass
		2440	1	0.677	≥ 0.5	Pass
		2480	1	0.693	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

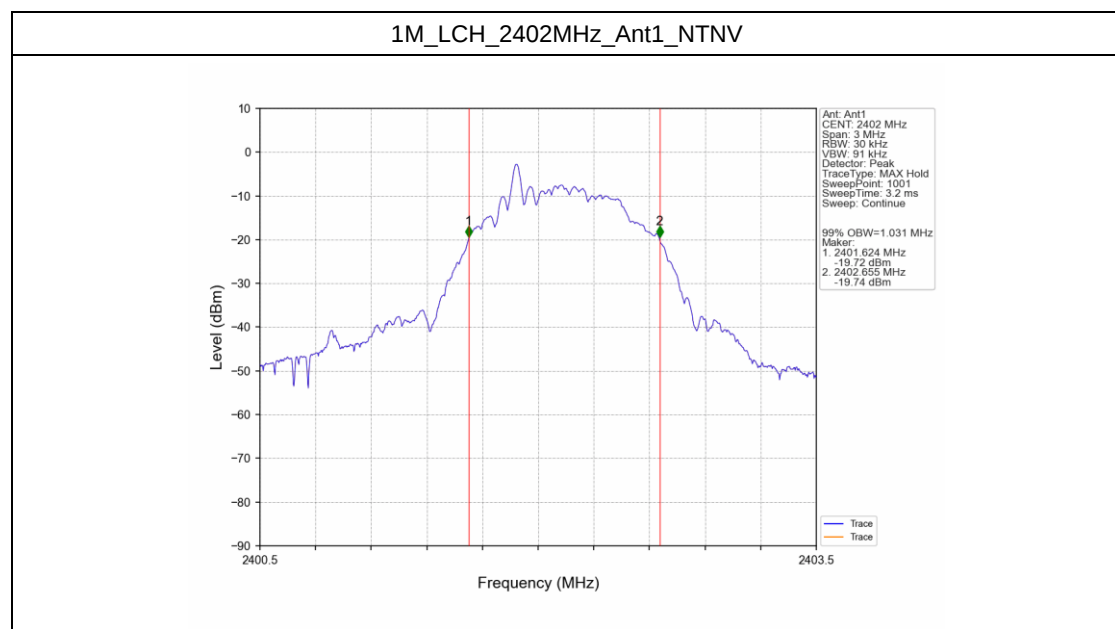


1M_MCH_2440MHz_Ant1_NTNV

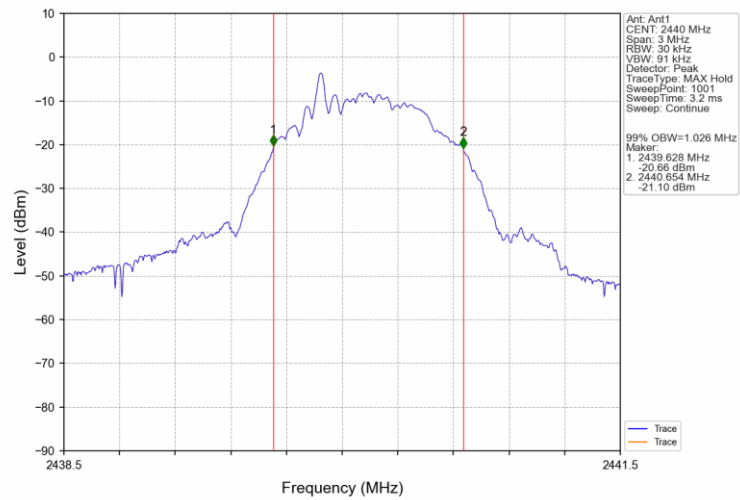


1M_HCH_2480MHz_Ant1_NTNV

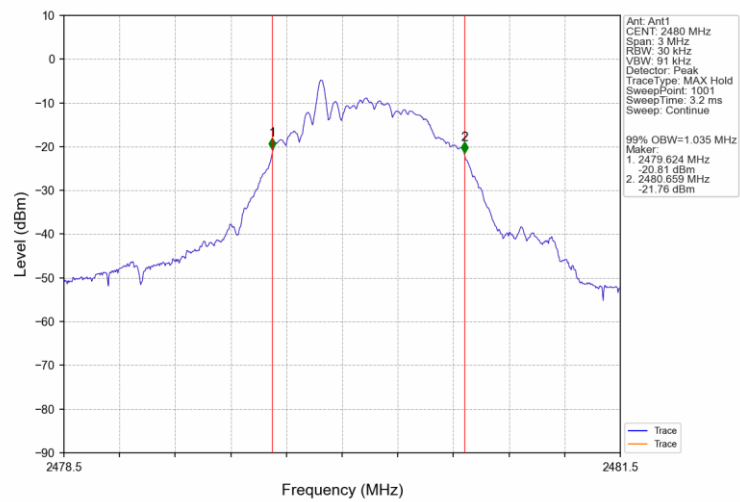

2.2.2 6dB BW

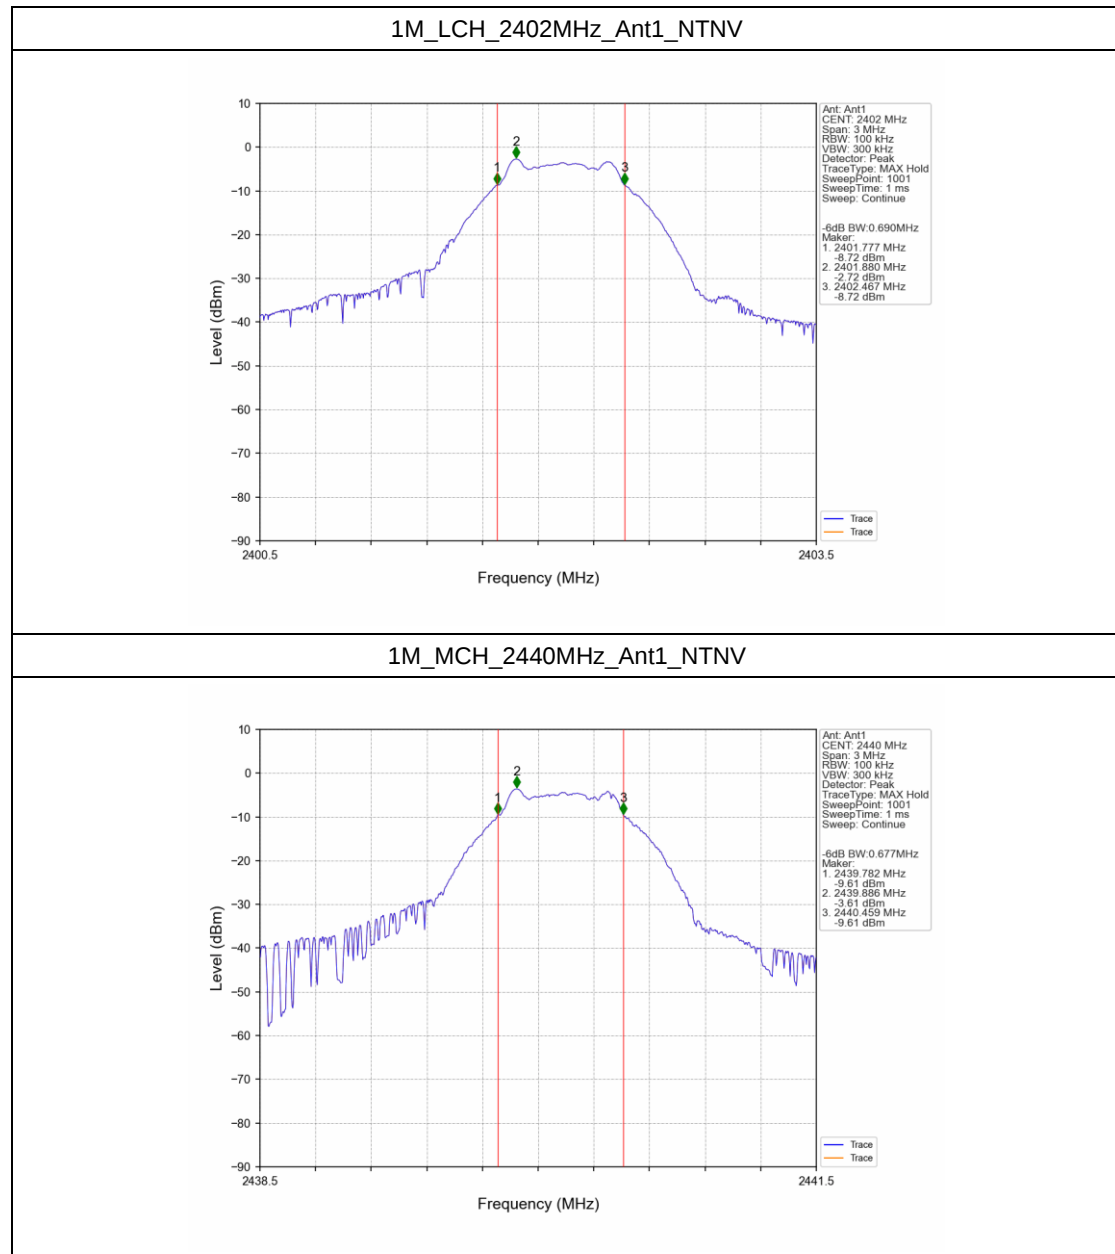

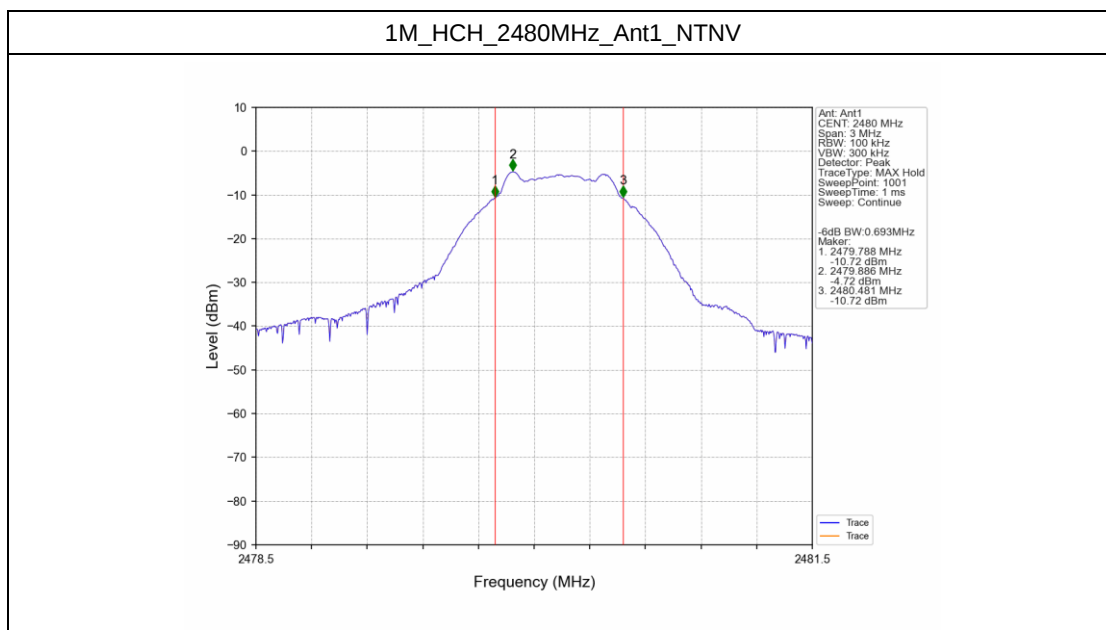

3. Maximum Conducted Output Power

3.1 Test Result


3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-2.17	<=30	Pass
		2440	-3.06	<=30	Pass
		2480	-4.09	<=30	Pass


Note1: Antenna Gain: Ant1: 0.00dBi;

3.2 Test Graph


3.2.1 Power

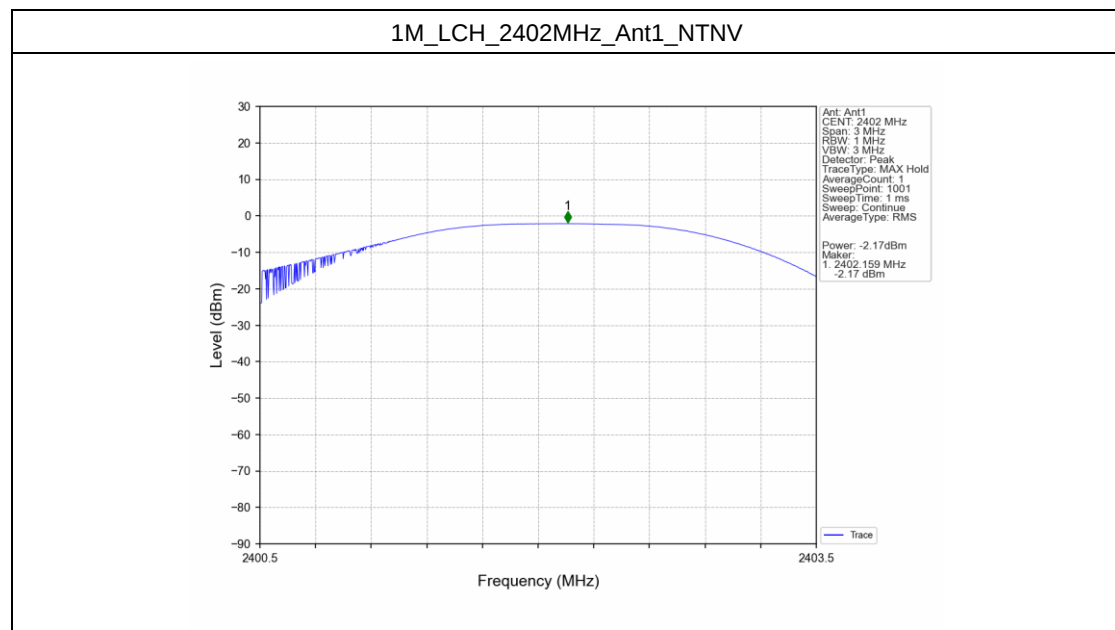

1M_MCH_2440MHz_Ant1_NTNV

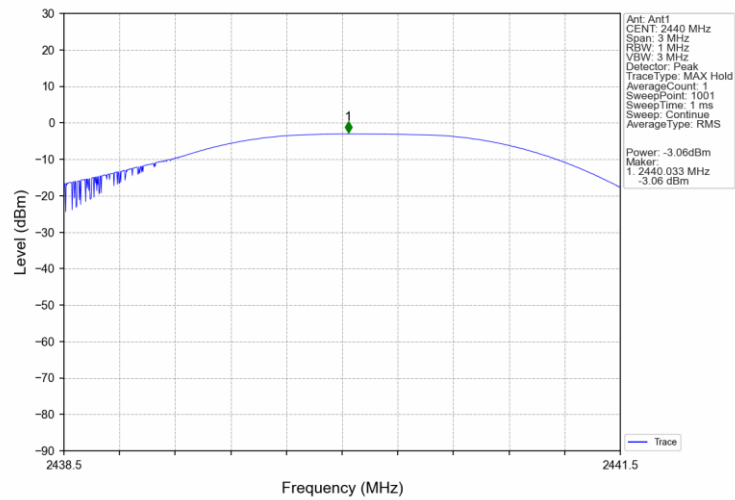

1M_HCH_2480MHz_Ant1_NTNV

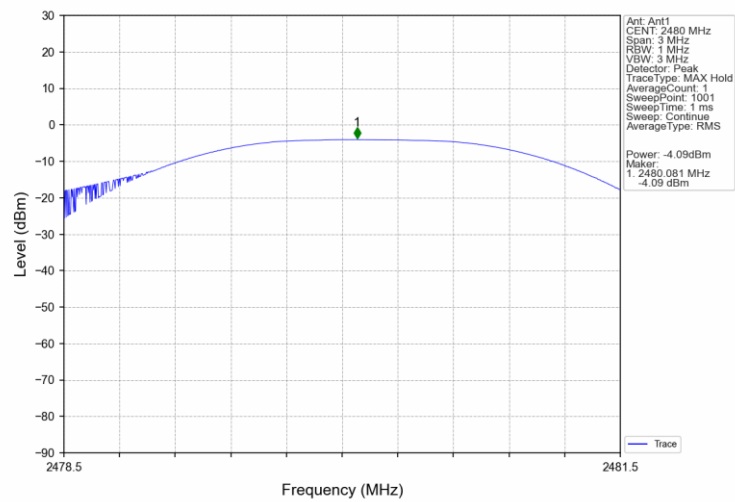

4. Maximum Power Spectral Density


4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-2.69	<=8	Pass
		2440	-3.45	<=8	Pass
		2480	-4.56	<=8	Pass
Note1: Antenna Gain: Ant1: 0.00dBi;					

4.2 Test Graph


4.2.1 PSD

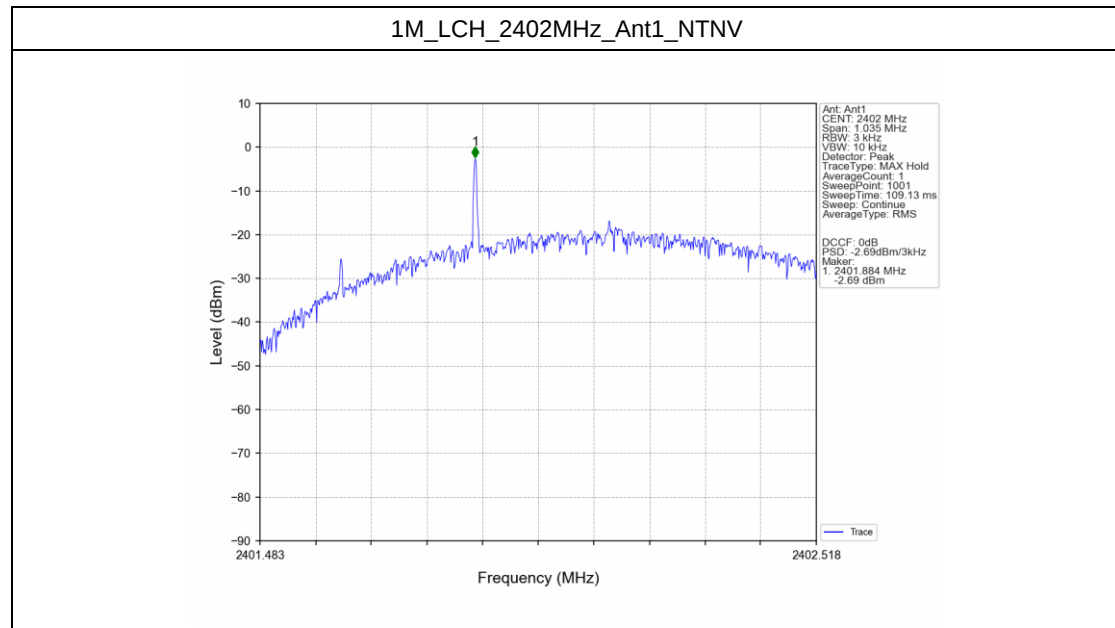

1M_MCH_2440MHz_Ant1_NTNV

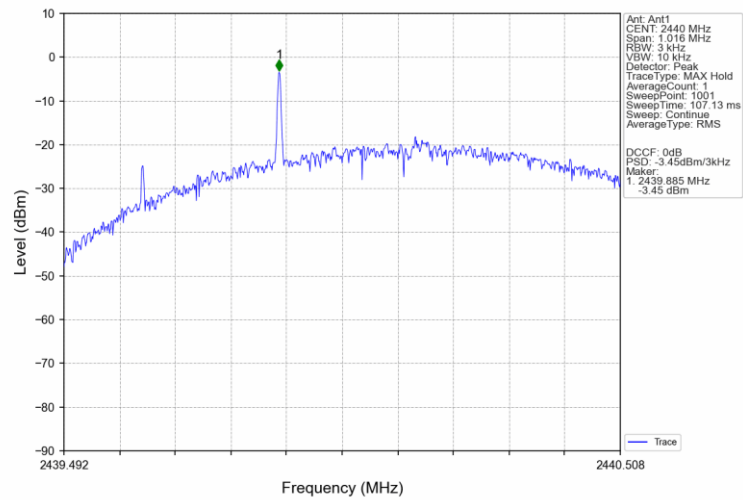

1M_HCH_2480MHz_Ant1_NTNV

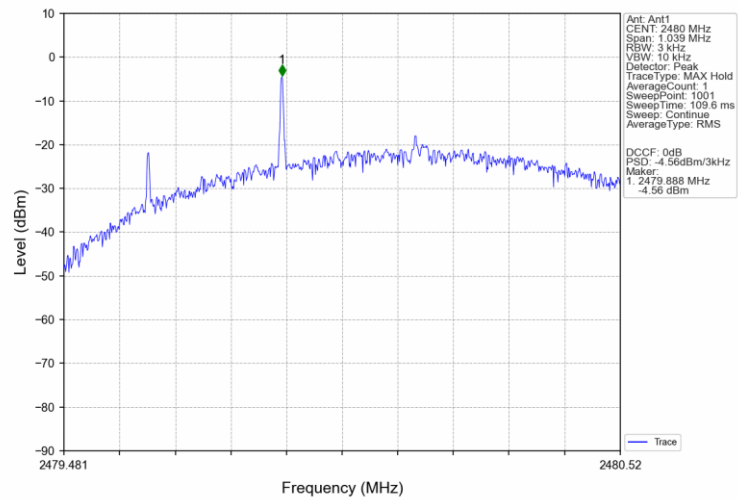

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-2.73
		2440	1	-3.63
		2480	1	-4.75
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.				

5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-2.73	-22.73	Pass
		2440	1	-2.73	-22.73	Pass
		2480	1	-2.73	-22.73	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.						

5.2 Test Graph


5.2.1 Ref

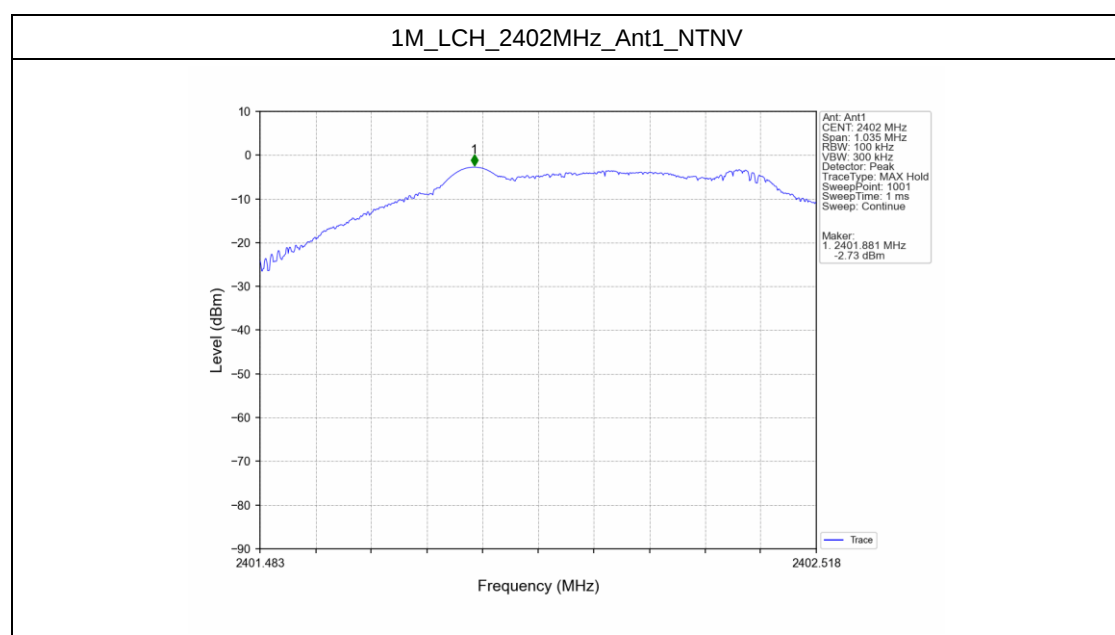


1M_MCH_2440MHz_Ant1_NTNV

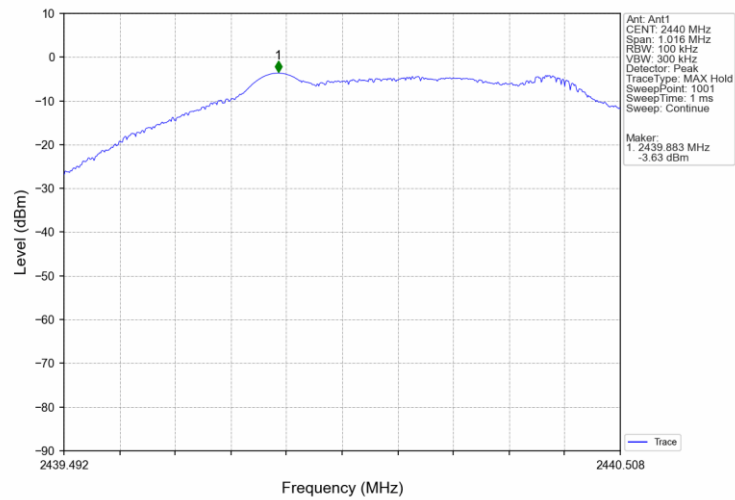


1M_HCH_2480MHz_Ant1_NTNV

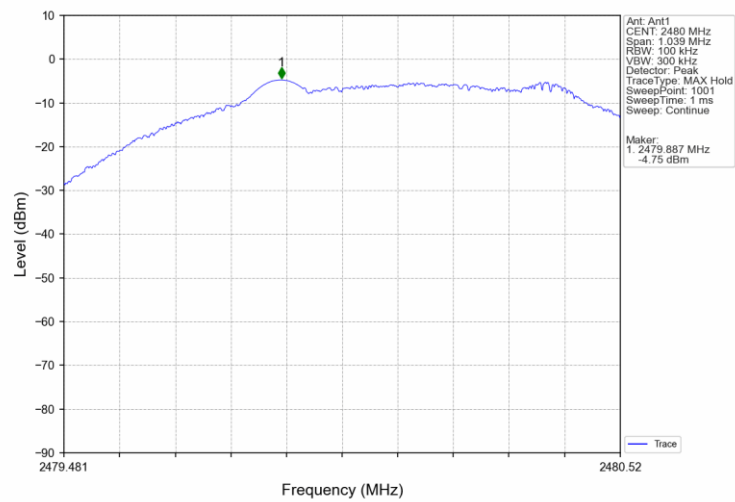


5.2.2 CSE

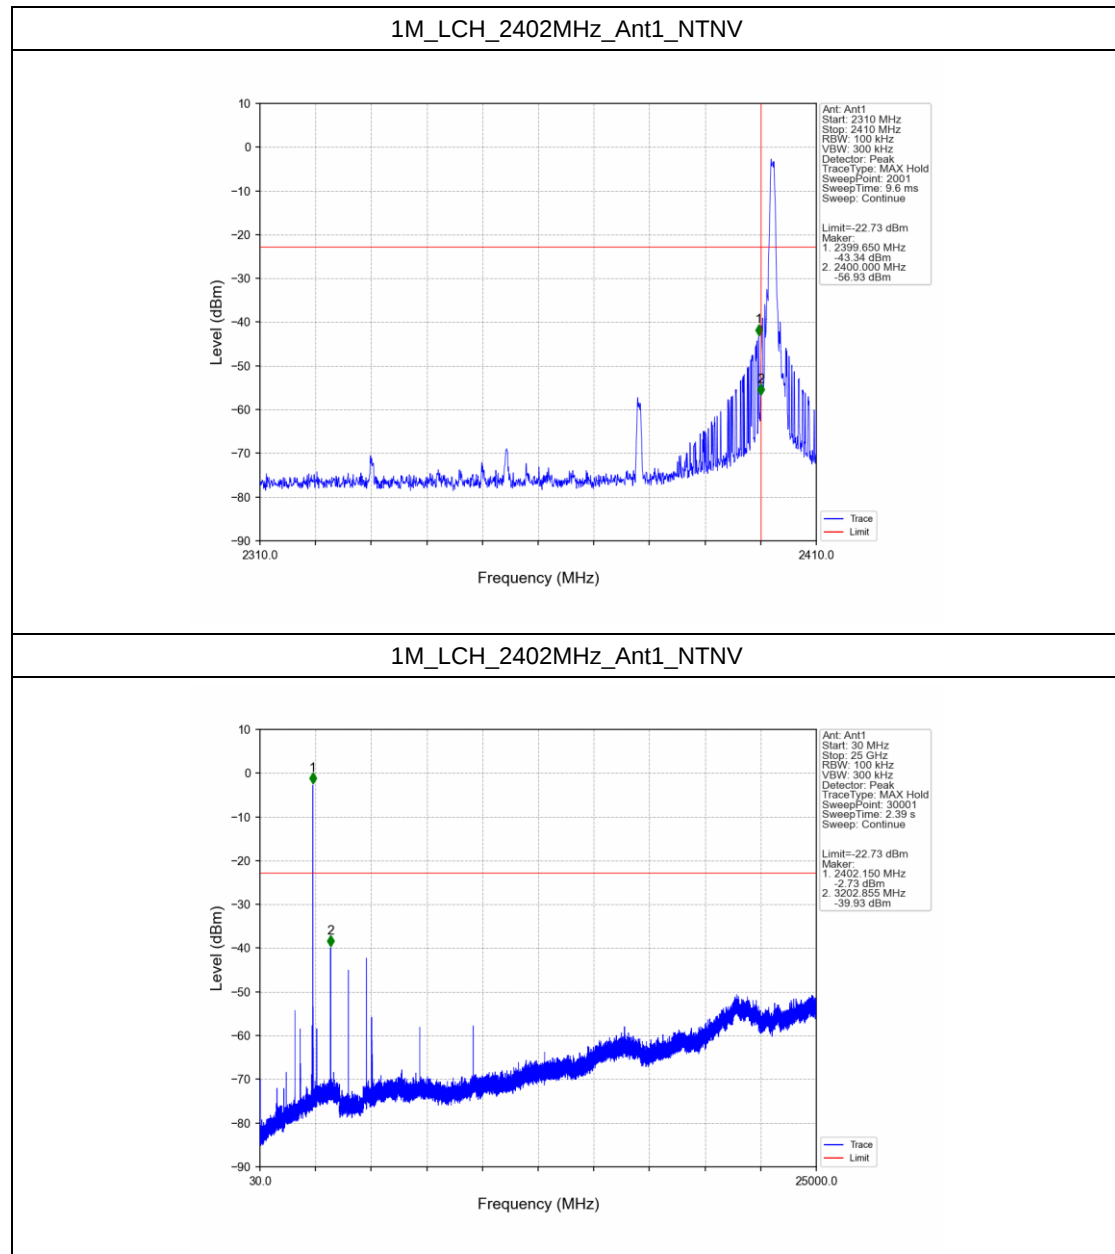


1M_MCH_2440MHz_Ant1_NTNV

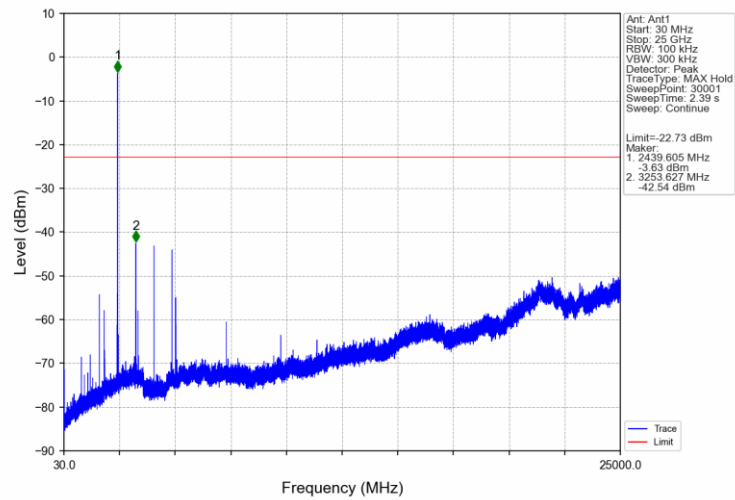

1M_HCH_2480MHz_Ant1_NTNV

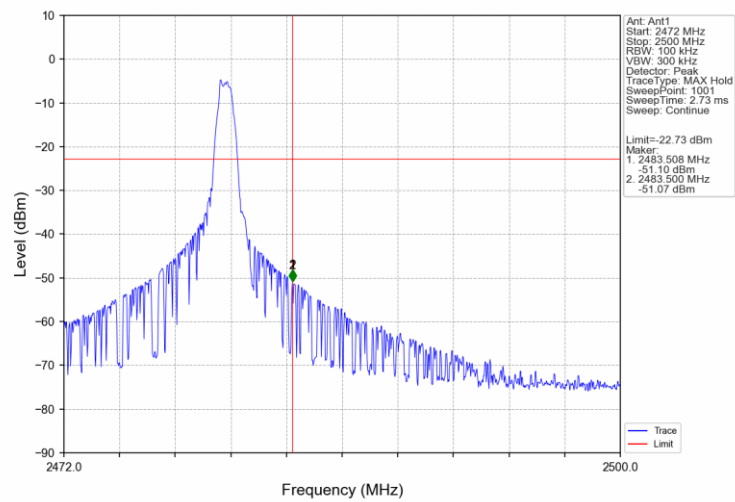

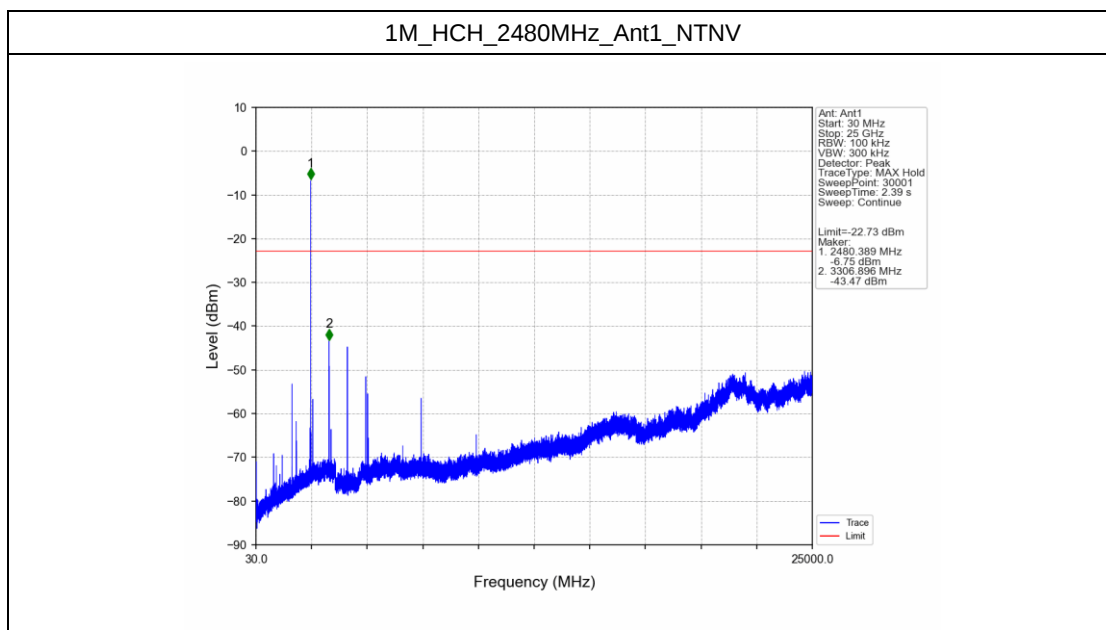

6. Form731

6.1 Test Result

6.1.1 Form731

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
2402	2480	0.0006	-2.17