



RF TEST REPORT

Report No.:FCS202507297W02

Applicant : Fujian Iselected E-commerce Co., Ltd.

Product Name : 2.4GHz & Bluetooth Wireless Keyboard

Brand Name : Philips

Model Name : SPK8618

Series model : SPK8618DTRH,SPK8618HTRH,SPK8618SXRH,SPK8618CTRH, SPK8618UPRH

Test Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247

FCC ID : 2BMNP-SPK8618

Date of Receipt : Jul 09, 2025

Date of Test : Jul 11, 2025~Jul 18, 2025

Date of Issue : Jul 31, 2025

Tested by

Scott Shen

(Scott Shen)

Reviewed by

Duke Qian

(Duke Qian)

Approved by

Jack Wang

(Jack Wang)



TABLE OF CONTENTS

REVISION HISTORY	3
DECLARATION OF REPORT	4
SUMMARY OF TEST RESULT	5
1. GENERAL DESCRIPTION	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Factory	6
1.4. General Information of EUT	7
1.5. Equipment Specification	8
1.6. Modification of EUT	8
1.7. Laboratory Information	8
1.8. Applicable Standards	8
2. TEST CONFIGURATION OF EUT	9
2.1. Carrier Frequency Channel	9
2.2. Test Modes	9
2.3. Block Diagram of Test System	10
2.4. Description of Support Units	10
2.5. Test Software and Power Level	10
2.6. EUT Operating Conditions	10
2.7. Equipment List	11
2.8. Measurement Uncertainty	13
3. TEST RESULT	14
3.1. Maximum Peak Conducted Output Power	14
3.2. Duty Cycle	16
3.3. 6dB Bandwidth and 99% Bandwidth	17
3.4. Power Spectral Density	19
3.5. Conducted Band Edge	20
3.6. Conducted Spurious Emission	21
3.7. Radiated Spurious Emission and Restricted Band	22
3.8. AC Power-Line Conducted Emission	26
3.9. Antenna Requirement	28
4. TEST SETUP PHOTOGRAPHS	28
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	28
6. Appendix A of data	29
A1. Conducted Peak Output Power	29
A2. Duty Cycle	30
A3. 6dB Bandwidth and 99% Bandwidth	31
A4. Power Spectral Density	33
A5. Conducted Band Edge and Spurious Emission	34
A6. Radiated Spurious Emission and Restricted Band	36
A7. AC Power-Line Conducted Emission	48



REVISION HISTORY

Rev.	Issue Date	Revisions	Revised by
00	Jul 31, 2025	Initial Release	/

DECLARATION OF REPORT

1. The device has been tested by Flux Compliance, and the test results show that the equipment under test (EUT) is in compliance with the requirements of 47 CFR 15.247. And it is applicable only to the tested sample identified in the report.
2. This report shall not be reproduced except in full, without the written approval of Flux Compliance, this document only be altered or revised by Flux Compliance, personal only, and shall be noted in the revision of the document.
3. The general information of EUT in this report is provided by the customer or manufacture, Flux Compliance is only responsible for the test data but not for the information provided by the customer or manufacture.
4. The results in this report is only apply to the sample as tested under conditions. The customer or manufacturer is responsible for ensuring that the additional production units of this model have the same electrical and mechanical components.
5. In this report, '□' indicates that EUT does not support content after '□', and '☒' indicates that it supports content after '☒'

SUMMARY OF TEST RESULT

Report Section	Standard Section	Test Item	Judgment	Remark
3.1	47 CFR 15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	--
3.2	--	Duty Cycle	Report only	--
3.3	47 CFR 15.247(a)(2)	6dB Bandwidth	PASS	--
	--	99% Bandwidth	Report only	--
3.4	47 CFR 15.247(e)	Power Spectral Density	PASS	--
3.5	47 CFR 15.247(d)	Conducted Band Edge	PASS	--
3.6	47 CFR 15.247(d)	Conducted Spurious Emission	PASS	--
3.7	47 CFR 15.247(d)/15.209(a)/15.205(a)	Radiated Spurious Emission and Restricted Band	PASS	--
3.8	47 CFR 15.207(a)	AC Power-Line Conducted Emission	PASS	--
3.9	47 CFR 15.203	Antenna Requirements	PASS	--

1. GENERAL DESCRIPTION

1.1. Applicant

Name : Fujian Iselected E-commerce Co., Ltd.

Address : 15th Floor, Building A, Aofeng Plaza, No. 2 Aofeng Road, Taijiang District, Fuzhou City, Fujian Province, China

1.2. Manufacturer

Name : MMD (Shanghai) Electronic Technology Co., Ltd.

Address : Room107, Building 17, No. 525 Yuanjiang Road, Minhang District, Shanghai, China

1.3. Factory

Name : SISUN ELECTRONICS TECHNOLOGY (DG) CO., LTD

Address : Sisun industrial park,Xikeng road, Puxin village,Shipai town,Dongguan,China

1.4. General Information of EUT

General Information	
Equipment Name	2.4GHz & Bluetooth Wireless Keyboard
Brand Name	Philips
Model Name	SPK8618
Series Model	SPK8618DTRH,SPK8618HTRH,SPK8618SXRH,SPK8618CTRH,SPK8618UPRH
Model Difference	only model name and color are different
Antenna Type	Chip Antenna
Antenna Gain	2.71dBi
Sample No	202507070004001
Power Source	DC 3.7V
Battery	Rated Voltage:3.7V Charge Limit Voltage:4.2V Capacity:4000mAh
Hardware version	V2.0
Software version	V11.1
Connecting I/O Port(s)	Refer to the remark below.

Remark:

The above information of EUT was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.5. Equipment Specification

Equipment Specification		
Frequency Range	2402MHz - 2480MHz	
Number of Channels	40CH	
Carrier Frequency of Each Channel	2402 + n*2 MHz; n = 0 ~ 39	
Maximum Output Power To Antenna	<input checked="" type="checkbox"/> Bluetooth LE(1Mbps):	3.81dBm (2.4mW)
	--	--
Type of Modulation	Bluetooth LE:	GFSK
Antenna Type	Chip Antenna	
Antenna Gain	2.71dBi	

1.6. Modification of EUT

No modifications are made to the EUT during all test items.

1.7. Laboratory Information

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-0769-27280901
Fax:	+86-0769-27280901
FCC Test Firm Registration Number: 514908	
Designation number: CN0127	
A2LA accreditation number: 5545.01	

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

47 CFR Part 15 Subpart C §15.247

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2020

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2. TEST CONFIGURATION OF EUT

2.1. Carrier Frequency Channel

Frequency Band	Channel	Frequency MHz	Channel	Frequency MHz	Channel	Frequency MHz
2400 - 2483.5 MHz	00	2402	14	2430	28	2458
	01	2404	15	2432	29	2460
	02	2406	16	2434	30	2462
	03	2408	17	2436	31	2464
	04	2410	18	2438	32	2466
	05	2412	19	2440	33	2468
	06	2414	20	2442	34	2470
	07	2416	21	2444	35	2472
	08	2418	22	2446	36	2474
	09	2420	23	2448	37	2476
	10	2422	24	2450	38	2478
	11	2424	25	2452	39	2480
	12	2426	26	2454	--	--
	13	2428	27	2456	--	--

Remark:

Low Channel: **CH 00_2402 MHz**; Middle Channel: **CH 19_2440 MHz**; High Channel: **CH 39_2480 MHz**.


2.2. Test Modes

The table below is showing all test modes to demonstrate in compliance with the standard.


Summary Table of Test Modes		
Test Item	Data Rate / Modulation	
	<input checked="" type="checkbox"/> Bluetooth LE(1Mbps)	<input type="checkbox"/> Bluetooth LE(2Mbps)
For Conducted and Radiated Test	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz
	Mode 2: CH19_2440 MHz	Mode 5: CH19_2440 MHz
	Mode 3: CH39_2480 MHz	Mode 6: CH39_2480 MHz
For AC Power-line Conducted Emission	Mode 1: CH00_2402 MHz	

2.3. Block Diagram of Test System


2.3.1. For AC Power-Line Conducted Emission

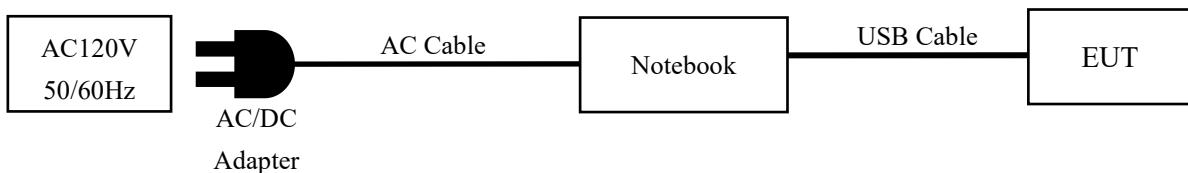

2.3.2. For Radiated Spurious Emission

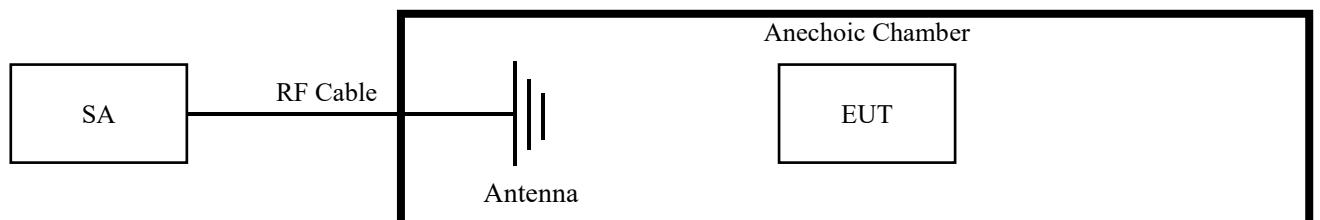

2.3.3. For Conducted Test



2.4. Description of Support Units

NO.	Unit	Brand	Model	Description
1	PC	Redmi G	2021Ryzen	N/A
2	USB Line	/	/	/

2.5. Test Software and Power Level

During the test, the channel and power control software provided by the customer is used to control the operation channel and output power level.

2.6. EUT Operating Conditions

For AC power-line conducted emission, the EUT was connected under the large package sizes transmission.

For radiated spurious emission and conducted test, the engineering test program was provided and make the EUT to continuous transmit/receive.

2.7. Equipment List

2.7.1. For AC Power-Line Conducted Emission

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2024.08.28	2025.08.27
LISN	R&S	ENV216	FCS-E007	2024.08.28	2025.08.27
LISN	ETS	3810/2NM	FCS-E009	2024.08.28	2025.08.27
Temperature & Humidity	HTC-1	victor	FCS-E008	2024.08.28	2025.08.27
Testing Software	EZ-EMC(Ver.EMC-CON 3A1.1)				

2.7.2. For Radiated Spurious Emission

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2024.08.28	2025.08.27
Signal Analyzer	R&S	FSV40-N	FCS-E012	2024.08.28	2025.08.27
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2024.08.28	2025.08.27
Bilog Antenna	SCHWARZBEC K	VULB 9168	FCS-E002	2024.08.28	2025.08.27
Horn Antenna	SCHWARZBEC K	BBHA 9120D	FCS-E003	2024.08.28	2025.08.27
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2024.08.28	2025.08.27
Pre-Amplifier(0.1M-3 GHz)	EMCI	EM330N	FCS-E004	2024.08.28	2025.08.27
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2024.08.28	2025.08.27
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2024.08.28	2025.08.27
Temperature & Humidity	HTC-1	victor	FCS-E005	2024.08.28	2025.08.27
Testing Software	EZ-EMC(Ver.STSLAB 03A1 RE)				

2.7.3. RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2024.08.28	2025.08.27
Spectrum Analyzer	Agilent	E4447A	MY50180039	2024.08.28	2025.08.27
Spectrum Analyzer	R&S	FSV-40	101499	2024.08.28	2025.08.27
Power Sensor	Agilent	UX2021XA	FCS-E021	2024.08.28	2025.08.27
Testing Software	EZ-EMC(Ver.STSLAB 03A1 RE)				

Remark: Calibration duration for above equipments is 1 year.

2.8. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.988 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	All emissions radiated (9KHz -30MHz)	± 3.1 dB
5	Conducted Emission (150KHz-30MHz)	± 4.74 dB
6	All emissions, radiated(<1G) 30MHz-1000MHz	± 5.2 dB
7	All emissions, radiated 1GHz -18GHz	± 4.66 dB
8	All emissions, radiated 18GHz -40GHz	± 4.31 dB
9	Occupied bandwidth	± 0.3 dB
10	Power Spectral Density	± 0.48 dB

3. TEST RESULT

3.1. Maximum Peak Conducted Output Power

3.1.1. Limit

47 CFR 15.247(b)(3): For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

47 CFR 15.247(b)(4): If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

47 CFR 15.247(c)(1)(i): Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.1.2. Test Procedure


ANSI C63.10-2020 clause 7.8.5: This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

1. Use the following spectrum analyzer settings:
 - ① Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - ② RBW > 20 dB bandwidth of the emission being measured.
 - ③ VBW \geq RBW.
 - ④ Sweep: Auto.
 - ⑤ Detector function: Peak.
 - ⑥ Trace: Max hold.
2. Allow trace to stabilize.
3. Use the marker-to-peak function to set the marker to the peak of the emission.
4. The indicated level is the peak output power, after any corrections for external attenuators and cables.
5. A plot of the test results and setup description shall be included in the test report.

Remark:

A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

3.1.3. Test Setup

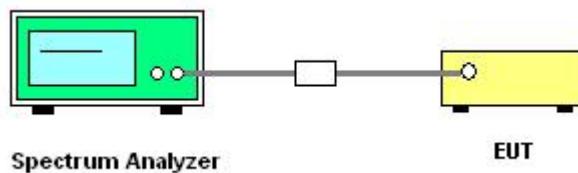

3.1.4. Test Result of Maximum Peak Conducted Output Power

Please refer to the Appendix A1.

3.2. Duty Cycle

3.2.1. Limit


There is no limit requirement for Duty Cycle.

3.2.2. Test Procedure

ANSI C63.10-2020 clause 11.6: Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

1. A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
2. The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - ① Set the center frequency of the instrument to the center frequency of the transmission.
 - ② Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value.
 - ③ Set VBW \geq RBW. Set detector = peak or average.
 - ④ The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.2.3. Test Setup

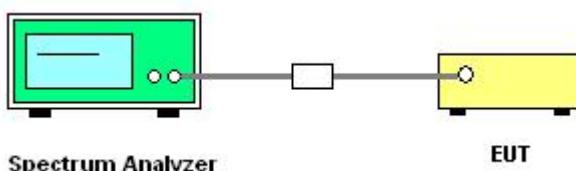

3.2.4. Test Result of Duty Cycle

Please refer to the Appendix A2.

3.3. 6dB Bandwidth and 99% Bandwidth

3.3.1. Limit

47 CFR 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

There is no limit requirement for 99% Bandwidth.

3.3.2. Test Procedure

1. The testing of 6dB Bandwidth follows ANSI C63.10-2020 clause 11.8.1: The steps for the first option are as follows:

- ① Set RBW=shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- ② Set the VBW $\geq [3 \times \text{RBW}]$.
- ③ Detector = peak.
- ④ Trace mode = max hold.
- ⑤ Sweep = No faster than coupled (auto) time.
- ⑥ Allow the trace to stabilize.
- ⑦ Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2. The testing of 99% Bandwidth follows ANSI C63.10-2020 clause 6.9.3: The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:


- ① The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- ② The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- ③ Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in ANSI C63.10-2020 clause 4.1.5.2.
- ④ Step a) through step c) might require iteration to adjust within the specified range.
- ⑤ Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- ⑥ Use the 99% power bandwidth function of the instrument (if available) and report the

measured bandwidth.

⑦ If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

⑧ The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.3.3. Test Setup

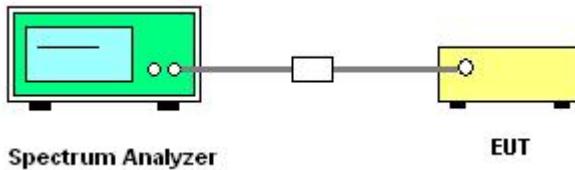

3.3.4. Test Result of 6dB Bandwidth and 99% Bandwidth

Please refer to the Appendix A3.

3.4. Power Spectral Density

3.4.1. Limit


47 CFR 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

3.4.2. Test Procedure

ANSI C63.10-2020 clause 11.10.2: The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to 3 kHz.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.

3.4.3. Test Setup

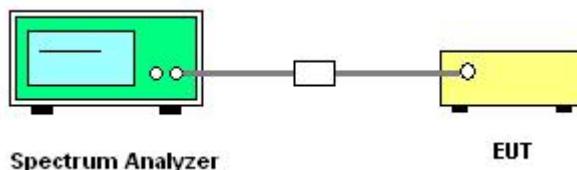

3.4.4. Test Result of Power Spectral Density

Please refer to the Appendix A4.

3.5. Conducted Band Edge


3.5.1. Limit

47 CFR 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

3.5.2. Test Procedure

1. The testing follows ANSI C63.10-2020 clause 11.11.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Conducted Band Edge measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the 100 kHz bandwidth within the band that contains the highest level of the desired power when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.5.3. Test Setup

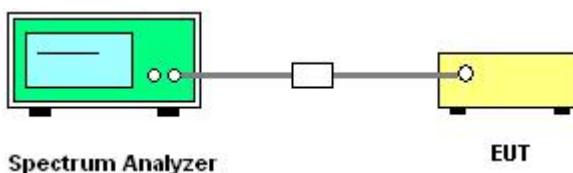

3.5.4. Test Result of Conducted Band Edge

Please refer to the Appendix A5.

3.6. Conducted Spurious Emission


3.6.1. Limit

47 CFR 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

3.6.2. Test Procedure

1. The testing follows ANSI C63.10-2020 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.6.3. Test Setup

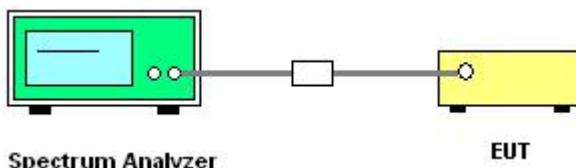

3.6.4. Test Result of Conducted Spurious Emission

Please refer to the Appendix A5.

3.7. Radiated Spurious Emission and Restricted Band

3.7.1. Limit

47 CFR 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

47 CFR 15.205(a): Only spurious emissions are permitted in any of the frequency bands listed below:

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
0.090-0.110	12.29-12.293	149.9-150.05	1660-1710	8.025-8.5
0.495-0.505	12.51975-12.52025	156.52475-156.52525	1718.8-1722.2	9.0-9.2
2.1735-2.1905	12.57675-12.57725	156.7-156.9	2200-2300	9.3-9.5
4.125-4.128	13.36-13.41	162.0125-167.17	2310-2390	10.6-12.7
4.17725-4.17775	16.42-16.423	167.72-173.2	2483.5-2500	13.25-13.4
4.20725-4.20775	16.69475-16.69525	240-285	2690-2900	14.47-14.5
6.215-6.218	16.80425-16.80475	322-335.4	3260-3267	15.35-16.2
6.26775-6.26825	25.5-25.67	399.9-410	3332-3339	17.7-21.4
6.31175-6.31225	37.5-38.25	608-614	3345.8-3358	22.01-23.12
8.291-8.294	73-74.6	960-1240	3600-4400	23.6-24.0
8.362-8.366	74.8-75.2	1300-1427	4500-5150	31.2-31.8
8.37625-8.38675	108-121.94	1435-1626.5	5350-5460	36.43-36.5
8.41425-8.41475	123-138	1645.5-1646.5	7250-7750	Above 38.6

47 CFR 15.209(a): The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3


Above 960	500	3
-----------	-----	---

3.7.2. Test Procedure


1. The testing follows ANSI C63.10-2020 clause 11.11 & 11.12.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Pre-amp Factor = Level.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - ① Span shall wide enough to fully capture the emission being measured;
 - ② When frequency < 1 GHz:
 - Set RBW=100 kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - ③ When frequency \geq 1 GHz:
 - Set RBW = 1 MHz; VBW = 3 MHz for peak measurement;
 - Set RBW = 1 MHz; VBW = 10 Hz, when duty cycle is no less than 98 percent or VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.7.3. Test Setup


3.7.3.1. For radiated emissions below 30MHz

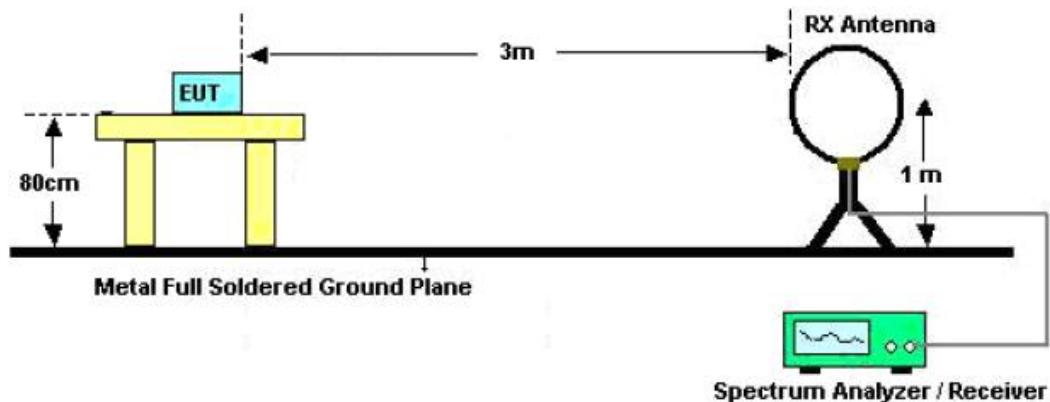

3.7.3.2. For radiated emissions from 30MHz to 1GHz

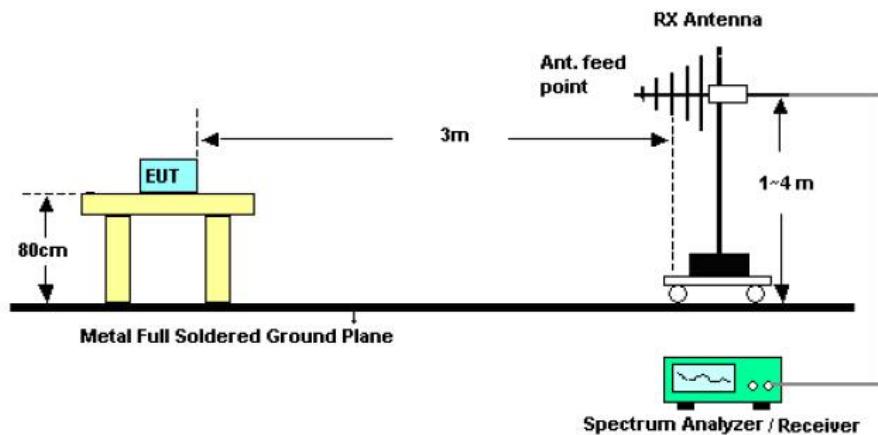

3.7.3.3. For radiated emissions above 1GHz

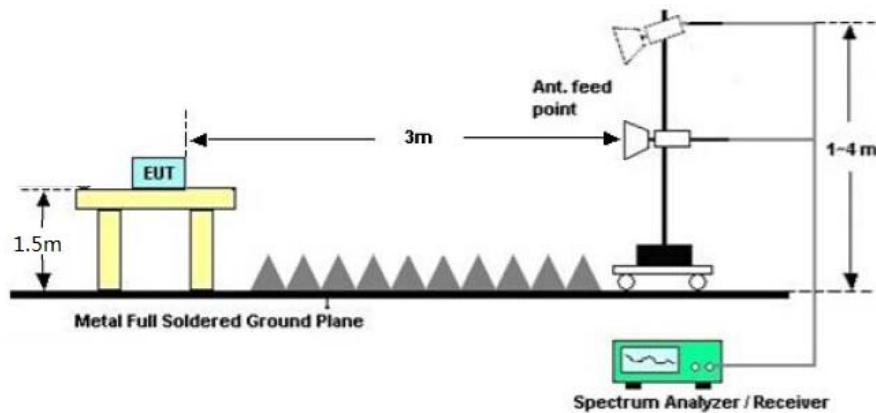

3.7.4. Test Result of Radiated Spurious Emission and Restricted Band

Note:

Please refer to the Appendix A6

3.8. AC Power-Line Conducted Emission

3.8.1. Limit

47 CFR 15.207(a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table:


Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.8.2. Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.8.3. Test Setup

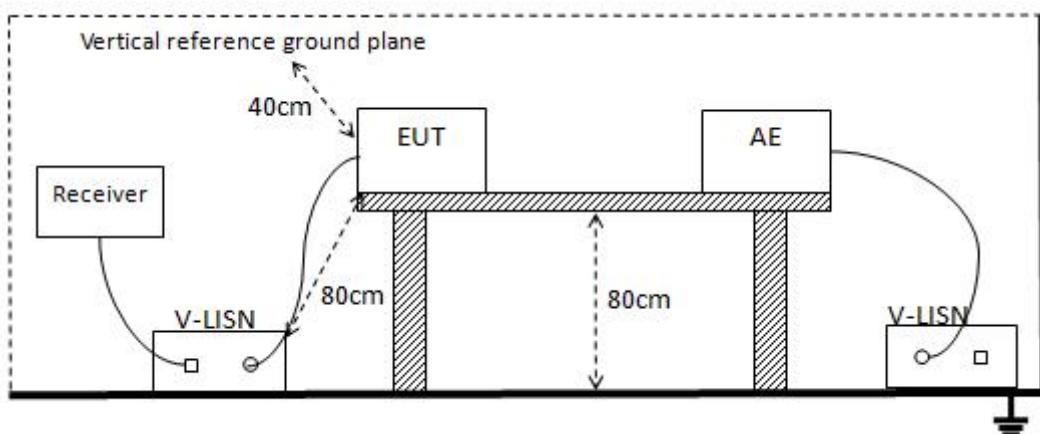

3.8.4. Test Result of AC Power-Line Conducted Emission

Please refer to the Appendix A7.

3.9. Antenna Requirement

3.9.1. Standard Requirement

According to 47 CFR 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.9.2. EUT Antenna

The antenna used for the EUT is Chip antenna, which meets the antenna requirements.

4. TEST SETUP PHOTOGRAPHS

Please refer to the Appendix F.

5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

External Please refer to the Appendix G.

Internal Please refer to the Appendix H.


6.Appendix A of data

A1.Conducted Peak Output Power

Test Result

Mode	Channel	Peak Output Power (dBm)	Peak Output Power (mW)	Limit (dBm)	Result
BLE 1M	0	3.81	2.4	≤21	PASS
	19	3.65	2.32	≤21	PASS
	39	2.96	1.98	≤21	PASS

Test Graphs

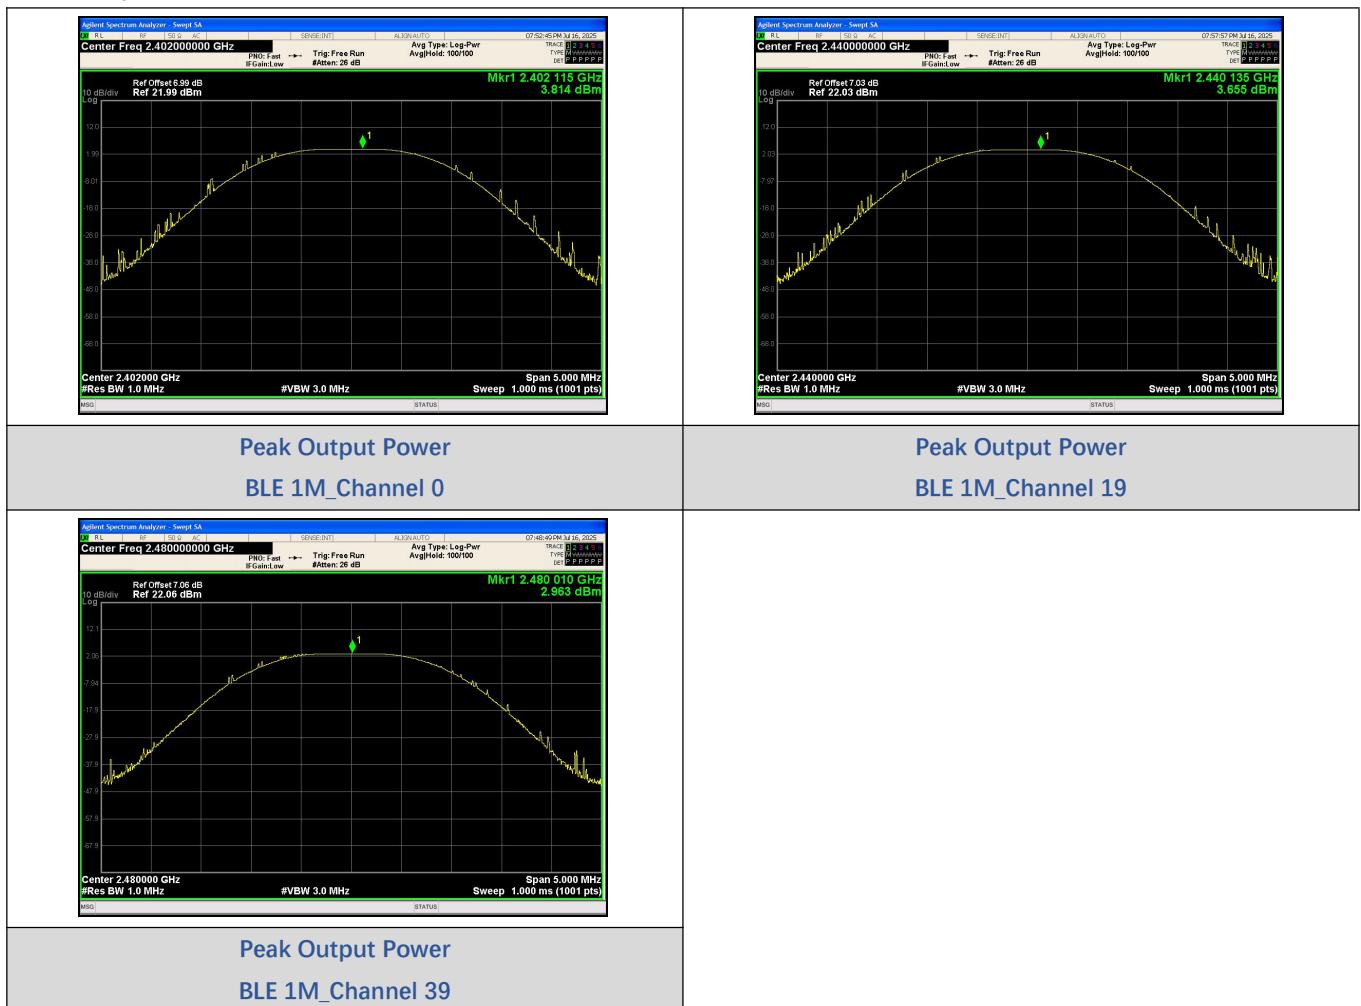


A2.Duty Cycle

Test Result

Mode	Channel	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)
BLE 1M	0	2.785	3.565	78.12	0.7812	1.0724
	19	2.785	3.565	78.12	0.7812	1.0724
	39	2.785	3.565	78.12	0.7812	1.0724

Test Graphs

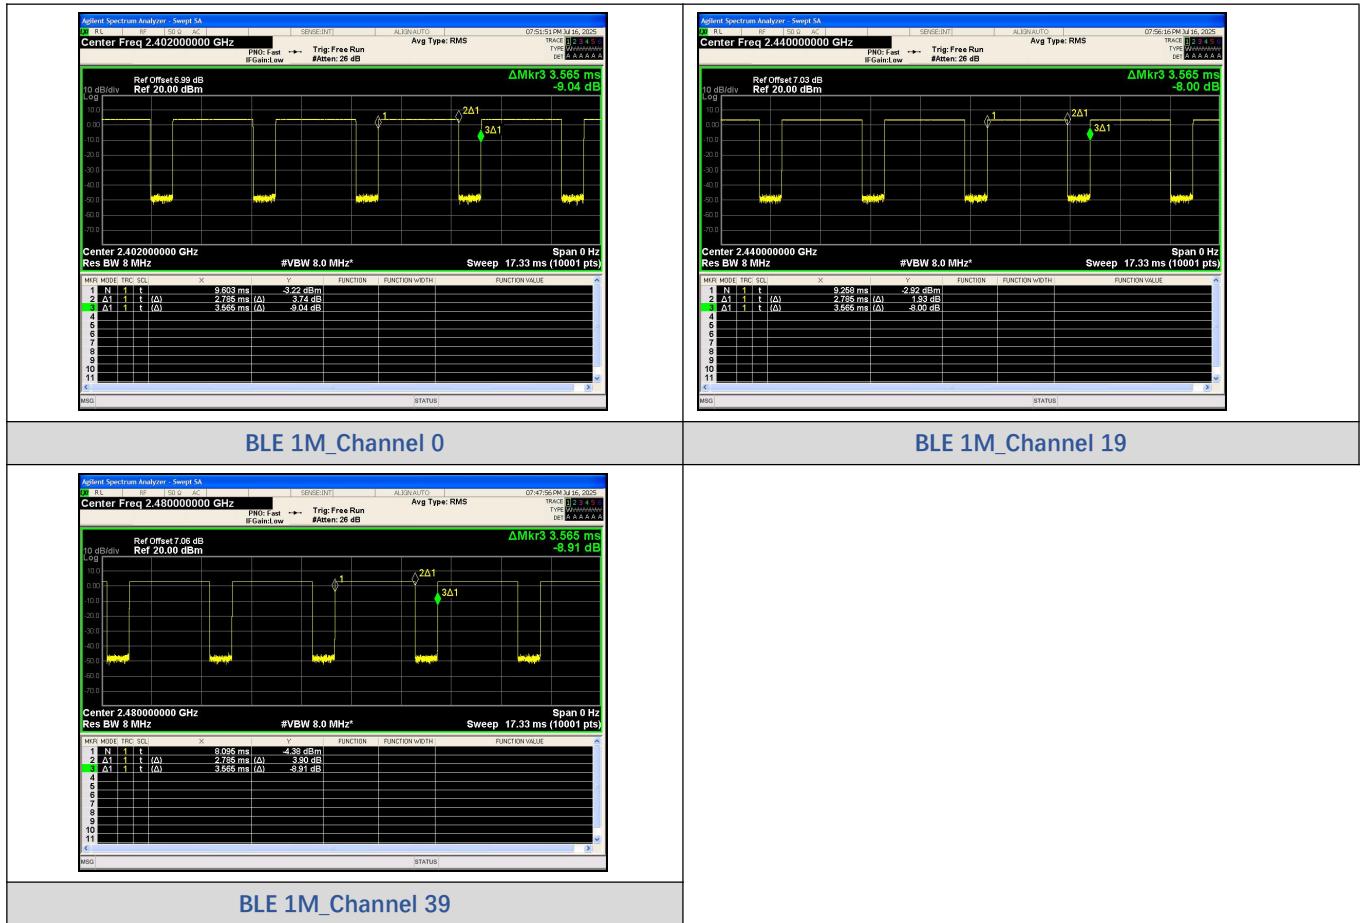

A3.6dB Bandwidth and 99% Bandwidth

Test Result for 6dB Bandwidth:

Mode	Channel	Center Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
BLE 1M	0	2402	0.6371	≥0.5	PASS
	19	2440	0.6351		PASS
	39	2480	0.6358		PASS


Test Graphs



Test Result for 99% Bandwidth:

Mode	Channel	Center Frequency (MHz)	99% BW (MHz)
BLE 1M	0	2402	1.0499
BLE 1M	19	2440	1.0440
BLE 1M	39	2480	1.0454

Test Graphs

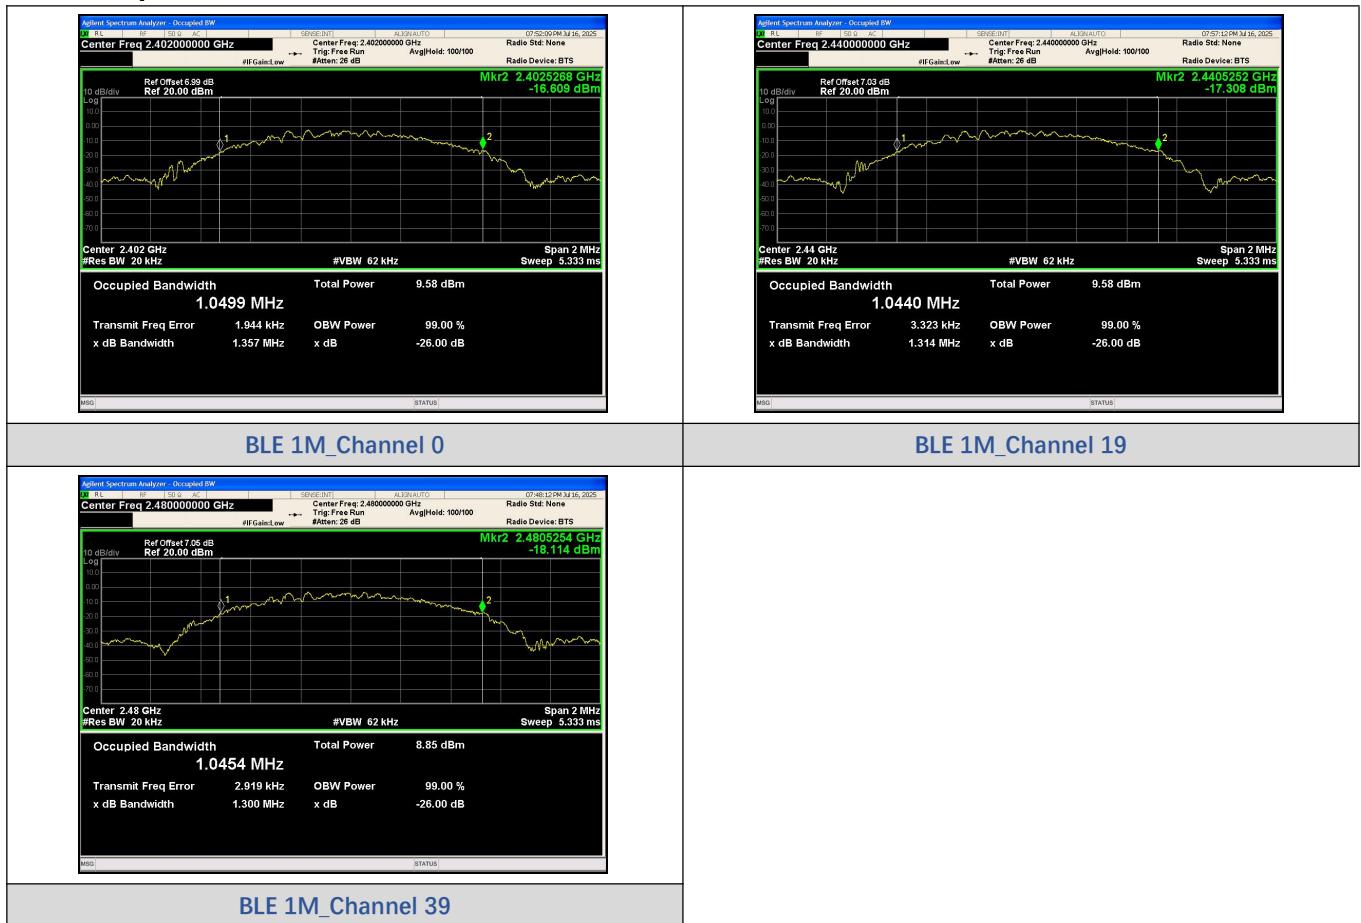


A4. Power Spectral Density

Test Result

Mode	Channel	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
BLE 1M	0	-11.130	≤8	PASS
BLE 1M	19	-11.330	≤8	PASS
BLE 1M	39	-11.670	≤8	PASS

Test Graphs

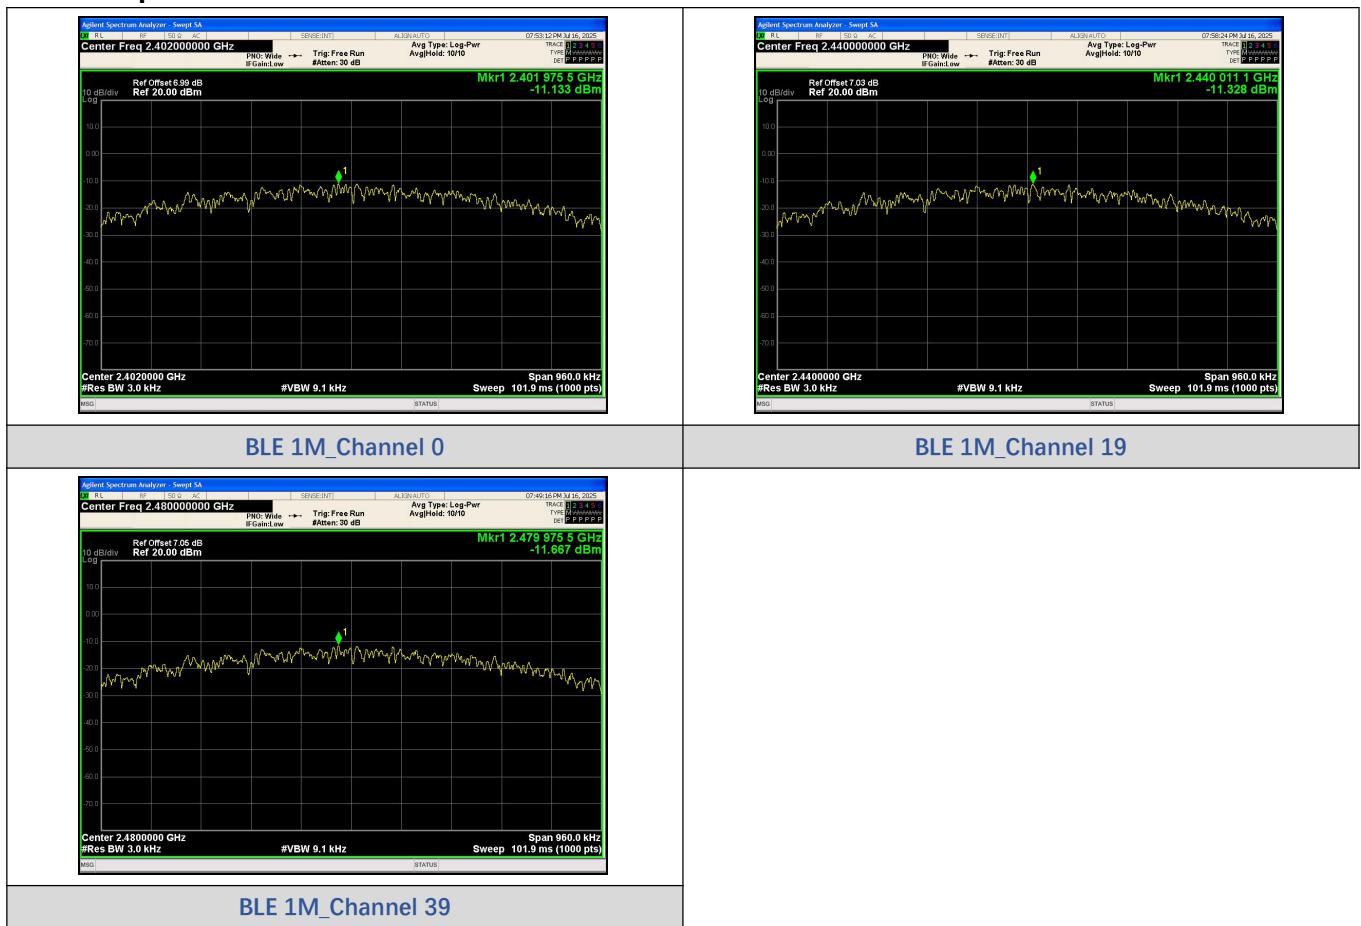


A5.Conducted Band Edge and Spurious Emission

Test Result

Mode	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
BLE 1M	0	2398.80	-52.404	-17.04	-35.364	PASS
		2400.00	-52.510	-17.04	-35.470	PASS
		4803.60	-65.559	-17.04	-48.519	PASS
		7205.10	-54.958	-17.04	-37.918	PASS
		9607.20	-69.358	-17.04	-52.318	PASS
		24926.3	-54.007	-17.04	-36.967	PASS
	19	4881.05	-69.487	-17.23	-52.257	PASS
		7320.62	-55.542	-17.23	-38.312	PASS
		9761.43	-70.683	-17.23	-53.453	PASS
		24996.2	-54.010	-17.23	-36.780	PASS
	39	2483.50	-56.040	-17.87	-38.170	PASS
		4959.70	-68.930	-17.87	-51.059	PASS
		7440.47	-56.755	-17.87	-38.885	PASS
		9919.99	-69.043	-17.87	-51.172	PASS
		24905.1	-52.173	-17.87	-34.303	PASS

Test Graphs



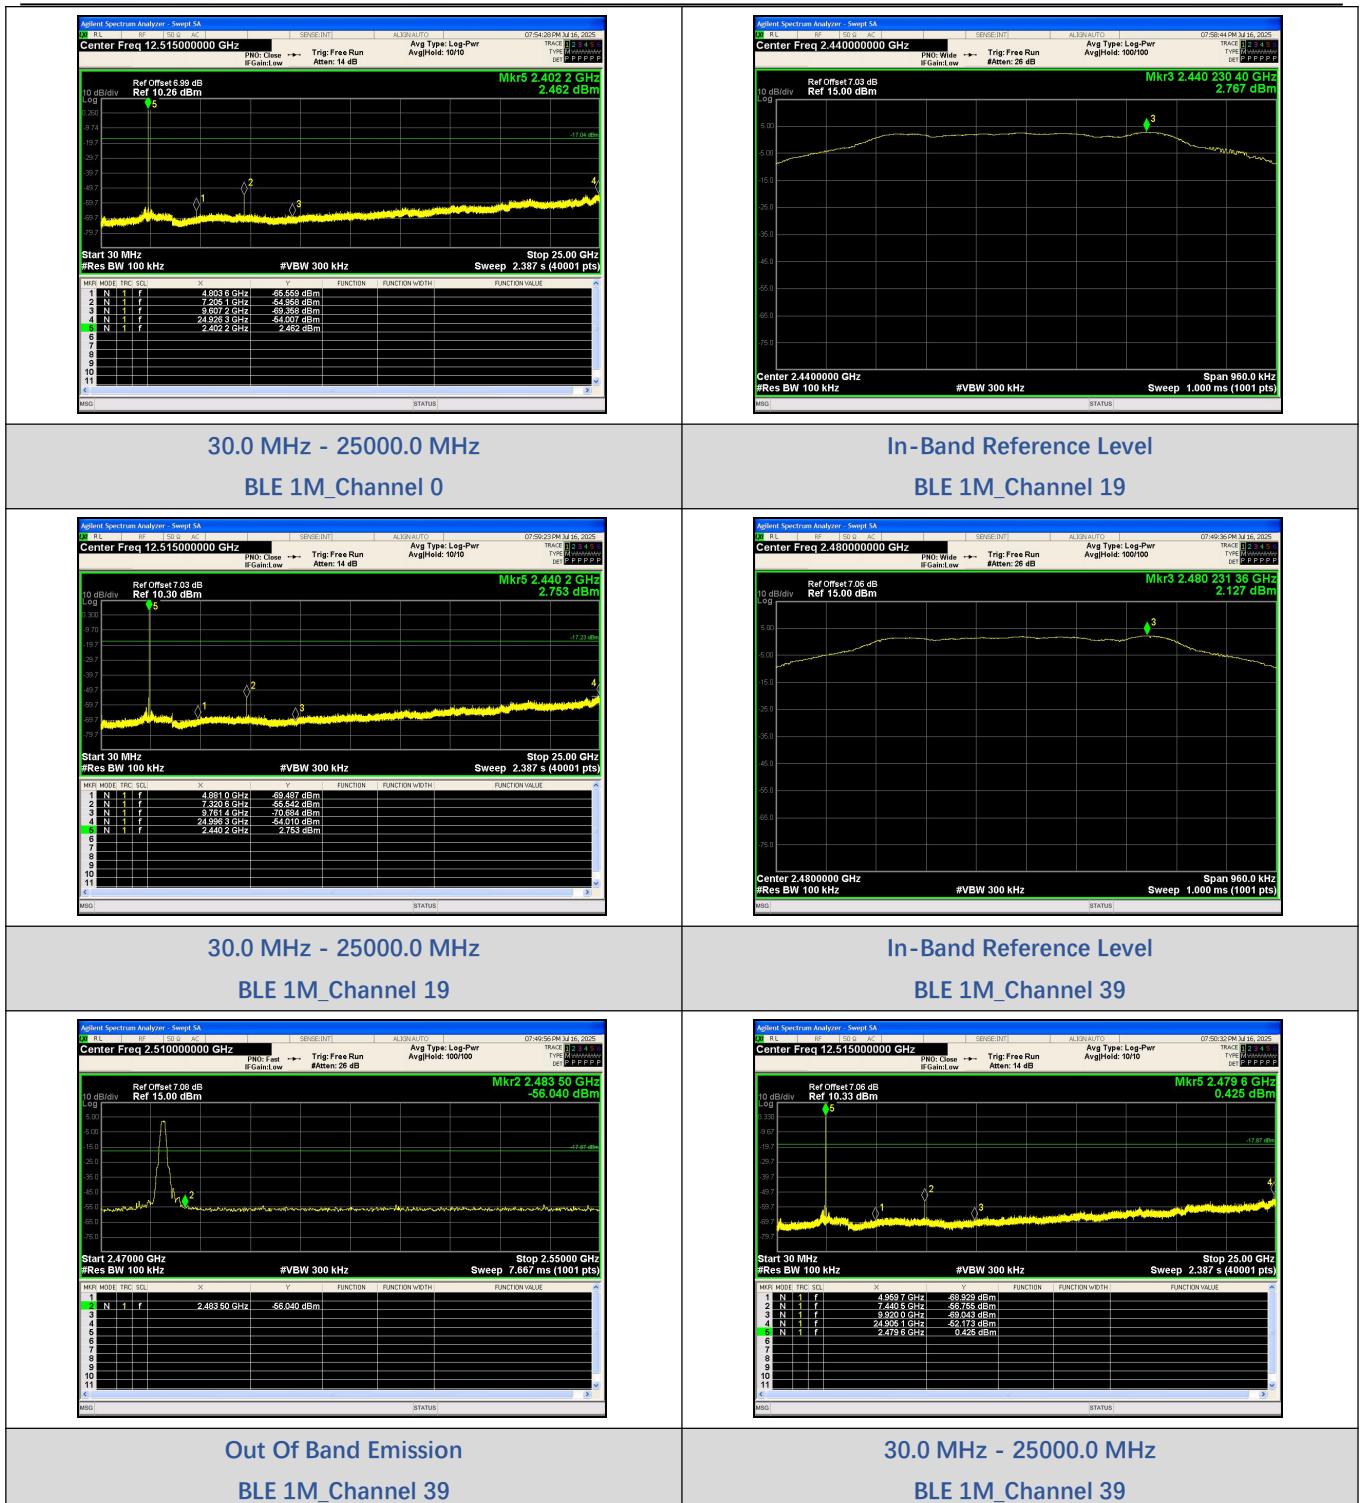

A6.Radiated Spurious Emission and Restricted Band

Test Result

Test Result for Radiated Spurious Emission:


For 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.


For 30 MHz ~ 1 GHz:

Note:

1. All modes have been tested, only worst case(2402MHz)mode was recorded in the test report.
2. Emission Level = Reading Value+ Correction Factor.
3. Correction Factor= Insertion loss + Cable loss.
4. The emission levels of other frequencies were less than 20dB margin against the limit.
5. Margin value = Emission level-Limit value.

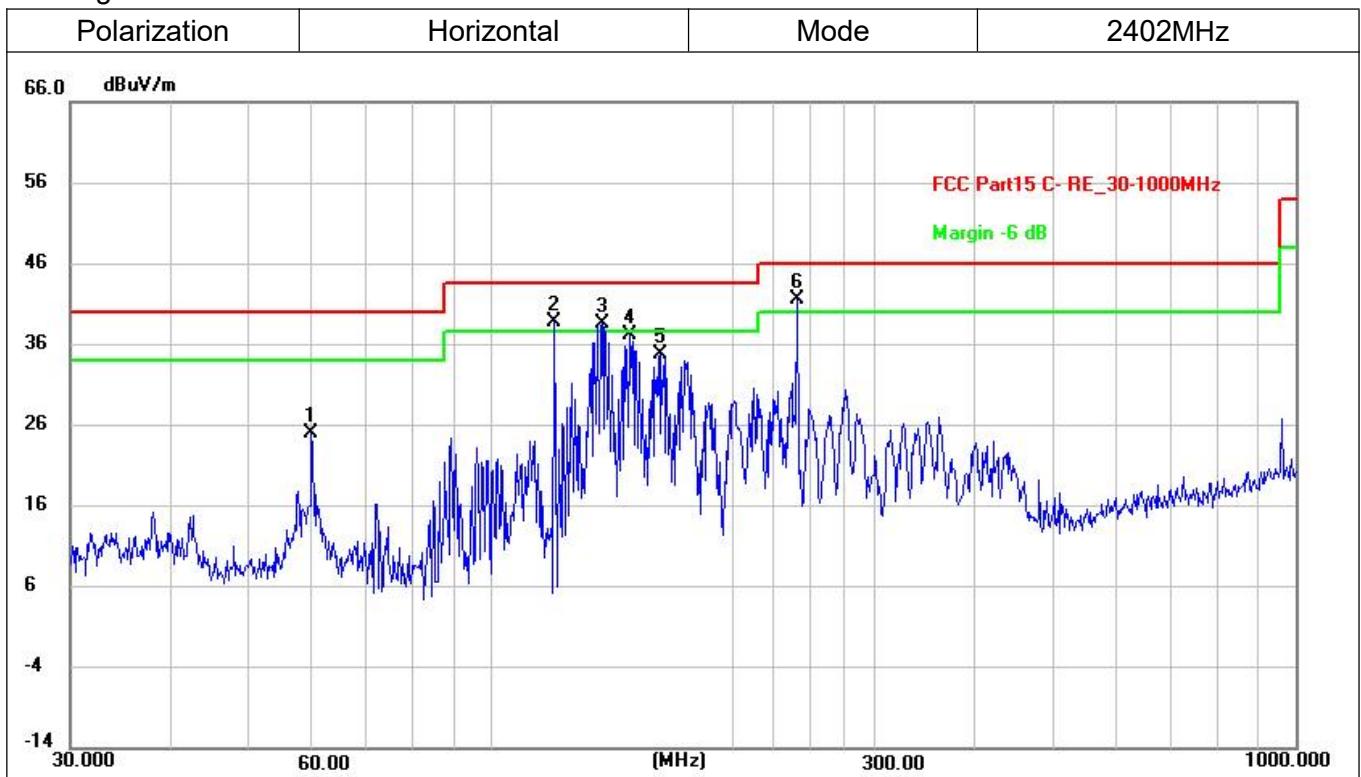

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	59.8588	54.43	-29.36	25.07	40.00	-14.93	peak	
2	119.8556	70.83	-32.00	38.83	43.50	-4.67	peak	
3	137.4202	68.67	-30.08	38.59	43.50	-4.91	peak	
4	148.4410	66.33	-29.09	37.24	43.50	-6.26	peak	
5	162.6105	63.94	-29.14	34.80	43.50	-8.70	peak	
6	239.9873	72.27	-30.71	41.56	46.00	-4.44	peak	

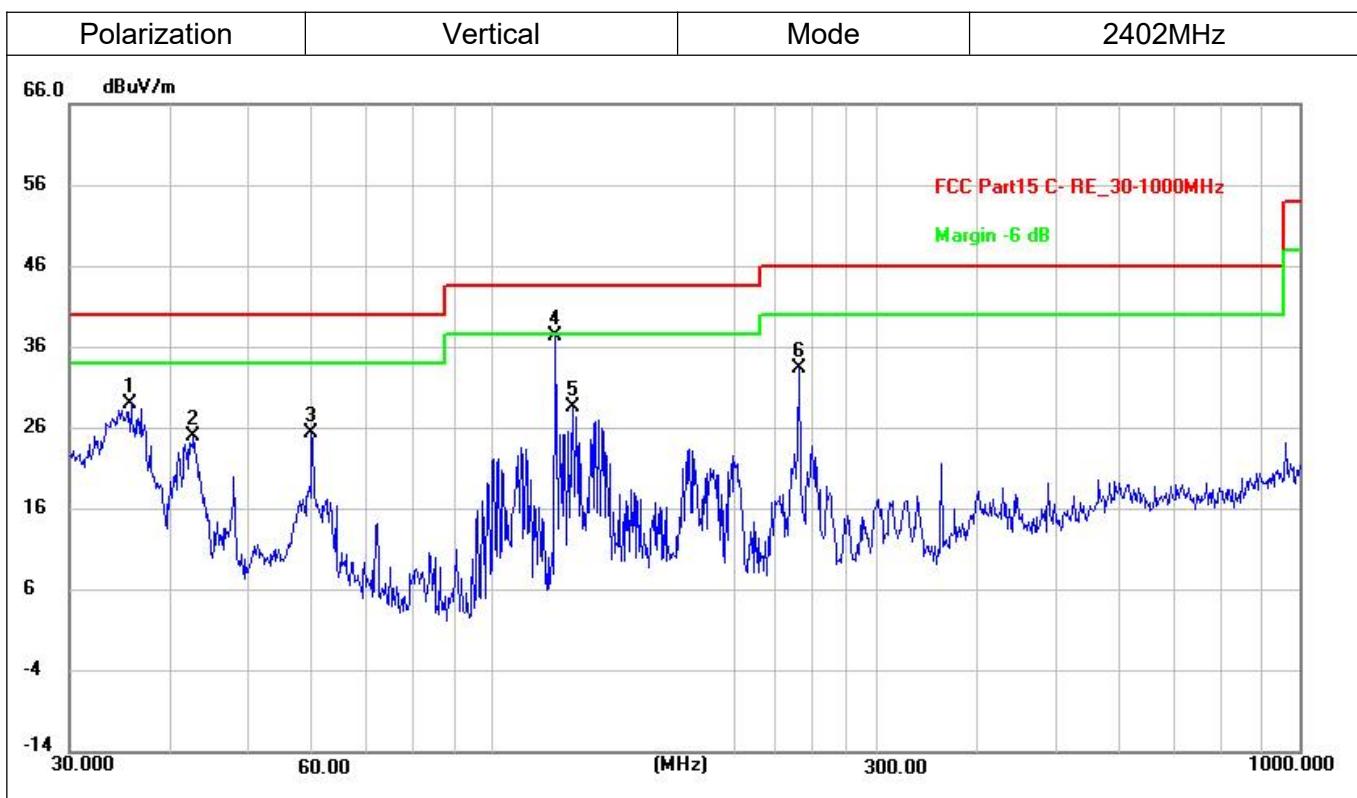


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	35.7490	58.39	-29.49	28.90	40.00	-11.10	peak
2	42.7496	54.19	-29.22	24.97	40.00	-15.03	peak
3	59.8588	54.79	-29.36	25.43	40.00	-14.57	peak
4	119.8556	69.47	-32.00	37.47	43.50	-6.03	peak
5	125.8864	60.09	-31.47	28.62	43.50	-14.88	peak
6	239.9874	64.01	-30.71	33.30	46.00	-12.70	peak


For 1 GHz ~ 18GHz:

Note:


1. The all data rate modes had been test, but only worse test data was recorded in the test report.
2. In frequency ranges 18 ~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.
3. We used the filter to test and the main frequency was filtered out.
4. Emission Level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
5. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)-Amplifier Gain.
6. The emission levels of other frequencies were less than 20dB margin against the limit.
7. Margin value = Emission level-Limit value.

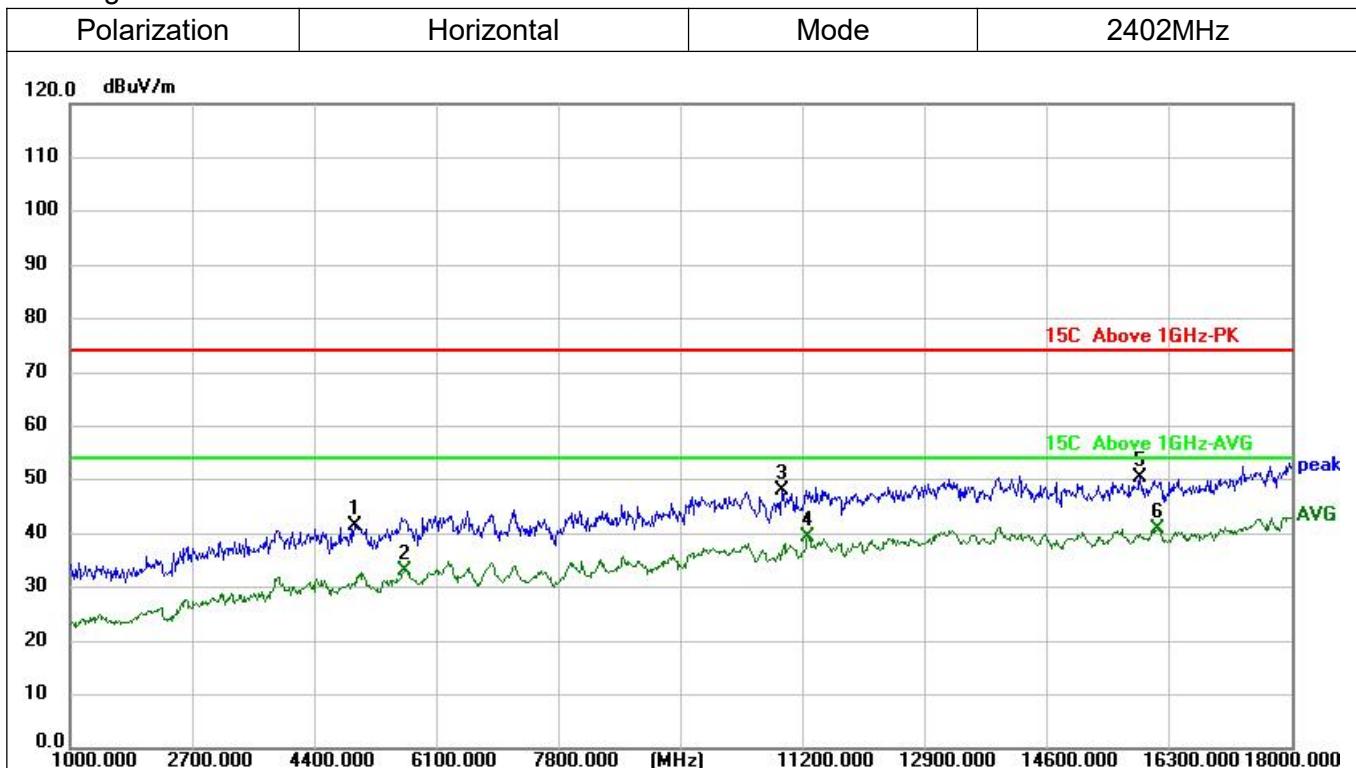


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4961.000	46.81	-5.34	41.47	74.00	-32.53	peak
2	5658.000	37.23	-4.20	33.03	54.00	-20.97	AVG
3	10911.000	41.31	6.73	48.04	74.00	-25.96	peak
4	11268.000	31.85	7.48	39.33	54.00	-14.67	AVG
5	15892.000	38.53	11.88	50.41	74.00	-23.59	peak
6	16130.000	28.83	12.03	40.86	54.00	-13.14	AVG

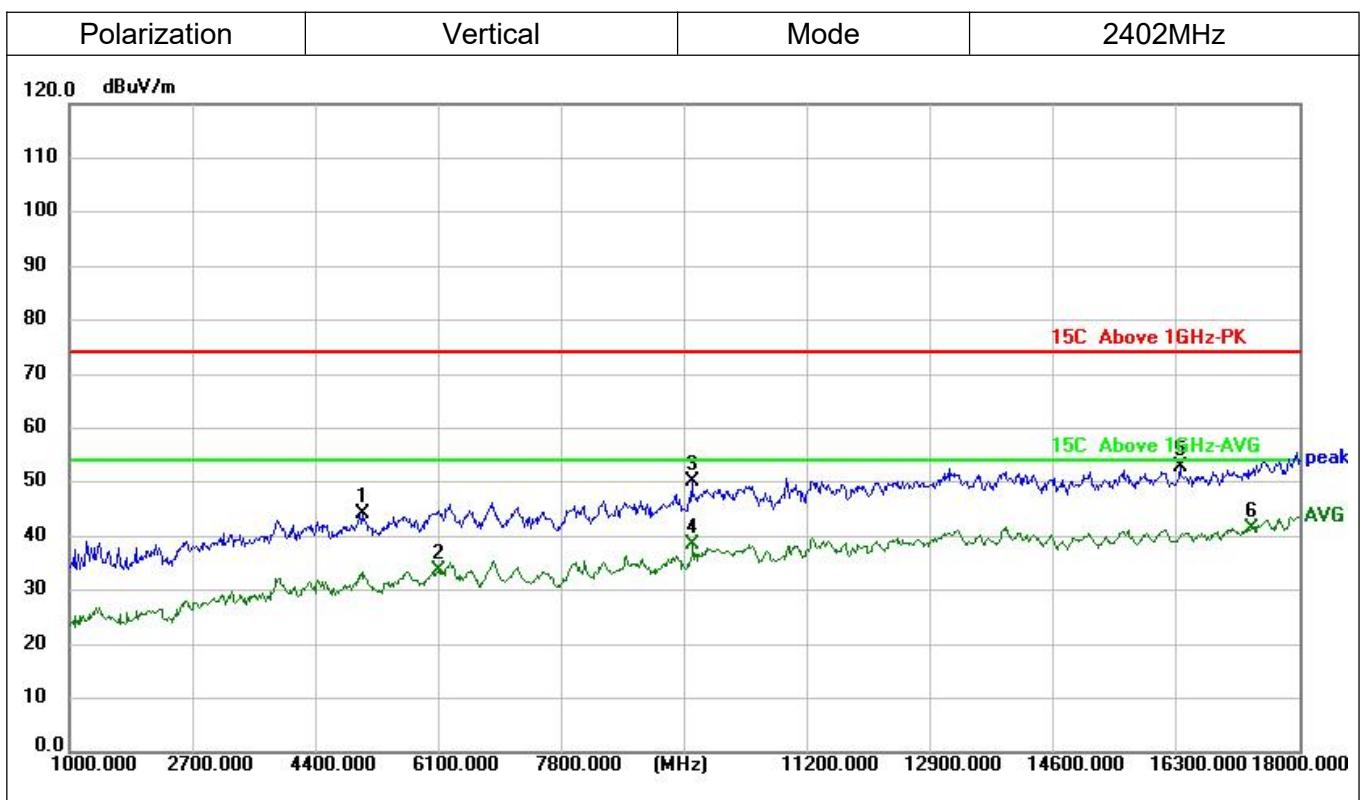


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	5046.000	49.25	-5.09	44.16	74.00	-29.84	AVG
2	6100.000	35.80	-2.22	33.58	54.00	-20.42	peak
3	9602.000	45.73	4.38	50.11	74.00	-23.89	peak
4	9619.000	34.15	4.41	38.56	54.00	-15.44	AVG
5	16351.000	40.44	12.25	52.69	74.00	-21.31	peak
6	17337.000	26.39	15.16	41.55	54.00	-12.45	AVG

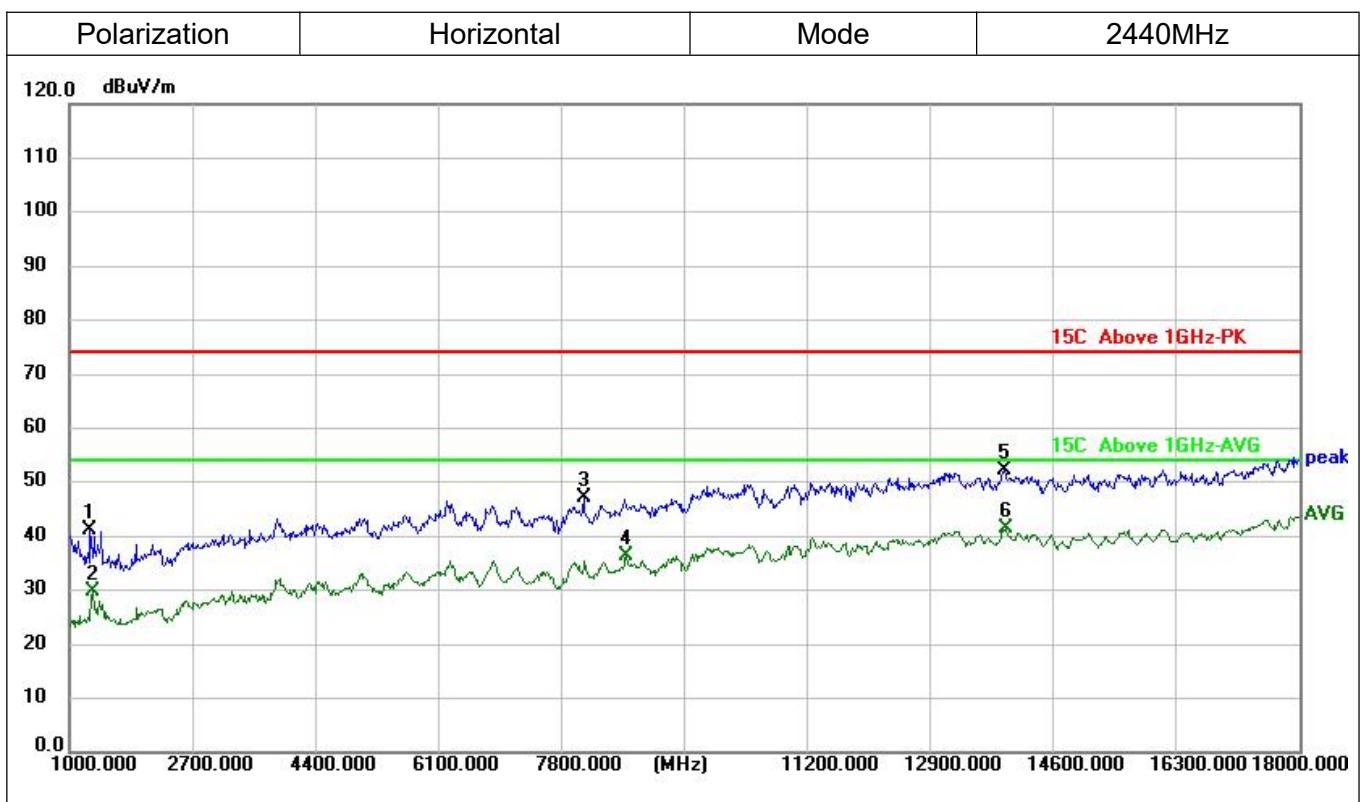


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1289.000	61.16	-20.09	41.07	74.00	-32.93	peak
2	1323.000	49.68	-20.00	29.68	54.00	-24.32	AVG
3	8106.000	45.35	1.90	47.25	74.00	-26.75	peak
4	8701.000	33.48	2.82	36.30	54.00	-17.70	AVG
5	13920.000	41.77	10.52	52.29	74.00	-21.71	peak
6	13937.000	31.00	10.55	41.55	54.00	-12.45	AVG

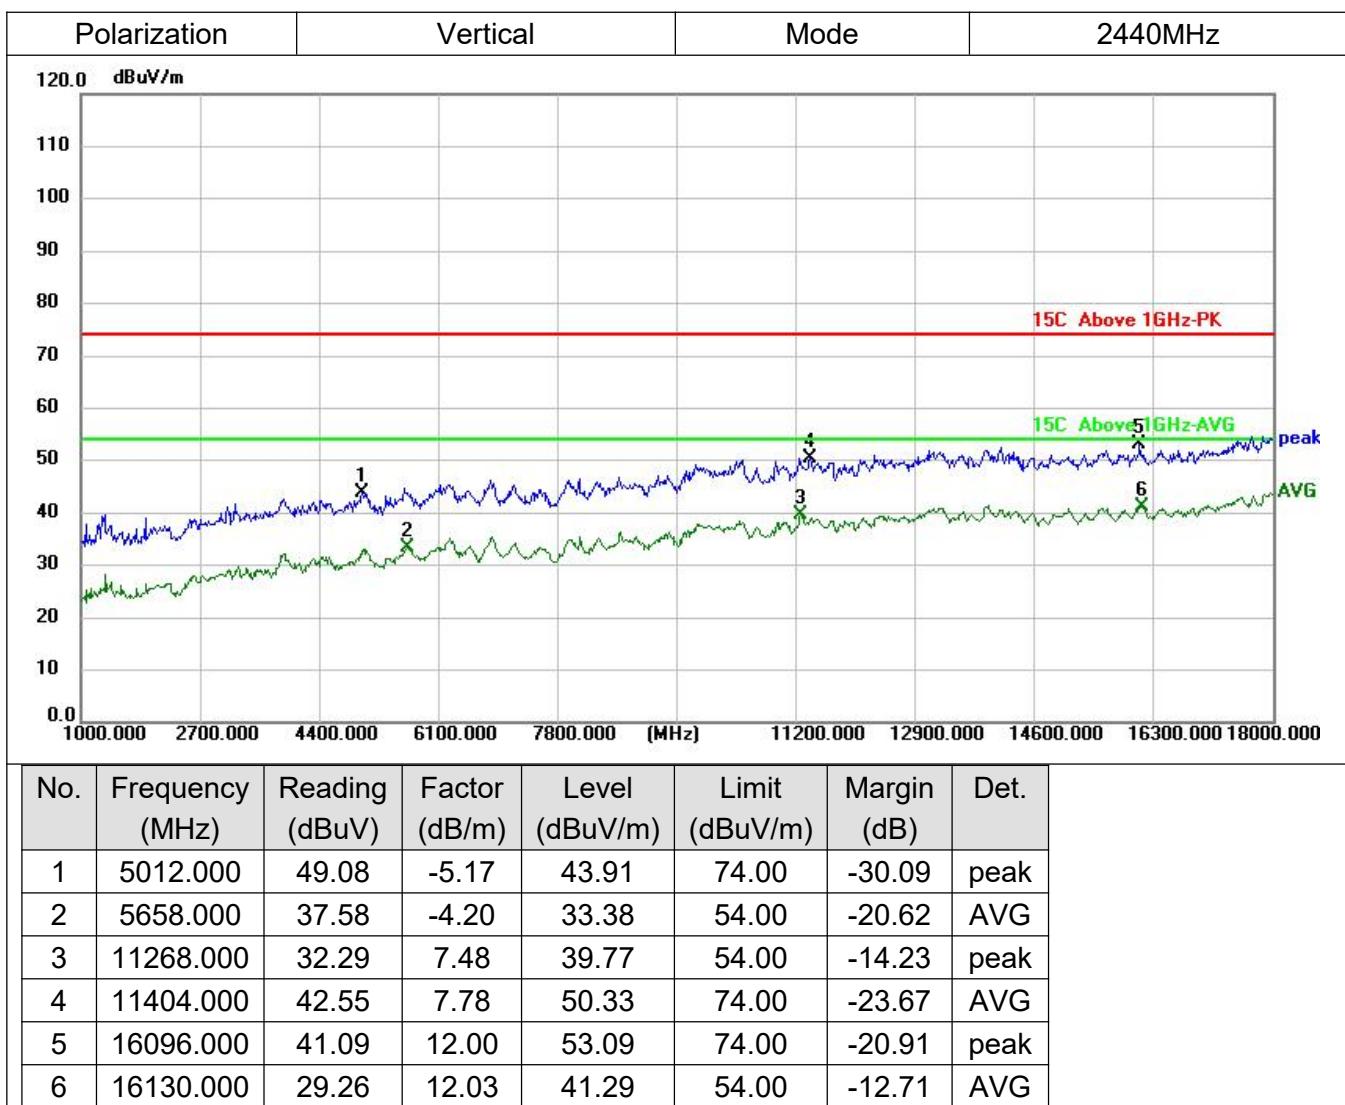


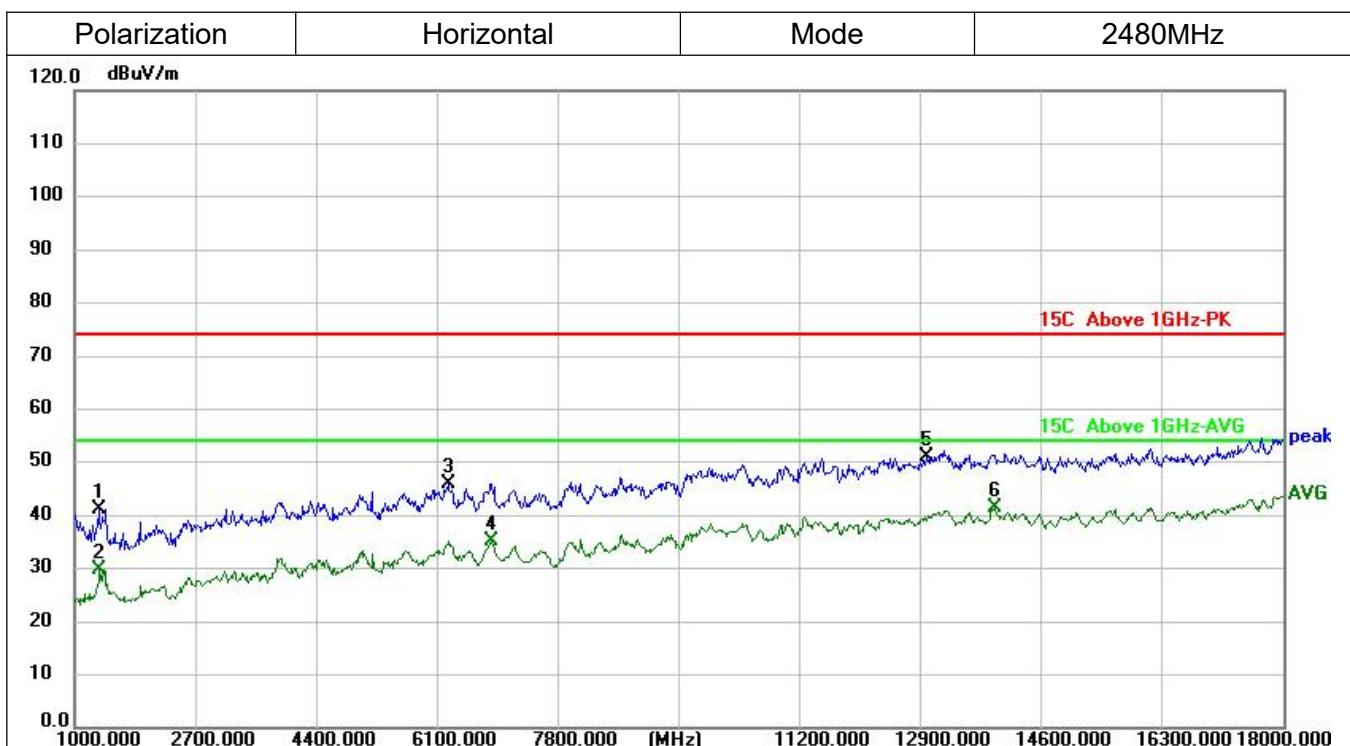



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1340.000	61.15	-19.95	41.20	74.00	-32.80	peak
2	1357.000	49.82	-19.90	29.92	54.00	-24.08	AVG
3	6253.000	47.67	-1.79	45.88	74.00	-28.12	peak
4	6865.000	35.71	-0.44	35.27	54.00	-18.73	AVG
5	12985.000	41.37	9.76	51.13	74.00	-22.87	peak
6	13937.000	30.80	10.55	41.35	54.00	-12.65	AVG

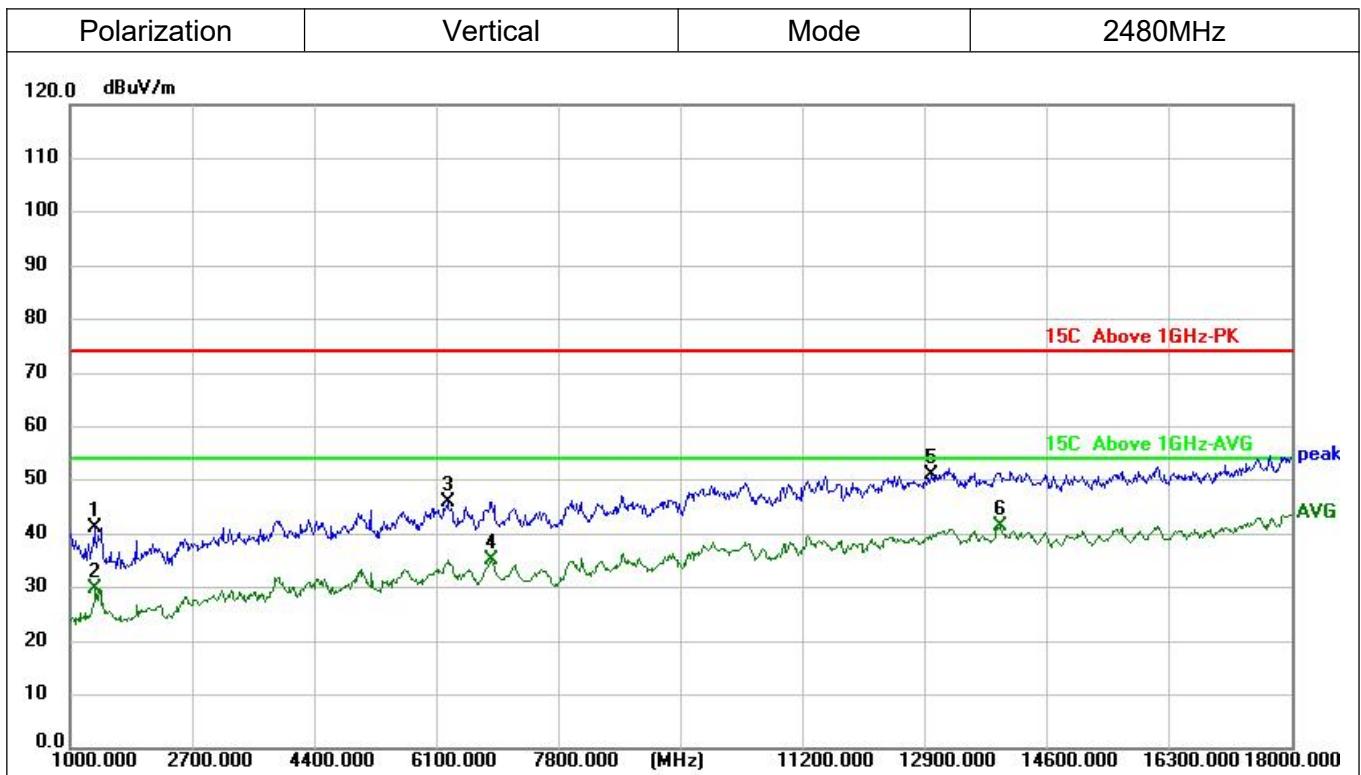


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	1340.000	61.15	-19.95	41.20	74.00	-32.80	peak	
2	1357.000	49.82	-19.90	29.92	54.00	-24.08	AVG	
3	6253.000	47.67	-1.79	45.88	74.00	-28.12	peak	
4	6865.000	35.71	-0.44	35.27	54.00	-18.73	AVG	
5	12985.000	41.37	9.76	51.13	74.00	-22.87	peak	
6	13937.000	30.80	10.55	41.35	54.00	-12.65	AVG	

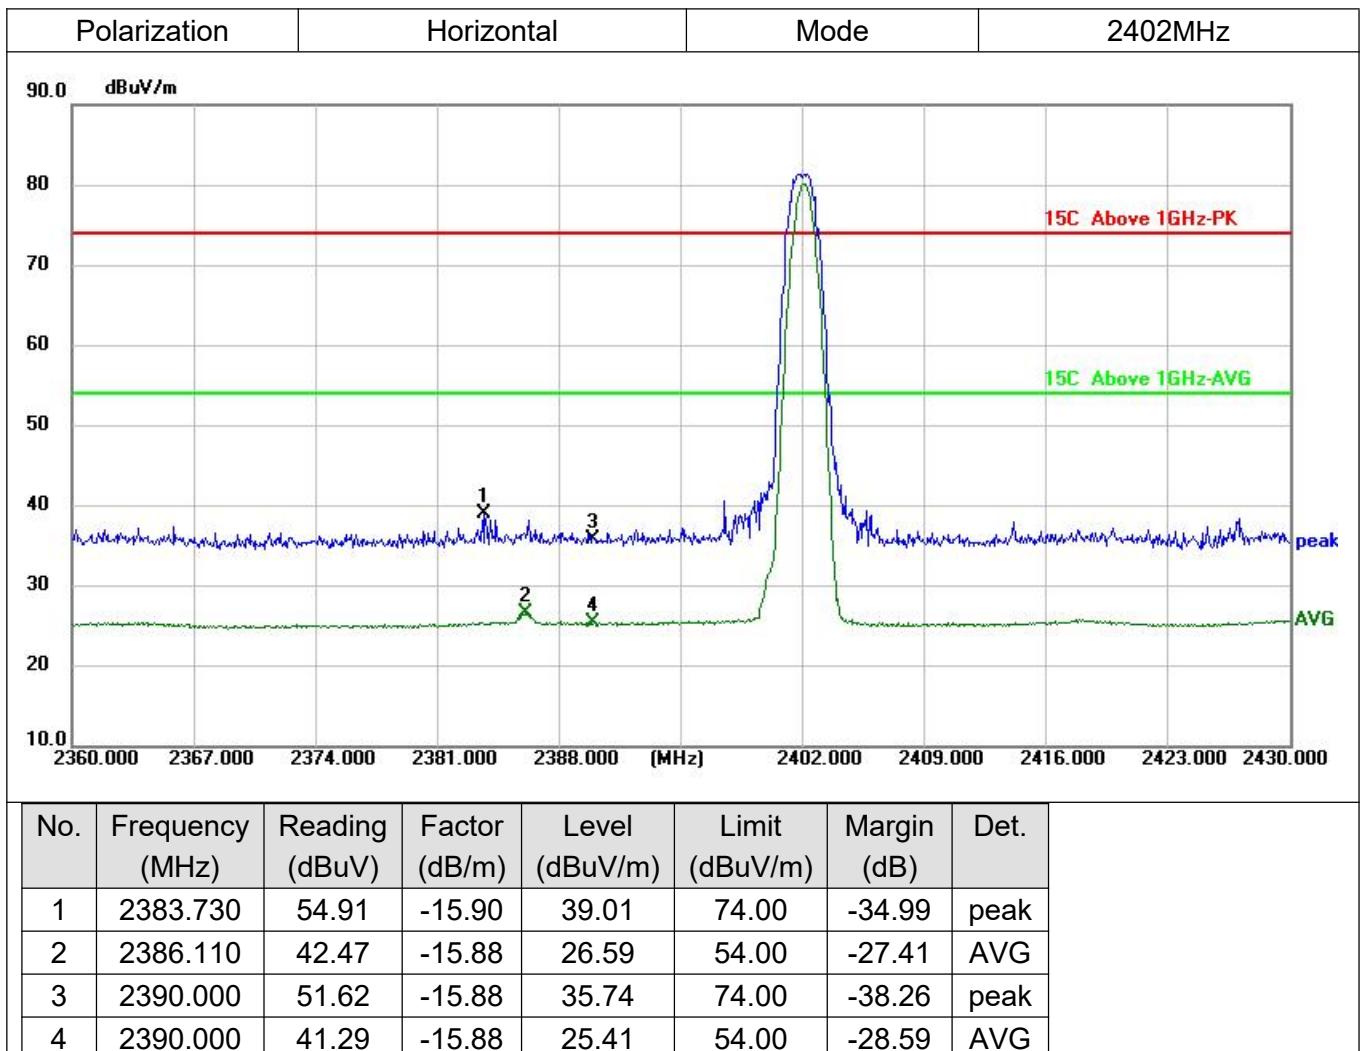Test Result of Restricted Band:

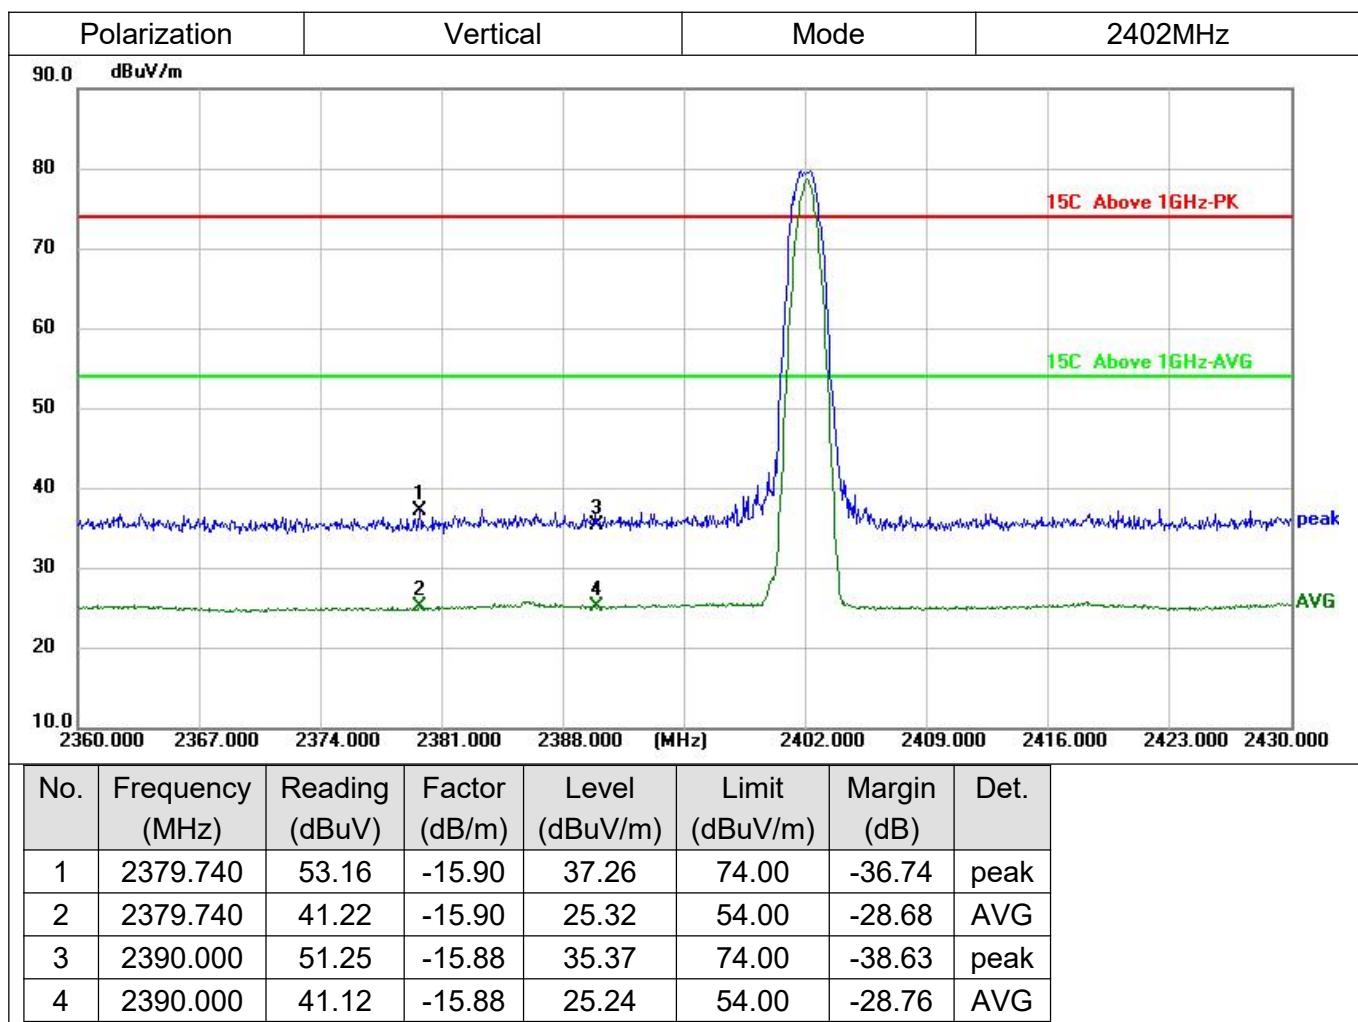

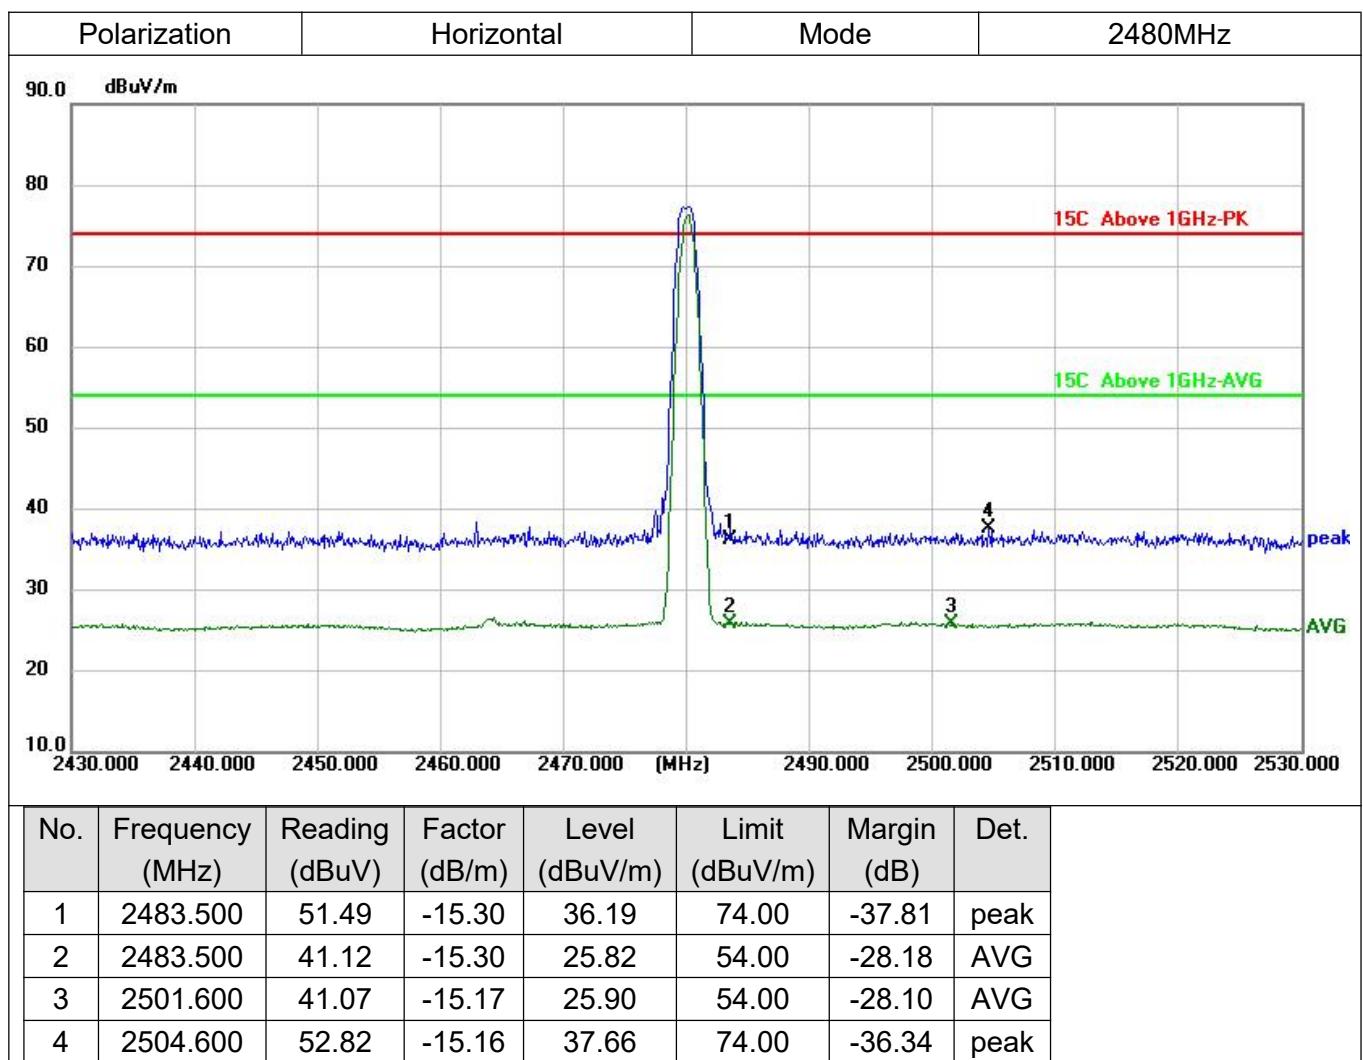

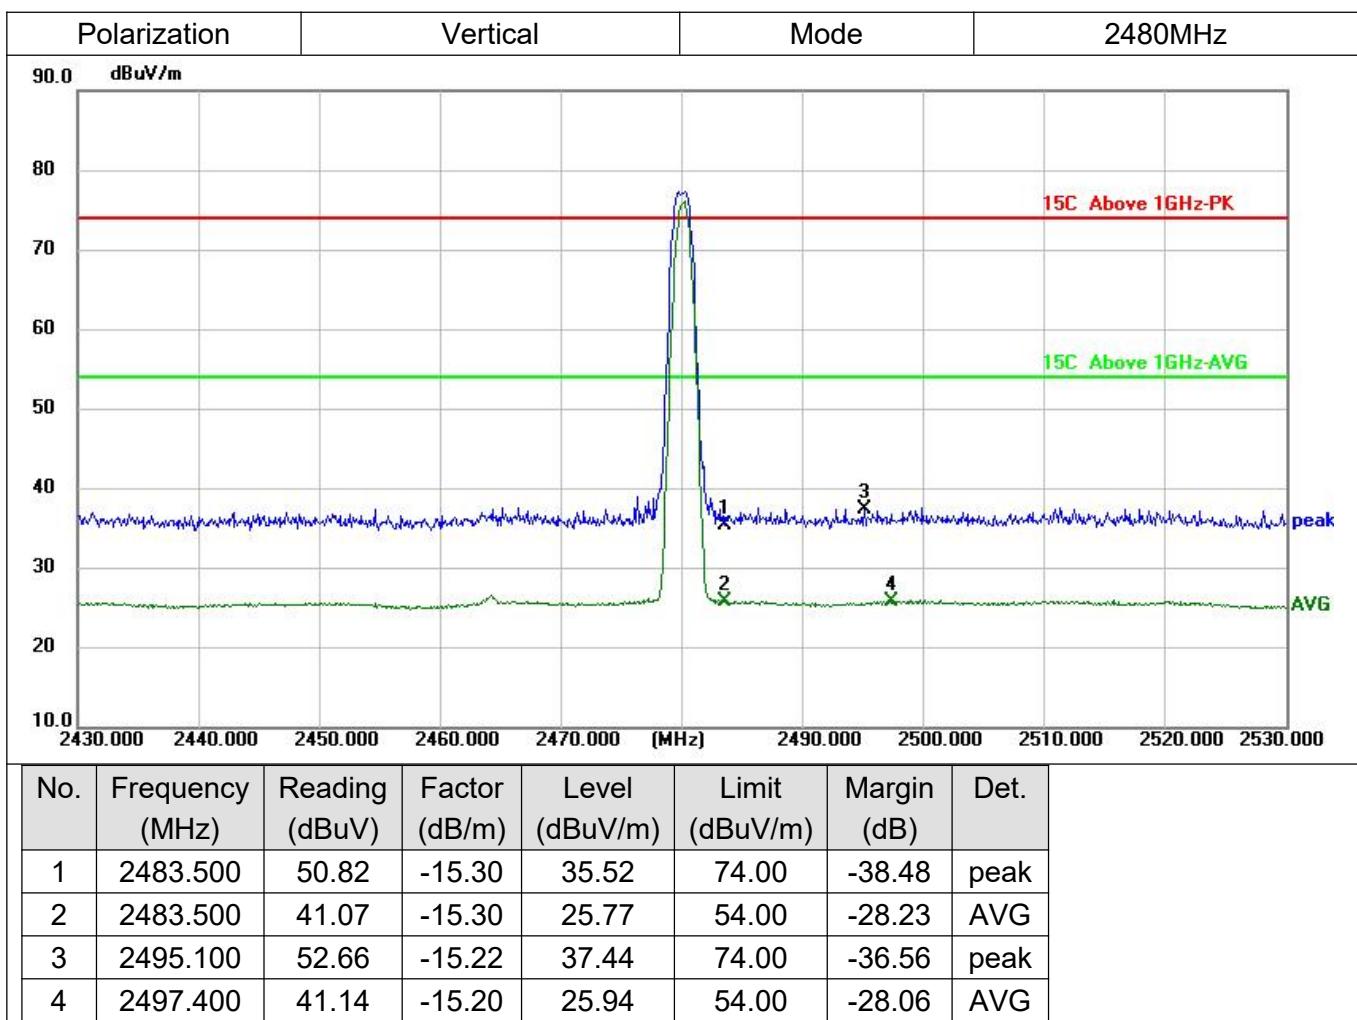
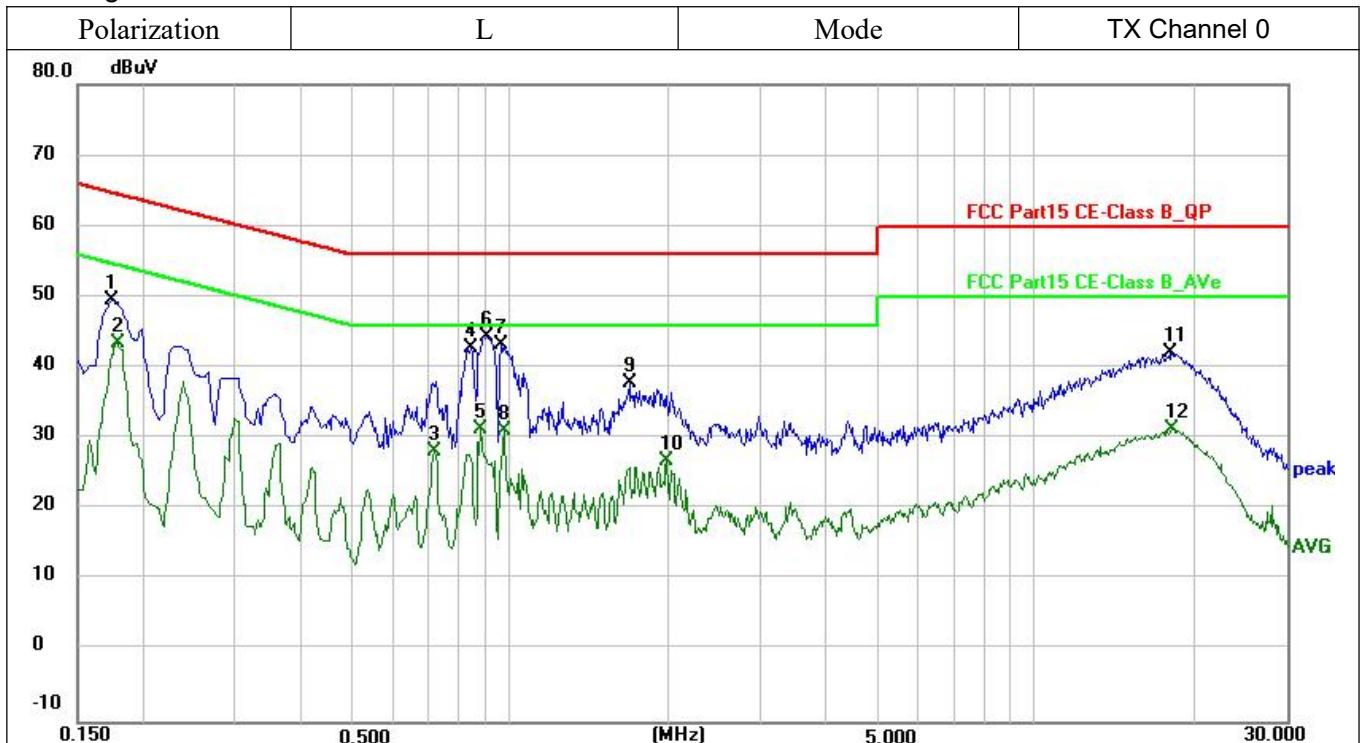

REMARKS:

1. Emission Level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)-Amplifier Gain.
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level-Limit value.


A7.AC Power-Line Conducted Emission

Note:

1. All modes have been tested, only worst case(BLE_2402MHz)mode was recorded in the test report.
2. Emission Level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level-Limit value.



No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1740	30.20	19.43	49.63	64.77	-15.14	QP
2	0.1780	24.10	19.44	43.54	54.58	-11.04	AVG
3	0.7180	8.83	19.51	28.34	46.00	-17.66	AVG
4	0.8420	23.34	19.51	42.85	56.00	-13.15	QP
5	0.8780	11.79	19.54	31.33	46.00	-14.67	AVG
6	0.9020	24.92	19.55	44.47	56.00	-11.53	QP
7	0.9620	23.69	19.51	43.20	56.00	-12.80	QP
8	0.9780	11.71	19.52	31.23	46.00	-14.77	AVG
9	1.6820	18.28	19.57	37.85	56.00	-18.15	QP
10	1.9860	7.36	19.58	26.94	46.00	-19.06	AVG
11	17.9460	20.80	21.47	42.27	60.00	-17.73	QP
12	18.2060	10.01	21.51	31.52	50.00	-18.48	AVG

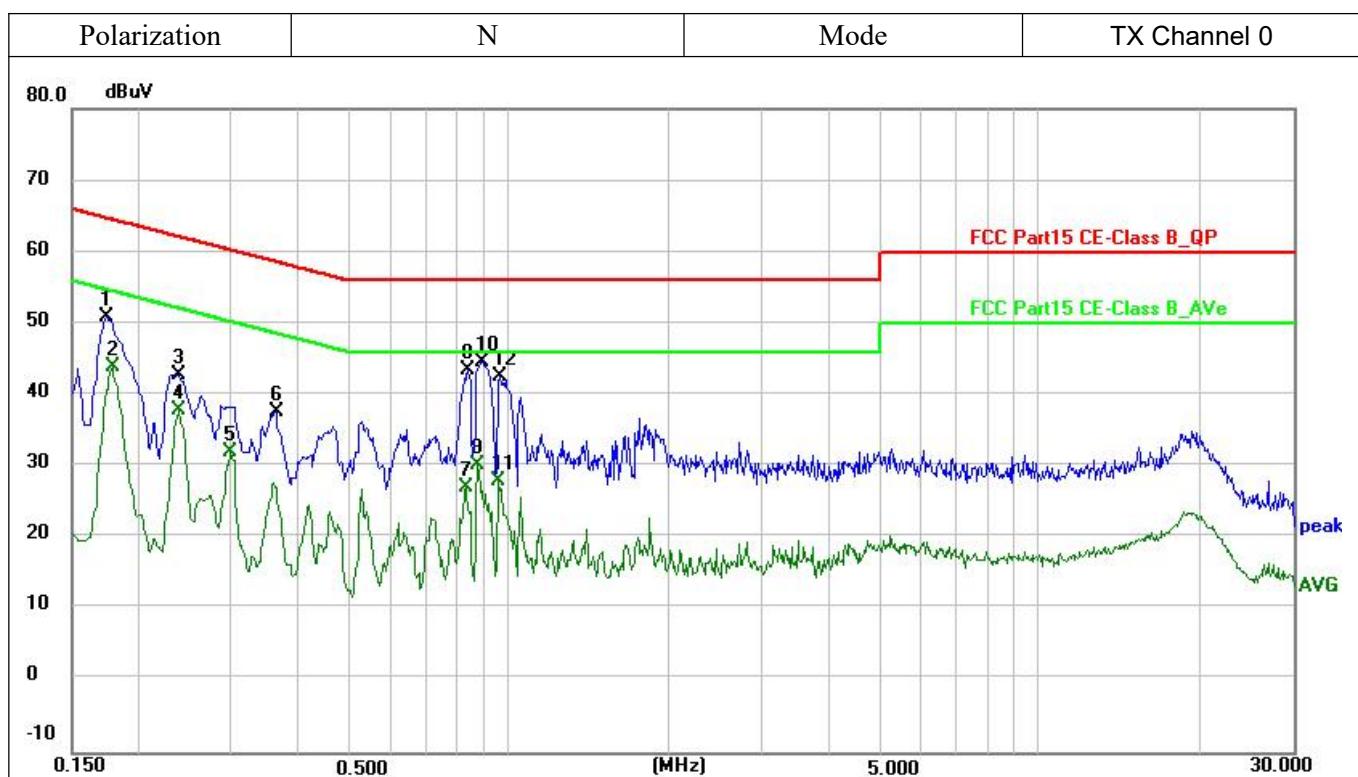

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1740	31.56	19.42	50.98	64.77	-13.79	QP
2	0.1780	24.48	19.42	43.90	54.58	-10.68	AVG
3	0.2380	23.34	19.42	42.76	62.17	-19.41	QP
4	0.2380	18.48	19.42	37.90	52.17	-14.27	AVG
5	0.2980	12.70	19.43	32.13	50.30	-18.17	AVG
6	0.3620	18.32	19.46	37.78	58.68	-20.90	QP
7	0.8300	7.62	19.50	27.12	46.00	-18.88	AVG
8	0.8380	24.06	19.50	43.56	56.00	-12.44	QP
9	0.8740	10.86	19.51	30.37	46.00	-15.63	AVG
10	0.8900	25.17	19.52	44.69	56.00	-11.31	QP
11	0.9580	8.60	19.50	28.10	46.00	-17.90	AVG
12	0.9620	23.03	19.50	42.53	56.00	-13.47	QP

*****END OF THE REPORT*****