



Appendix B

Detailed Test Results

1. GSM
GSM850 for Head& Body
GSM1900 for Head& Body
2. WCDMA
WCDMA Band II for Head& Body
WCDMA Band V for Head& Body
3. LTE
LTE Band 7 for Head& Body
LTE Band 12 for Head& Body
LTE Band 25 for Head& Body
LTE Band 26 for Head& Body
LTE Band 41 for Head& Body
LTE Band 66 for Head& Body
4. WIFI&BT
WIFI 2.4GHz for Head& Body
WIFI 5.2GHz for Head& Body
WIFI 5.3GHz for Head& Body
WIFI 5.5GHz for Head& Body
WIFI 5.8GHz for Head& Body



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date:2025/4/17

Test Laboratory: LCS-SAR Lab
GSM 850 128CH Right Cheek

DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1

Communication System: UID 0, GSM (0); Frequency: 824.2 MHz;Duty Cycle: 1: 1
Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.734$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.596 W/kg



Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.243 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.743 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.578W/kg

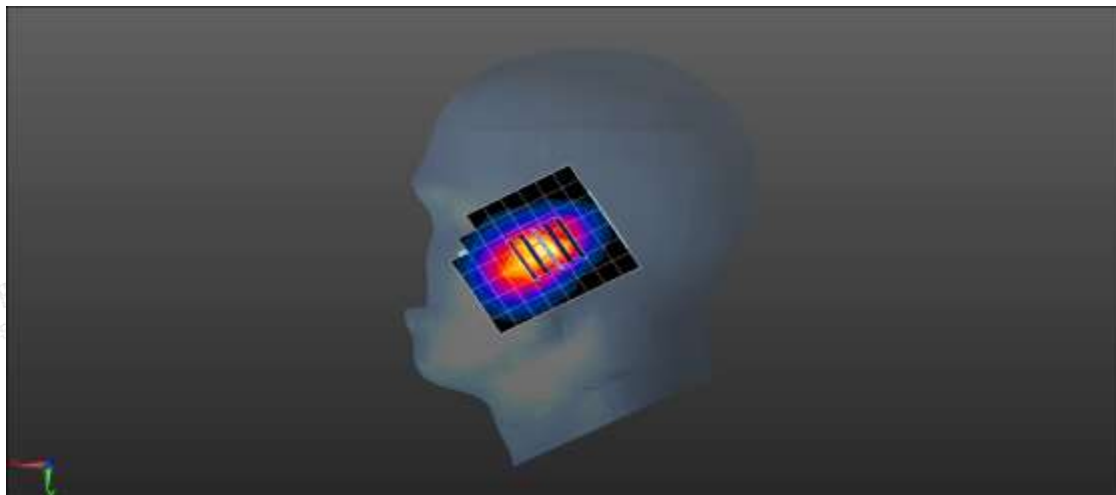



Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

GSM 850 GPRS 3TX 190CH Rear side 10mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1: 2.77

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 41.791$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.529 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.524 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.745 W/kg

SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.515 W/kg

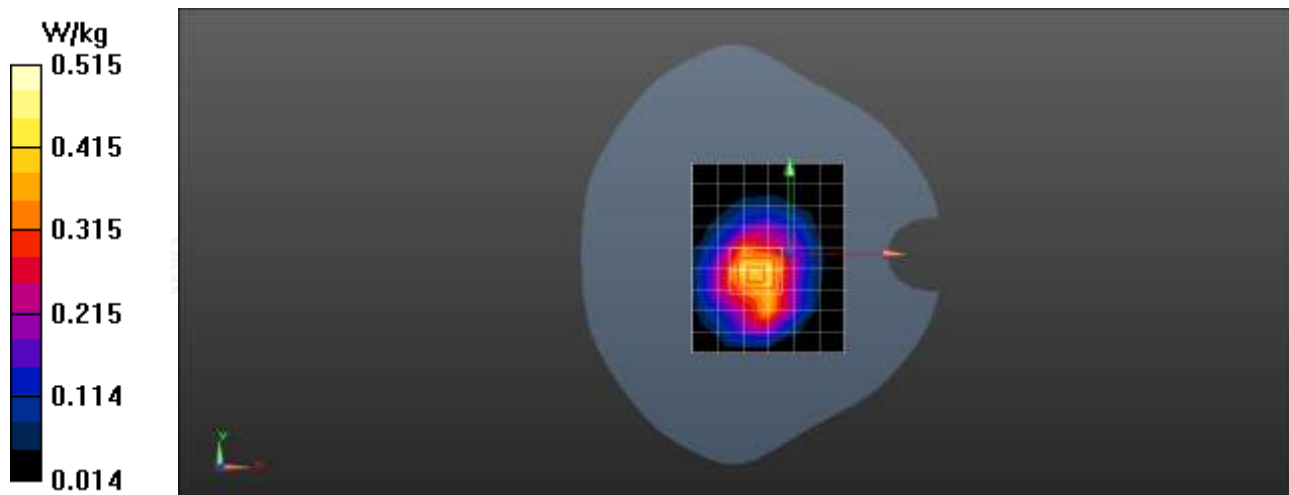

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

GSM 850 GPRS 3TX 190CH Rear side 5mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1: 2.77

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 41.791$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.633 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.42 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.923 W/kg

SAR(1 g) = 0.39 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.601 W/kg

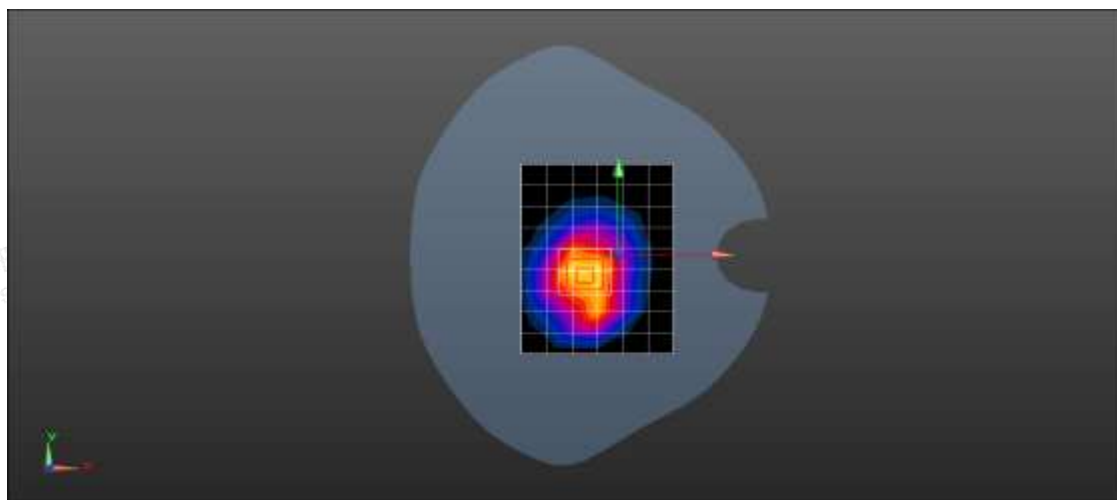

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/4/19

Test Laboratory: LCS-SAR Lab
GSM 1900 661CH Right Cheek

DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1: 1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.269$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.524 W/kg



Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.483 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.637 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.508 W/kg

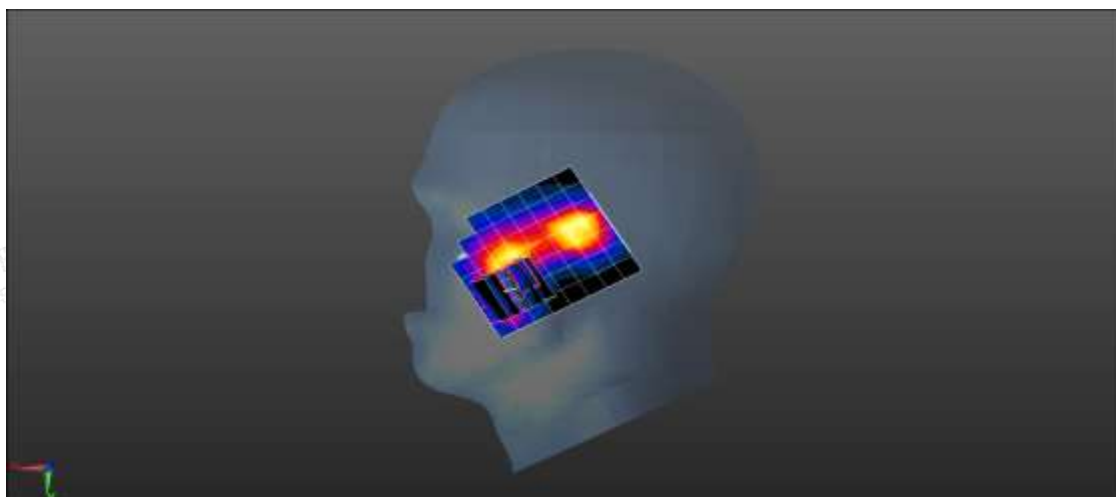



Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

GSM 1900 GPRS 2TX 661CH Rear side 10mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1: 4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.269$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.555 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.251 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.785 W/kg

SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.532 W/kg

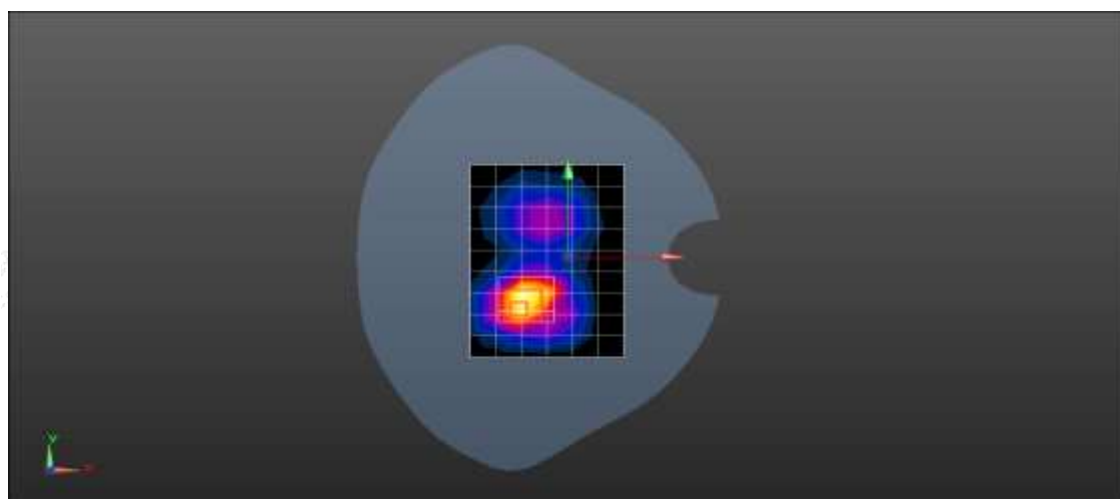

Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

GSM 1900 GPRS 2TX 661CH Rear side 5mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1: 4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.269$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.683 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.548 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.913 W/kg

SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.651 W/kg

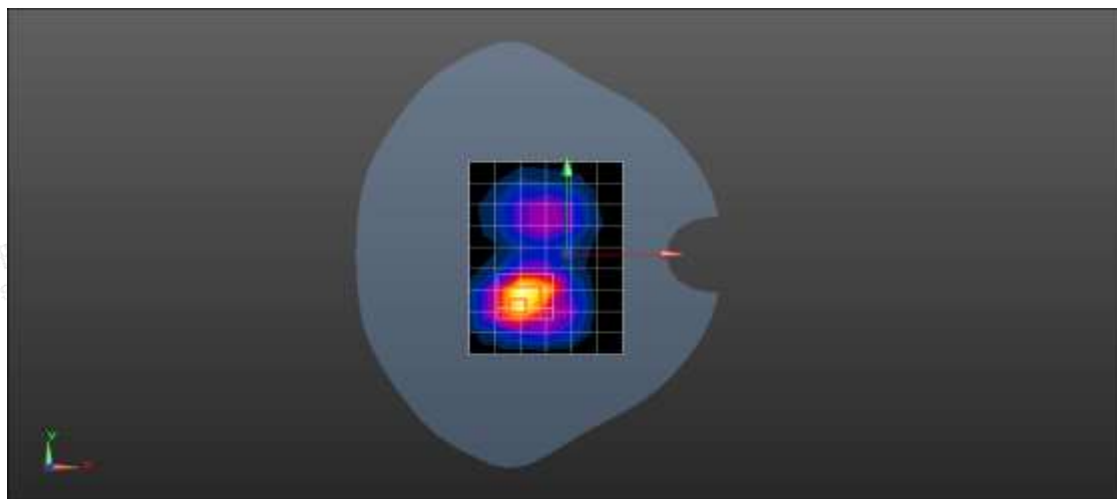

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9400CH Right Cheek**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.269$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.564 W/kg



Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.254 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.517 W/kg

SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.539 W/kg

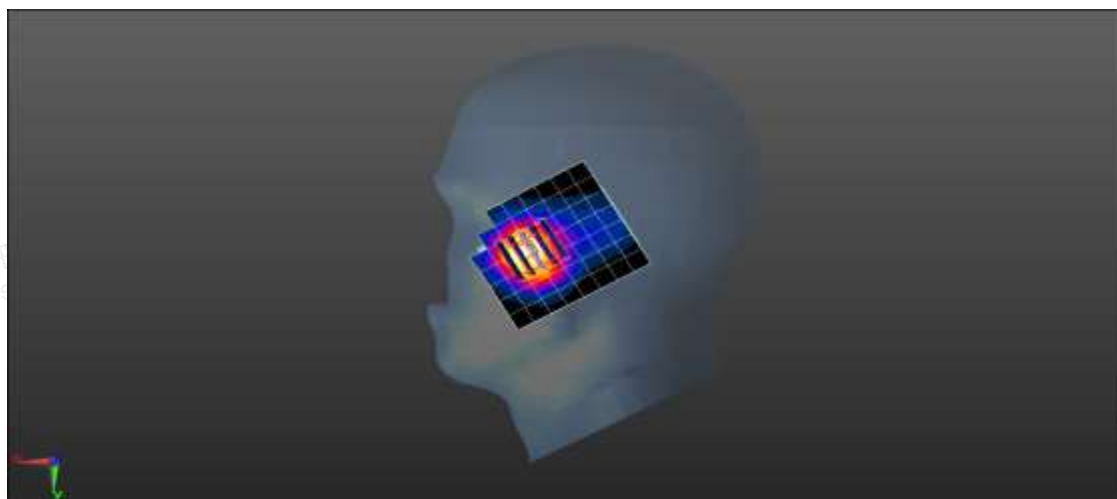

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9400CH Rear side 10mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.26$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.396 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.254 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.542 W/kg

SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

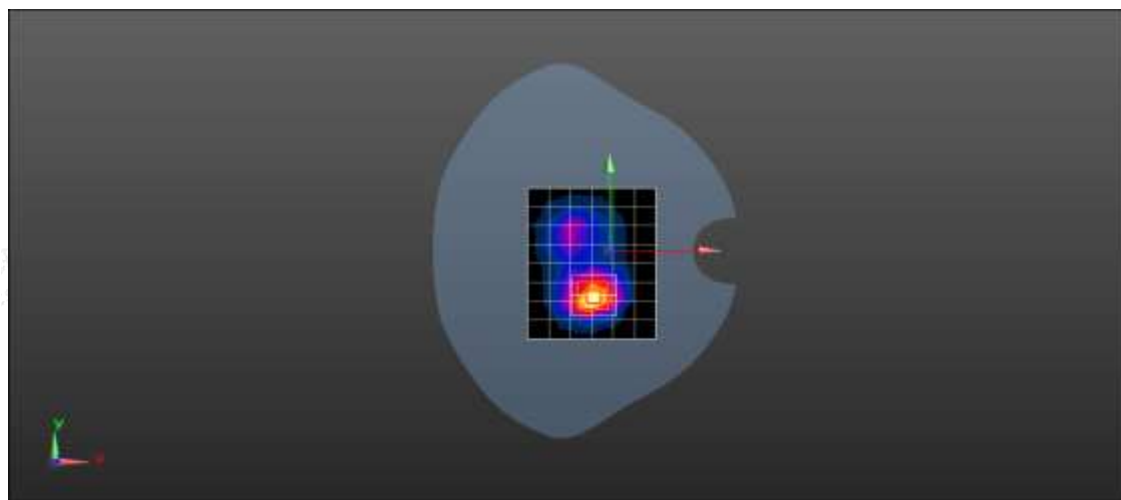

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9400CH Rear side 5mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.26$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.652W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.143 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.936 W/kg

SAR(1 g) = 0.43 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.623 W/kg

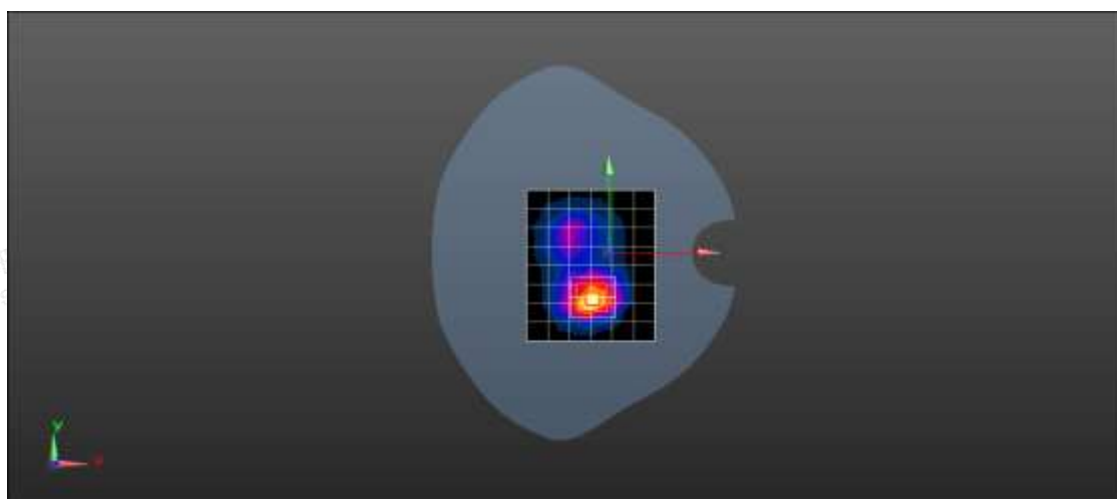

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

WCDMA V RMC 4132CH Right Cheek**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.427$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.631 W/kg



Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.428 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.674 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.595 W/kg

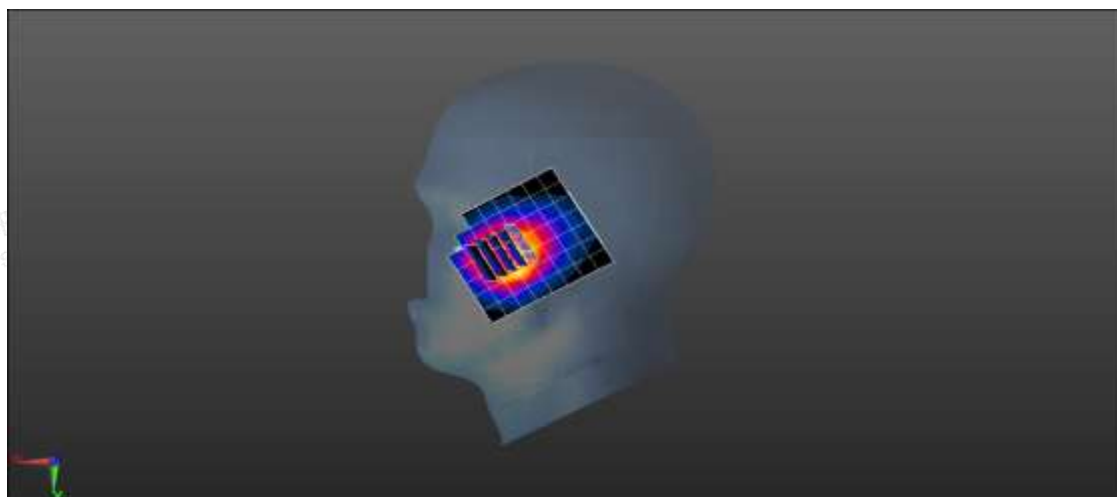

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

WCDMA V RMC 4132CH Rear side 10mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.427$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.408 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.254 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.696 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.425 W/kg

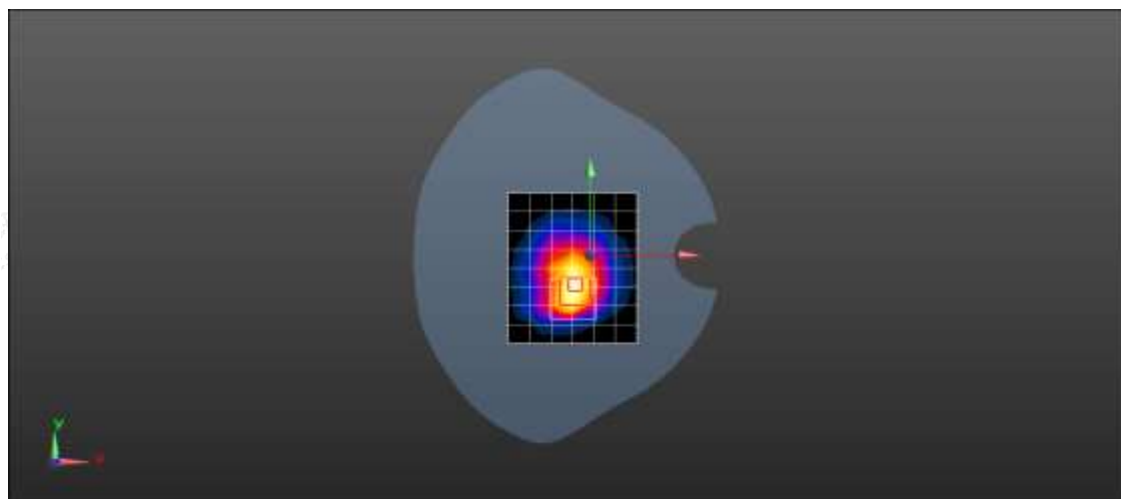

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

WCDMA V RMC 4132CH Rear side 5mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.427$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.864 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.734 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.525 W/kg; SAR(10 g) = 0.279 W/kg

Maximum value of SAR (measured) = 0.842 W/kg

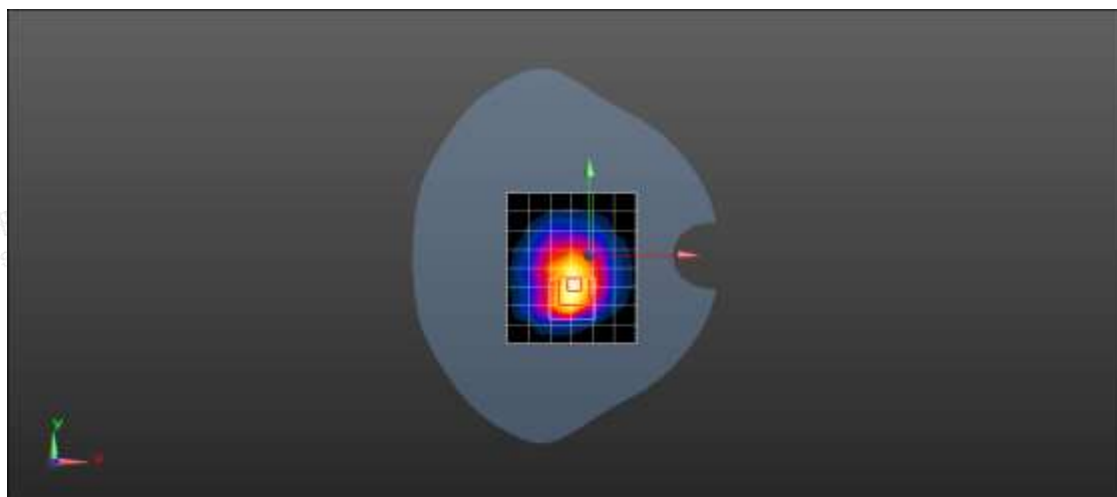

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/21

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 21100CH 1RB49 Right Cheek**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 2535.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535.5$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 38.337$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.876W/kg



Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.438 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.268W/kg

Maximum value of SAR (measured) = 0.844 W/kg

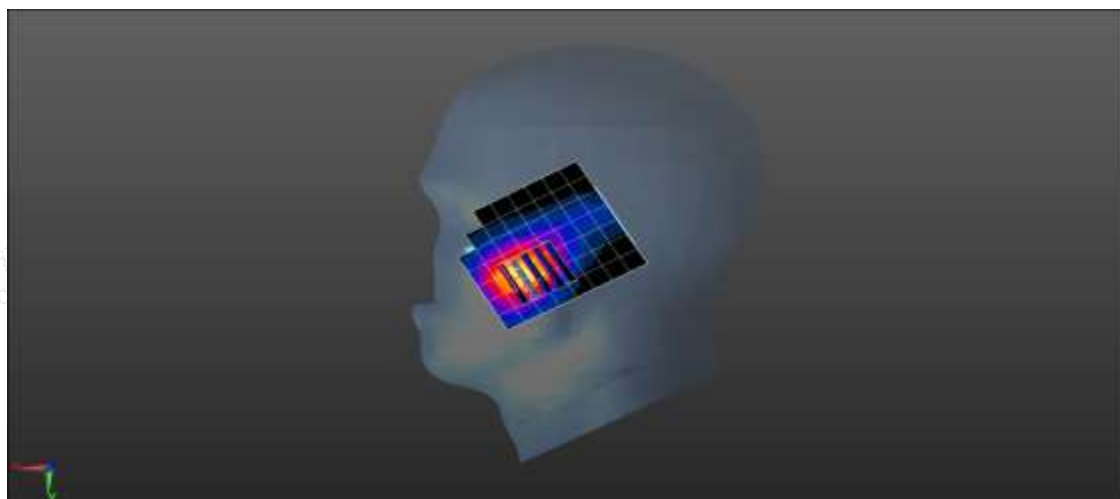

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/21

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 21100CH 1RB49 Rear side 10mm

DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2535.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535.5$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 38.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.692 W/kg



Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.87 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 0.965 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.274 W/kg

Maximum value of SAR (measured) = 0.663 W/kg

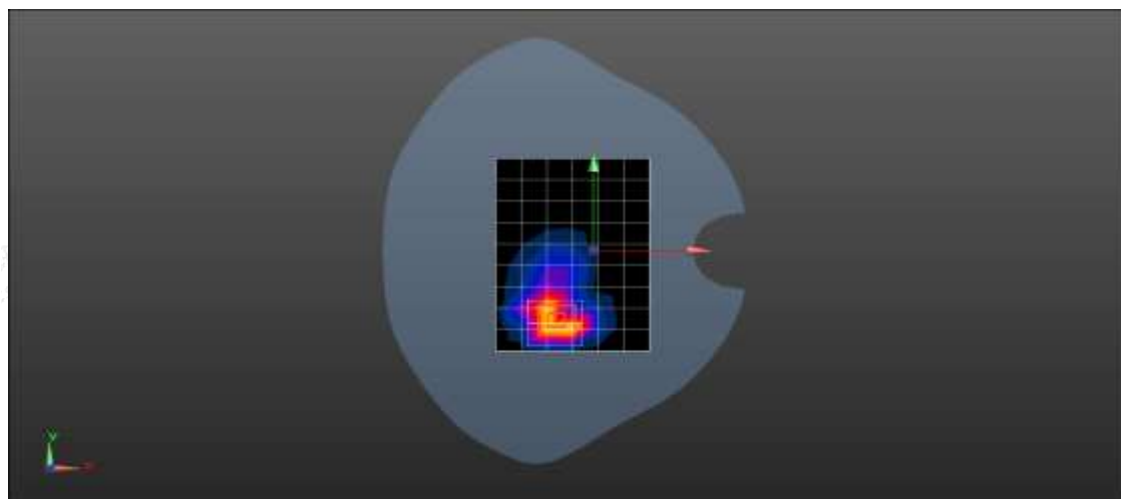

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/21

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 21100CH 1RB49 Rear side 5mm

DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2535.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535.5$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 38.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.913 W/kg



Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value =13.73 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.626 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 0.888 W/kg

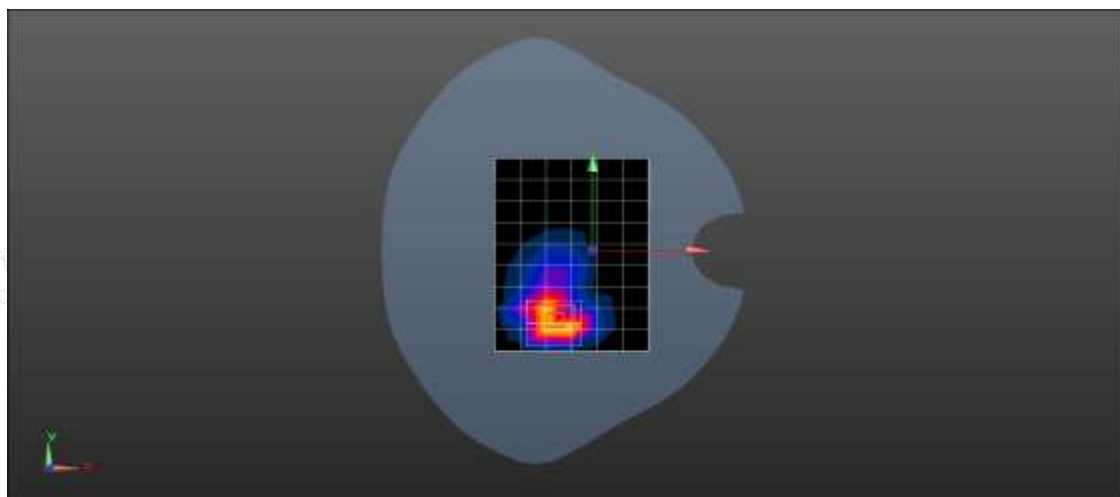

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/16

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23095CH 1RB0 Right Cheek**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.657$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.522W/kg



Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.897 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.517 W/kg

SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.492 W/kg

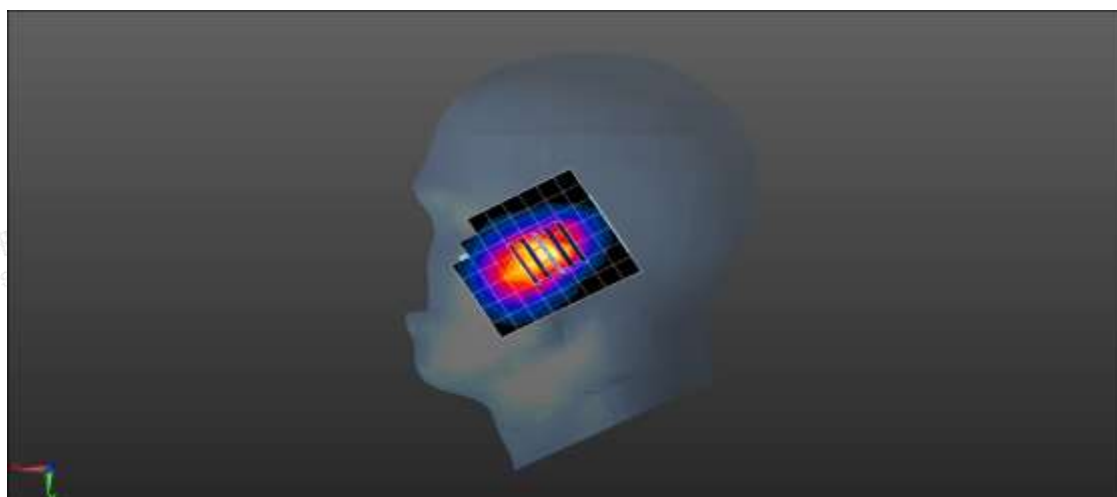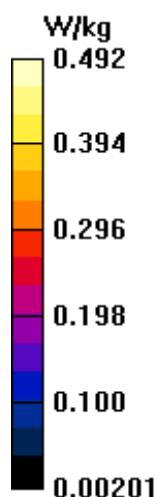

Date: 2025/4/16

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23095CH 1RB0 Rear side 10mm

DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.657$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.578 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.662 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.956 W/kg

SAR(1 g) = 0.308 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.558 W/kg

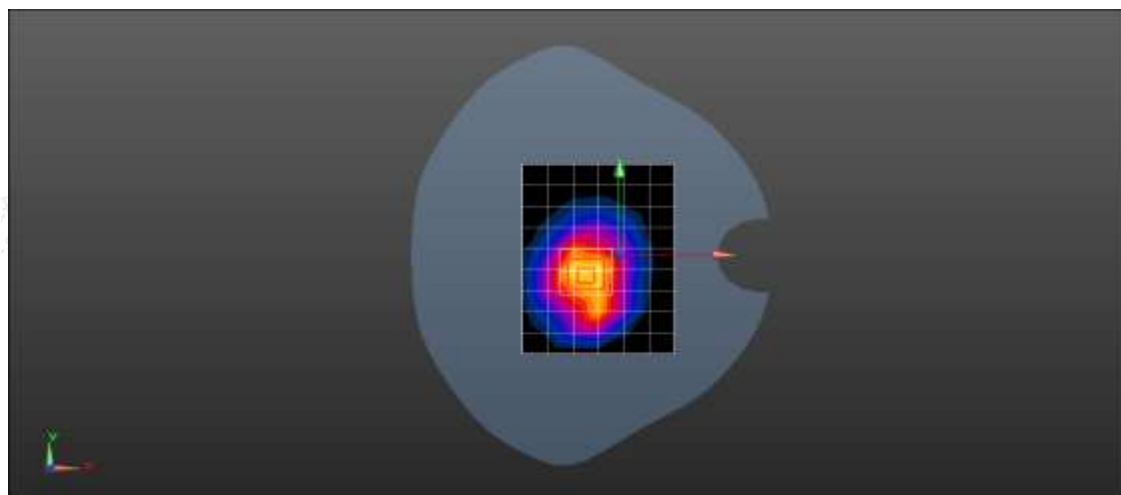

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/4/16

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23095CH 1RB0 Rear side 5mm

DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.657$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.738 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.19 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.976 W/kg

SAR(1 g) = 0.47 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 0.719 W/kg

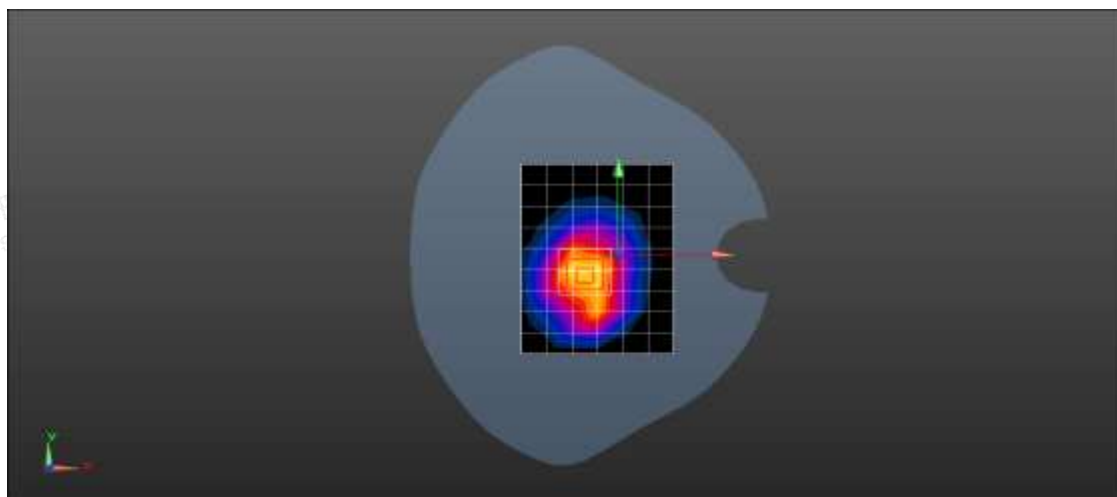

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

LTE B25 20M QPSK 26590CH 1RB49 Right Cheek

DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1905$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.457$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.706 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.467 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.967 W/kg

SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.234 W/kg

Maximum value of SAR (measured) = 0.690 W/kg

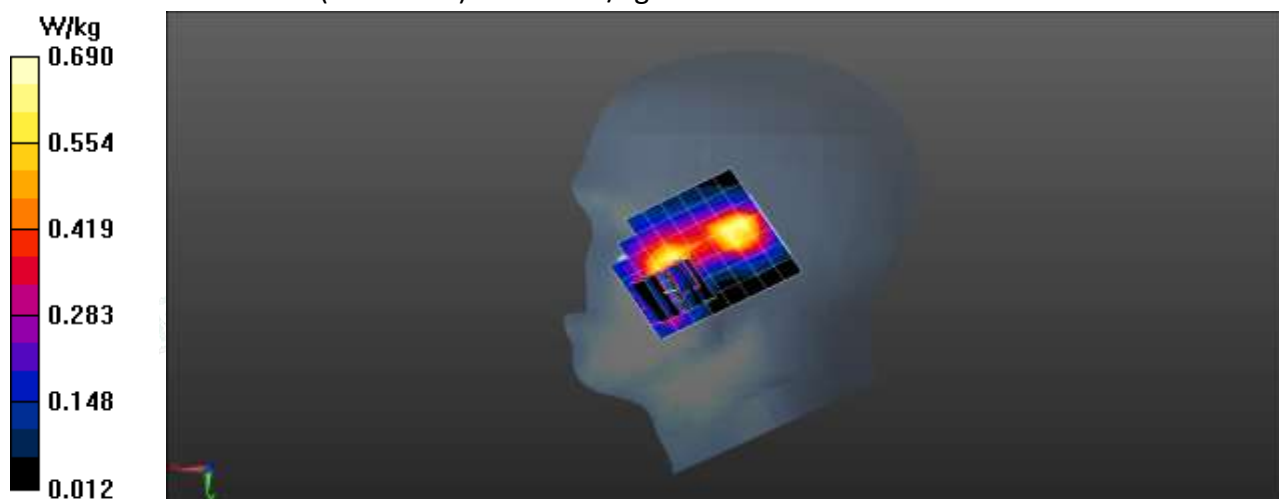

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

LTE B25 20M QPSK 26590CH 1RB49 Rear side 10mm

DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1905$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.457$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.644 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.325 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.426 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 0.621 W/kg

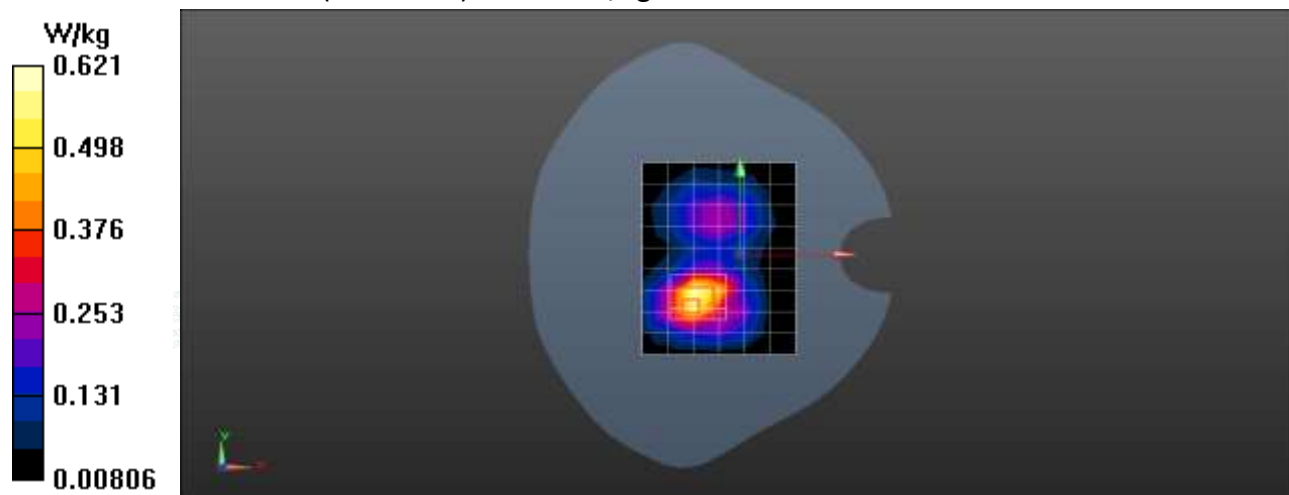

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/19

Test Laboratory: LCS-SAR Lab

LTE B25 20M QPSK 26590CH 1RB49 Rear side 5mm

DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1905$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.457$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.42 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.242 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.653 W/kg; SAR(10 g) = 0.346 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

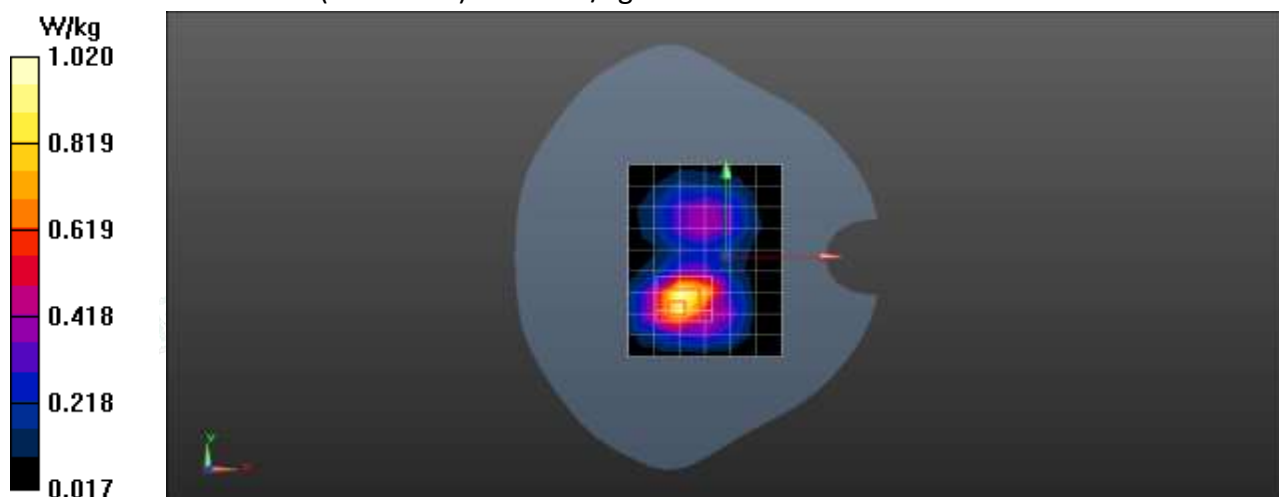

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

LTE B26 15M QPSK 26915CH 1RB74 Right Cheek**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.734$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.396 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.337 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.377W/kg

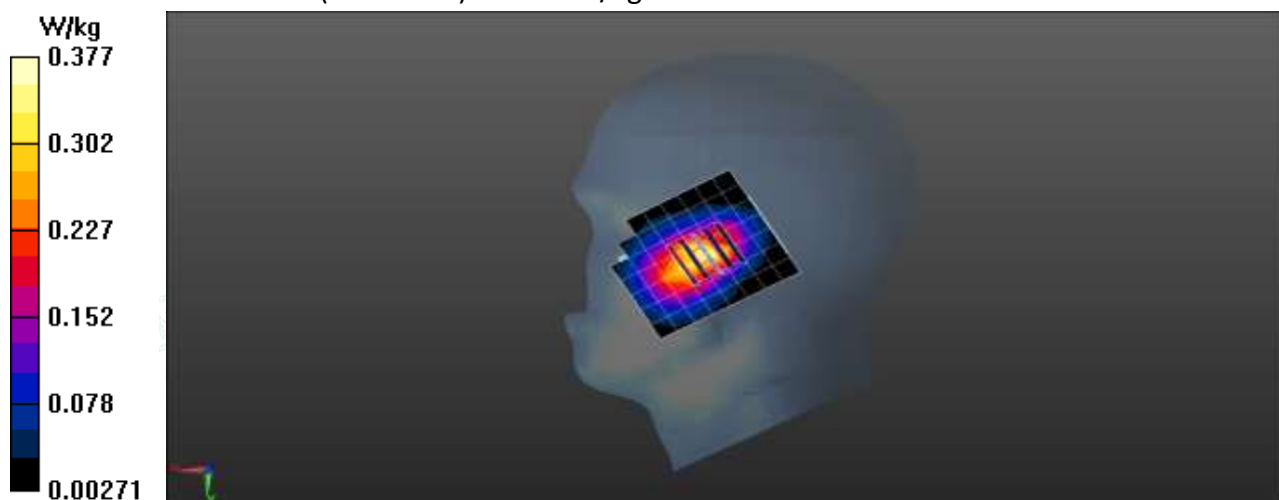

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

LTE B26 15M QPSK 26915CH 1RB74 Rear side 10mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.734$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.668W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.452 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 0.636 W/kg

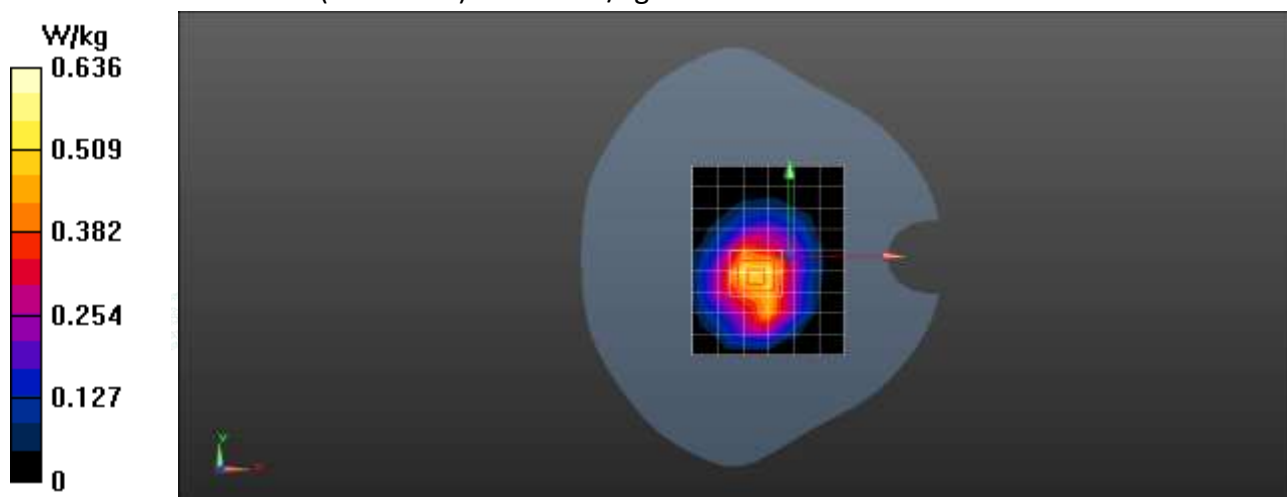

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

LTE B26 15M QPSK 26915CH 1RB74 Rear side 5mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.734$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.954W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.58 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.531 W/kg; SAR(10 g) = 0.274 W/kg

Maximum value of SAR (measured) = 0.921 W/kg

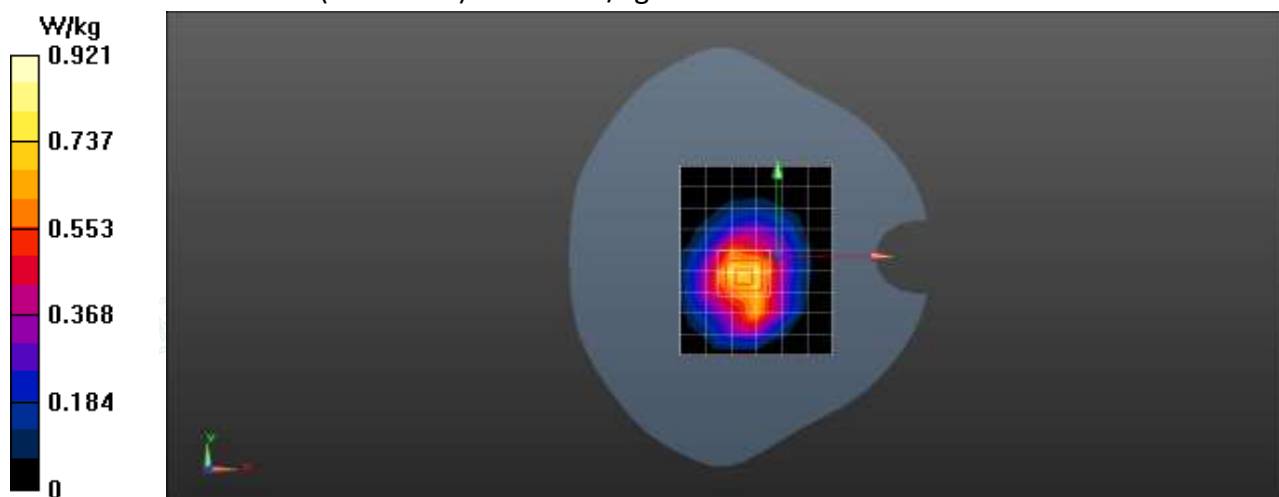

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/21

Test Laboratory: LCS-SAR Lab

LTE B41 20M QPSK 39750CH 1RB99 Right Cheek**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 2506 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2506$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 38.753$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.608 W/kg



Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.547 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.673 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.174 W/kg

Maximum value of SAR (measured) = 0.583 W/kg

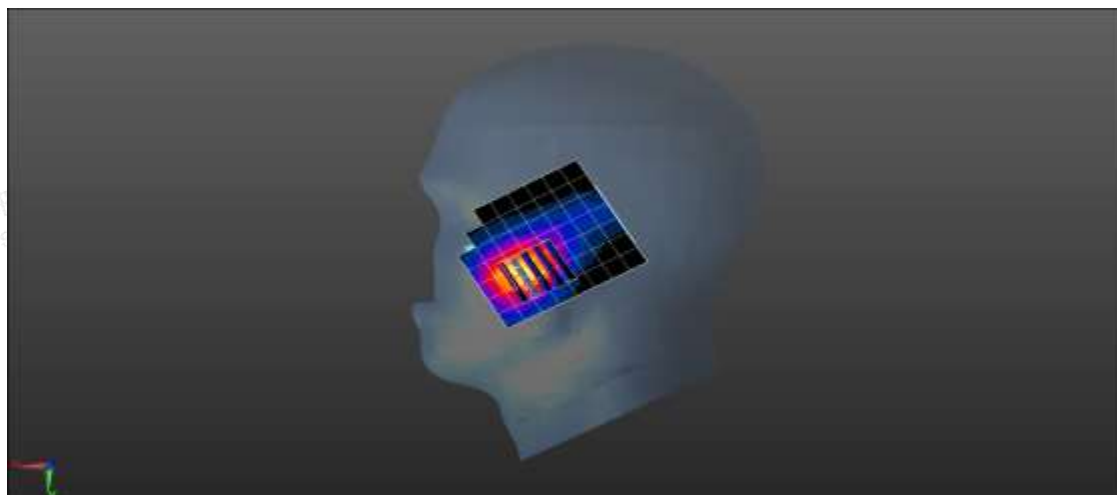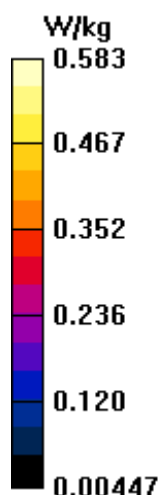

Date:2025/4/21

Test Laboratory: LCS-SAR Lab

LTE B41 20M QPSK 39750CH 1RB99 Rear side 10mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 2506 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2506$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 38.753$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.466 W/kg



Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.542 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.743 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.451 W/kg

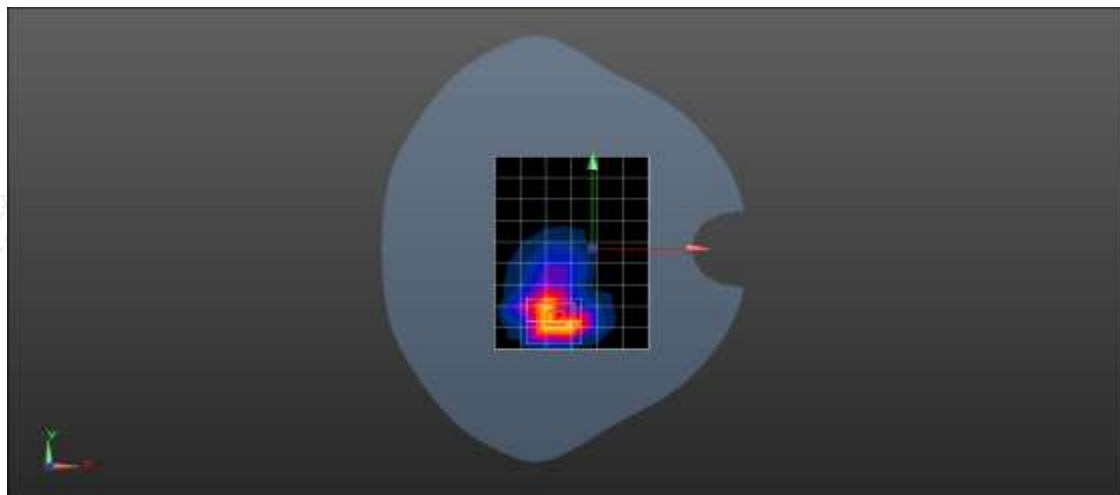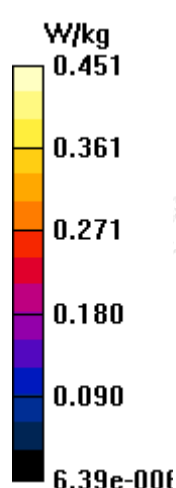

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date:2025/4/21

Test Laboratory: LCS-SAR Lab

LTE B41 20M QPSK 39750CH 1RB99 Rear side 5mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 2506 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2506$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 38.753$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.696 W/kg



Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.443 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.973 W/kg

SAR(1 g) = 0.468 W/kg; SAR(10 g) = 0.268 W/kg

Maximum value of SAR (measured) = 0.687 W/kg

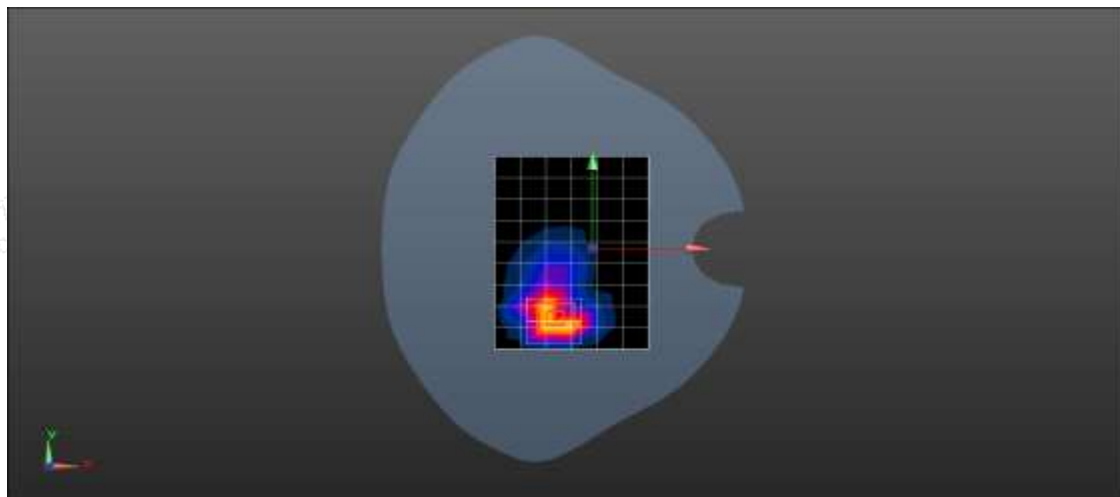

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/18

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132322CH 1RB99 Right Cheek**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.346 \text{ S/m}$; $\epsilon_r = 40.572$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.486 W/kg



Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.238 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.452 W/kg

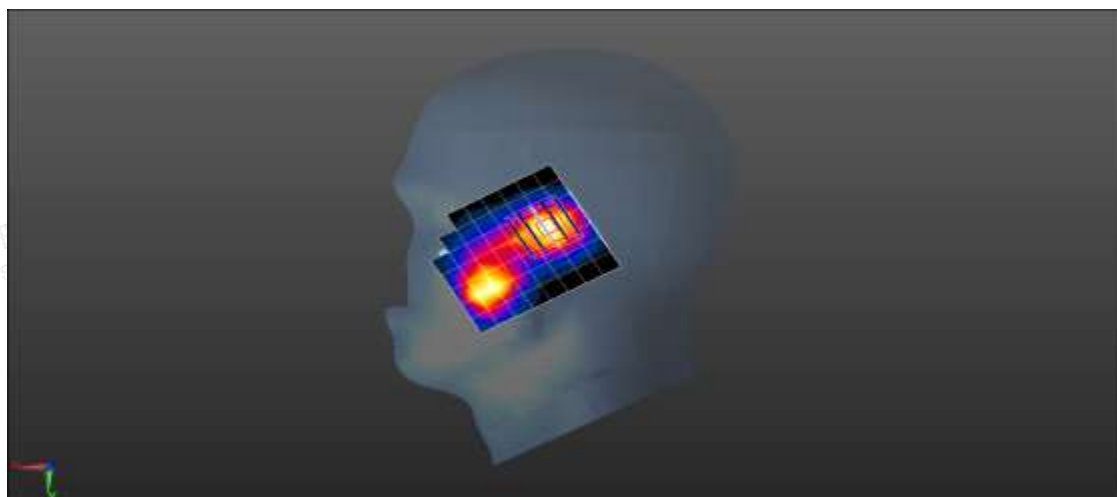

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/18

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132322CH 1RB99 Rear Side 10mm

DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.346$ S/m; $\epsilon_r = 40.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.511 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.154 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.696 W/kg

SAR(1 g) = 0.349 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 0.524 W/kg

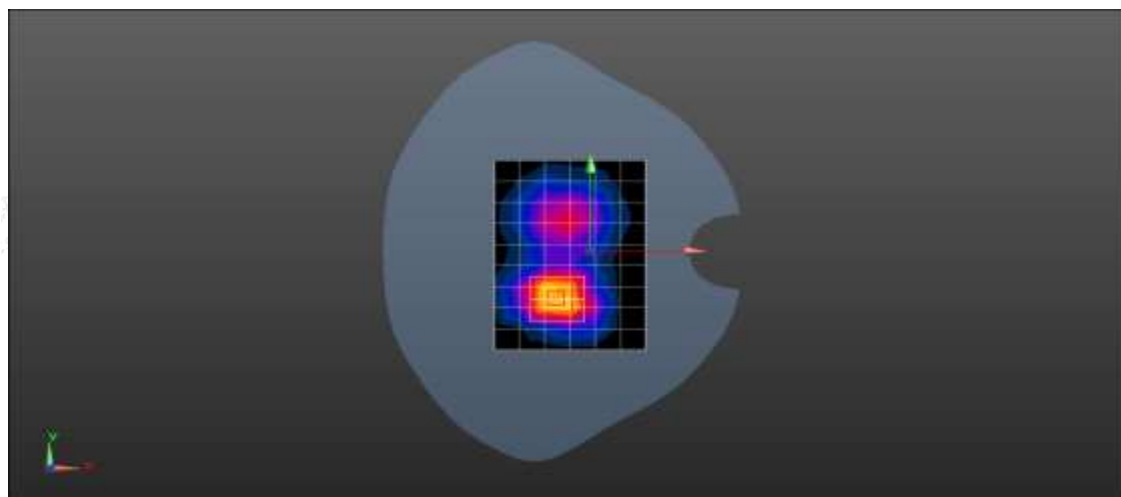

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/18

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132322CH 1RB99 Rear Side 5mm

DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.346$ S/m; $\epsilon_r = 40.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.934 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.745 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.502 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.893 W/kg

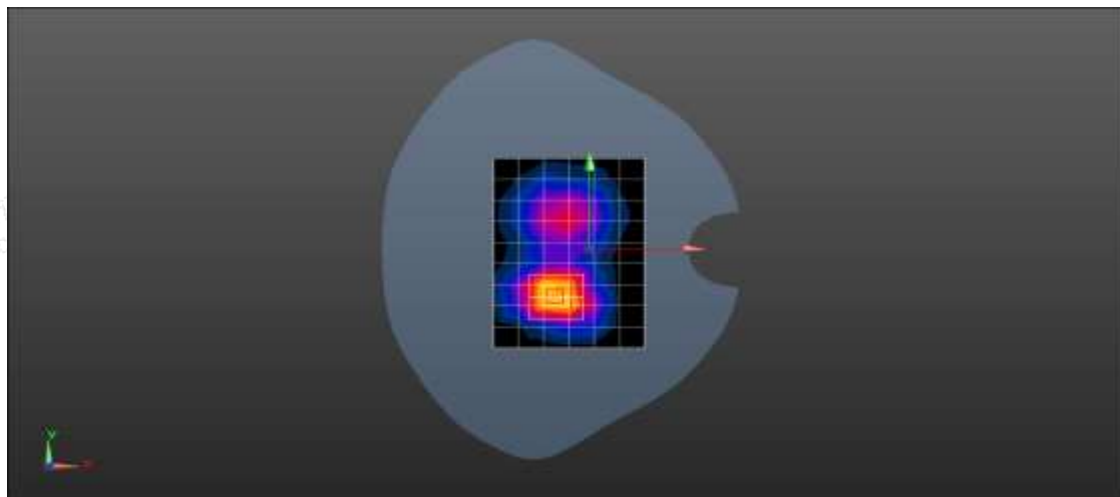

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date:2025/4/20

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Left Cheek**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz;Duty Cycle: 1:1011

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.762$ S/m; $\epsilon_r = 39.495$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.43, 7.43, 7.43); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.786 W/kg



Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.517 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.867 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.754 W/kg

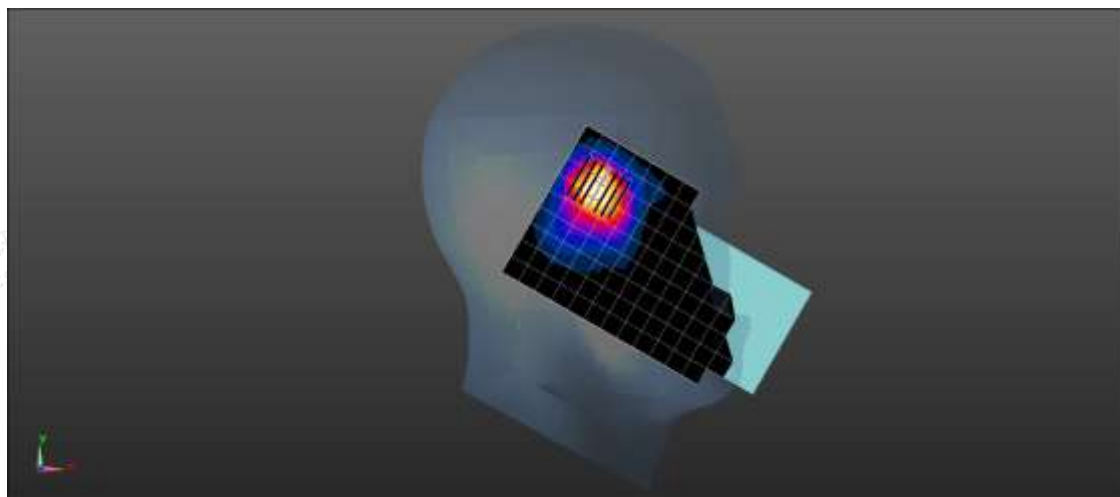

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/20

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Rear side 10mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1011

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.762$ S/m; $\epsilon_r = 39.495$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.43, 7.43, 7.43); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.489W/kg



Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.221 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.777 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.467 W/kg

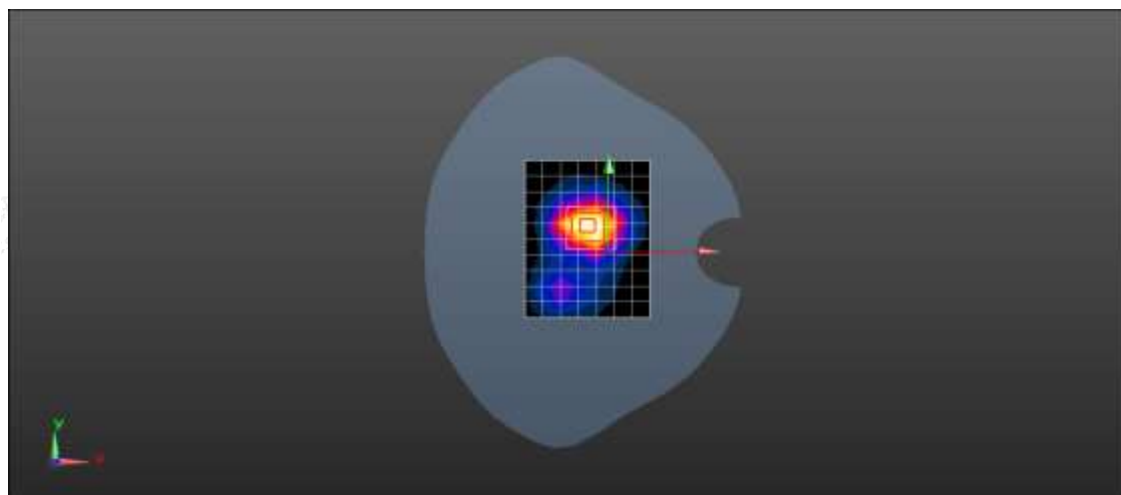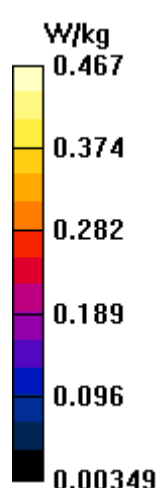

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/20

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Rear side 5mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1011

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.762$ S/m; $\epsilon_r = 39.495$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.43, 7.43, 7.43); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.624 W/kg



Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.452 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.783 W/kg

SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.594 W/kg

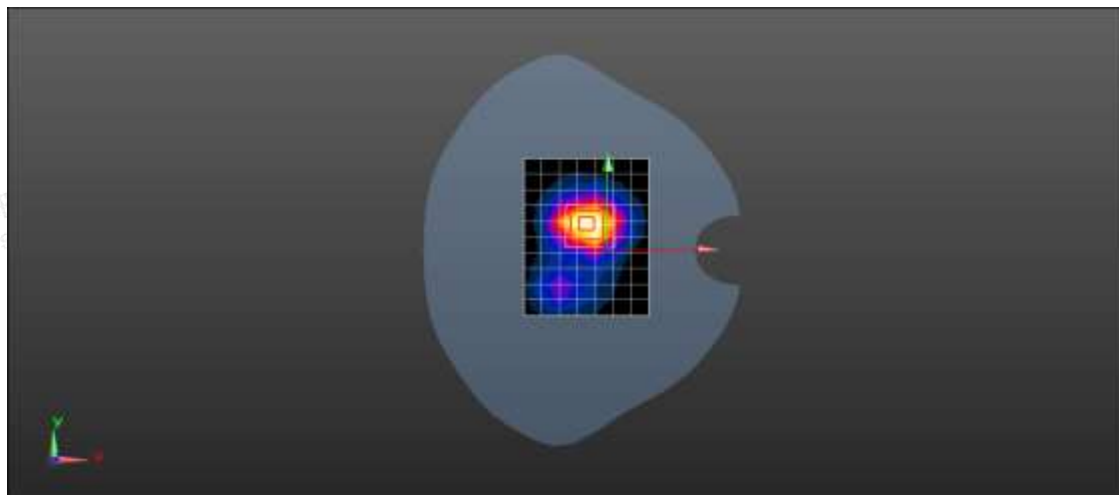

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/22

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 36CH Left Cheek**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5180 MHz; Duty Cycle: 1:1.057

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.728 \text{ S/m}$; $\epsilon_r = 36.431$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (11x17x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.482 W/kg



Configuration/Head /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.879 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.534 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.451W/kg

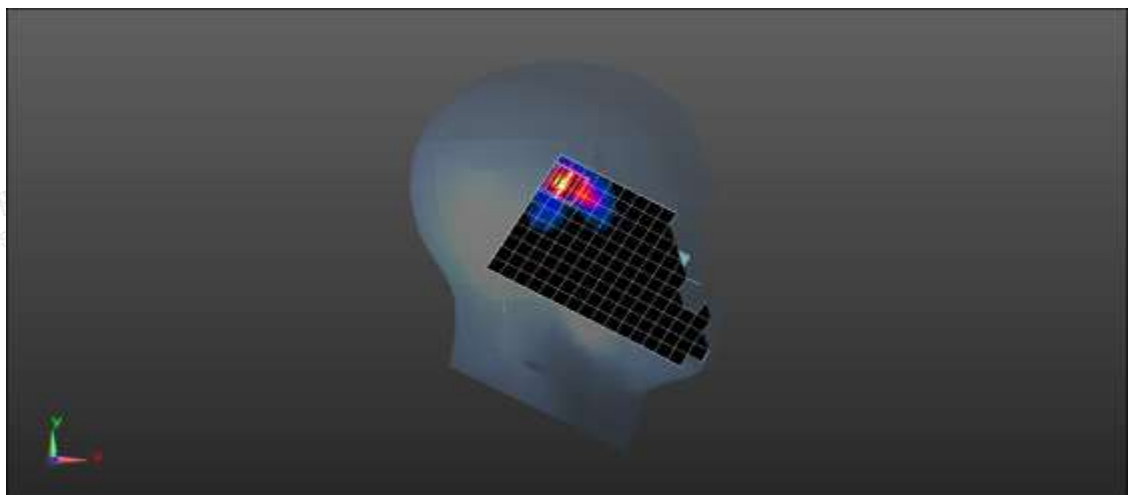

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/22

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 36CH Rear side 10mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5180 MHz; Duty Cycle: 1:1.057

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.728$ S/m; $\epsilon_r = 36.431$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.441 W/kg



Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.214 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.521 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.425 W/kg

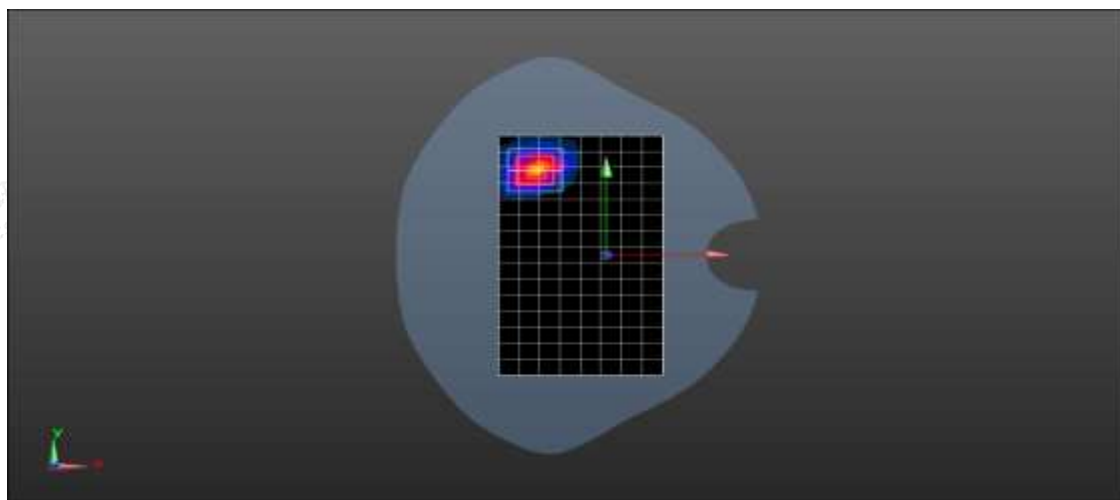

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/4/22

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 36CH Rear side 5mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5180 MHz; Duty Cycle: 1:1.057

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.728$ S/m; $\epsilon_r = 36.431$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.507 W/kg



Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.458 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.543 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.486W/kg

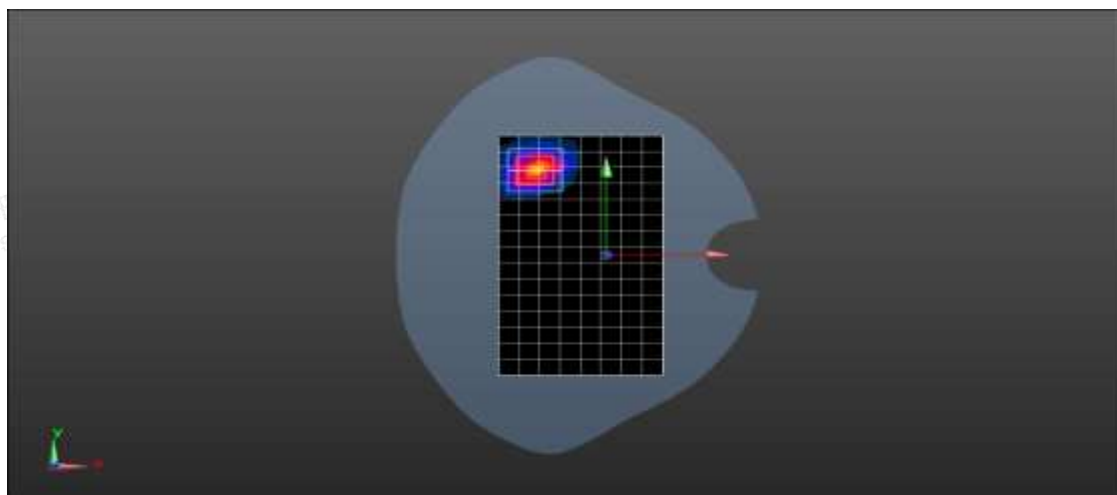

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/22

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11a 60CH Left Cheek**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5300 MHz; Duty Cycle: 1:1.057

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.647 \text{ S/m}$; $\epsilon_r = 36.834$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (11x17x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.456 W/kg



Configuration/Head /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.447 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.573 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.439 W/kg

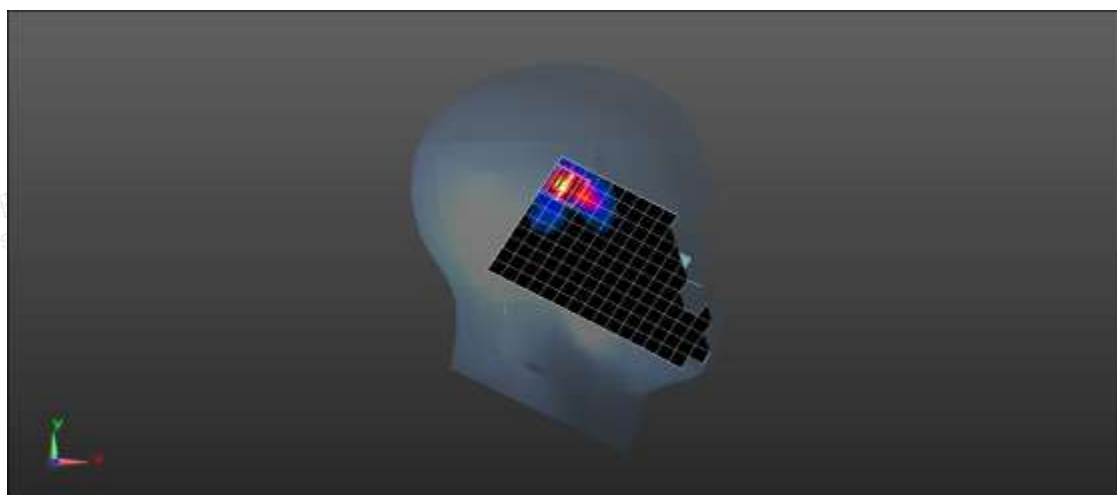

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/22

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11a 60CH Rear side 10mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5300 MHz; Duty Cycle: 1:1.057

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.647 \text{ S/m}$; $\epsilon_r = 36.834$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.499 W/kg



Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.784 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.714 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.487W/kg

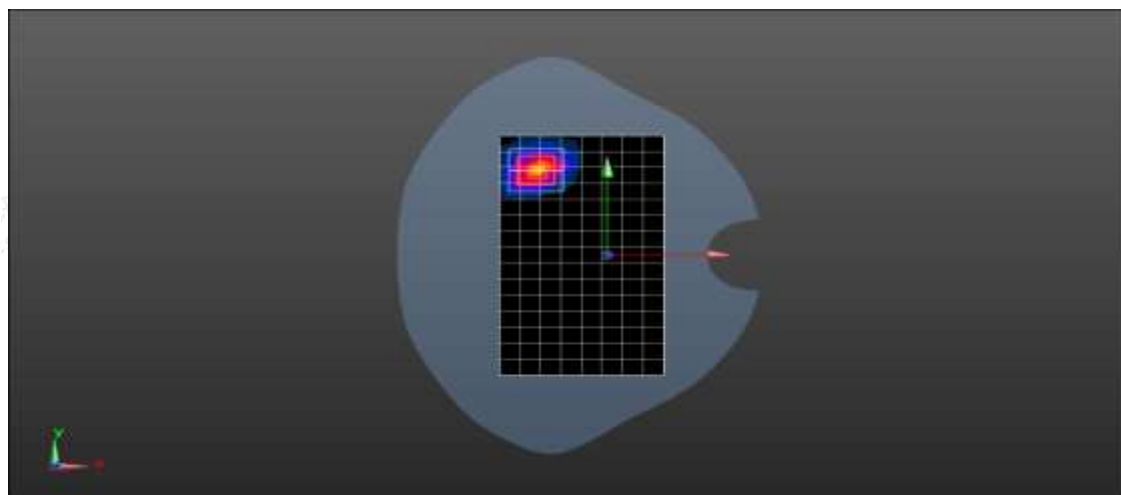

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/22

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11a 60CH Rear side 5mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5300 MHz; Duty Cycle: 1:1.057

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.647$ S/m; $\epsilon_r = 36.834$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.496 W/kg



Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.276 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.472W/kg

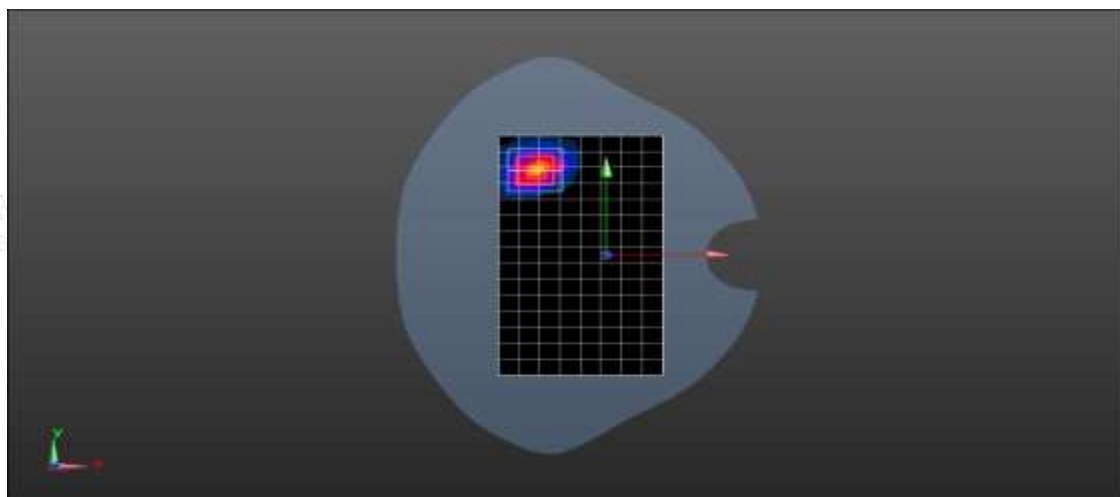

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/22

Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11a 100CH Left Cheek**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5500 MHz; Duty Cycle: 1:1.058

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.164$ S/m; $\epsilon_r = 35.236$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.74, 4.74, 4.74); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Head /Area Scan (11x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.453 W/kg



Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.243 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.427 W/kg

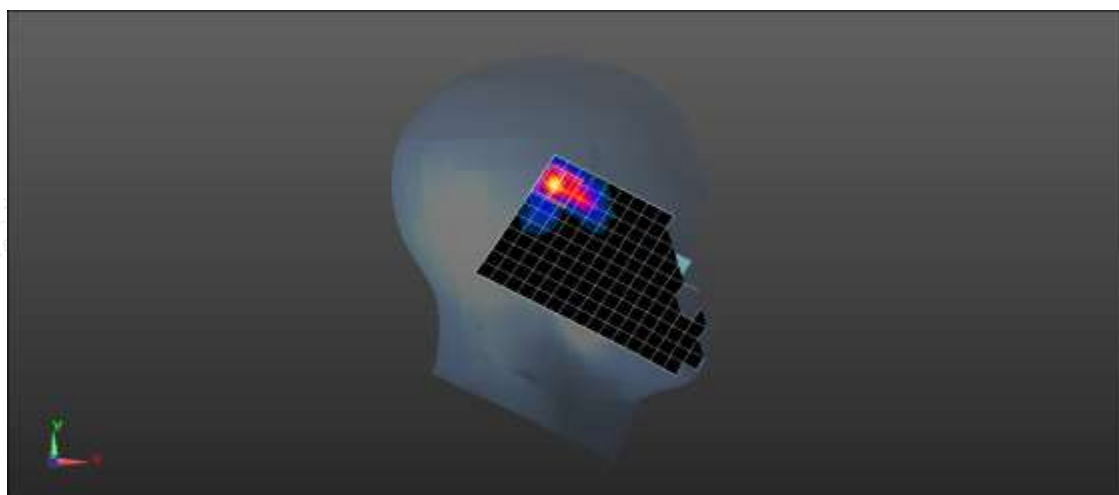

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/22

Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11a 100CH Rear side 10mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5500 MHz; Duty Cycle: 1:1.058

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.164$ S/m; $\epsilon_r = 35.236$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.74, 4.74, 4.74); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.611 W/kg



Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.225 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.888 W/kg

SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 0.596 W/kg

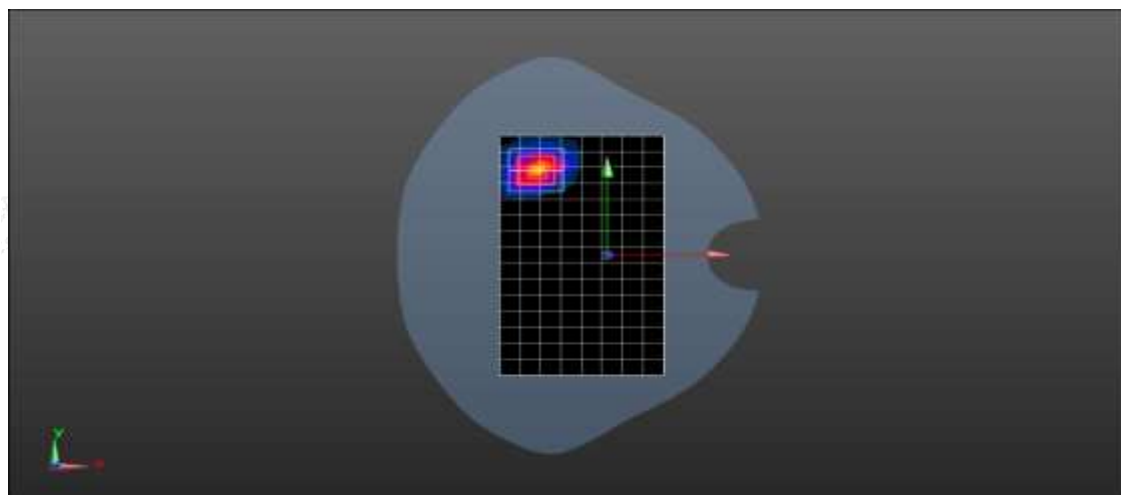

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/22

Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11a 100CH Rear side 5mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5500 MHz; Duty Cycle: 1:1.058

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.164$ S/m; $\epsilon_r = 35.236$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.74, 4.74, 4.74); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.587 W/kg



Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.253 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.653 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.560 W/kg

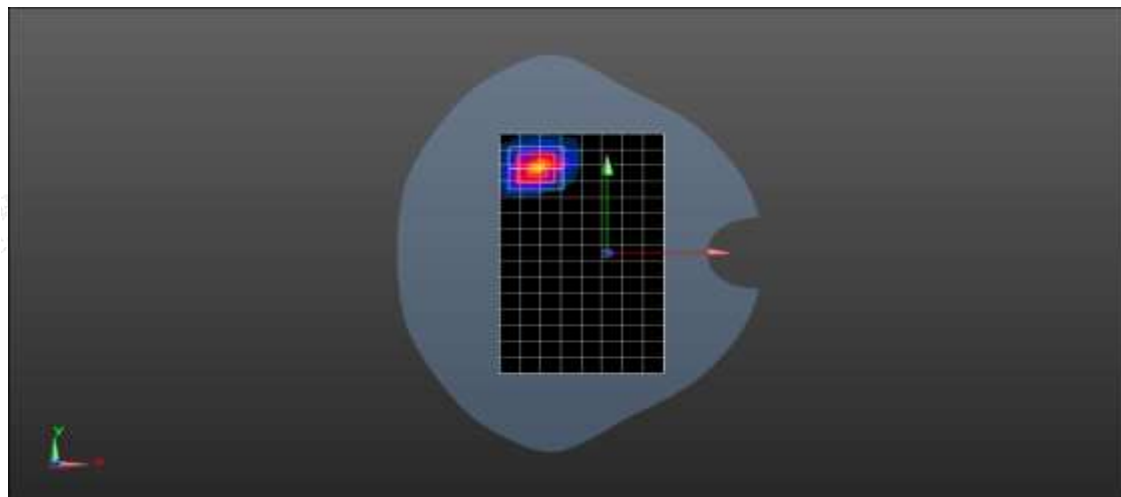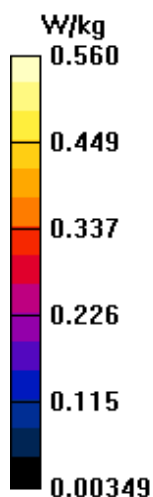

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/22

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 149CH Left Cheek**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5745 MHz; Duty Cycle: 1:1.057

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.273 \text{ S/m}$; $\epsilon_r = 35.296$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.86, 4.86, 4.86); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Head /Area Scan (11x17x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.273 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.452 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.258 W/kg

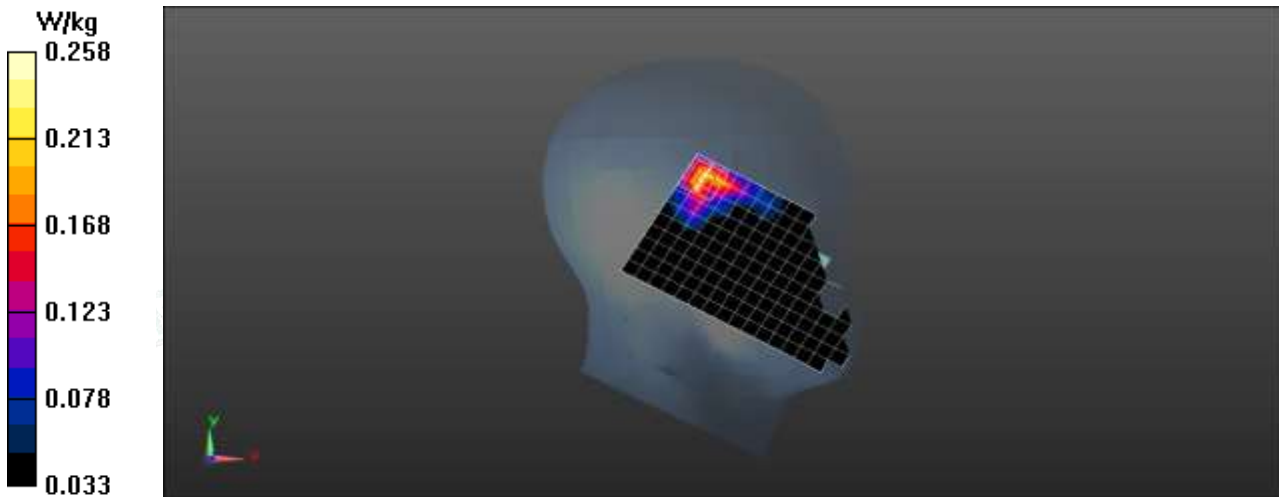

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/22

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 149CH Rear side 10mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5745 MHz; Duty Cycle: 1:1.057

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.273$ S/m; $\epsilon_r = 35.296$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.86, 4.86, 4.86); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.432 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.121 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.612 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.448 W/kg

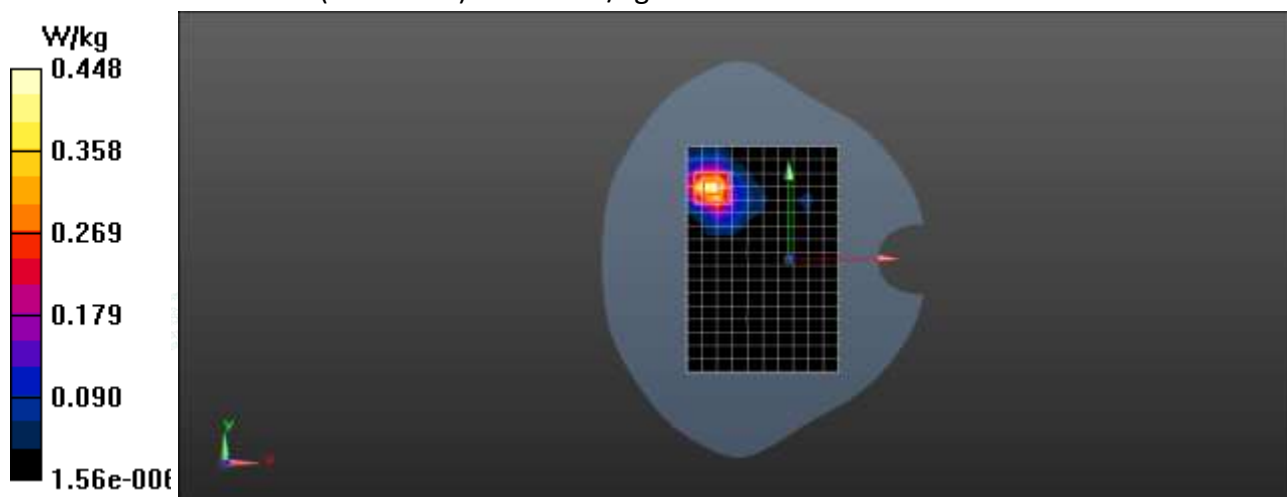

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/22

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 149CH Rear side 5mm**DUT: TD-LTE digital mobile phone; Type: S26 Pro; Serial: A250311056-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5745 MHz; Duty Cycle: 1:1.057

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.273 \text{ S/m}$; $\epsilon_r = 35.296$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.86, 4.86, 4.86); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.426 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.924 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.408 W/kg

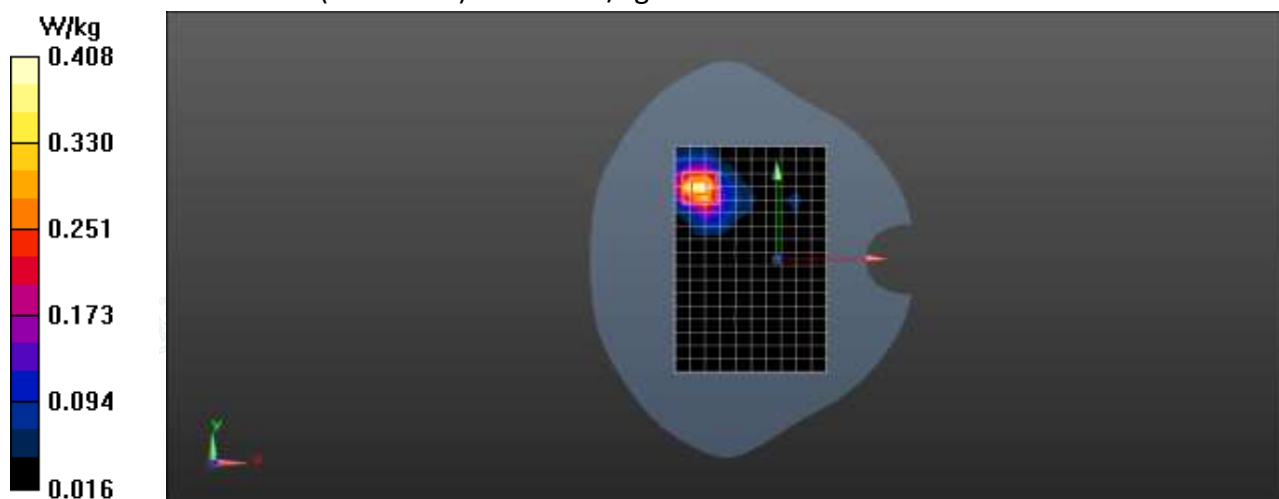

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity