

Installation Manual

Longriver

148.00 mm

210.00 mm

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


NOTE 2:

Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


MODEL	V2	DATE 2024/12/1	ONLINE	
			Product Name	
COLOUR		SCALE 1:1	REMARK	

Wireless Water Temperature Monitor Manual


1. Remove the hook plate from the back of the monitor, tear off the 3M adhesive tape, and stick it upwards in the direction of the hook plate arrow at a suitable visible height on the wall

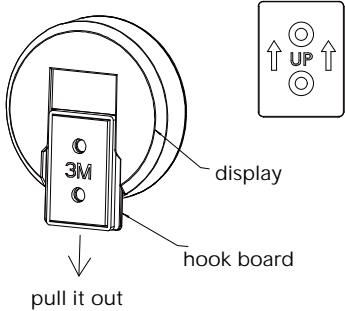

3. Insert the display screen into the hook plate from top to bottom

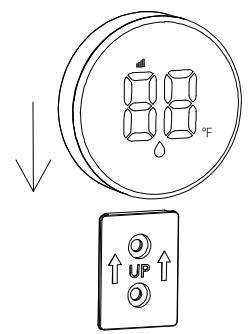


Introduction to Display Screen Content

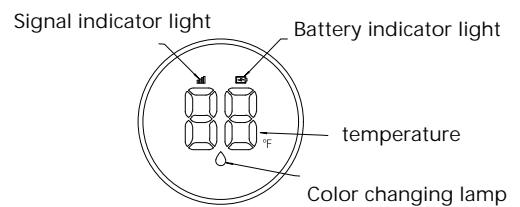


The light below 86 °F displays blue
87.8 °F -104 °F light displays green
The light above 105.8 °F displays red

2. Press the button on the back of the display screen to turn it on, then press it again to turn it off. When in the on state, the screen signal indicator light starts flashing, indicating that the display screen is already in the on state. When the faucet is turned on, the signal indicator light stays on, indicating that a temperature signal has been received and the water temperature is displayed.

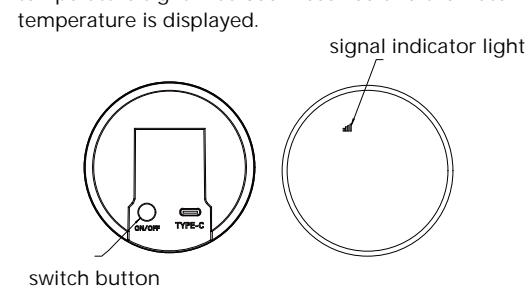


4. When the battery indicator light turns red, it indicates that the battery is low and needs to be charged. The battery indicator light shows blue, indicating that it is charging. When the indicator light displays green, it means it is full.

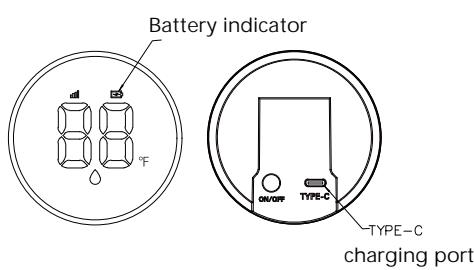


148.00 mm

Sensor Installation Manual


1. Remove the hose nut from the faucet outlet

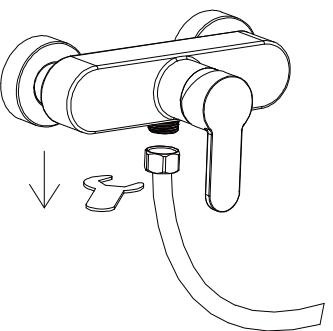

2. Screw the sensor into the faucet outlet

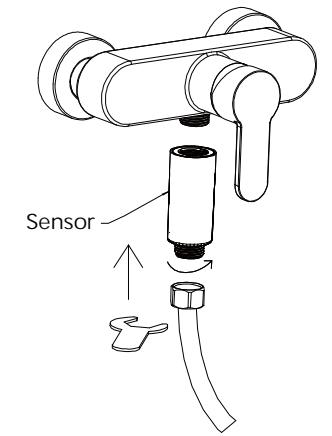

3. After turning on the temperature display screen, turn on the faucet to show the current water temperature

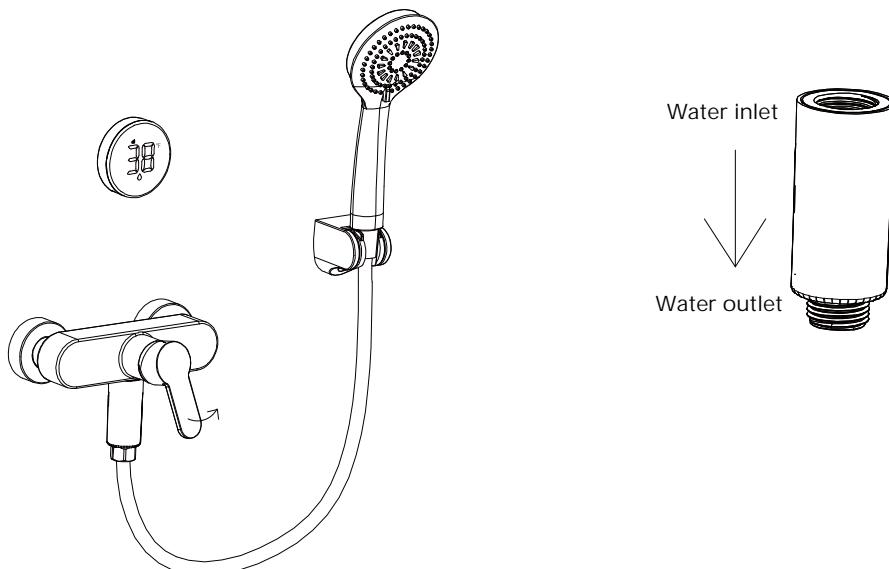

Attention: The inlet and outlet directions of the sensor. The connection is reversed and cannot function properly

210.00 mm

MODEL	V2	DATE 2024/12/1	ONLINE	
			Product Name	1:1
COLOUR		SCALE	1:1	REMARK