

TEST REPORT

Report No.: BCTC2412969670-2E

Applicant: Xiamen Tiange Sports Manufacture Co., Ltd.

Product Name: Bluetooth headset

Test Model: WILD-V10S

Tested Date: 2024-12-10 to 2025-03-21

Issued Date: 2025-03-21



Shenzhen BCTC Testing Co., Ltd.

FCC ID: 2BMRB-V10S

Product Name: Bluetooth headset

Trademark: N/A

Model/Type Reference: WILD-V10S
WILD-V10X

Prepared For: Xiamen Tiange Sports Manufacture Co., Ltd.

Address: 4 FLOOR, 3 WORKSHOP, NO.515 SHANGTOUTING, JIMEI DISTRICT
XIAMEN, FUJIAN, CHINA

Manufacturer: Shenzhen Vimoto electronic Technology Co., LTD

Address: Plant 102, Building A6, Hao Si Nan'an Science Park, No. 165, Nanpu Road,
Shangliao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong
Province

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road,
Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2024-12-10

Sample Tested Date: 2024-12-10 to 2025-03-21

Issue Date: 2025-03-21


Report No.: BCTC2412969670-2E

Test Standards: FCC Part15.247
ANSI C63.10-2013

Test Results: PASS

Remark: This is Bluetooth BLE radio test report.

Tested by:



Shanshan. Zhang / Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.


Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	10
4.6 Table of parameters of text software setting	10
5. Test Facility And Test Instrument Used	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. Conducted Emissions	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure	13
6.4 EUT Operating Conditions	13
6.5 Test Result	14
7. Radiated Emissions	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	17
7.3 Test procedure	18
7.4 EUT operating Conditions	19
7.5 Test Result	19
8. Radiated Band Emission Measurement And Restricted Bands Of Operation	30
8.1 Block Diagram Of Test Setup	30
8.2 Limit	30
8.3 Test Procedure	31
8.4 EUT Operating Conditions	32
8.5 Test Result	32
9. Power Spectral Density Test	35
9.1 Block Diagram Of Test Setup	35
9.2 Limit	35
9.3 Test procedure	35
9.4 EUT Operating Conditions	35
9.5 Test Result	36
10. Bandwidth Test	44
10.1 Block Diagram Of Test Setup	44
10.2 Limit	44
10.3 Test procedure	44
10.4 EUT operating Conditions	44
10.5 Test Result	45
11. Peak Output Power Test	53
11.1 Block Diagram Of Test Setup	53

11.2	Limit	53
11.3	Test Procedure	53
11.4	EUT Operating Conditions	53
11.5	Test Result.....	54
12.	100 kHz Bandwidth Of Frequency Band Edge	55
12.1	Block Diagram Of Test Setup.....	55
12.2	Limit	55
12.3	Test procedure	55
12.4	EUT operating Conditions	55
12.5	Test Result.....	55
13.	Antenna Requirement	76
13.1	Limit	76
13.2	Test Result.....	76
14.	EUT Photographs.....	77
15.	EUT Test Setup Photographs.....	78


(Note: N/A Means Not Applicable)

TEST
TO
OVER
t Sea

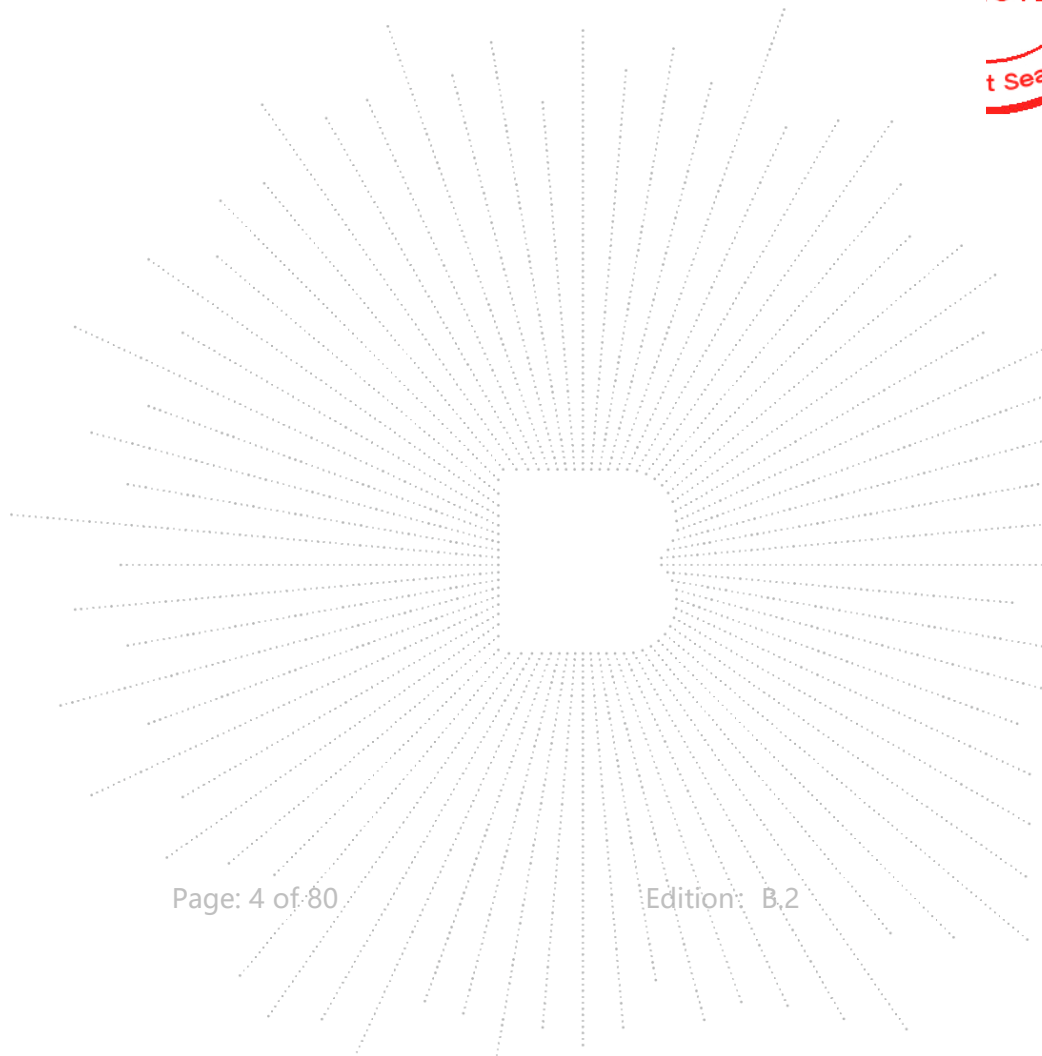

1. Version

Report No.	Issue Date	Description	Approved
BCTC2412969670-2E	2025-03-21	Original	Valid

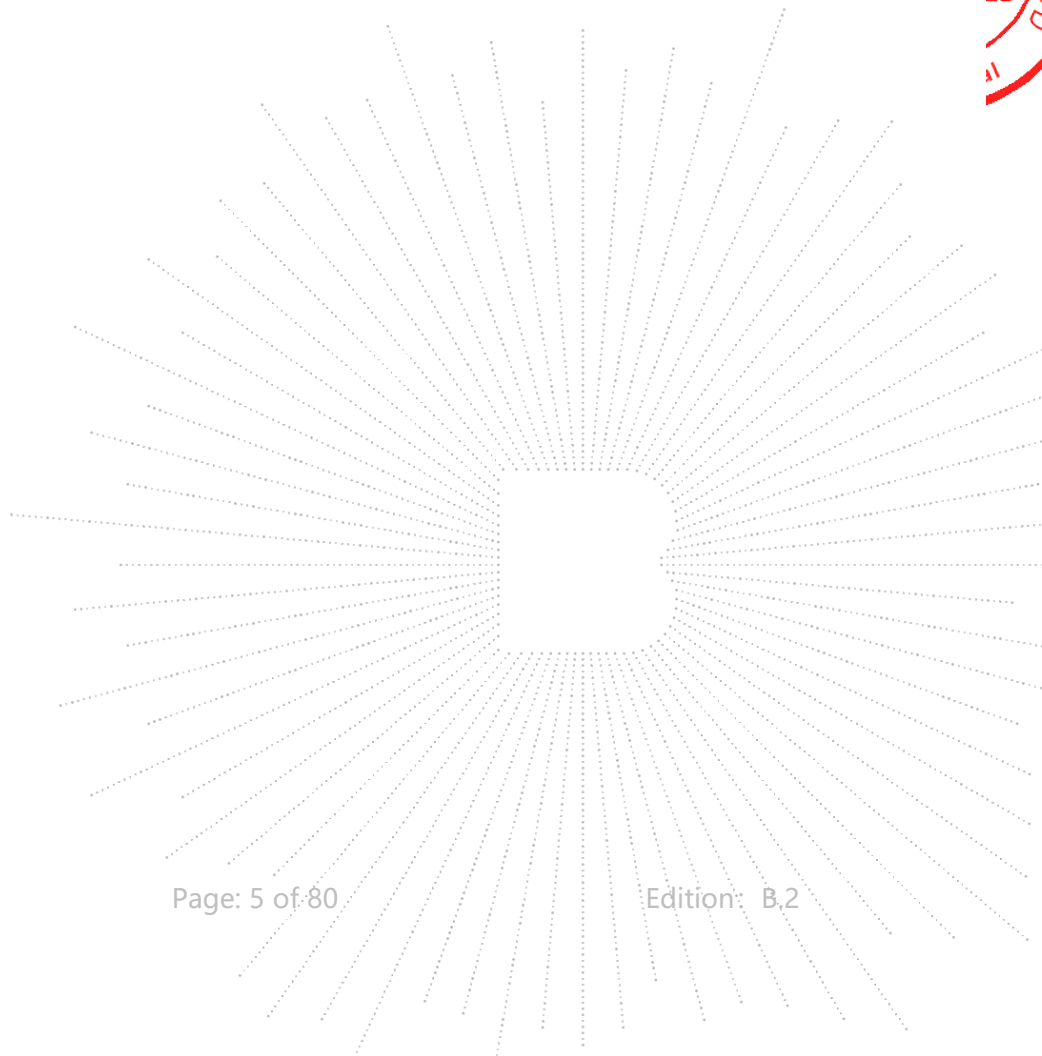

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS
2	6dB Bandwidth	15.247 (a)(2)	PASS
3	Peak Output Power	15.247 (b)	PASS
4	Radiated Spurious Emission	15.247 (d), 15.205	PASS
5	Power Spectral Density	15.247 (e)	PASS
6	Restricted Band of Operation	15.205	PASS
7	Band Edge (Out of Band Emissions)	15.247(d)	PASS
8	Antenna Requirement	15.203	PASS

CO., LTD.

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Power Spectral Density	U=1.19dB
8	Conducted output power uncertainty Above 1G	U=1.576dB
9	Conducted output power uncertainty below 1G	U=1.28dB
10	Conducted spurious emissions	U=0.55dB
11	Occupied Bandwidth/Frequency Range	U=3.46%
12	humidity uncertainty	U=5.3%
13	Temperature uncertainty	U=0.59℃
14	Frequency Error	U=53.50Hz
15	Frequency Drift	U=0.64kHz

4. Product Information And Test Setup

4.1 Product Information


Model/Type Reference:	WILD-V10S WILD-V10X
Model Differences:	All the models are the same circuit and RF module, except model names and appearance of the color. (For each model, two antennas and exteriors were designed.)
Software Version:	N/A
Operation Frequency:	2402-2480MHz
Type of Modulation:	Chip 1(QCC3034): GFSK 1Mbps, GFSK 2Mbps Chip 2(QCC5171): GFSK 1Mbps, GFSK 2Mbps
Number Of Channel	40CH
Antenna installation:	Internal antenna
Antenna Gain:	Chip 1(QCC3034): 2.71dBi Chip 2(QCC5171): Antenna 1: 1.8dBi; Antenna 2: 2.66dBi
	Remark: ☒ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. ☐ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Ratings:	DC 5V from adapter or DC 3.7V from battery



4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission and Radiated Spurious Emission:



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Bluetooth headset	N/A	WILD-V10S	---	EUT
E-2	Adapter	UGREEN	CD289	---	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	1m	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	11	2422	21	2442
02	2404	12	2424	22	2444
03	2406	13	2426	23	2446
~	~	~	~	~	~
09	2418	19	2438	39	2478
10	2420	20	2440	40	2480

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH01	GFSK(1Mbps)
Mode 2	CH20	
Mode 3	CH40	
Mode 4	CH01	GFSK(2Mbps)
Mode 5	CH20	
Mode 6	CH40	
Mode 7	Link mode (Conducted Emission & Radiated emission)	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test

4.6 Table of parameters of text software setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	blueTest3		
Frequency	2402 MHz	2440 MHz	2480 MHz
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD9561-F	01323	May 16, 2024	May 15, 2025

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Radio frequency control box	MAIWEI	MW100-RFC B	\	\	\
Software	MAIWEI	MTS 8310	\	\	\

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenn(18GHz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

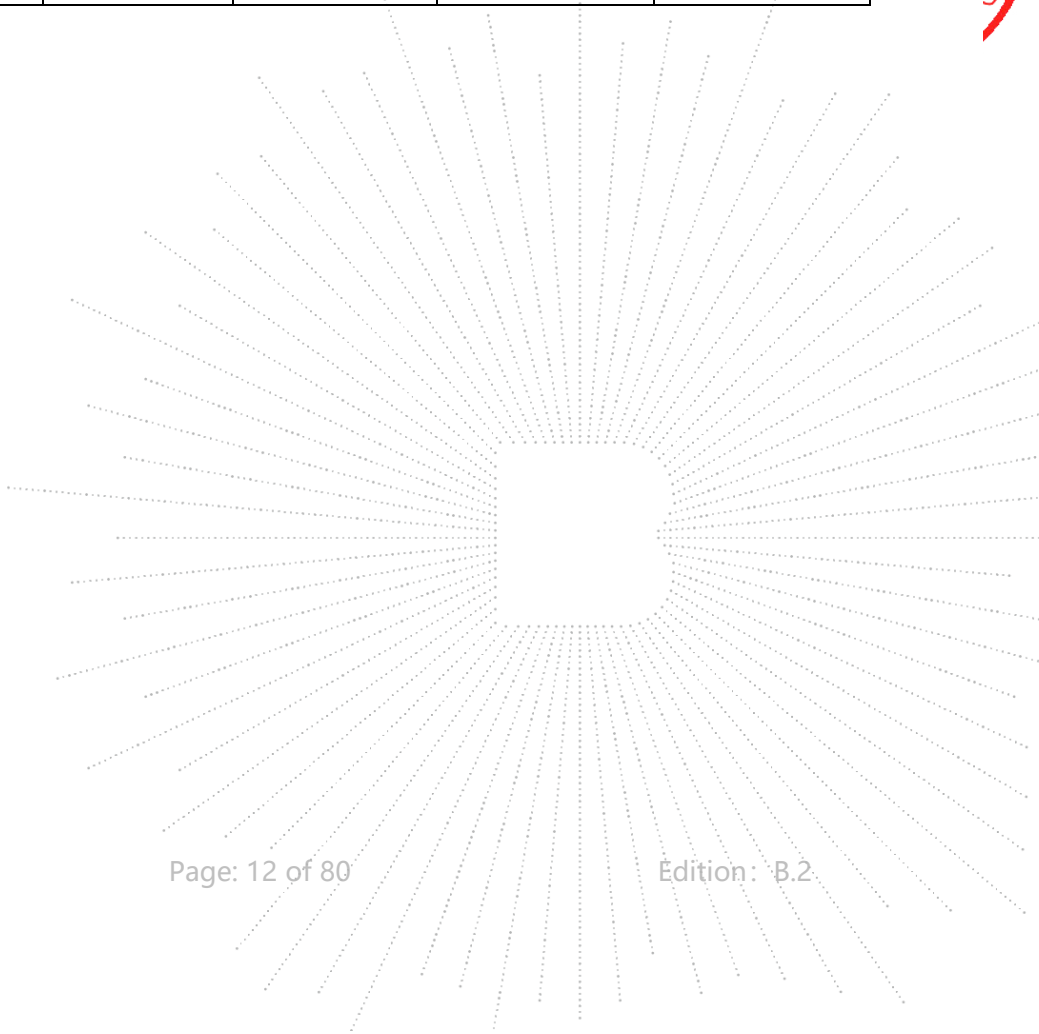

6. Conducted Emissions

6.1 Block Diagram Of Test Setup



6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	24.1 °C	Relative Humidity:	56%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	L

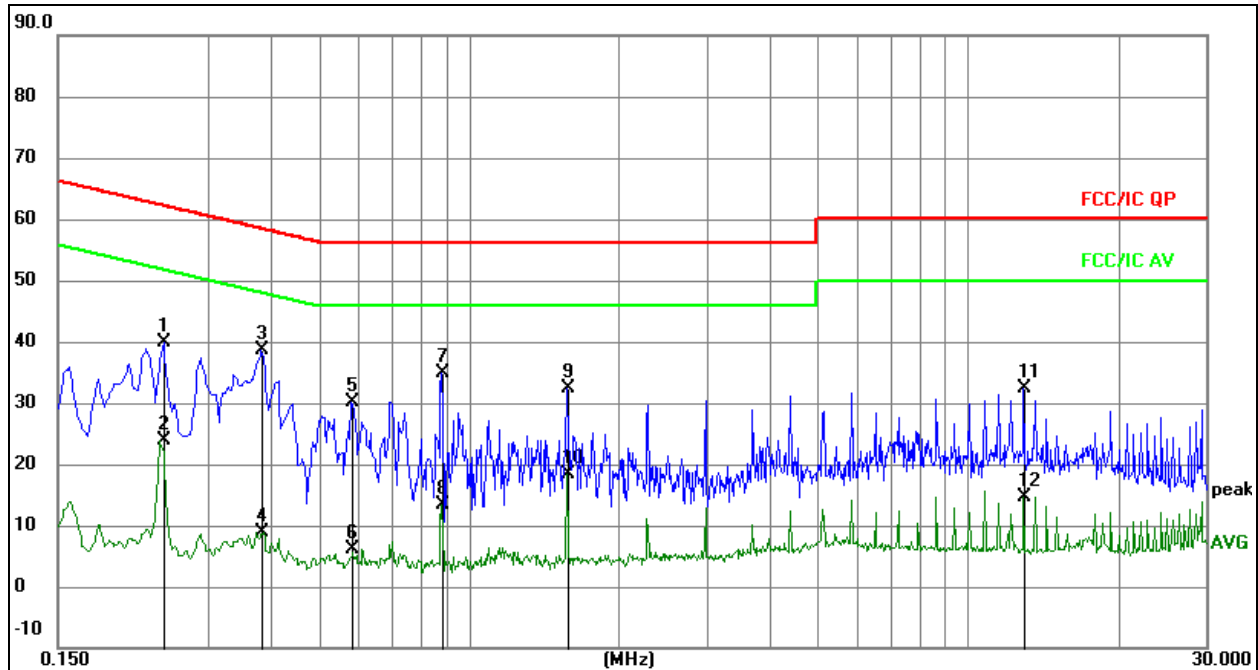


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2445	19.75	20.07	39.82	61.94	-22.12	QP
2		0.2445	3.82	20.07	23.89	51.94	-28.05	AVG
3	*	0.3840	18.66	20.08	38.74	58.19	-19.45	QP
4		0.3840	-11.29	20.08	8.79	48.19	-39.40	AVG
5		0.5820	9.98	20.08	30.06	56.00	-25.94	QP
6		0.5820	-13.92	20.08	6.16	46.00	-39.84	AVG
7		0.8835	14.80	20.09	34.89	56.00	-21.11	QP
8		0.8835	-6.70	20.09	13.39	46.00	-32.61	AVG
9		1.5765	12.39	20.10	32.49	56.00	-23.51	QP
10		1.5765	-1.60	20.10	18.50	46.00	-27.50	AVG
11		12.9614	12.21	20.25	32.46	60.00	-27.54	QP
12		12.9614	-5.66	20.25	14.59	50.00	-35.41	AVG

Temperature:	24.1 °C	Relative Humidity:	56%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	N

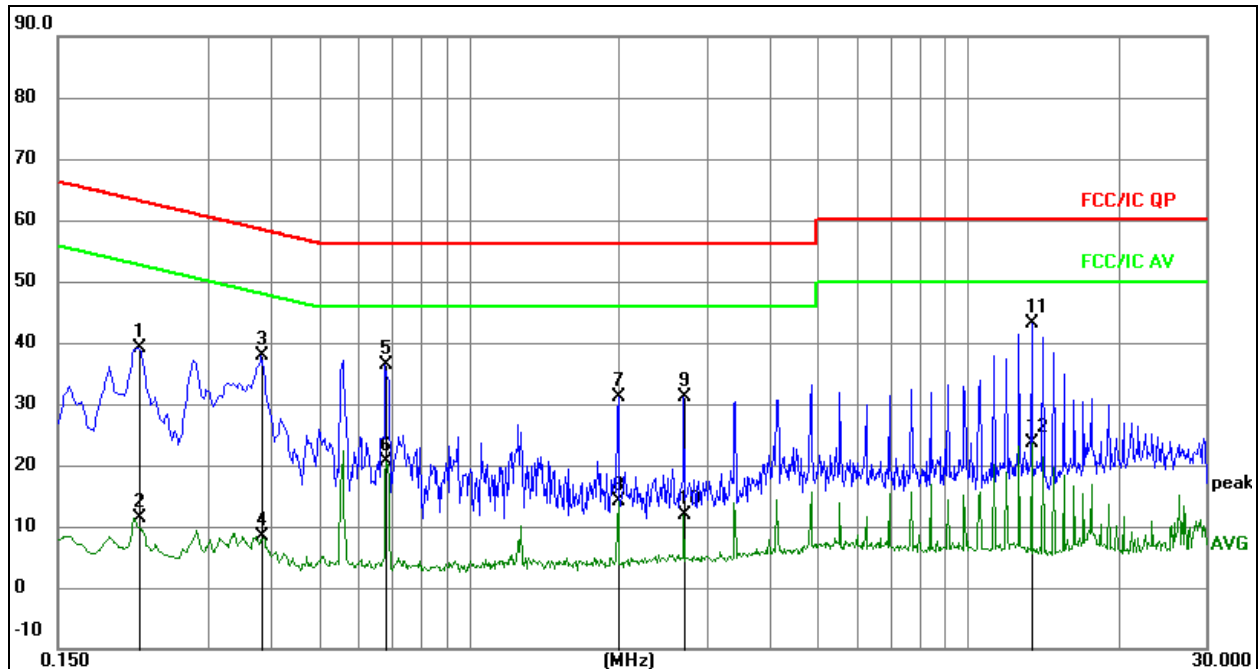
Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2175	19.12	20.07	39.19	62.91	-23.72	QP
2		0.2175	-8.76	20.07	11.31	52.91	-41.60	AVG
3		0.3840	17.88	20.08	37.96	58.19	-20.23	QP
4		0.3840	-11.60	20.08	8.48	48.19	-39.71	AVG
5		0.6809	16.31	20.09	36.40	56.00	-19.60	QP
6		0.6809	0.47	20.09	20.56	46.00	-25.44	AVG
7		1.9950	11.12	20.10	31.22	56.00	-24.78	QP
8		1.9950	-5.95	20.10	14.15	46.00	-31.85	AVG
9		2.7015	11.14	20.11	31.25	56.00	-24.75	QP
10		2.7015	-8.33	20.11	11.78	46.00	-34.22	AVG
11	*	13.4250	22.96	20.27	43.23	60.00	-16.77	QP
12		13.4250	3.29	20.27	23.56	50.00	-26.44	AVG

7. Radiated Emissions

7.1 Block Diagram Of Test Setup

(A) Radiated Emission Test-Up Frequency Below 30MHz



(B) Radiated Emission Test-Up Frequency 30MHz~1GHz



(C) Radiated Emission Test-Up Frequency Above 1GHz



7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

(1)The limit for radiated test was performed according to FCC PART 15C.

(2)The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1)through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	23.9 °C	Relative Humidity:	50%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

ANT 1:

Temperature:	23.9 °C	Relative Humidity:	50%RH
Pressure:	101KPa	Test Voltage:	DC 3.7V
Test Mode:	Mode 7	Polarization:	Horizontal

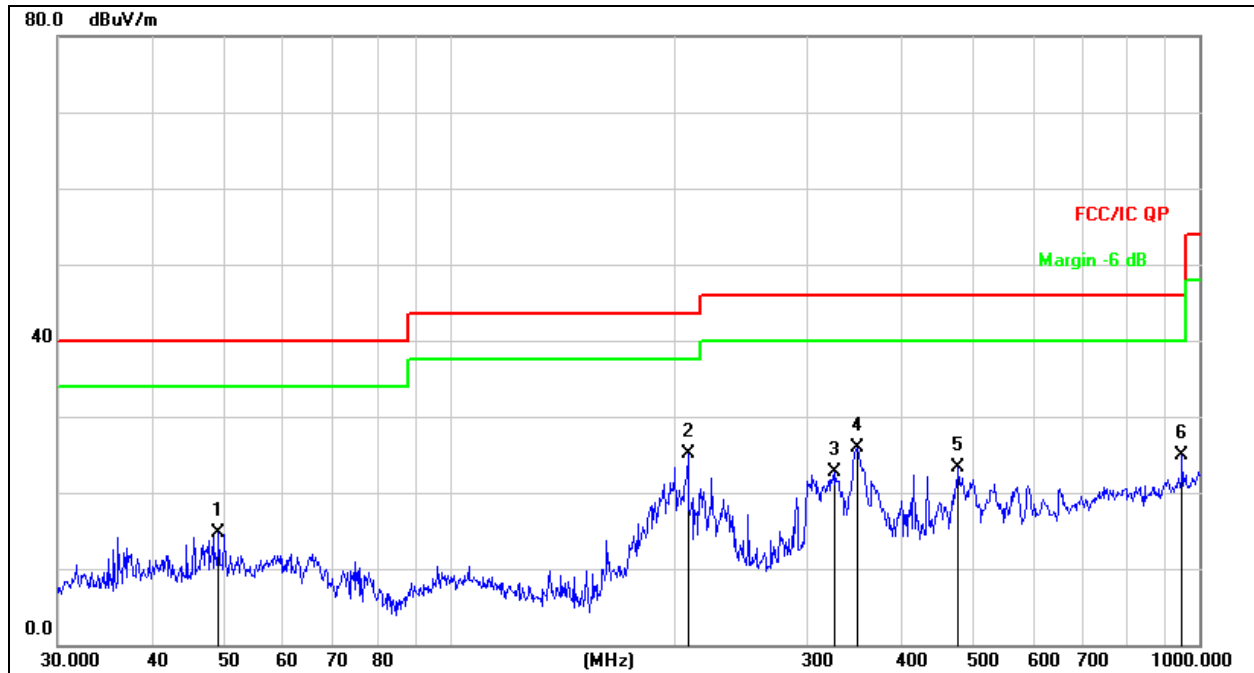


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		49.1865	28.67	-13.97	14.70	40.00	-25.30	QP
2	*	207.8501	40.52	-15.50	25.02	43.50	-18.48	QP
3		326.7395	34.94	-12.30	22.64	46.00	-23.36	QP
4		349.2500	37.32	-11.51	25.81	46.00	-20.19	QP
5		477.1694	32.49	-9.18	23.31	46.00	-22.69	QP
6		948.7610	27.76	-2.94	24.82	46.00	-21.18	QP

Temperature:	23.9 °C	Relative Humidity:	50%RH
Pressure:	101KPa	Test Voltage:	DC 3.7V
Test Mode:	Mode 7	Polarization:	Vertical

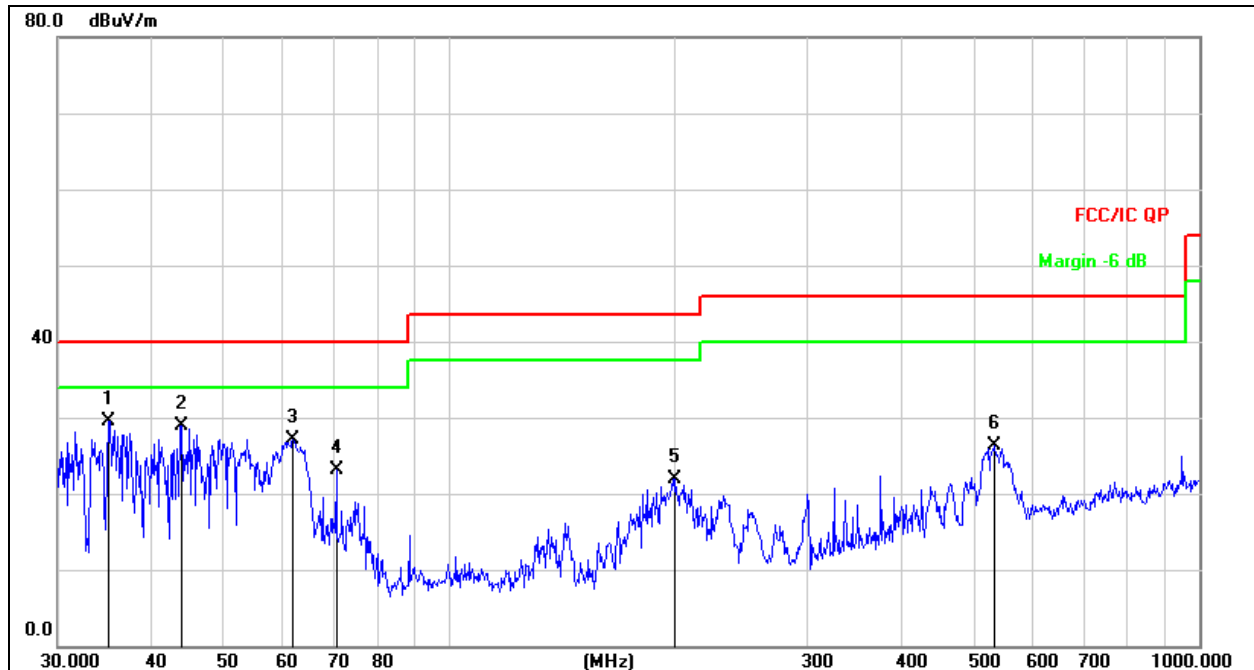


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	35.0048	45.24	-15.68	29.56	40.00	-10.44	QP
2		43.9658	43.29	-14.39	28.90	40.00	-11.10	QP
3		61.7781	42.82	-15.74	27.08	40.00	-12.92	QP
4		70.5836	41.25	-18.10	23.15	40.00	-16.85	QP
5		199.9856	37.61	-15.72	21.89	43.50	-21.61	QP
6		531.9635	36.10	-9.74	26.36	46.00	-19.64	QP

ANT 2:

Temperature:	23.9 °C	Relative Humidity:	50%RH
Pressure:	101KPa	Test Voltage:	DC 3.7V
Test Mode:	Mode 4	Polarization:	Horizontal

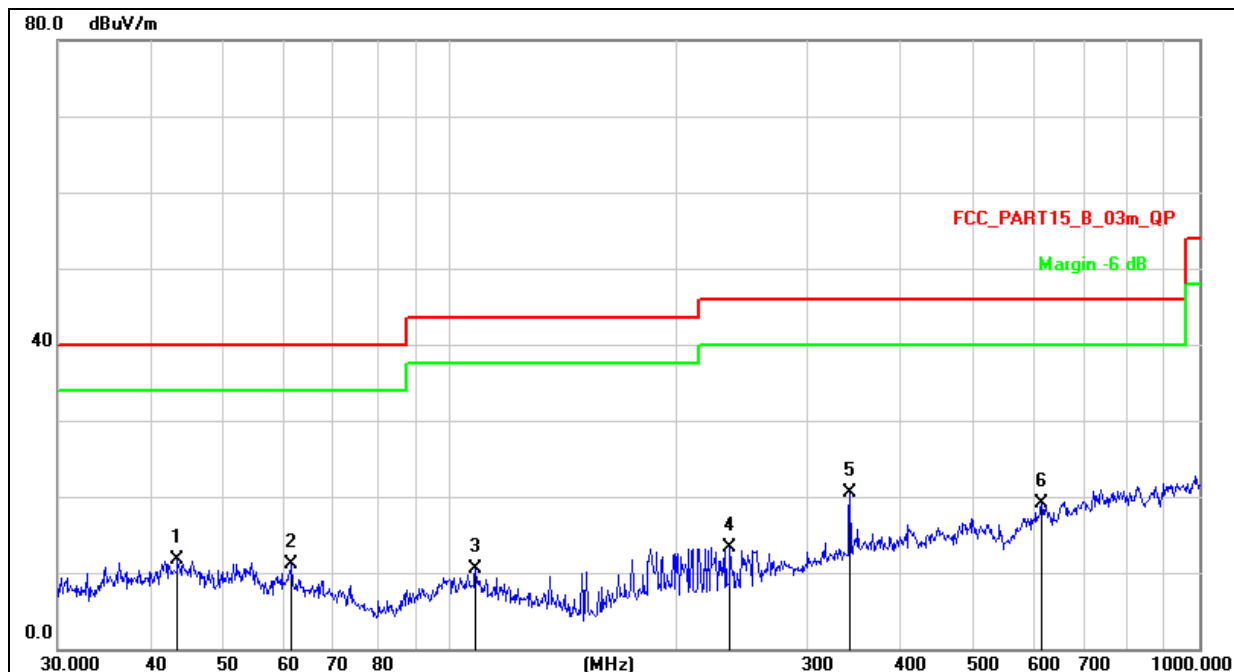


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		43.3534	26.19	-14.45	11.74	40.00	-28.26	QP
2		61.5618	26.81	-15.68	11.13	40.00	-28.87	QP
3		108.2667	26.95	-16.51	10.44	43.50	-33.06	QP
4		236.6447	28.05	-14.67	13.38	46.00	-32.62	QP
5	*	341.9786	32.34	-11.76	20.58	46.00	-25.42	QP
6		616.3718	25.78	-6.74	19.04	46.00	-26.96	QP

Temperature:	23.9 °C	Relative Humidity:	50%RH
Pressure:	101KPa	Test Voltage:	DC 3.7V
Test Mode:	Mode 4	Polarization:	Vertical

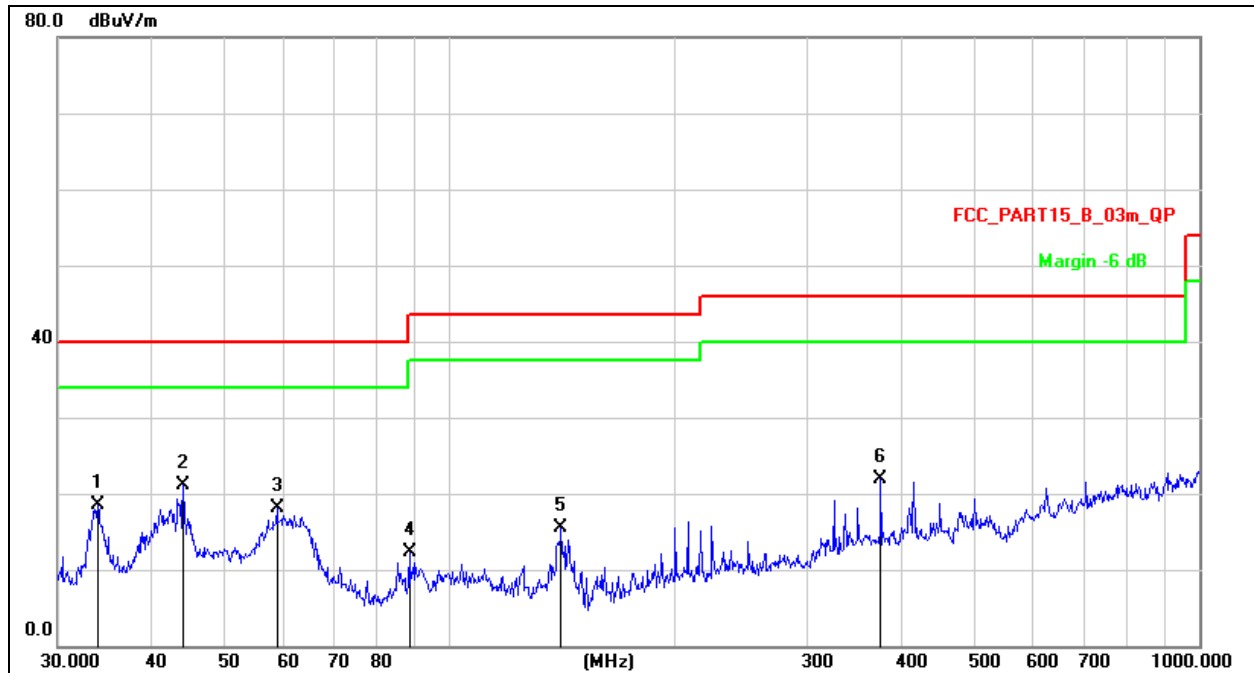

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		33.9174	34.47	-15.89	18.58	40.00	-21.42	QP
2	*	44.1202	35.41	-14.38	21.03	40.00	-18.97	QP
3		58.8185	33.10	-15.09	18.01	40.00	-21.99	QP
4		88.3421	30.02	-17.79	12.23	43.50	-31.27	QP
5		140.8351	34.35	-18.79	15.56	43.50	-27.94	QP
6		375.9385	33.10	-11.15	21.95	46.00	-24.05	QP

Chip 1
Between 1GHz – 25GHz
1Mbps

GFSK							
Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel							
V	4804.00	72.30	-19.99	52.31	74.00	-21.69	PK
V	4804.00	61.59	-19.99	41.60	54.00	-12.40	AV
V	7206.00	64.90	-14.22	50.68	74.00	-23.32	PK
V	7206.00	55.50	-14.22	41.28	54.00	-12.72	AV
H	4804.00	68.11	-19.99	48.12	74.00	-25.88	PK
H	4804.00	57.20	-19.99	37.21	54.00	-16.79	AV
H	7206.00	63.17	-14.22	48.95	74.00	-25.05	PK
H	7206.00	54.77	-14.22	40.55	54.00	-13.45	AV
Middle channel							
V	4880.00	69.72	-19.84	49.88	74.00	-24.12	PK
V	4880.00	61.62	-19.84	41.78	54.00	-12.22	AV
V	7320.00	61.88	-13.90	47.98	74.00	-26.02	PK
V	7320.00	53.30	-13.90	39.40	54.00	-14.60	AV
H	4880.00	67.35	-19.84	47.51	74.00	-26.49	PK
H	4880.00	56.55	-19.84	36.71	54.00	-17.29	AV
H	7320.00	60.18	-13.90	46.28	74.00	-27.72	PK
H	7320.00	52.94	-13.90	39.04	54.00	-14.96	AV
High channel							
V	4960.00	71.96	-19.68	52.28	74.00	-21.72	PK
V	4960.00	61.34	-19.68	41.66	54.00	-12.34	AV
V	7440.00	63.90	-13.57	50.33	74.00	-23.67	PK
V	7440.00	53.26	-13.57	39.69	54.00	-14.31	AV
H	4960.00	70.81	-19.68	51.13	74.00	-22.87	PK
H	4960.00	60.60	-19.68	40.92	54.00	-13.08	AV
H	7440.00	61.20	-13.57	47.63	74.00	-26.37	PK
H	7440.00	53.37	-13.57	39.80	54.00	-14.20	AV

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2Mbps

GFSK							
Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel							
V	4804.00	71.13	-19.99	51.14	74.00	-22.86	PK
V	4804.00	60.27	-19.99	40.28	54.00	-13.72	AV
V	7206.00	63.15	-14.22	48.93	74.00	-25.07	PK
V	7206.00	53.92	-14.22	39.70	54.00	-14.30	AV
H	4804.00	66.41	-19.99	46.42	74.00	-27.58	PK
H	4804.00	57.24	-19.99	37.25	54.00	-16.75	AV
H	7206.00	60.41	-14.22	46.19	74.00	-27.81	PK
H	7206.00	51.74	-14.22	37.52	54.00	-16.48	AV
Middle channel							
V	4880.00	69.87	-19.84	50.03	74.00	-23.97	PK
V	4880.00	61.92	-19.84	42.08	54.00	-11.92	AV
V	7320.00	60.35	-13.90	46.45	74.00	-27.55	PK
V	7320.00	52.25	-13.90	38.35	54.00	-15.65	AV
H	4880.00	65.43	-19.84	45.59	74.00	-28.41	PK
H	4880.00	55.90	-19.84	36.06	54.00	-17.94	AV
H	7320.00	57.49	-13.90	43.59	74.00	-30.41	PK
H	7320.00	50.22	-13.90	36.32	54.00	-17.68	AV
High channel							
V	4960.00	71.12	-19.68	51.44	74.00	-22.56	PK
V	4960.00	60.52	-19.68	40.84	54.00	-13.16	AV
V	7440.00	65.12	-13.57	51.55	74.00	-22.45	PK
V	7440.00	54.47	-13.57	40.90	54.00	-13.10	AV
H	4960.00	69.05	-19.68	49.37	74.00	-24.63	PK
H	4960.00	58.34	-19.68	38.66	54.00	-15.34	AV
H	7440.00	62.94	-13.57	49.37	74.00	-24.63	PK
H	7440.00	54.00	-13.57	40.43	54.00	-13.57	AV

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit

2.If peak below the average limit, the average emission was no test.

3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Chip 2(Antenna 1)
Between 1GHz – 25GHz
1Mbps**

GFSK							
Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel							
V	4804.00	71.50	-19.99	51.51	74.00	-22.49	PK
V	4804.00	63.04	-19.99	43.05	54.00	-10.95	AV
V	7206.00	62.73	-14.22	48.51	74.00	-25.49	PK
V	7206.00	52.87	-14.22	38.65	54.00	-15.35	AV
H	4804.00	68.65	-19.99	48.66	74.00	-25.34	PK
H	4804.00	58.92	-19.99	38.93	54.00	-15.07	AV
H	7206.00	61.08	-14.22	46.86	74.00	-27.14	PK
H	7206.00	52.52	-14.22	38.30	54.00	-15.70	AV
Middle channel							
V	4880.00	70.02	-19.84	50.18	74.00	-23.82	PK
V	4880.00	61.03	-19.84	41.19	54.00	-12.81	AV
V	7320.00	61.86	-13.90	47.96	74.00	-26.04	PK
V	7320.00	52.26	-13.90	38.36	54.00	-15.64	AV
H	4880.00	67.69	-19.84	47.85	74.00	-26.15	PK
H	4880.00	58.17	-19.84	38.33	54.00	-15.67	AV
H	7320.00	59.46	-13.90	45.56	74.00	-28.44	PK
H	7320.00	52.04	-13.90	38.14	54.00	-15.86	AV
High channel							
V	4960.00	71.60	-19.68	51.92	74.00	-22.08	PK
V	4960.00	62.15	-19.68	42.47	54.00	-11.53	AV
V	7440.00	63.65	-13.57	50.08	74.00	-23.92	PK
V	7440.00	53.69	-13.57	40.12	54.00	-13.88	AV
H	4960.00	68.91	-19.68	49.23	74.00	-24.77	PK
H	4960.00	58.02	-19.68	38.34	54.00	-15.66	AV
H	7440.00	61.18	-13.57	47.61	74.00	-26.39	PK
H	7440.00	52.87	-13.57	39.30	54.00	-14.70	AV

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

GFSK							
Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel							
V	4804.00	71.11	-19.99	51.12	74.00	-22.88	PK
V	4804.00	62.25	-19.99	42.26	54.00	-11.74	AV
V	7206.00	62.69	-14.22	48.47	74.00	-25.53	PK
V	7206.00	52.82	-14.22	38.60	54.00	-15.40	AV
H	4804.00	67.49	-19.99	47.50	74.00	-26.50	PK
H	4804.00	56.79	-19.99	36.80	54.00	-17.20	AV
H	7206.00	60.03	-14.22	45.81	74.00	-28.19	PK
H	7206.00	51.79	-14.22	37.57	54.00	-16.43	AV
Middle channel							
V	4880.00	68.43	-19.84	48.59	74.00	-25.41	PK
V	4880.00	60.53	-19.84	40.69	54.00	-13.31	AV
V	7320.00	60.93	-13.90	47.03	74.00	-26.97	PK
V	7320.00	52.69	-13.90	38.79	54.00	-15.21	AV
H	4880.00	66.40	-19.84	46.56	74.00	-27.44	PK
H	4880.00	56.20	-19.84	36.36	54.00	-17.64	AV
H	7320.00	59.26	-13.90	45.36	74.00	-28.64	PK
H	7320.00	51.50	-13.90	37.60	54.00	-16.40	AV
High channel							
V	4960.00	71.28	-19.68	51.60	74.00	-22.40	PK
V	4960.00	61.96	-19.68	42.28	54.00	-11.72	AV
V	7440.00	63.69	-13.57	50.12	74.00	-23.88	PK
V	7440.00	53.75	-13.57	40.18	54.00	-13.82	AV
H	4960.00	68.29	-19.68	48.61	74.00	-25.39	PK
H	4960.00	58.86	-19.68	39.18	54.00	-14.82	AV
H	7440.00	61.49	-13.57	47.92	74.00	-26.08	PK
H	7440.00	54.23	-13.57	40.66	54.00	-13.34	AV

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Chip 2(Antenna 2)
Between 1GHz – 25GHz
1Mbps**

GFSK							
Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel							
V	4804.00	71.79	-19.99	51.80	74.00	-22.20	PK
V	4804.00	62.04	-19.99	42.05	54.00	-11.95	AV
V	7206.00	61.54	-14.22	47.32	74.00	-26.68	PK
V	7206.00	51.60	-14.22	37.38	54.00	-16.62	AV
H	4804.00	68.20	-19.99	48.21	74.00	-25.79	PK
H	4804.00	57.44	-19.99	37.45	54.00	-16.55	AV
H	7206.00	59.50	-14.22	45.28	74.00	-28.72	PK
H	7206.00	52.50	-14.22	38.28	54.00	-15.72	AV
Middle channel							
V	4880.00	70.37	-19.84	50.53	74.00	-23.47	PK
V	4880.00	63.50	-19.84	43.66	54.00	-10.34	AV
V	7320.00	61.64	-13.90	47.74	74.00	-26.26	PK
V	7320.00	51.78	-13.90	37.88	54.00	-16.12	AV
H	4880.00	68.80	-19.84	48.96	74.00	-25.04	PK
H	4880.00	58.14	-19.84	38.30	54.00	-15.70	AV
H	7320.00	59.01	-13.90	45.11	74.00	-28.89	PK
H	7320.00	51.61	-13.90	37.71	54.00	-16.29	AV
High channel							
V	4960.00	72.84	-19.68	53.16	74.00	-20.84	PK
V	4960.00	61.89	-19.68	42.21	54.00	-11.79	AV
V	7440.00	64.54	-13.57	50.97	74.00	-23.03	PK
V	7440.00	54.25	-13.57	40.68	54.00	-13.32	AV
H	4960.00	70.93	-19.68	51.25	74.00	-22.75	PK
H	4960.00	61.81	-19.68	42.13	54.00	-11.87	AV
H	7440.00	62.15	-13.57	48.58	74.00	-25.42	PK
H	7440.00	53.59	-13.57	40.02	54.00	-13.98	AV

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2Mbps

GFSK							
Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel							
V	4804.00	70.93	-19.99	50.94	74.00	-23.06	PK
V	4804.00	60.18	-19.99	40.19	54.00	-13.81	AV
V	7206.00	60.37	-14.22	46.15	74.00	-27.85	PK
V	7206.00	50.65	-14.22	36.43	54.00	-17.57	AV
H	4804.00	69.64	-19.99	49.65	74.00	-24.35	PK
H	4804.00	59.33	-19.99	39.34	54.00	-14.66	AV
H	7206.00	58.95	-14.22	44.73	74.00	-29.27	PK
H	7206.00	49.95	-14.22	35.73	54.00	-18.27	AV
Middle channel							
V	4880.00	69.66	-19.84	49.82	74.00	-24.18	PK
V	4880.00	60.85	-19.84	41.01	54.00	-12.99	AV
V	7320.00	60.83	-13.90	46.93	74.00	-27.07	PK
V	7320.00	52.63	-13.90	38.73	54.00	-15.27	AV
H	4880.00	66.10	-19.84	46.26	74.00	-27.74	PK
H	4880.00	55.87	-19.84	36.03	54.00	-17.97	AV
H	7320.00	58.81	-13.90	44.91	74.00	-29.09	PK
H	7320.00	50.03	-13.90	36.13	54.00	-17.87	AV
High channel							
V	4960.00	71.93	-19.68	52.25	74.00	-21.75	PK
V	4960.00	63.26	-19.68	43.58	54.00	-10.42	AV
V	7440.00	65.89	-13.57	52.32	74.00	-21.68	PK
V	7440.00	55.52	-13.57	41.95	54.00	-12.05	AV
H	4960.00	70.01	-19.68	50.33	74.00	-23.67	PK
H	4960.00	60.00	-19.68	40.32	54.00	-13.68	AV
H	7440.00	63.31	-13.57	49.74	74.00	-24.26	PK
H	7440.00	55.04	-13.57	41.47	54.00	-12.53	AV


Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8. Radiated Band Emission Measurement And Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

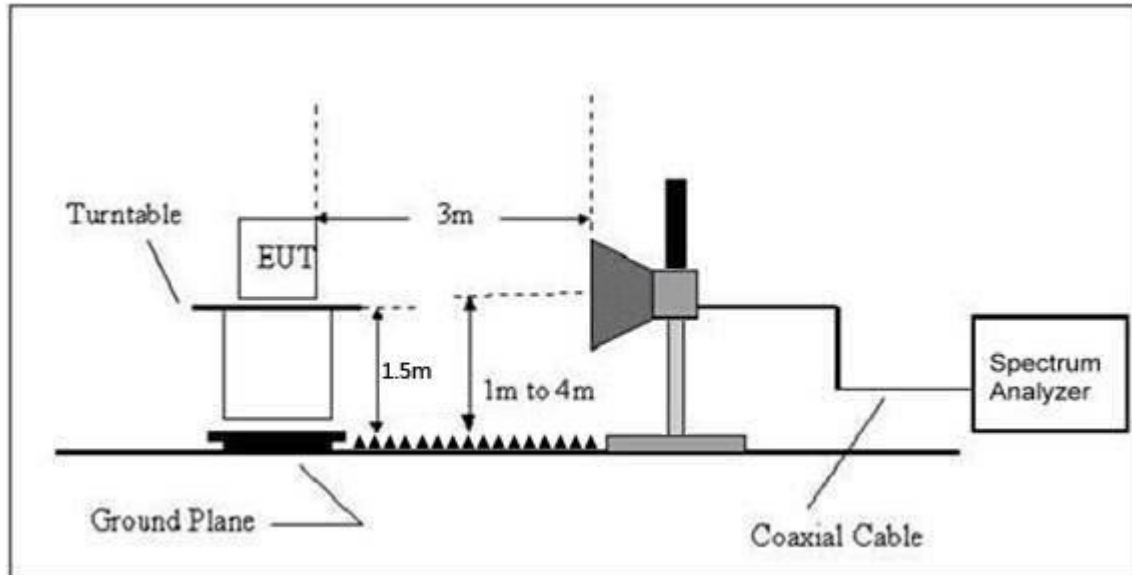

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(3)
13.36-13.41			

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

(1)The limit for radiated test was performed according to FCC PART 15C.

(2)The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test Procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the Highest channel.

Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

Chip 1

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Over	Result
					PK	PK	AV	PK	
GFSK(1Mbps)	Low Channel 2402MHz								
	H	2390.00	73.50	-25.43	48.07	74.00	54.00	-25.93	PASS
	H	2400.00	75.22	-25.40	49.82	74.00	54.00	-24.18	PASS
	V	2390.00	73.44	-25.43	48.01	74.00	54.00	-25.99	PASS
	V	2400.00	73.53	-25.40	48.13	74.00	54.00	-25.87	PASS
	High Channel 2480MHz								
	H	2483.50	73.84	-25.15	48.69	74.00	54.00	-25.31	PASS
	H	2500.00	70.11	-25.10	45.01	74.00	54.00	-28.99	PASS
	V	2483.50	73.42	-25.15	48.27	74.00	54.00	-25.73	PASS
V	2500.00	68.80	-25.10	43.70	74.00	54.00	-30.30	PASS	
GFSK(2Mbps)	Low Channel 2402MHz								
	H	2390.00	72.94	-25.43	47.51	74.00	54.00	-26.49	PASS
	H	2400.00	74.84	-25.40	49.44	74.00	54.00	-24.56	PASS
	V	2390.00	73.00	-25.43	47.57	74.00	54.00	-26.43	PASS
	V	2400.00	73.72	-25.40	48.32	74.00	54.00	-25.68	PASS
	High Channel 2480MHz								
	H	2483.50	73.24	-25.15	48.09	74.00	54.00	-25.91	PASS
	H	2500.00	69.51	-25.10	44.41	74.00	54.00	-29.59	PASS
	V	2483.50	71.75	-25.15	46.60	74.00	54.00	-27.40	PASS
V	2500.00	68.55	-25.10	43.45	74.00	54.00	-30.55	PASS	

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Chip 2(Antenna 1)

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Over	Result
					PK	PK	AV	PK	
GFSK(1Mbps)	Low Channel 2402MHz								
	H	2390.00	73.43	-25.43	48.00	74.00	54.00	-26.00	PASS
	H	2400.00	74.54	-25.40	49.14	74.00	54.00	-24.86	PASS
	V	2390.00	72.79	-25.43	47.36	74.00	54.00	-26.64	PASS
	V	2400.00	73.24	-25.40	47.84	74.00	54.00	-26.16	PASS
	High Channel 2480MHz								
	H	2483.50	72.27	-25.15	47.12	74.00	54.00	-26.88	PASS
	H	2500.00	69.54	-25.10	44.44	74.00	54.00	-29.56	PASS
	V	2483.50	71.67	-25.15	46.52	74.00	54.00	-27.48	PASS
	V	2500.00	66.71	-25.10	41.61	74.00	54.00	-32.39	PASS
GFSK(2Mbps)	Low Channel 2402MHz								
	H	2390.00	74.00	-25.43	48.57	74.00	54.00	-25.43	PASS
	H	2400.00	76.49	-25.40	51.09	74.00	54.00	-22.91	PASS
	V	2390.00	74.37	-25.43	48.94	74.00	54.00	-25.06	PASS
	V	2400.00	74.24	-25.40	48.84	74.00	54.00	-25.16	PASS
	High Channel 2480MHz								
	H	2483.50	72.20	-25.15	47.05	74.00	54.00	-26.95	PASS
	H	2500.00	70.86	-25.10	45.76	74.00	54.00	-28.24	PASS
	V	2483.50	73.70	-25.15	48.55	74.00	54.00	-25.45	PASS
	V	2500.00	70.05	-25.10	44.95	74.00	54.00	-29.05	PASS

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Chip 2(Antenna 2)


Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Over	Result
					PK	PK	AV	PK	
GFSK(1Mbps)	Low Channel 2402MHz								
	H	2390.00	72.22	-25.43	46.79	74.00	54.00	-27.21	PASS
	H	2400.00	74.90	-25.40	49.50	74.00	54.00	-24.50	PASS
	V	2390.00	72.67	-25.43	47.24	74.00	54.00	-26.76	PASS
	V	2400.00	73.47	-25.40	48.07	74.00	54.00	-25.93	PASS
	High Channel 2480MHz								
	H	2483.50	70.59	-25.15	45.44	74.00	54.00	-28.56	PASS
	H	2500.00	67.43	-25.10	42.33	74.00	54.00	-31.67	PASS
	V	2483.50	72.82	-25.15	47.67	74.00	54.00	-26.33	PASS
	V	2500.00	68.99	-25.10	43.89	74.00	54.00	-30.11	PASS
GFSK(2Mbps)	Low Channel 2402MHz								
	H	2390.00	73.25	-25.43	47.82	74.00	54.00	-26.18	PASS
	H	2400.00	75.63	-25.40	50.23	74.00	54.00	-23.77	PASS
	V	2390.00	72.77	-25.43	47.34	74.00	54.00	-26.66	PASS
	V	2400.00	72.93	-25.40	47.53	74.00	54.00	-26.47	PASS
	High Channel 2480MHz								
	H	2483.50	72.33	-25.15	47.18	74.00	54.00	-26.82	PASS
	H	2500.00	68.54	-25.10	43.44	74.00	54.00	-30.56	PASS
	V	2483.50	71.78	-25.15	46.63	74.00	54.00	-27.37	PASS
	V	2500.00	67.18	-25.10	42.08	74.00	54.00	-31.92	PASS

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

9. Power Spectral Density Test

9.1 Block Diagram Of Test Setup

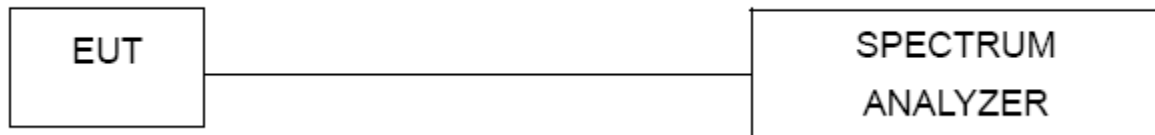

9.2 Limit

FCC Part15 (15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Limits Of Radiated Emission Measurement (Above 1000MHz)

9.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.


Note: Power Spectral Density(dBm)=Reading+Cable Loss


9.5 Test Result



Chip 1

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 3.7V


Mode	Frequency	Power Spectral Density(dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK(1Mbps)	2402 MHz	-7.75	8	PASS
	2440 MHz	-8.73	8	PASS
	2480 MHz	-7.57	8	PASS
GFSK(2Mbps)	2402 MHz	-10.86	8	PASS
	2440 MHz	-10.56	8	PASS
	2480 MHz	-9.77	8	PASS

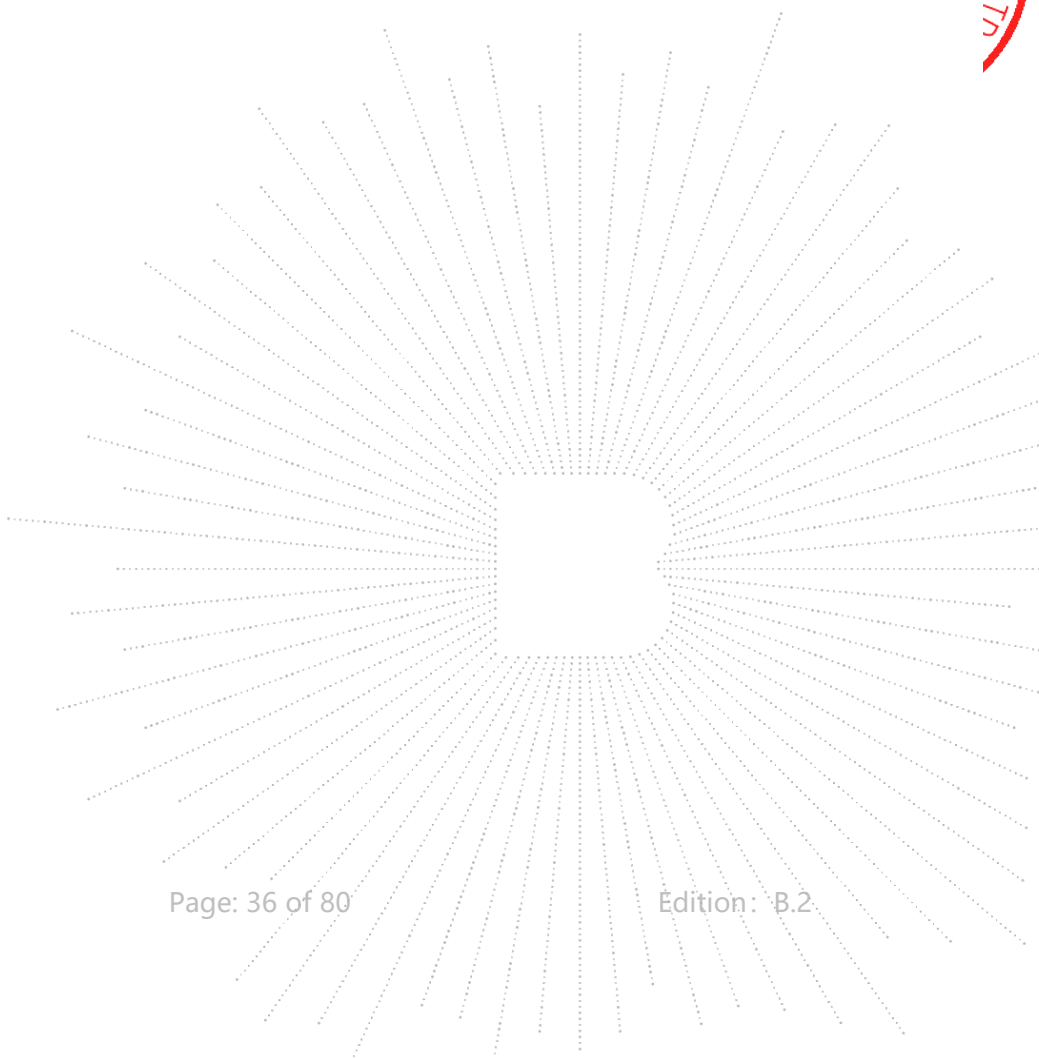

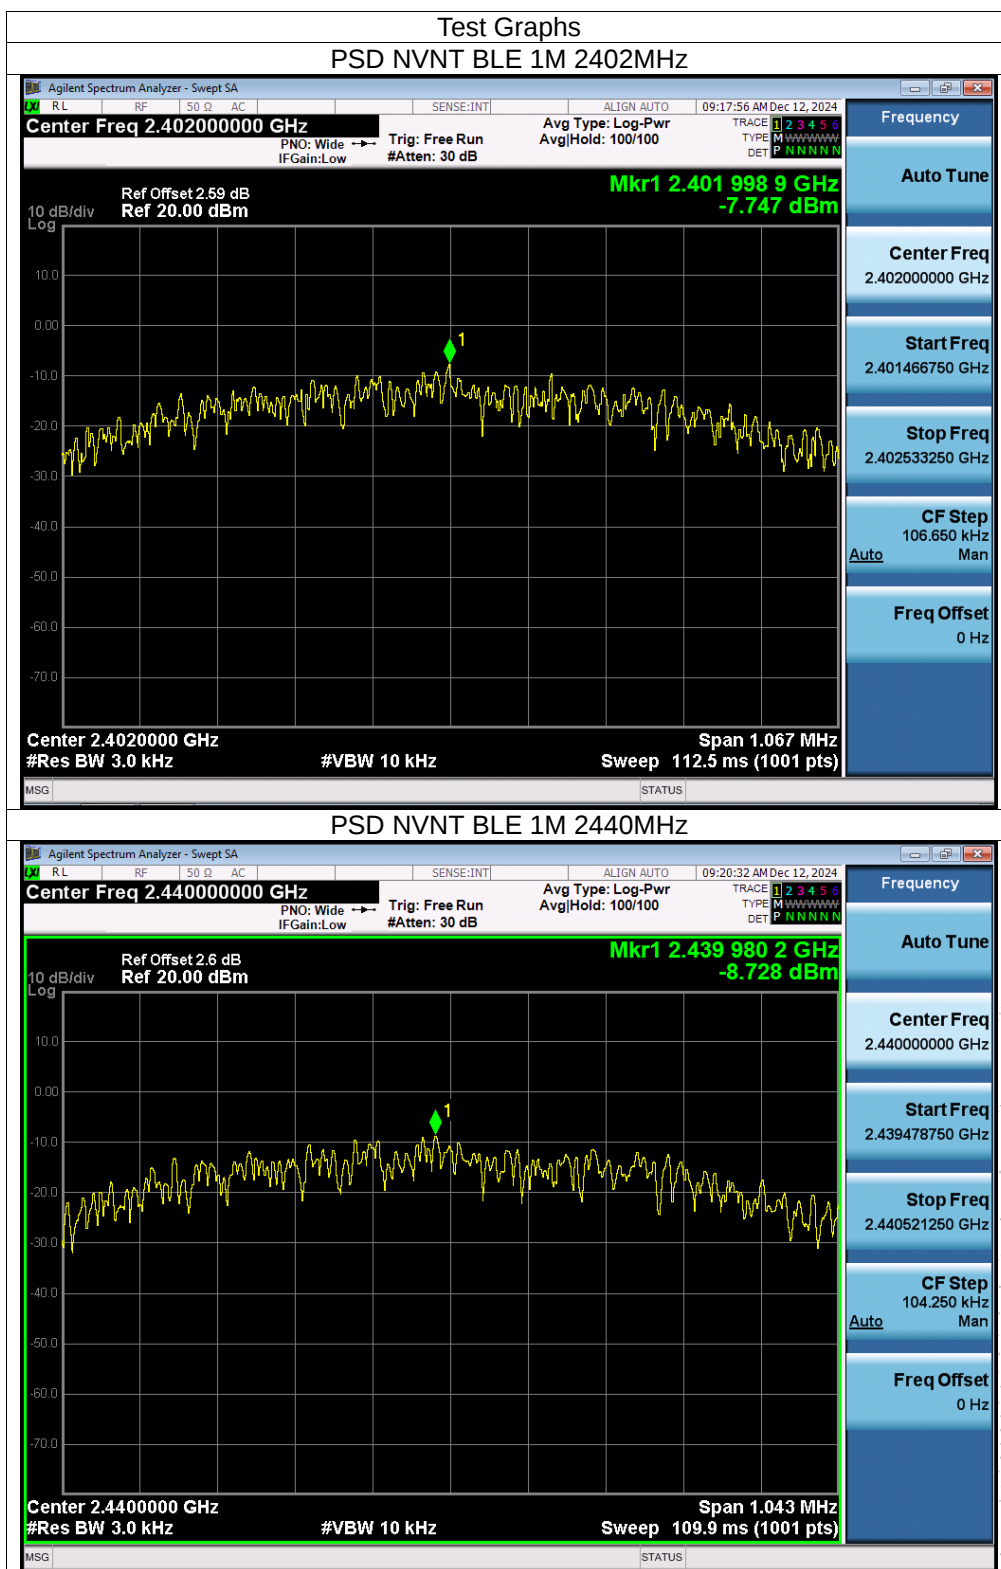

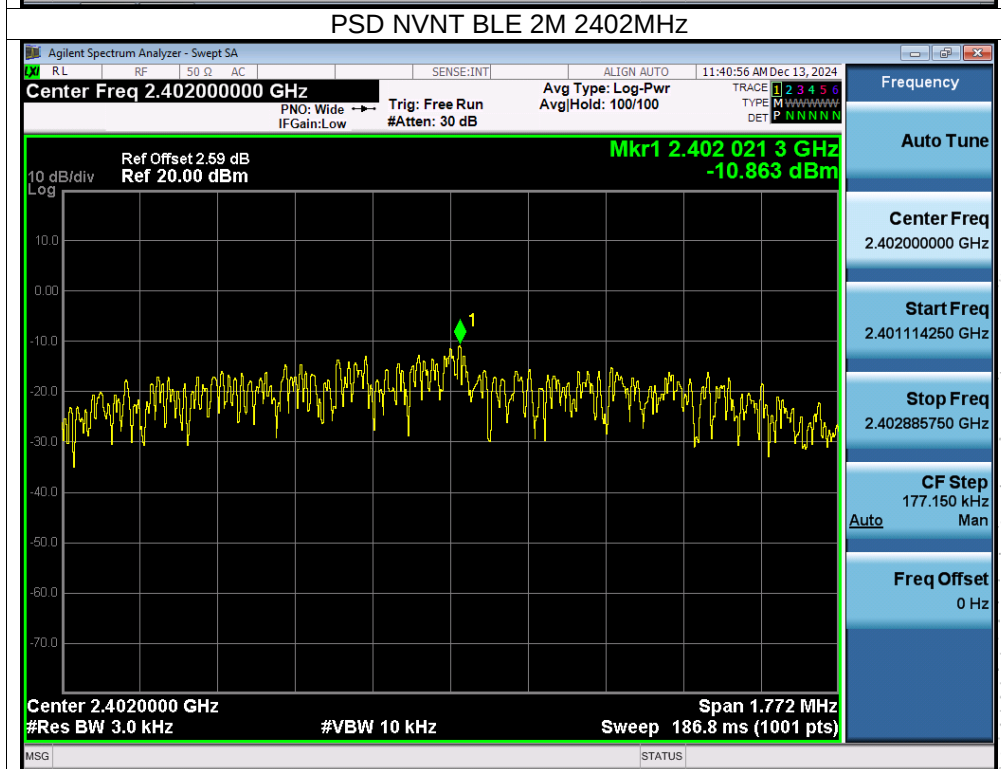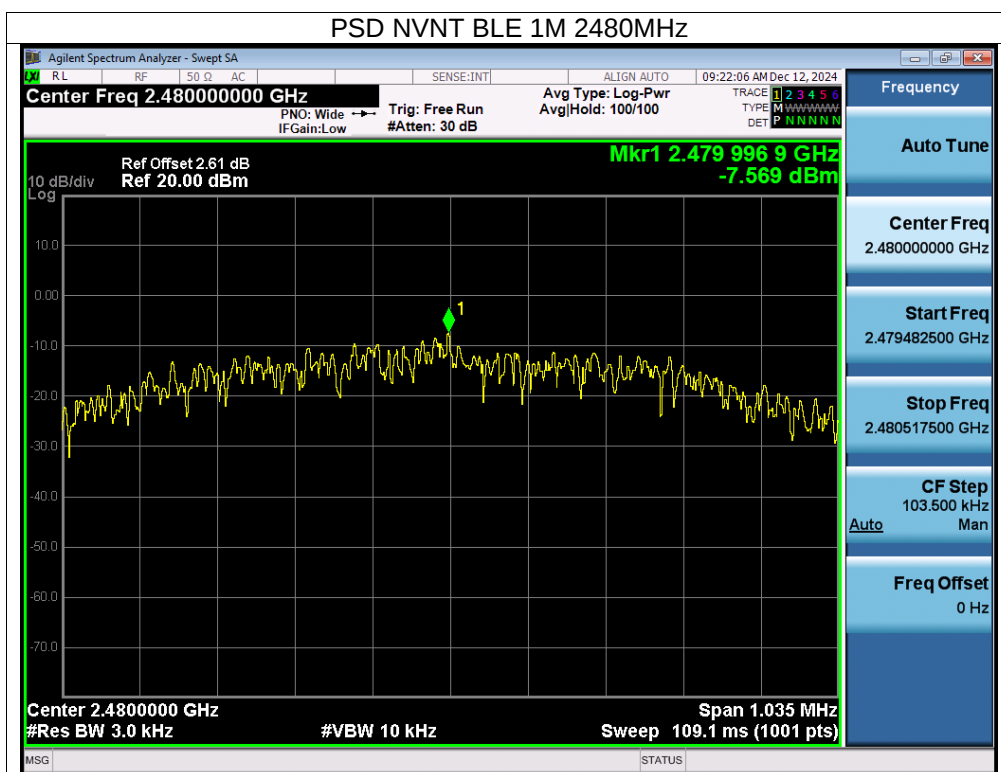


SHENZHEN


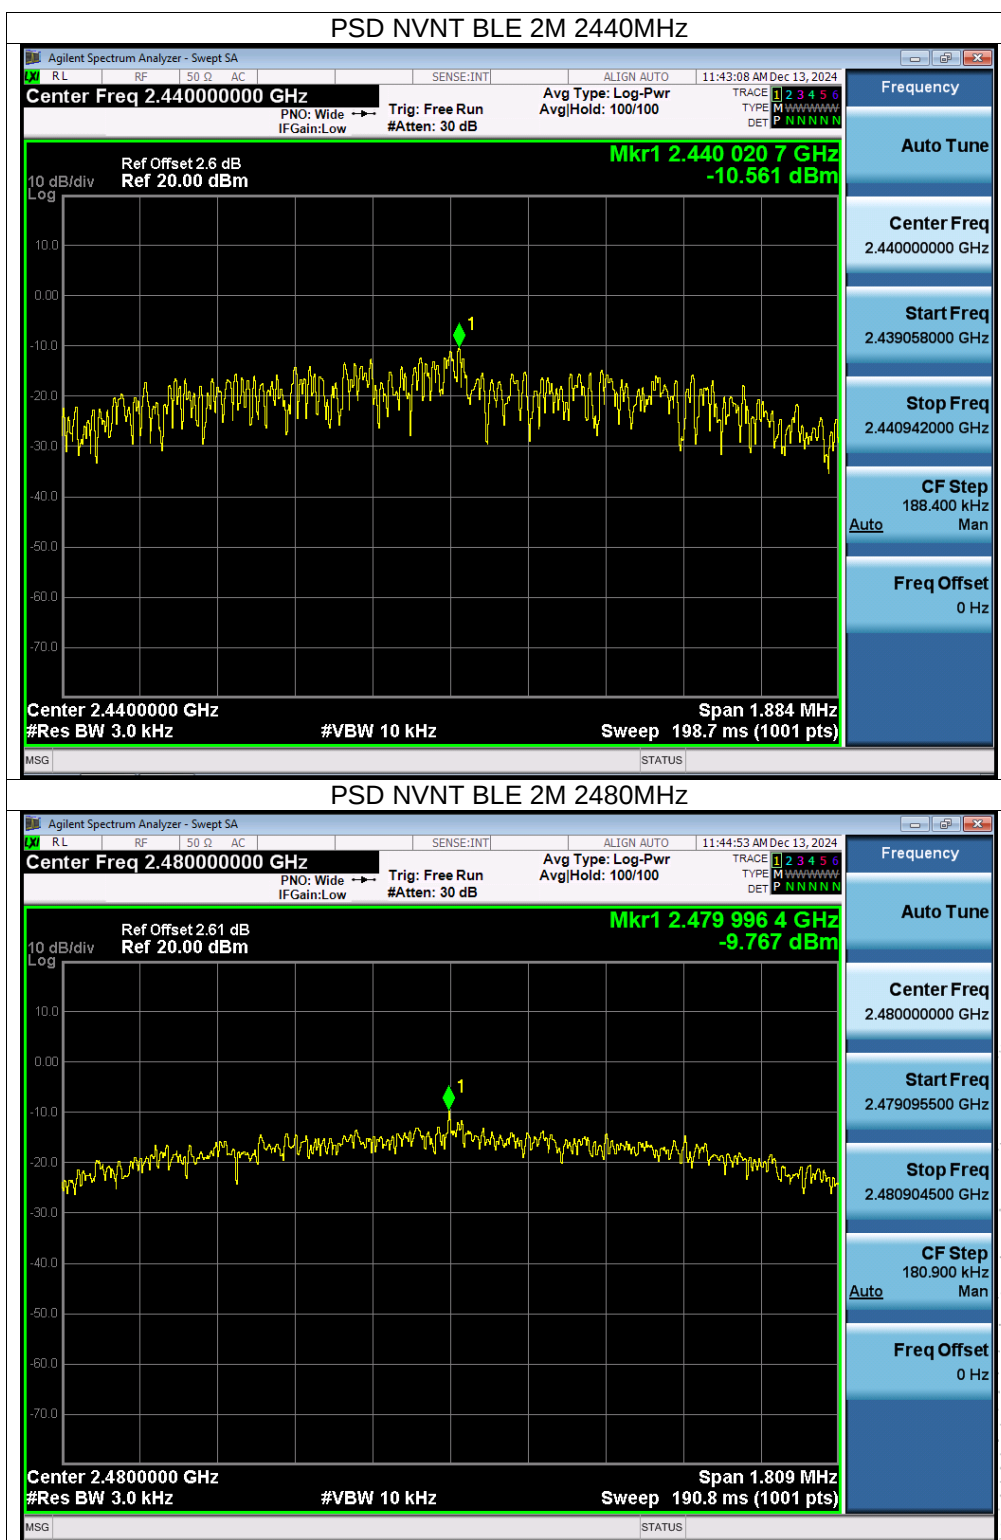




Chip 2

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 3.7V

Mode	Frequency	Power Spectral Density(dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK(1Mbps)	2402 MHz	-16.82	8	PASS
	2440 MHz	-17.08	8	PASS
	2480 MHz	-17.73	8	PASS
GFSK(2Mbps)	2402 MHz	-20.05	8	PASS
	2440 MHz	-20.32	8	PASS
	2480 MHz	-20.97	8	PASS

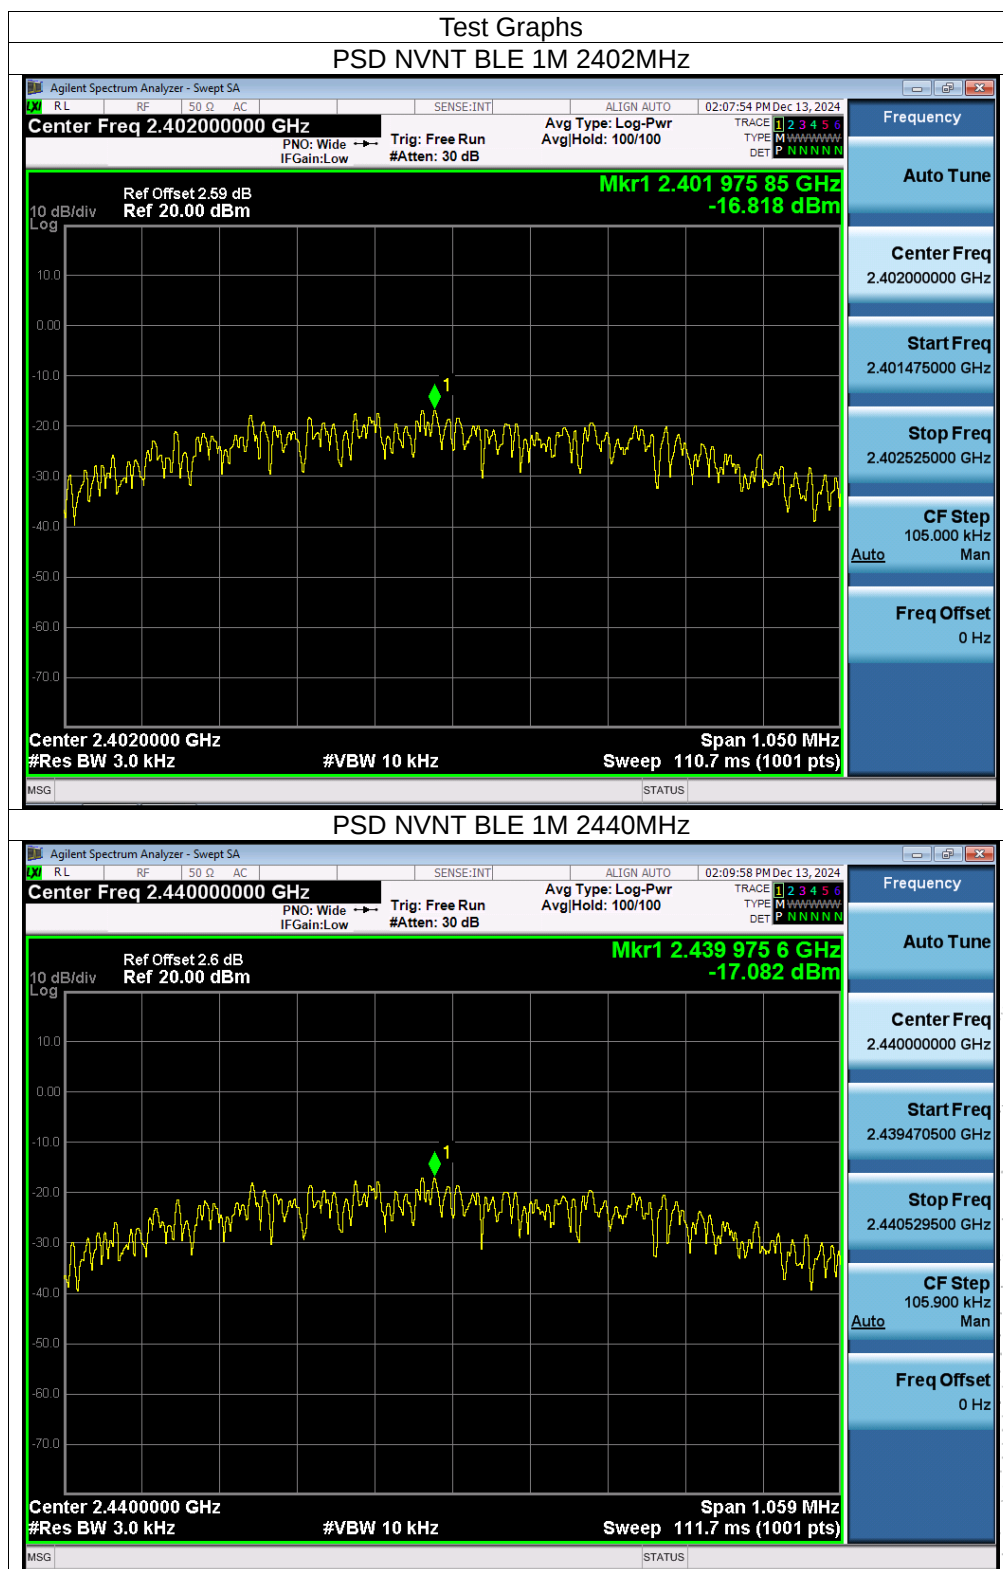

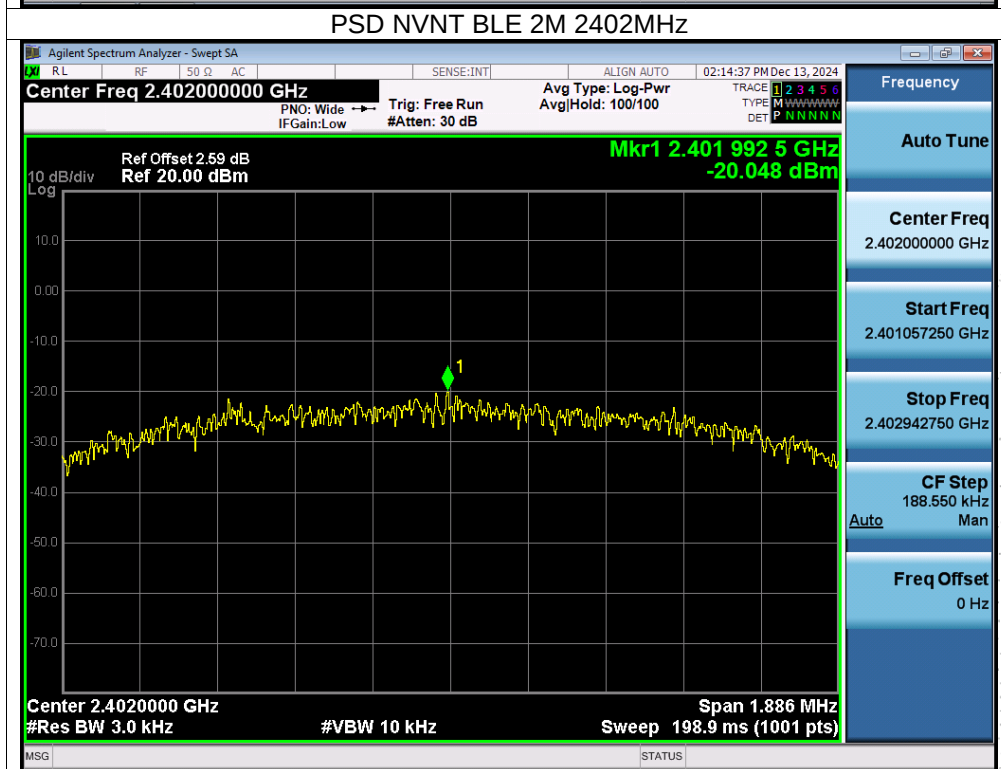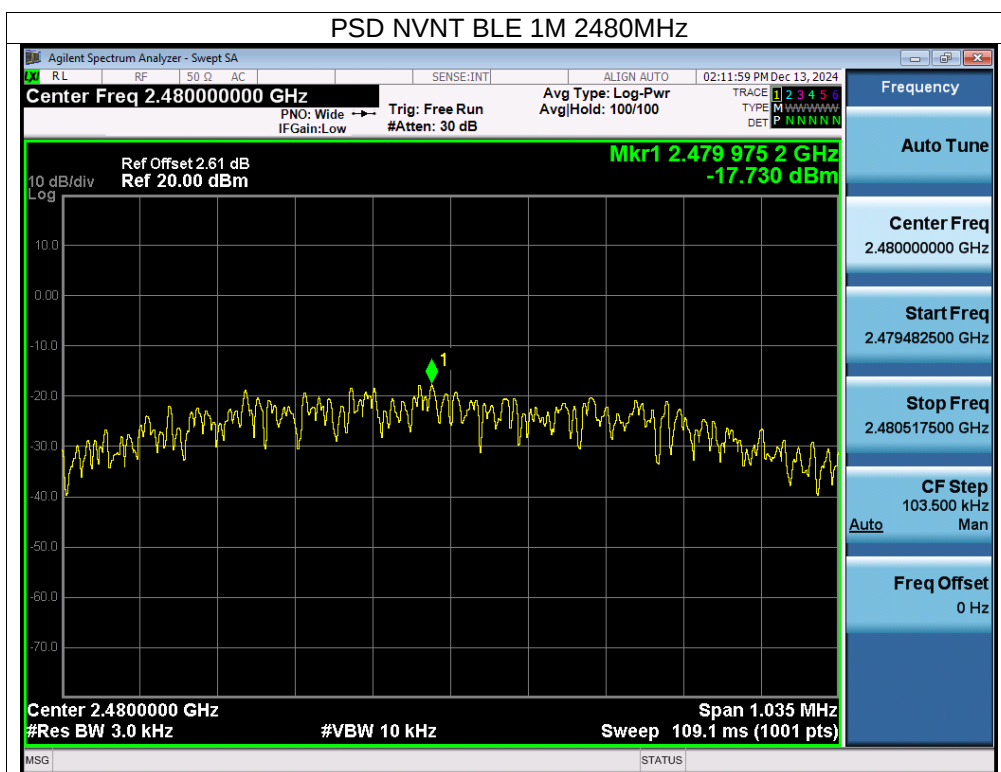

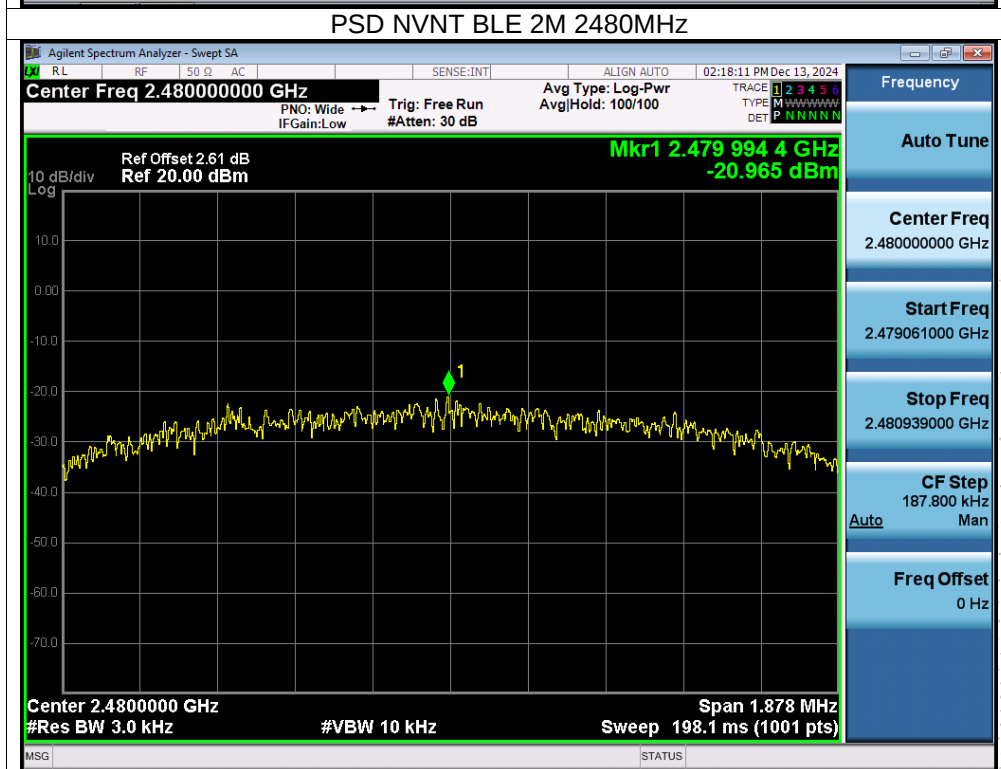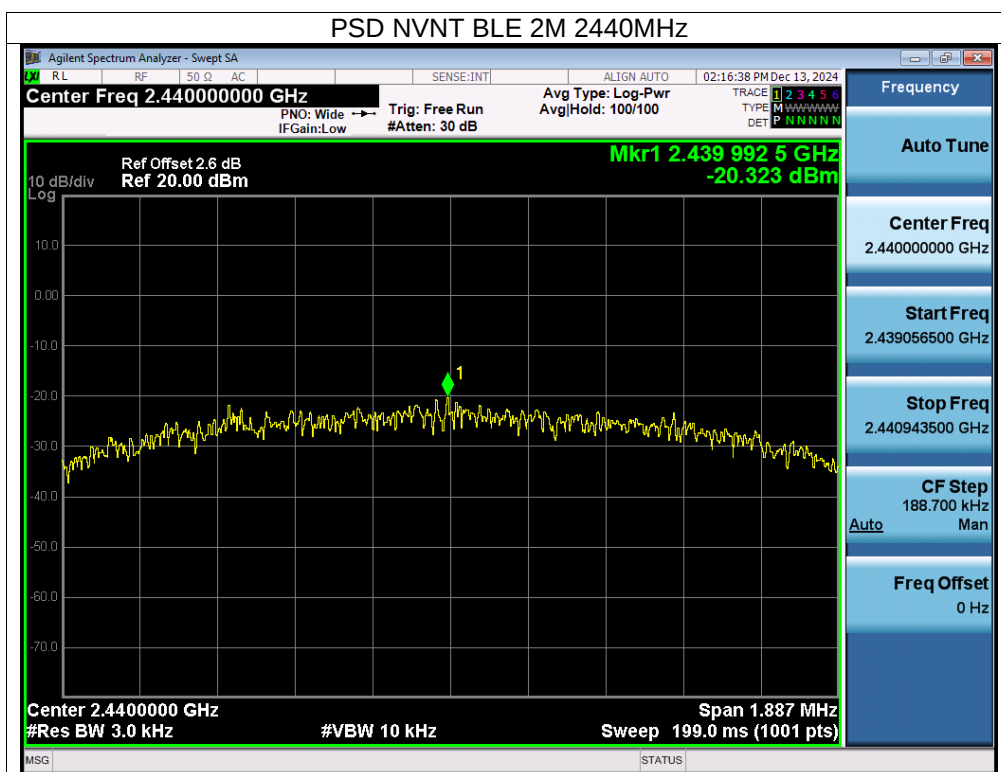

10. Bandwidth Test

10.1 Block Diagram Of Test Setup



10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (-6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 EUT operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

10.5 Test Result

Chip 1

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 3.7V

Mode	Frequency (MHz)	-6dB bandwidth (MHz)	Limit (kHz)	Result
GFSK(1Mbps)	2402	0.711	500	Pass
	2440	0.695	500	Pass
	2480	0.690	500	Pass
GFSK(2Mbps)	2402	1.181	500	Pass
	2440	1.256	500	Pass
	2480	1.206	500	Pass

2017