



FCC TEST REPORT FOR

Volla Systeme GmbH

Volla Phone Quintus

Test Model: Quintus

Prepared for : Volla Systeme GmbH
Address : Kolner StraBe 102, Remscheid Nordrhein-Westfalen, 42897, Germany

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei,
Shajing Street, Baoan District, Shenzhen, 518000, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : October 12, 2024
Number of tested samples : 2
Sample No. : A241010047-1, A241010047-2
Serial number : Prototype
Date of Test : October 12, 2024 ~ December 18, 2024
Date of Report : December 18, 2024



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: (+86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

**FCC PART 22/24/27 TEST REPORT****FCC Part 22H/Part 24E/Part 27**

Report Reference No. : **LCSA10114082EM**
FCC ID. : **2BMSM-QUINTUS**
Date of Issue..... : **December 18, 2024**

Testing Laboratory Name : **Shenzhen LCS Compliance Testing Laboratory Ltd.**
101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Address : **Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,**
518000, China

Applicant's name : **Volla Systeme GmbH**
Address : **Kolner StraBe 102, Remscheid Nordrhein-**
Westfalen, 42897, Germany

Test specification..... :
Standard : **FCC CFR Title 47 Part 2, Part 22H, Part 24E, Part 27**
TIA-603-E: 2016
KDB971168 D01 Power Meas License Digital Systems v03r01
Test Report Form No : **LCSEMC-1.0**
TRF Originator : **Shenzhen LCS Compliance Testing Laboratory Ltd.**
Master TRF : **Dated 2011-03**

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description..... : **Volla Phone Quintus**
Trade Mark..... : **Volla**
Test Model : **Quintus**
Rating..... : **Please Refer to Page 6**
Result..... : **Positive**

Compiled by:

Jack Liu/ Administrator

Supervised by:

Cary Luo/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

**TEST REPORT****Test Report No. : LCSA10114082EM**

December 18, 2024

Date of issue

EUT.....	: Volla Phone Quintus
Test Model.....	: Quintus
Applicant.....	: Volla Systeme GmbH
Address.....	: Kolner StraBe 102,Remscheid Nordrhein-Westfalen,42897,Germany
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Volla Systeme GmbH
Address.....	: Kolner StraBe 102,Remscheid Nordrhein-Westfalen,42897,Germany
Telephone.....	: /
Fax.....	: /
Factory.....	: Volla Systeme GmbH
Address.....	: Kolner StraBe 102,Remscheid Nordrhein-Westfalen,42897,Germany
Telephone.....	: /
Fax.....	: /

Test Result:**PASS**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	December 18, 2024	Initial Issue	---





Contents

1	TEST STANDARDS.....	6
2	SUMMARY.....	7
2.1	Product Description	7
2.2	Equipment under Test	11
2.3	Short description of the Equipment under Test (EUT)	11
2.4	Support equipment List	11
2.5	External I/O Cable	11
2.6	Normal Accessory setting	11
2.7	Test Sample	11
2.8	EUT configuration	12
2.9	Related Submittal(s) / Grant (s)	12
2.10	Modifications	12
2.11	General Test Conditions/Configurations	12
3	TEST ENVIRONMENT	13
3.1	Address of the test laboratory	13
3.2	Test Facility	13
3.3	Environmental conditions	13
3.4	Test Description	13
3.5	Equipments Used during the Test	21
3.6	Measurement uncertainty	22
4	TEST CONDITIONS AND RESULTS.....	23
4.1	Output Power	23
4.2	Peak-to-Average Ratio (PAR)	40
4.3	Occupied Bandwidth and Emission Bandwidth	41
4.4	Band Edge compliance	42
4.5	Spurious Emssion on Antenna Port	44
4.6	Radiated Spurious Emssion	48
4.7	Frequency Stability under Temperature & Voltage Variations	59
5	TEST SETUP PHOTOS OF THE EUT.....	67
6	EXTERNAL PHOTOS OF THE EUT	67
7	INTERNAL PHOTOS OF THE EUT	67





1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 22H](#): Cellular Radiotelephone Service

[FCC Part 24E](#): Broadband PCS

[FCC Part 27](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[TIA-603-E March 2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B](#): Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[ANSI C63.4:2014](#): Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

[FCC KDB971168 D01](#): Power Meas License Digital Systems v03r01



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2 SUMMARY

2.1 Product Description

The **Volla Systeme GmbH**'s Model: Quintus or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

EUT : Volla Phone Quintus

Test Model : Quintus

Ratings : For AC Adapter: Input:100-240V~, 50/60Hz, 1.5A
Adapter:Output: 5.0V = 3.0A 15.0W OR 9.0V = 3.0A 27.0W OR
12.0V=3.0A 36.0W OR 15.0V=3.0A 45.0W OR 20.0V=3.25A 65.0W
OR 11.0V=6.0A 66.0W
DC 3.87V by Rechargeable Li-ion Battery, 4600mAh

Hardware Version : /

Software Version : /

Bluetooth :

Frequency Range : 2402MHz~2480MHz

Channel Number : 79 channels for Bluetooth V5.2 (DSS)
40 channels for Bluetooth V5.2 (DTS)

Channel Spacing : 1MHz for Bluetooth V5.2 (DSS)
2MHz for Bluetooth V5.2 (DTS)

Modulation Type : GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V5.2 (DSS)
GFSK for Bluetooth V5.2 (DTS)

Bluetooth Version : V5.2

Antenna Description : PIFA Antenna(ANT7), -2.5dBi(Max.)

WIFI(2.4G Band) :

Frequency Range : 2412MHz~2462MHz

Channel Spacing : 5MHz

Channel Number : 11 Channels for 20MHz bandwidth (2412~2462MHz)
7 Channels for 40MHz bandwidth (2422~2452MHz)

Modulation Type : IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK)
IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ax: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)

Antenna Description : PIFA Antenna(ANT6), -4.5dBi(Max.)
PIFA Antenna(ANT7), -2.5dBi(Max.)

WIFI(5.2G Band) :

Frequency Range : 5180MHz~5240MHz

Channel Number : 4 Channels for 20MHz bandwidth(5180MHz~5240MHz)
2 channels for 40MHz bandwidth(5190MHz~5230MHz)
1 channels for 80MHz bandwidth(5210MHz)

Modulation Type : IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ax: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)

Antenna Description : PIFA Antenna(ANT6), -2.2dBi(Max.)
PIFA Antenna(ANT7), -3.8dBi(Max.)

WIFI(5.3G Band)



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Frequency Range : 5260MHz~5320MHz

Channel Number : 4 Channels for 20MHz bandwidth(5260MHz~5320MHz)
2 channels for 40MHz bandwidth(5270MHz~5310MHz)
1 channels for 80MHz bandwidth(5290MHz)

Modulation Type : IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ax: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)

Antenna Description : PIFA Antenna(ANT6), -1.5dBi(Max.)
PIFA Antenna(ANT7), -5.0dBi(Max.)

WIFI(5.5G Band)

Frequency Range : 5500MHz~5700MHz

Channel Number : 11 Channels for 20MHz bandwidth(5500MHz~5700MHz)
5 Channels for 40MHz bandwidth(5510MHz~5670MHz)
2 Channels for 80MHz bandwidth(5530MHz, 5610MHz)

Modulation Type : IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ax: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)

Antenna Description : PIFA Antenna(ANT6), -2.0dBi(Max.)
PIFA Antenna(ANT7), -7.0dBi(Max.)

WIFI(5.8G Band)

Frequency Range : 5745MHz~5825MHz

Channel Number : 5 channels for 20MHz bandwidth(5745MHz~5825MHz)
2 channels for 40MHz bandwidth(5755MHz~5795MHz)
1 channels for 80MHz bandwidth(5775MHz)

Modulation Type : IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ax: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)

Antenna Description : PIFA Antenna(ANT6), -2.0dBi(Max.)
PIFA Antenna(ANT7), -8.0dBi(Max.)

2G

Support Band : ☒ GSM 900 (EU-Band) ☒ DCS 1800 (EU-Band)
☒ GSM 850 (U.S.-Band) ☒ PCS 1900 (U.S.-Band)

Release Version : R8

GPRS Class : Class 12

EGPRS Class : Class 12

Type Of Modulation : GMSK for GSM/GPRS; GMSK/8PSK for EGPRS

Antenna Description : GSM 850: -3.5 dBi(ANT0), -6.0 dBi(ANT3)
PCS 1900: -1.1 dBi(ANT0), -2.0 dBi(ANT3)

3G

Support Band : ☒ WCDMA Band I (EU-Band)
☒ WCDMA Band II (U.S.-Band)
☒ WCDMA Band IV (U.S.-Band)
☒ WCDMA Band V (U.S.-Band)
☒ WCDMA Band VIII (EU-Band)

Release Version : R8



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Type Of Modulation : QPSK,16QAM

Antenna Description : PIFA Antenna
WCDMA Band II -1.1 dBi(ANT0), -2.0 dBi(ANT3)
WCDMA Band IV 1.4 dBi(ANT0), -2.0 dBi(ANT3)
WCDMA Band V -3.5 dBi(ANT0), -6.0 dBi(ANT3)

LTE :

Support Band : ☒E-UTRA Band 1(EU-Band)
☒E-UTRA Band 2(U.S.-Band)
☒E-UTRA Band 3(EU-Band)
☒E-UTRA Band 5(U.S.-Band)
☒E-UTRA Band 7(U.S.-Band)
☒E-UTRA Band 8(EU-Band)
☒E-UTRA Band 20(EU-Band)
☒E-UTRA Band 28(EU-Band)
☒E-UTRA Band 38(U.S.-Band)
☒E-UTRA Band 40(EU-Band)
☒E-UTRA Band 41(U.S.-Band)

LTE Release Version : R15

Type Of Modulation : QPSK/16QAM

Antenna Description : PIFA Antenna
For E-UTRA Band 2 -1.1 dBi(ANT0), -2.0 dBi(ANT3)
For E-UTRA Band 5 -3.5 dBi(ANT0),-1.8 dBi(ANT3)
For E-UTRA Band 7 -3.5 dBi(ANT0),-1.8 dBi(ANT2), -1.1 dBi(ANT3),-1.8 dBi(ANT5)
For E-UTRA Band 38 -2.0 dBi(ANT0),-1.1 dBi(ANT3),-1.8 dBi(ANT5)
For E-UTRA Band 41 -2.0 dBi(ANT0), -1.1 dBi(ANT2),-1.1 dBi(ANT3),-1.8 dBi(ANT5)

Power Class : Class 3

NR :

Operation Band : SA Band:
n1: UL: 1920MHz~1980MHz, DL: 2110MHz~2170MHz
n3: UL: 1710MHz~1785MHz, DL:1805MHz~1880MHz
n5: UL: 824MHz~849MHz, DL:869MHz~894MHz
n7: UL: 2500MHz~2570MHz, DL: 2620MHz~2690MHz
n8: UL: 880MHz~915MHz, DL: 925MHz~960MHz
n20: UL: 832MHz~862MHz, DL: 791MHz~821MHz
n28: UL: 703MHz~748MHz, DL: 758MHz~803MHz
n38: UL & DL: 2570MHz~2620MHz
n41: UL & DL: 2496MHz~2690MHz
n77: UL & DL: 3450 MHz ~ 3550 MHz&3700 MHz ~ 3980 MHz
n78: UL & DL: 3450 MHz ~ 3550 MHz&3700 MHz ~ 3800 MHz

Support Type : ☒SA

Subcarrier Spacing : 15KHz,30KHz

Modulation Type : DFT-BPSK, DFT-QPSK, DFT-16QAM, DFT-64QAM, DFT-256QAM
CP-QPSK, CP-16QAM, CP-64QAM, CP-256QAM

SCS and Channel Bandwidths : n5_SCS 15kHz: 5 MHz,10 MHz,15 MHz,20 MHz
n7_SCS 15kHz: 5 MHz,10 MHz,15 MHz,20 MHz,25 MHz,30 MHz,40 MHz,50MHz
n38_SCS 30kHz:10 MHz,15 MHz,20 MHz,25 MHz,30 MHz,40 MHz
n41_SCS 30kHz: 10 MHz, 15 MHz, 20 MHz, 30 MHz, 40 MHz, 50 MHz, 60 MHz, 70 MHz, 80 MHz,90 MHz, 100 MHz
n77_SCS 30kHz: 20 MHz, 50 MHz,100 MHz
n78_SCS 30kHz: 20 MHz, 50 MHz,100 MHz





Power Class

: NR Band 5/7/38/41:PC3
NR Band 77/78: PC2

Antenna Description

: PIFA Antenna
NR Band n5: -3.5 dBi(ANT0), -6.0 dBi(ANT3)
NR Band n7: -2.0 dBi(ANT0), -6.0 dBi(ANT3)
NR Band n38: -2.0 dBi(ANT0), -6.0 dBi(ANT3)
NR Band n41: -2.0 dBi(ANT0), -6.0 dBi(ANT3)
NR Band n77: -4.3 dBi(ANT1), -6.0 dBi(ANT2) , -6.0 dBi(ANT4),1.2 dBi(ANT5)
NR Band n78: -4.3 dBi(ANT1), -6.0 dBi(ANT2) , -6.0 dBi(ANT4),1.2 dBi(ANT5)

NFC

:

Operating Frequency

: 13.56MHz

Modulation Type

: ASK

Antenna Description

: Internal Antenna

Extreme temp. Tolerance

: -30°C to +50°C

Extreme vol. Limits

: 3.3VDC to 4.45VDC (nominal: 3.87VDC)





2.2 Equipment under Test

Power supply system utilised

Power supply voltage	:	☒ 120V/ 60 Hz	☐ 115V/60Hz
		☐ 12 V DC	☐ 24 V DC
		☐ Other (specified in blank below)	

2.3 Short description of the Equipment under Test (EUT)

2.4.1 GeneralDescription

Volla Phone Quintus is subscriber equipment in the BT/BLE/2.4GWIFI/5.2GWIFI/5.3GWIFI/5.5GWIFI/5.8GWIFI/GSM/WCDMA/LTE/NR system. GSM/GPRS/EGPRS frequency band is Band II/V. The HSPA/UMTS frequency band is Band II/IV/V. LTE frequency band is band 2/5/7/38/41. NR frequency band is band 5/7/38/41/77/78. The HSPA/UMTS frequency band II and Band IV and Band V test data included in this report. The Volla Phone Quintus implements such functions as RF signal receiving/transmitting, GSM/GPRS/EGPRS HSPA/UMTS/LTE/NR protocol processing, video MMS service and etc. Externally it provides SIM card interface.

2.4 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Shenzhen Huajin Electronics Co.,Ltd	Power Adapter	HJ-PD66W-US	---	FCC

2.5 External I/O Cable

I/O Port Description	Quantity	Cable
Type-C USB Port	1	USB Cable:unshielded
SIM Port	1	--

2.6 Normal Accessory setting

Fully charged battery was used during the test.

2.7 Test Sample

The application provides 2 samples to meet requirement;

Sample Number	Description
Sample 1(A241010047-1)	Engineer sample – continuous transmit
Sample 2(A241010047-2)	Normal sample – Intermittent transmit





2.8 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○ Power Cable	Length (m) :	/
	Shield :	/
	Detachable :	/
○ Multimeter	Manufacturer :	/
	Model No. :	/

2.9 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2BMSM-QUINTUS filing to comply with FCC Part 22, Part 24 and Part 27 Rules

2.10 Modifications

No modifications were implemented to meet testing criteria.

2.11 General Test Conditions/Configurations

2.10.1 Test Environment

EnvironmentParameter	SelectedValuesDuringTests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	DC 3.3V
	VN	DC 3.87V
	VH	DC 4.45V

NOTE:VL=lower extreme testvoltage VN=nominal voltage
VH=upper extreme testvoltage TN=normal temperature





3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen LCS Compliance Testing Laboratory Ltd

101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

The sites are constructed in conformance with the requirements of ANSI C63.4 (2014) and CISPR Publication 22.

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4 Test Description

NR Band 5 (824-849MHz pairedwith 869-894MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §22.913	FCC: ERP $\leq$ 7W.	Pass
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §22.917	$\leq -13\text{dBm}/1\% \cdot \text{EBW}$, In 1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: $\leq -13\text{dBm}/100\text{kHz}$, from 9kHz to 10th harmonics but outside authorized operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: $\leq -13\text{dBm}/100\text{kHz}$.	Pass
Frequency Stability	§2.1055, §22.355	$\leq \pm 2.5\text{ppm}$.	Pass
NOTE 1:For the verdict, the"N/A"denotes"not applicable",the"N/T"de notes "not tested".			



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**NR Band 7 (2500-2570MHz pairedwith 2620-2690MHz)**

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §27.50(h)	FCC: EIRP $\leq$ 2W.	Pass
Peak-AverageRatio	§2.1046, §27.50(a)	Limit $\leq$ 13dB	Pass
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §27.53(m)	More details specified in §27.53(m)(4)	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	More details specified in §27.53(m)(4)	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	More details specified in §27.53(m)(4)	Pass
Frequency Stability	§2.1055, §27.54	$\leq \pm 2.5\text{ppm}$.	Pass
NOTE 1:For the verdict, the“N/A”denotes“not applicable”,the“N/T”de notes “not tested”.			



**NR Band 38(2570~2620MHz)**

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)	EIRP $\leq$ 2W;	PASS
Peak-Average Ratio	§2.1046, §27.50	Limit $\leq$ 13dB	PASS
Modulation Characteristics	§2.1047	Digitalmodulation	N/A
Bandwidth	§2.1049	OBW: Nolimit. EBW: Nolimit.	PASS
BandEdges Compliance	§2.1051, §27.53(m)	$\leq$ -13dBm/1%*EBW,in1 MHz bands immediately outside and adjacent to The frequency block.	PASS
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	$\leq$ -13dBm/1MHz, from 9kHz to10th harmonics but outside authorized Operating frequency ranges.	PASS
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	PASS
Radiated spurious emission	§2.1053, §27.53(m)	$\leq$ -25dBm/1MHz.	PASS
NOTE 1:For the verdict, the“N/A”denotes“not applicable”,the“N/T”de notes “not tested”.			



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**NR Band 41(2496-2690MHz)**

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)	EIRP $\leq$ 2W;	PASS
Peak-Average Ratio	§2.1046, §27.50	Limit $\leq$ 13dB	PASS
Modulation Characteristics	§2.1047	Digitalmodulation	N/A
Bandwidth	§2.1049	OBW: Nolimit. EBW: Nolimit.	PASS
BandEdges Compliance	§2.1051, §27.53(m)	$\leq$ -13dBm/1%*EBW,in1 MHz bands immediately outside and adjacent to The frequency block.	PASS
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	$\leq$ -13dBm/1MHz, from 9kHz to10th harmonics but outside authorized Operating frequency ranges.	PASS
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	PASS
Radiated spurious emission	§2.1053, §27.53(m)	$\leq$ -25dBm/1MHz.	PASS
NOTE 1:For the verdict, the“N/A”denotes“not applicable”,the“N/T”de notes “not tested”.			



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**NR Band 77(3450-3550MHz)**

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Power Output Data	§2.1046, §27.50(k)	EIRP $\leq$ 1W;	PASS
Peak-Average Ratio	§2.1046, §27.50(k)	Limit $\leq$ 13dB	PASS
Modulation Characteristics	§2.1047	Digitalmodulation	N/A
Bandwidth	§2.1049	OBW: Nolimit. EBW: Nolimit.	PASS
BandEdges Compliance	§2.1051, §27.53(n) (2)	$\leq$ -13dBm/1%*EBW,in1 MHz bands immediately outside and adjacent to The frequency block.	PASS
Spurious Emission at Antenna Terminals	§2.1051, §27.53(n) (2)	$\leq$ -13dBm/1MHz, from 9kHz to10th harmonics but outside authorized Operating frequency ranges.	PASS
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	PASS
Radiated spurious emission	§2.1053, §27.53(n) (2)	$\leq$ -13dBm/1MHz.	PASS
NOTE 1:For the verdict, the“N/A”denotes“not applicable”,the“N/T”de notes “not tested”.			





NR Band 77(3700-3980MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Power Output Data	§2.1046, §27.50(j)	EIRP $\leq$ 1W;	PASS
Peak-Average Ratio	§2.1046, §27.50(j)	Limit $\leq$ 13dB	PASS
Modulation Characteristics	§2.1047	Digitalmodulation	N/A
Bandwidth	§2.1049	OBW: Nolimit. EBW: Nolimit.	PASS
BandEdges Compliance	§2.1051, §27.53(l) (2)	$\leq$ -13dBm/1%*EBW,in1 MHz bands immediately outside and adjacent to The frequency block.	PASS
Spurious Emission at Antenna Terminals	§2.1051, §27.53(l) (2)	$\leq$ -13dBm/1MHz, from 9kHz to10th harmonics but outside authorized Operating frequency ranges.	PASS
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	PASS
Radiated spurious emission	§2.1053, §27.53(l) (2)	$\leq$ -13dBm/1MHz.	PASS
NOTE 1:For the verdict, the“N/A”denotes“not applicable”,the“N/T”de notes “not tested”.			



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**NR Band 78(3450-3550MHz)**

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Power Output Data	§2.1046, §27.50(k)	$EIRP \leq 1W$;	PASS
Peak-Average Ratio	§2.1046, §27.50(k)	Limit $\leq 13dB$	PASS
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: Nolimit. EBW: Nolimit.	PASS
BandEdges Compliance	§2.1051, §27.53(n) (2)	$\leq -13dBm/1\%*EBW$, in 1 MHz bands immediately outside and adjacent to The frequency block.	PASS
Spurious Emission at Antenna Terminals	§2.1051, §27.53(n) (2)	$\leq -13dBm/1MHz$, from 9kHz to 10th harmonics but outside authorized Operating frequency ranges.	PASS
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	PASS
Radiated spurious emission	§2.1053, §27.53(n) (2)	$\leq -13dBm/1MHz$.	PASS
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".			



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**NR Band 78(3700-3800MHz)**

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Power Output Data	§2.1046, §27.50(j)	EIRP $\leq$ 1W;	PASS
Peak-Average Ratio	§2.1046, §27.50(j)	Limit $\leq$ 13dB	PASS
Modulation Characteristics	§2.1047	Digitalmodulation	N/A
Bandwidth	§2.1049	OBW: Nolimit. EBW: Nolimit.	PASS
BandEdges Compliance	§2.1051, §27.53(l) (2)	$\leq$ -13dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to The frequency block.	PASS
Spurious Emission at Antenna Terminals	§2.1051, §27.53(l) (2)	$\leq$ -13dBm/1MHz, from 9kHz to 10th harmonics but outside authorized Operating frequency ranges.	PASS
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	PASS
Radiated spurious emission	§2.1053, §27.53(l) (2)	$\leq$ -13dBm/1MHz.	PASS
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".			



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3.5 Equipments Used during the Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Meter	R&S	NRVS	100444	2024-06-06	2025-06-05
2	Power Sensor	R&S	NRV-Z81	100458	2024-06-06	2025-06-05
3	Power Sensor	R&S	NRV-Z32	10057	2024-06-06	2025-06-05
4	LTE Test Software	Tonscend	JS1120-1	N/A	N/A	N/A
5	RF Control Unit	Tonscend	JS0806-1	158060009	2023-11-09 2024-11-08	2024-11-08 2025-11-07
6	MXA Signal Analyzer	Agilent	N9020A	MY51250905	2023-11-09 2024-11-08	2024-11-08 2025-11-07
7	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2024-06-06	2025-06-05
8	DC Power Supply	Agilent	E3642A	N/A	2023-11-09 2024-11-08	2024-11-08 2025-11-07
9	EMI Test Software	AUDIX	E3	/	N/A	N/A
10	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2024-06-06	2025-06-05
11	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
12	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2024-07-13	2027-07-12
13	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2024-08-03	2027-08-02
14	By-log Antenna	SCHWARZBECK	VULB9163	9163-471	2024-08-03	2027-08-02
15	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2024-07-13	2027-07-12
16	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1926	2024-07-13	2027-07-12
17	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2024-07-13	2027-07-12
18	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	792	2024-07-13	2027-07-12
19	Broadband Preamplifier	SCHWARZBECK	BBV9719	9719-025	2024-07-30	2025-07-29
20	EMI Test Receiver	R&S	ESR 7	101181	2024-06-06	2025-06-05
21	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2024-06-06	2025-06-05
22	Low-frequency amplifier	SchwarzZBECK	BBV9745	00253	2023-11-09 2024-11-08	2024-11-08 2025-11-07
23	High-frequency amplifier	JS Denki Pte	PA0118-43	JSPA21009	2023-11-09 2024-11-08	2024-11-08 2025-11-07
24	6dB Attenuator	/	100W/6dB	1172040	2024-06-06	2025-06-05
26	3dB Attenuator	/	2N-3dB	/	2023-11-09 2024-11-08	2024-11-08 2025-11-07
27	Temperature & Humidity Chamber	Baro	/	/	2024-06-12	2025-06-11
28	EMI Test Software	Farad	EZ	/	N/A	N/A
29	RADIO COMMUNICATION TESTER	R&S	CMU 200	105988	2024-06-06	2025-06-05
30	RADIO COMMUNICATION TESTER	Anritsu	MT8821C	6262257865	2024-06-06	2025-06-05
31	RADIO COMMUNICATION TESTER	Anritsu	MT8000A	6262208376	2024-10-08	2025-10-07
32	Signal Analyzer	Anritsu	MS2840A	6201591940	2024-06-06	2025-06-05
33	Signal Generator	Anritsu	MG3710E	6262204211	2024-06-06	2025-06-05
34	Signal Generator	Anritsu	MG3692C	222804	2024-01-10	2025-01-09
35	Antenna Mast	Max-Full	MFA-515BSN	1308572	N/A	N/A



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3.6 Measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to ETSI TR 100 028 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics" and is documented in the Shenzhen LCS Compliance Testing Laboratory Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen LCS Compliance Testing Laboratory Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	3.10 dB	(1)
Radiated Emission	1~18GHz	3.80 dB	(1)
Radiated Emission	18~40GHz	3.90 dB	(1)
Conducted Disturbance	0.15~30MHz	1.63 dB	(1)
Conducted Power	9KHz~18GHz	0.61 dB	(1)
Spurious RF Conducted Emission	9KHz~40GHz	1.22 dB	(1)
Band Edge Compliance of RF Emission	9KHz~40GHz	1.22 dB	(1)
Occupied Bandwidth	9KHz~40GHz	-	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.





4 TEST CONDITIONS AND RESULTS


4.1 Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via Anritsu Digital Radio Communication tester (MT8000A) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

4.1.1. Conducted Output Power

TEST CONFIGURATION

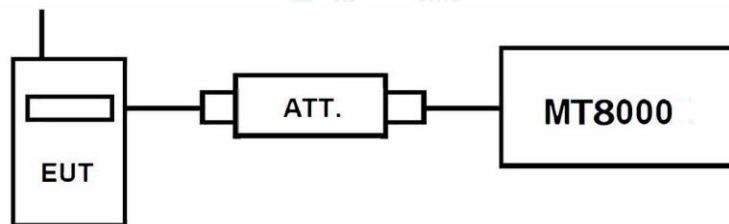

TEST PROCEDURE

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a MT8000A by an Att.
- EUT Communicate with MT8000A then selects a channel for testing.
- Add a correction factor to the display MT8000A, and then test.

TEST RESULTS

Remark:

- We were tested all RB Configuration refer 3GPP TS138 521 for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78; recorded worst case for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78.
- For NR Band 5, please refer to Appendix M: Section M.1
- For NR Band 7, please refer to Appendix N: Section N.1
- For NR Band 38, please refer to Appendix O: Section O.1
- For NR Band 41, please refer to Appendix P: Section P.1
- NR Band 77, please refer to Appendix Q&R: Section Q&R.1
- NR Band 78, please refer to Appendix S&T: Section S&T.1





4.1.2. Radiated Output Power

LIMIT

This is the test for the maximum radiated power from the EUT.


Per §22.913(2) Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

Per Part 27.50(h) (2) specifies Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

FCC section 27.50(j) (3), for mobile, and portable (hand-held) stations operating in the 3700-3980 MHz band are limited to 1 watt EIRP.

FCC section 27.50(k) (3), Mobile devices are limited to 1Watt (30 dBm) EIRP in the 3450-3550 MHz band.

TEST CONFIGURATION

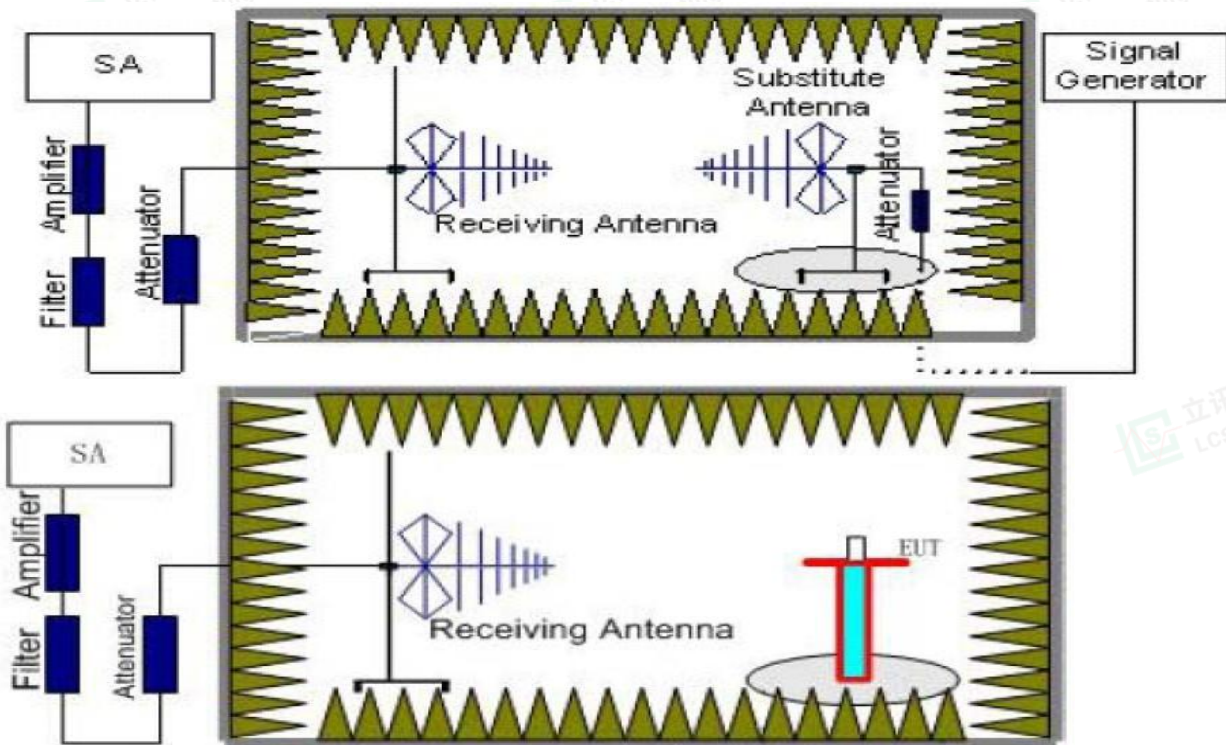

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).





4. The EUT shall be replaced by a substitution antenna. In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
 $Power(EIRP) = P_{Mea} + P_{Ag} - P_{cl} + G_a$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.

TEST RESULTS

Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS138 521 for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78; recorded worst case for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$
3. $ERP = EIRP - 2.15dBi$ as EIRP by subtracting the gain of the dipole.
4. Margin = Emission Level - Limit
5. We tested the worst-case records for H and V directions, and only the worst-case records for V direction were recorded in the report.

NR FDD Band 5_Channel Bandwidth 5MHz_DFT-BPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	Correction (dB)	P_{Aq} (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-15.67	3.45	8.45	2.15	33.79	20.97	38.45	-17.48	V
836.5	-16.47	3.49	8.45	2.15	33.85	20.19	38.45	-18.26	V
846.5	-16.43	3.55	8.36	2.15	33.88	20.11	38.45	-18.34	V

NR FDD Band 5_Channel Bandwidth 10MHz_DFT-BPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	Correction (dB)	P_{Aq} (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.0	-15.63	3.45	8.45	2.15	33.79	21.01	38.45	-17.44	V
836.5	-16.18	3.49	8.45	2.15	33.85	20.48	38.45	-17.97	V
844.0	-16.41	3.55	8.36	2.15	33.88	20.13	38.45	-18.32	V

NR FDD Band 5_Channel Bandwidth 15MHz_DFT-BPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	Correction (dB)	P_{Aq} (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
831.5	-15.53	3.45	8.45	2.15	33.79	21.11	38.45	-17.34	V
836.5	-15.77	3.49	8.45	2.15	33.85	20.89	38.45	-17.56	V
841.5	-16.09	3.55	8.36	2.15	33.88	20.45	38.45	-18.00	V





NR FDD Band 5_Channel Bandwidth 20MHz_ DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Aq} (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
834	-16.02	3.45	8.45	2.15	33.79	20.62	38.45	-17.83	V
836.5	-15.50	3.49	8.45	2.15	33.85	21.16	38.45	-17.29	V
839	-15.97	3.55	8.36	2.15	33.88	20.57	38.45	-17.88	V

NR FDD Band 5_Channel Bandwidth 5MHz_ CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Aq} (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-16.65	3.45	8.45	2.15	33.79	19.99	38.45	-18.46	V
836.5	-17.38	3.49	8.45	2.15	33.85	19.28	38.45	-19.17	V
846.5	-17.06	3.55	8.36	2.15	33.88	19.48	38.45	-18.97	V

NR FDD Band 5_Channel Bandwidth 10MHz_ CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Aq} (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.0	-17.49	3.45	8.45	2.15	33.79	19.15	38.45	-19.30	V
836.5	-16.78	3.49	8.45	2.15	33.85	19.88	38.45	-18.57	V
844.0	-17.29	3.55	8.36	2.15	33.88	19.25	38.45	-19.20	V

NR FDD Band 5_Channel Bandwidth 15MHz_ CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Aq} (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
831.5	-16.74	3.45	8.45	2.15	33.79	19.90	38.45	-18.55	V
836.5	-17.33	3.49	8.45	2.15	33.85	19.33	38.45	-19.12	V
841.5	-16.76	3.55	8.36	2.15	33.88	19.78	38.45	-18.67	V

NR FDD Band 5_Channel Bandwidth 20MHz_ CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Aq} (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
834	-17.48	3.45	8.45	2.15	33.79	19.16	38.45	-19.29	V
836.5	-17.39	3.49	8.45	2.15	33.85	19.27	38.45	-19.18	V
839	-17.10	3.55	8.36	2.15	33.88	19.44	38.45	-19.01	V

NR FDD Band 7_Channel Bandwidth 5MHz_ DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2502.5	-18.55	4.32	6.80	36.14	20.07	33.01	-12.94	V
2535	-18.47	4.32	6.61	36.17	19.99	33.01	-13.02	V
2567.5	-18.92	4.33	6.57	36.22	19.54	33.01	-13.47	V





NR FDD Band 7_Channel Bandwidth 10MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2505.0	-18.18	4.32	6.80	36.14	20.44	33.01	-12.57	V
2535	-18.63	4.32	6.61	36.17	19.83	33.01	-13.18	V
2565.0	-18.68	4.33	6.57	36.22	19.78	33.01	-13.23	V

NR FDD Band 7_Channel Bandwidth 15MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2507.5	-18.34	4.32	6.80	36.14	20.28	33.01	-12.73	V
2535	-18.45	4.32	6.61	36.17	20.01	33.01	-13.00	V
2562.5	-18.96	4.33	6.57	36.22	19.50	33.01	-13.51	V

NR FDD Band 7_Channel Bandwidth 20MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2510.0	-18.73	4.32	6.80	36.14	19.89	33.01	-13.12	V
2535	-18.43	4.32	6.61	36.17	20.03	33.01	-12.98	V
2560.0	-18.97	4.33	6.57	36.22	19.49	33.01	-13.52	V

NR FDD Band 7_Channel Bandwidth 25MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2512.5	-19.42	4.32	6.80	36.14	19.20	33.01	-13.81	V
2535	-19.36	4.32	6.61	36.17	19.10	33.01	-13.91	V
2557.5	-19.90	4.33	6.57	36.22	18.56	33.01	-14.45	V

NR FDD Band 7_Channel Bandwidth 30MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2515.0	-19.64	4.32	6.80	36.14	18.98	33.01	-14.03	V
2535	-19.34	4.32	6.61	36.17	19.12	33.01	-13.89	V
2555.0	-19.20	4.33	6.57	36.22	19.26	33.01	-13.75	V

NR FDD Band 7_Channel Bandwidth 40MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2520.0	-19.60	4.32	6.80	36.14	19.02	33.01	-13.99	V
2535	-19.65	4.32	6.61	36.17	18.81	33.01	-14.20	V
2550.0	-19.01	4.33	6.57	36.22	19.45	33.01	-13.56	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NR FDD Band 7_Channel Bandwidth 50MHz_ DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2525	-19.70	4.32	6.80	36.14	18.92	33.01	-14.09	V
2535	-19.13	4.32	6.61	36.17	19.33	33.01	-13.68	V
2545	-19.53	4.33	6.57	36.22	18.93	33.01	-14.08	V

NR FDD Band 7_Channel Bandwidth 5MHz_ CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2502.5	-19.42	4.32	6.80	36.14	19.20	33.01	-13.81	V
2535	-19.82	4.32	6.61	36.17	18.64	33.01	-14.37	V
2567.5	-18.93	4.33	6.57	36.22	19.53	33.01	-13.48	V

NR FDD Band 7_Channel Bandwidth 10MHz_ CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2505.0	-19.68	4.32	6.80	36.14	18.94	33.01	-14.07	V
2535	-19.31	4.32	6.61	36.17	19.15	33.01	-13.86	V
2565.0	-19.80	4.33	6.57	36.22	18.66	33.01	-14.35	V

NR FDD Band 7_Channel Bandwidth 15MHz_ CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2507.5	-19.11	4.32	6.80	36.14	19.51	33.01	-13.50	V
2535	-19.08	4.32	6.61	36.17	19.38	33.01	-13.63	V
2562.5	-19.06	4.33	6.57	36.22	19.40	33.01	-13.61	V

NR FDD Band 7_Channel Bandwidth 20MHz_ CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2510.0	-19.39	4.32	6.80	36.14	19.23	33.01	-13.78	V
2535	-19.31	4.32	6.61	36.17	19.15	33.01	-13.86	V
2560.0	-19.54	4.33	6.57	36.22	18.92	33.01	-14.09	V

NR FDD Band 7_Channel Bandwidth 25MHz_ CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2512.5	-18.99	4.32	6.80	36.14	19.63	33.01	-13.38	V
2535	-19.86	4.32	6.61	36.17	18.60	33.01	-14.41	V
2557.5	-19.35	4.33	6.57	36.22	19.11	33.01	-13.90	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NR FDD Band 7_Channel Bandwidth 30MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2515.0	-19.85	4.32	6.80	36.14	18.77	33.01	-14.24	V
2535	-19.71	4.32	6.61	36.17	18.75	33.01	-14.26	V
2555.0	-19.69	4.33	6.57	36.22	18.77	33.01	-14.24	V

NR FDD Band 7_Channel Bandwidth 40MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2520.0	-19.60	4.32	6.80	36.14	19.02	33.01	-13.99	V
2535	-18.91	4.32	6.61	36.17	19.55	33.01	-13.46	V
2550.0	-19.26	4.33	6.57	36.22	19.20	33.01	-13.81	V

NR FDD Band 7_Channel Bandwidth 50MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2525	-19.47	4.32	6.80	36.14	19.15	33.01	-13.86	V
2535	-19.40	4.32	6.61	36.17	19.06	33.01	-13.95	V
2545	-18.91	4.33	6.57	36.22	19.55	33.01	-13.46	V

NR FDD Band 38_Channel Bandwidth 10MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2575	-18.44	4.34	6.88	36.20	20.30	33.01	-12.71	V
2595	-18.70	4.36	6.55	36.26	19.75	33.01	-13.26	V
2615	-18.72	4.47	6.35	36.50	19.66	33.01	-13.35	V

NR FDD Band 38_Channel Bandwidth 15MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2577.5	-18.70	4.34	6.88	36.20	20.04	33.01	-12.97	V
2595	-18.93	4.36	6.55	36.26	19.52	33.01	-13.49	V
2612.5	-18.63	4.47	6.35	36.50	19.75	33.01	-13.26	V

NR FDD Band 38_Channel Bandwidth 20MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2580.0	-18.10	4.34	6.88	36.20	20.64	33.01	-12.37	V
2595	-18.81	4.36	6.55	36.26	19.64	33.01	-13.37	V
2610.0	-18.16	4.47	6.35	36.50	20.22	33.01	-12.79	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**NR FDD Band 38_Channel Bandwidth 25MHz_DFT-BPSK**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2582.5	-18.00	4.34	6.88	36.20	20.74	33.01	-12.27	V
2595	-18.24	4.36	6.55	36.26	20.21	33.01	-12.80	V
2607.5	-18.45	4.47	6.35	36.50	19.93	33.01	-13.08	V

NR FDD Band 38_Channel Bandwidth 30MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2585.0	-19.29	4.34	6.88	36.20	19.45	33.01	-13.56	V
2595	-18.95	4.36	6.55	36.26	19.50	33.01	-13.51	V
2605.0	-19.10	4.47	6.35	36.50	19.28	33.01	-13.73	V

NR FDD Band 38_Channel Bandwidth 40MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2590	-19.65	4.34	6.88	36.20	19.09	33.01	-13.92	V
2595	-19.87	4.36	6.55	36.26	18.58	33.01	-14.43	V
2600	-18.95	4.47	6.35	36.50	19.43	33.01	-13.58	V

NR FDD Band 38_Channel Bandwidth 10MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2575	-19.11	4.34	6.88	36.20	19.63	33.01	-13.38	V
2595	-19.29	4.36	6.55	36.26	19.16	33.01	-13.85	V
2615	-19.54	4.47	6.35	36.50	18.84	33.01	-14.17	V

NR FDD Band 38_Channel Bandwidth 15MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2577.5	-19.40	4.34	6.88	36.20	19.34	33.01	-13.67	V
2595	-19.63	4.36	6.55	36.26	18.82	33.01	-14.19	V
2612.5	-19.65	4.47	6.35	36.50	18.73	33.01	-14.28	V

NR FDD Band 38_Channel Bandwidth 20MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2580.0	-18.23	4.34	6.88	36.20	20.51	33.01	-12.50	V
2595	-18.87	4.36	6.55	36.26	19.58	33.01	-13.43	V
2610.0	-18.97	4.47	6.35	36.50	19.41	33.01	-13.60	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**NR FDD Band 38_Channel Bandwidth 25MHz_CP-16QAM**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2582.5	-18.68	4.34	6.88	36.20	20.06	33.01	-12.95	V
2595	-18.66	4.36	6.55	36.26	19.79	33.01	-13.22	V
2607.5	-18.86	4.47	6.35	36.50	19.52	33.01	-13.49	V

NR FDD Band 38_Channel Bandwidth 30MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2585.0	-18.66	4.34	6.88	36.20	20.08	33.01	-12.93	V
2595	-18.49	4.36	6.55	36.26	19.96	33.01	-13.05	V
2605.0	-18.56	4.47	6.35	36.50	19.82	33.01	-13.19	V

NR FDD Band 38_Channel Bandwidth 40MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2590	-18.84	4.34	6.88	36.20	19.90	33.01	-13.11	V
2595	-18.47	4.36	6.55	36.26	19.98	33.01	-13.03	V
2600	-18.09	4.47	6.35	36.50	20.29	33.01	-12.72	V

NR FDD Band 41_Channel Bandwidth 10MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2501.01	-18.15	4.32	6.80	36.13	20.46	33.01	-12.55	V
2592.99	-18.09	4.36	6.55	36.26	20.36	33.01	-12.65	V
2685.00	-18.42	4.51	6.37	36.54	19.98	33.01	-13.03	V

NR FDD Band 41_Channel Bandwidth 15MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2503.50	-18.16	4.32	6.80	36.13	20.45	33.01	-12.56	V
2592.99	-18.25	4.36	6.55	36.26	20.20	33.01	-12.81	V
2682.48	-18.11	4.51	6.37	36.54	20.29	33.01	-12.72	V

NR FDD Band 41_Channel Bandwidth 20MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2506.02	-18.03	4.32	6.80	36.13	20.58	33.01	-12.43	V
2592.99	-18.29	4.36	6.55	36.26	20.16	33.01	-12.85	V
2679.99	-18.94	4.51	6.37	36.54	19.46	33.01	-13.55	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NR FDD Band 41_Channel Bandwidth 30MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2511.00	-18.64	4.32	6.80	36.13	19.97	33.01	-13.04	V
2592.99	-18.97	4.36	6.55	36.26	19.48	33.01	-13.53	V
2674.98	-18.37	4.51	6.37	36.54	20.03	33.01	-12.98	V

NR FDD Band 41_Channel Bandwidth 40MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2516.01	-19.11	4.32	6.80	36.13	19.50	33.01	-13.51	V
2592.99	-19.68	4.36	6.55	36.26	18.77	33.01	-14.24	V
2670.00	-19.14	4.51	6.37	36.54	19.26	33.01	-13.75	V

NR FDD Band 41_Channel Bandwidth 50MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2521.02	-18.91	4.32	6.80	36.13	19.70	33.01	-13.31	V
2592.99	-19.23	4.36	6.55	36.26	19.22	33.01	-13.79	V
2664.99	-19.44	4.51	6.37	36.54	18.96	33.01	-14.05	V

NR FDD Band 41_Channel Bandwidth 60MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2526.00	-19.84	4.32	6.80	36.13	18.77	33.01	-14.24	V
2592.99	-19.80	4.36	6.55	36.26	18.65	33.01	-14.36	V
2659.98	-19.18	4.51	6.37	36.54	19.22	33.01	-13.79	V

NR FDD Band 41_Channel Bandwidth 70MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2531.01	-19.73	4.32	6.80	36.13	18.88	33.01	-14.13	V
2592.99	-19.18	4.36	6.55	36.26	19.27	33.01	-13.74	V
2655.00	-19.84	4.51	6.37	36.54	18.56	33.01	-14.45	V

NR FDD Band 41_Channel Bandwidth 80MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2536.02	-18.87	4.32	6.80	36.13	19.74	33.01	-13.27	V
2592.99	-18.20	4.36	6.55	36.26	20.25	33.01	-12.76	V
2649.99	-18.81	4.51	6.37	36.54	19.59	33.01	-13.42	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NR FDD Band 41_Channel Bandwidth 90MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2541.00	-18.64	4.32	6.80	36.13	19.97	33.01	-13.04	V
2592.99	-18.23	4.36	6.55	36.26	20.22	33.01	-12.79	V
2644.98	-18.14	4.51	6.37	36.54	20.26	33.01	-12.75	V

NR FDD Band 41_Channel Bandwidth 100MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2546.01	-18.67	4.32	6.80	36.13	19.94	33.01	-13.07	V
2592.99	-18.90	4.36	6.55	36.26	19.55	33.01	-13.46	V
2640	-18.07	4.51	6.37	36.54	20.33	33.01	-12.68	V

NR FDD Band 41_Channel Bandwidth 10MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2501.01	-18.13	4.32	6.80	36.13	20.48	33.01	-12.53	V
2592.99	-18.22	4.36	6.55	36.26	20.23	33.01	-12.78	V
2685.00	-18.02	4.51	6.37	36.54	20.38	33.01	-12.63	V

NR FDD Band 41_Channel Bandwidth 15MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2503.50	-19.81	4.32	6.80	36.13	18.80	33.01	-14.21	V
2592.99	-19.50	4.36	6.55	36.26	18.95	33.01	-14.06	V
2682.48	-19.76	4.51	6.37	36.54	18.64	33.01	-14.37	V

NR FDD Band 41_Channel Bandwidth 20MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2506.02	-19.02	4.32	6.80	36.13	19.59	33.01	-13.42	V
2592.99	-19.44	4.36	6.55	36.26	19.01	33.01	-14.00	V
2679.99	-18.99	4.51	6.37	36.54	19.41	33.01	-13.60	V

NR FDD Band 41_Channel Bandwidth 30MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2511.00	-19.42	4.32	6.80	36.13	19.19	33.01	-13.82	V
2592.99	-19.21	4.36	6.55	36.26	19.24	33.01	-13.77	V
2674.98	-19.09	4.51	6.37	36.54	19.31	33.01	-13.70	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**NR FDD Band 41_Channel Bandwidth 40MHz_CP-16QAM**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2516.01	-19.39	4.32	6.80	36.13	19.22	33.01	-13.79	V
2592.99	-19.24	4.36	6.55	36.26	19.21	33.01	-13.80	V
2670.00	-19.48	4.51	6.37	36.54	18.92	33.01	-14.09	V

NR FDD Band 41_Channel Bandwidth 50MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2521.02	-18.59	4.32	6.80	36.13	20.02	33.01	-12.99	V
2592.99	-18.41	4.36	6.55	36.26	20.04	33.01	-12.97	V
2664.99	-18.42	4.51	6.37	36.54	19.98	33.01	-13.03	V

NR FDD Band 41_Channel Bandwidth 60MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2526.00	-18.88	4.32	6.80	36.13	19.73	33.01	-13.28	V
2592.99	-18.62	4.36	6.55	36.26	19.83	33.01	-13.18	V
2659.98	-18.49	4.51	6.37	36.54	19.91	33.01	-13.10	V

NR FDD Band 41_Channel Bandwidth 70MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2531.01	-18.10	4.32	6.80	36.13	20.51	33.01	-12.50	V
2592.99	-18.69	4.36	6.55	36.26	19.76	33.01	-13.25	V
2655.00	-18.70	4.51	6.37	36.54	19.70	33.01	-13.31	V

NR FDD Band 41_Channel Bandwidth 80MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2536.02	-18.80	4.32	6.80	36.13	19.81	33.01	-13.20	V
2592.99	-18.61	4.36	6.55	36.26	19.84	33.01	-13.17	V
2649.99	-18.12	4.51	6.37	36.54	20.28	33.01	-12.73	V

NR FDD Band 41_Channel Bandwidth 90MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2541.00	-19.31	4.32	6.80	36.13	19.30	33.01	-13.71	V
2592.99	-19.16	4.36	6.55	36.26	19.29	33.01	-13.72	V
2644.98	-19.55	4.51	6.37	36.54	18.85	33.01	-14.16	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NR FDD Band 41_Channel Bandwidth 100MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2546.01	-19.02	4.32	6.80	36.13	19.59	33.01	-13.42	V
2592.99	-19.36	4.36	6.55	36.26	19.09	33.01	-13.92	V
2640	-19.54	4.51	6.37	36.54	18.86	33.01	-14.15	V

NR FDD Band 77(3450-3550 MHz)_Channel Bandwidth 20MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3460.02	-18.30	4.62	7.42	37.02	21.52	30.00	-8.48	V
3499.98	-18.66	4.68	7.52	37.21	21.39	30.00	-8.61	V
3540.00	-18.78	4.71	7.61	37.25	21.37	30.00	-8.63	V

NR FDD Band 77(3450-3550 MHz)_Channel Bandwidth 50MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3475.02	-18.58	4.62	7.42	37.02	21.24	30.00	-8.76	V
3499.98	-18.85	4.68	7.52	37.21	21.20	30.00	-8.80	V
3525.00	-18.95	4.71	7.61	37.25	21.20	30.00	-8.80	V

NR FDD Band 77(3450-3550 MHz)_Channel Bandwidth 100MHz_DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3499.98	-18.38	4.68	7.52	37.21	21.67	30.00	-8.33	V

NR FDD Band 77(3450-3550 MHz)_Channel Bandwidth 20MHz_CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3460.02	-18.71	4.62	7.42	37.02	21.11	30.00	-8.89	V
3499.98	-18.26	4.68	7.52	37.21	21.79	30.00	-8.21	V
3540.00	-18.47	4.71	7.61	37.25	21.68	30.00	-8.32	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**NR FDD Band 77(3450-3550 MHz)_Channel Bandwidth 50MHz_ CP-16QAM**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3475.02	-18.69	4.62	7.42	37.02	21.13	30.00	-8.87	V
3499.98	-18.53	4.68	7.52	37.21	21.52	30.00	-8.48	V
3525.00	-18.24	4.71	7.61	37.25	21.91	30.00	-8.09	V

NR FDD Band 77(3450-3550 MHz)_Channel Bandwidth 100MHz_ CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3499.98	-18.26	4.68	7.52	37.21	21.79	30.00	-8.21	V

NR FDD Band 77(3700-3980 MHz)_Channel Bandwidth 20MHz_ DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3710.01	-18.26	4.71	7.68	37.32	22.03	30.00	-7.97	V
3840.00	-18.74	4.74	7.71	37.36	21.59	30.00	-8.41	V
3969.99	-18.87	4.77	7.74	37.46	21.56	30.00	-8.44	V

NR FDD Band 77(3700-3980 MHz)_Channel Bandwidth 50MHz_ DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3725.01	-18.89	4.71	7.68	37.32	21.40	30.00	-8.60	V
3840.00	-18.61	4.74	7.71	37.36	21.72	30.00	-8.28	V
3954.99	-18.41	4.77	7.74	37.46	22.02	30.00	-7.98	V

NR FDD Band 77(3700-3980 MHz)_Channel Bandwidth 100MHz_ DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3750	-18.59	4.71	7.68	37.32	21.70	30.00	-8.30	V
3840	-18.74	4.74	7.71	37.36	21.59	30.00	-8.41	V
3930	-18.18	4.77	7.74	37.46	22.25	30.00	-7.75	V

NR FDD Band 77(3700-3980 MHz)_Channel Bandwidth 20MHz_ CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3710.01	-18.79	4.71	7.68	37.32	21.50	30.00	-8.50	V
3840.00	-18.01	4.74	7.71	37.36	22.32	30.00	-7.68	V
3969.99	-18.32	4.77	7.74	37.46	22.11	30.00	-7.89	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**NR FDD Band 77(3700-3980 MHz)_Channel Bandwidth 50MHz_ CP-16QAM**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3725.01	-18.53	4.71	7.68	37.32	21.76	30.00	-8.24	V
3840.00	-18.24	4.74	7.71	37.36	22.09	30.00	-7.91	V
3954.99	-18.77	4.77	7.74	37.46	21.66	30.00	-8.34	V

NR FDD Band 77(3700-3980 MHz)_Channel Bandwidth 100MHz_ CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3750	-18.91	4.71	7.68	37.32	21.38	30.00	-8.62	V
3840	-18.40	4.74	7.71	37.36	21.93	30.00	-8.07	V
3930	-18.24	4.77	7.74	37.46	22.19	30.00	-7.81	V

NR FDD Band 78(3450-3550 MHz)_Channel Bandwidth 20MHz_ DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3460.02	-18.75	4.62	7.42	37.02	21.07	30.00	-8.93	V
3499.98	-18.48	4.68	7.52	37.21	21.57	30.00	-8.43	V
3540.00	-18.46	4.71	7.61	37.25	21.69	30.00	-8.31	V

NR FDD Band 78(3450-3550 MHz)_Channel Bandwidth 50MHz_ DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3475.02	-18.74	4.62	7.42	37.02	21.08	30.00	-8.92	V
3499.98	-18.00	4.68	7.52	37.21	22.05	30.00	-7.95	V
3525.00	-18.25	4.71	7.61	37.25	21.90	30.00	-8.10	V

NR FDD Band 78(3450-3550 MHz)_Channel Bandwidth 100MHz_ DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3499.98	-18.10	4.68	7.52	37.21	21.95	30.00	-8.05	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

NR FDD Band 78(3450-3550 MHz) Channel Bandwidth 20MHz CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3460.02	-18.96	4.62	7.42	37.02	20.86	30.00	-9.14	V
3499.98	-18.01	4.68	7.52	37.21	22.04	30.00	-7.96	V
3540.00	-18.47	4.71	7.61	37.25	21.68	30.00	-8.32	V

NR FDD Band 78(3450-3550 MHz) Channel Bandwidth 50MHz CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3475.02	-18.12	4.62	7.42	37.02	21.70	30.00	-8.30	V
3499.98	-18.36	4.68	7.52	37.21	21.69	30.00	-8.31	V
3525.00	-18.11	4.71	7.61	37.25	22.04	30.00	-7.96	V

NR FDD Band 78(3450-3550 MHz) Channel Bandwidth 100MHz CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3499.98	-18.87	4.68	7.52	37.21	21.18	30.00	-8.82	V

NR FDD Band 78(3700-3800 MHz) Channel Bandwidth 20MHz DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3710.01	-18.19	4.70	7.36	37.08	21.55	30.00	-8.45	V
3750.00	-18.83	4.72	7.45	37.19	21.09	30.00	-8.91	V
3789.99	-18.07	4.75	7.47	37.20	21.85	30.00	-8.15	V

NR FDD Band 78(3700-3800 MHz) Channel Bandwidth 50MHz DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3725.01	-18.12	4.70	7.36	37.08	21.62	30.00	-8.38	V
3750.00	-18.29	4.72	7.45	37.19	21.63	30.00	-8.37	V
3774.99	-18.09	4.75	7.47	37.20	21.83	30.00	-8.17	V

NR FDD Band 78(3700-3800 MHz) Channel Bandwidth 100MHz DFT-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3750	-18.09	4.72	7.45	37.19	21.83	30.00	-8.17	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**NR FDD Band 78(3700-3800 MHz)_Channel Bandwidth 20MHz_ CP-16QAM**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3710.01	-18.79	4.70	7.36	37.08	20.95	30.00	-9.05	V
3750.00	-18.81	4.72	7.45	37.19	21.11	30.00	-8.89	V
3789.99	-18.47	4.75	7.47	37.20	21.45	30.00	-8.55	V

NR FDD Band 78(3700-3800 MHz)_Channel Bandwidth 50MHz_ CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3725.01	-18.25	4.70	7.36	37.08	21.49	30.00	-8.51	V
3750.00	-18.31	4.72	7.45	37.19	21.61	30.00	-8.39	V
3774.99	-18.65	4.75	7.47	37.20	21.27	30.00	-8.73	V

NR FDD Band 78(3700-3800 MHz)_Channel Bandwidth 100MHz_ CP-16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3750	-18.81	4.72	7.45	37.19	21.11	30.00	-8.89	V

Note: All Modulation were tested and the report only recorded the worst modulation of DFT-BPSK&CP-16QAM



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




4.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

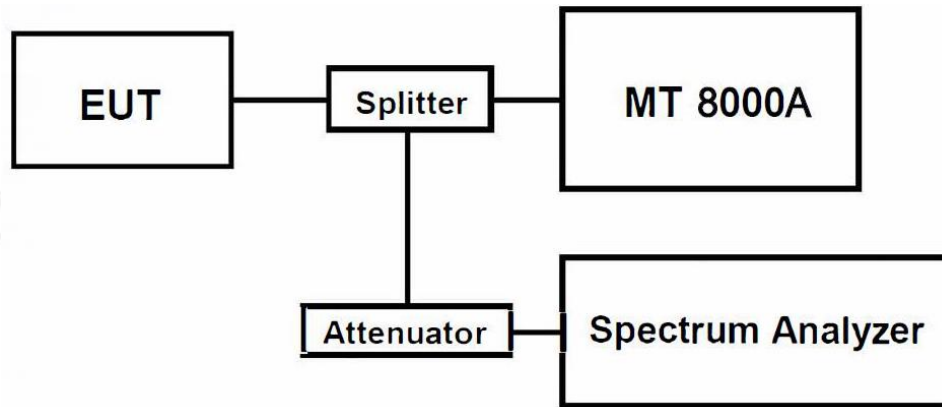

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms,
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS138 521 for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78; recorded worst case for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78.
2. For NR Band 5, please refer to Appendix M: Section M.2
3. For NR Band 7, please refer to Appendix N: Section N.2
4. For NR Band 38, please refer to Appendix O: Section O.2
5. For NR Band 41, please refer to Appendix P: Section P.2
6. NR Band 77, please refer to Appendix Q&R: Section Q&R.2
7. NR Band 78, please refer to Appendix S&T: Section S&T.2



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




4.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

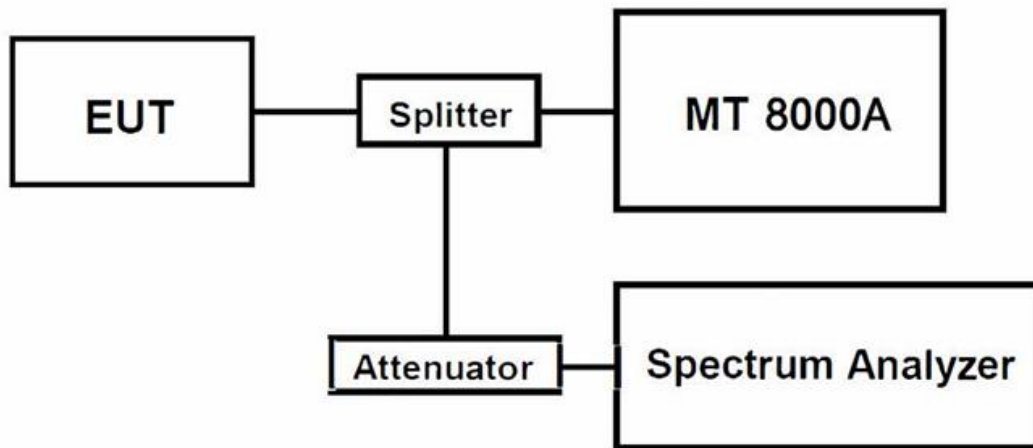

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS138 521 for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78; recorded worst case for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78.
2. For NR Band 5, please refer to Appendix M: Section M.3&4
3. For NR Band 7, please refer to Appendix N: Section N.3&4
4. For NR Band 38, please refer to Appendix O: Section O.3&4
5. For NR Band 41, please refer to Appendix P: Section P. 3&4
6. NR Band 77, please refer to Appendix Q&R: Section Q.3&4&R.3&4
7. NR Band 78, please refer to Appendix S&T: Section S.3&4&T.3&4



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



4.4 Band Edge compliance

LIMIT

For NR Band 5: Per FCC §22.917 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

For NR Band 7: Per FCC §27.53 (m)(4): For mobile digital stations, the attenuation factor shall be not less than:

- $40 + 10\log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge,
- $43 + 10\log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge, and
- $55 + 10\log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB). [§ 27.53(m)(4)]

In addition, the attenuation factor (fixed limit) shall not be less than:

- $43 + 10\log P$ dB on all frequencies between 2490.5 MHz and 2496 MHz, and
- $55 + 10\log P$ dB at or below 2490.5 MHz. [§ 27.53(m)(4)]

For NR Band 38: Per FCC §27.53 (m)(4): For mobile digital stations, the attenuation factor shall be not less than:

- $40 + 10\log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge,
- $43 + 10\log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge, and
- $55 + 10\log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB). [§ 27.53(m)(4)]

In addition, the attenuation factor (fixed limit) shall not be less than:

- $43 + 10\log P$ dB on all frequencies between 2490.5 MHz and 2496 MHz, and
- $55 + 10\log P$ dB at or below 2490.5 MHz. [§ 27.53(m)(4)]

For NR Band 41: Per §27.53 (m)(6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed; for mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 megahertz or 1 percent of emission bandwidth, as specified; or 1 megahertz or 2 percent for mobile digital stations, except in the band 2495-2496 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Show citation box.

For NR Band 77: FCC § 27.53(l) (2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




FCC § 27.53(n) (2) For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

For NR Band 78: FCC § 27.53(l) (2) For mobile operations in the 3700-3800 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

FCC § 27.53(n) (2) For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

TEST CONFIGURATION

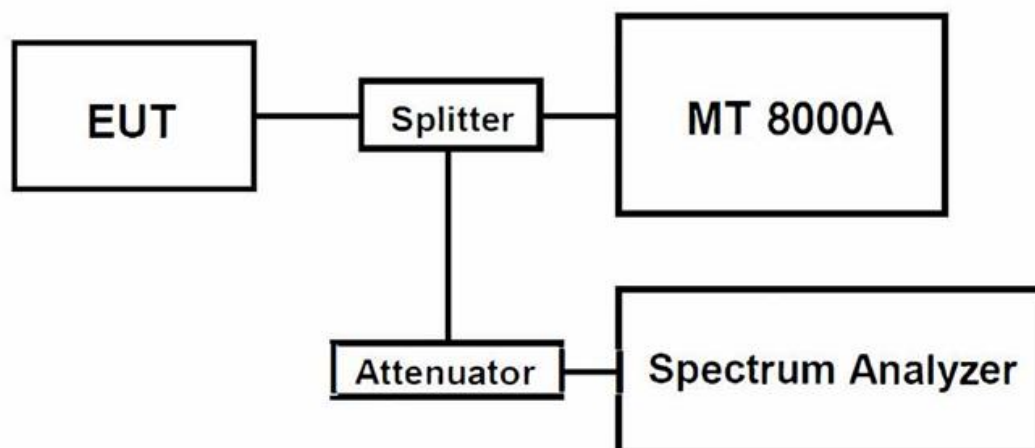

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS138 521 for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78; recorded worst case for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78.
2. For NR Band 5, please refer to Appendix M: Section M.5
3. For NR Band 7, please refer to Appendix N: Section N.5
4. For NR Band 38, please refer to Appendix O: Section O.5
5. For NR Band 41, please refer to Appendix P: Section P.5
6. NR Band 77, please refer to Appendix Q&R: Section Q&R.5
7. NR Band 78, please refer to Appendix S&T: Section S&T.5





4.5 Spurious Emission on Antenna Port

LIMIT

For NR Band 5: Per FCC §22.917 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

For NR Band 7: Per FCC §27.53 (m)(4): For mobile digital stations, the attenuation factor shall be not less than:

- $40 + 10\log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge,
- $43 + 10\log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge, and
- $55 + 10\log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB). [§ 27.53(m)(4)]

In addition, the attenuation factor (fixed limit) shall not be less than:

- $43 + 10\log P$ dB on all frequencies between 2490.5 MHz and 2496 MHz, and
- $55 + 10\log P$ dB at or below 2490.5 MHz. [§ 27.53(m)(4)]

For NR Band 38: Per FCC §27.53 (m)(4): For mobile digital stations, the attenuation factor shall be not less than:

- $40 + 10\log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge,
- $43 + 10\log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge, and
- $55 + 10\log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB). [§ 27.53(m)(4)]

In addition, the attenuation factor (fixed limit) shall not be less than:

- $43 + 10\log P$ dB on all frequencies between 2490.5 MHz and 2496 MHz, and
- $55 + 10\log P$ dB at or below 2490.5 MHz. [§ 27.53(m)(4)]

For NR Band 41: Per §27.53 (m)(6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed; for mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 megahertz or 1 percent of emission bandwidth, as specified; or 1 megahertz or 2 percent for mobile digital stations, except in the band 2495-2496 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Show citation box.

For NR Band 77: FCC § 27.53(l) (2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




FCC § 27.53(n) (2) For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

For NR Band 78: FCC § 27.53(l) (2) For mobile operations in the 3700-3800 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

FCC § 27.53(n) (2) For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

TEST CONFIGURATION

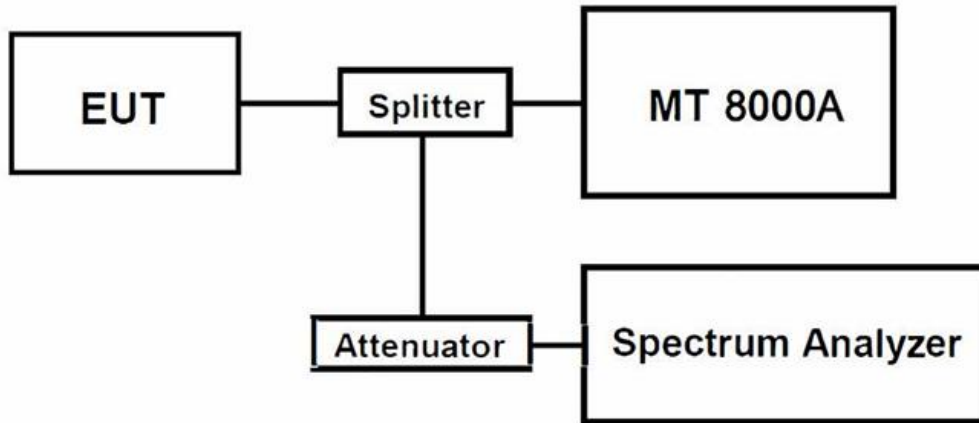

TEST PROCEDURE

The EUT was setup according to TIA-603-E

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW 500 by a Directional Couple.
- EUT Communicate with CMW 500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was setsufficient scans were taken to show the out of band Emission if any up to10th harmonic.
- Please refer to following tables for test antenna conducted emissions.

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
NR Band 5	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~9	1 MHz	3 MHz	3
NR Band 7	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
	20~26	1 MHz	3 MHz	2
NR Band 38	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10





	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
	20~26	1 MHz	3 MHz	2
NR Band 41	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
	20~26	1 MHz	3 MHz	2
NR Band 77	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
	20~40	1 MHz	3 MHz	2
NR Band 78	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
	20~38	1 MHz	3 MHz	2





TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS138 521 for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78; recorded worst case for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78.
2. For NR Band 5, please refer to Appendix M: Section M.6
3. For NR Band 7, please refer to Appendix N: Section N.6
4. For NR Band 38, please refer to Appendix O: Section O.6
5. For NR Band 41, please refer to Appendix P: Section P.6
6. NR Band 77, please refer to Appendix Q&R: Section Q&R.6
7. NR Band 78, please refer to Appendix S&T: Section S&T.6





4.6 Radiated Spurious Emission

LIMIT

For NR Band 5: Per FCC §22.917 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

For NR Band 7: Per FCC §27.53 (m)(4): For mobile digital stations, the attenuation factor shall be not less than:

- $40 + 10\log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge,
- $43 + 10\log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge, and
- $55 + 10\log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB). [§ 27.53(m)(4)]

In addition, the attenuation factor (fixed limit) shall not be less than:

- $43 + 10\log P$ dB on all frequencies between 2490.5 MHz and 2496 MHz, and
- $55 + 10\log P$ dB at or below 2490.5 MHz. [§ 27.53(m)(4)]

For NR Band 38: Per FCC §27.53 (m)(4): For mobile digital stations, the attenuation factor shall be not less than:

- $40 + 10\log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge,
- $43 + 10\log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge, and
- $55 + 10\log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB). [§ 27.53(m)(4)]

In addition, the attenuation factor (fixed limit) shall not be less than:

- $43 + 10\log P$ dB on all frequencies between 2490.5 MHz and 2496 MHz, and
- $55 + 10\log P$ dB at or below 2490.5 MHz. [§ 27.53(m)(4)]

For NR Band 41: Per §27.53 (m)(6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed; for mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 megahertz or 1 percent of emission bandwidth, as specified; or 1 megahertz or 2 percent for mobile digital stations, except in the band 2495-2496 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Show citation box.

For NR Band 77: FCC § 27.53(l) (2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




FCC § 27.53(n) (2) For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

For NR Band 78: FCC § 27.53(l) (2) For mobile operations in the 3700-3800 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

FCC § 27.53(n) (2) For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

TEST CONFIGURATION

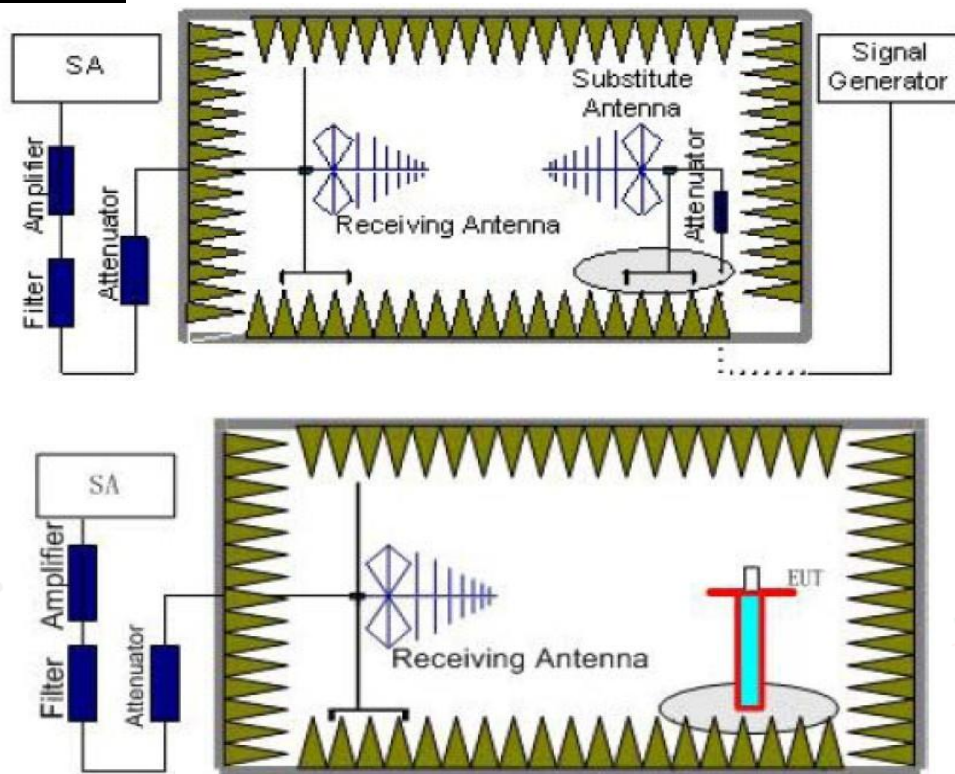

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.





5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
 $\text{Power(EIRP)} = P_{\text{Mea}} + P_{\text{Ag}} - P_{\text{cl}} + G_a$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
NR Band 5	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~9	1 MHz	3 MHz	3
NR Band 7	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
	20~26	1 MHz	3 MHz	2
NR Band 38	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
	20~26	1 MHz	3 MHz	2
NR Band 41	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
	20~26	1 MHz	3 MHz	2
NR Band 77	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3





	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
	20~40	1 MHz	3 MHz	2
NR Band 78	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
	20~38	1 MHz	3 MHz	2

Frequency	Channel	Frequency Range	Verdict
NR Band 5	Low	9KHz -9GHz	PASS
	Middle	9KHz -9GHz	PASS
	High	9KHz -9GHz	PASS
NR Band 7	Low	9KHz -26GHz	PASS
	Middle	9KHz -26GHz	PASS
	High	9KHz -26GHz	PASS
NR Band 38	Low	9KHz -26GHz	PASS
	Middle	9KHz -26GHz	PASS
	High	9KHz -26GHz	PASS
NR Band 41	Low	9KHz -26GHz	PASS
	Middle	9KHz -26GHz	PASS
	High	9KHz -26GHz	PASS
NR Band 77	Low	9KHz -40GHz	PASS
	Middle	9KHz -40GHz	PASS
	High	9KHz -40GHz	PASS
NR Band 78	Low	9KHz -38GHz	PASS
	Middle	9KHz -38GHz	PASS
	High	9KHz -38GHz	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Remark:

1. We were tested all RB Configuration refer 3GPP TS138 521 for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78; recorded worst case for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78.

3. We were not recorded other points as values lower than limits.

4. $Power(EIRP) = P_{Mea} + P_{Ag} - P_{cl} + G_a$

5. $Margin = EIRP - Limit$

NR Band 5_Channel Bandwidth 20MHz_DFT-BPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1668.00	-39.25	3.86	3.00	8.56	-34.55	-13.00	-21.55	H
2502.00	-46.85	4.29	3.00	6.98	-44.16	-13.00	-31.16	H
1668.00	-36.21	3.86	3.00	8.56	-31.51	-13.00	-18.51	V
2502.00	-38.64	4.29	3.00	6.98	-35.95	-13.00	-22.95	V

NR Band 5_Channel Bandwidth 20MHz_DFT-BPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.00	-39.60	3.89	3.00	8.62	-34.87	-13.00	-21.87	H
2509.50	-45.18	4.31	3.00	6.87	-42.62	-13.00	-29.62	H
1673.00	-35.33	3.86	3.00	8.62	-30.57	-13.00	-17.57	V
2509.50	-39.75	4.29	3.00	6.87	-37.17	-13.00	-24.17	V

NR Band 5_Channel Bandwidth 20MHz_DFT-BPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1678.00	-38.74	3.92	3.00	8.71	-33.95	-13.00	-20.95	H
2517.00	-46.30	4.35	3.00	6.92	-43.73	-13.00	-30.73	H
1678.00	-34.94	3.92	3.00	8.71	-30.15	-13.00	-17.15	V
2517.00	-36.06	4.35	3.00	6.92	-33.49	-13.00	-20.49	V

NR Band 5_Channel Bandwidth 20MHz_CP-QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1668.00	-39.11	3.86	3.00	8.56	-34.41	-13.00	-21.41	H
2502.00	-46.24	4.29	3.00	6.98	-43.55	-13.00	-30.55	H
1668.00	-34.76	3.86	3.00	8.56	-30.06	-13.00	-17.06	V
2502.00	-38.31	4.29	3.00	6.98	-35.62	-13.00	-22.62	V

NR Band 5_Channel Bandwidth 20MHz_CP-QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.00	-38.60	3.89	3.00	8.62	-33.87	-13.00	-20.87	H
2509.50	-47.62	4.31	3.00	6.87	-45.06	-13.00	-32.06	H
1673.00	-36.12	3.86	3.00	8.62	-31.36	-13.00	-18.36	V
2509.50	-37.05	4.29	3.00	6.87	-34.47	-13.00	-21.47	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

*NR Band 5_Channel Bandwidth 20MHz_CP-QPSK_High Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1678.00	-38.88	3.92	3.00	8.71	-34.09	-13.00	-21.09	H
2517.00	-47.16	4.35	3.00	6.92	-44.59	-13.00	-31.59	H
1678.00	-36.86	3.92	3.00	8.71	-32.07	-13.00	-19.07	V
2517.00	-36.01	4.35	3.00	6.92	-33.44	-13.00	-20.44	V

NR Band 7_Channel Bandwidth 50MHz_DFT-BPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5050.00	-41.31	5.88	3.00	10.78	-36.41	-25.00	-11.41	H
7575.00	-46.46	7.21	3.00	12.31	-41.36	-25.00	-16.36	H
5050.00	-36.18	5.88	3.00	10.78	-31.28	-25.00	-6.28	V
7575.00	-36.24	7.21	3.00	12.31	-31.14	-25.00	-6.14	V

NR Band 7_Channel Bandwidth 50MHz_DFT-BPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-38.84	5.90	3.00	10.81	-33.93	-25.00	-8.93	H
7605.00	-47.74	7.24	3.00	12.35	-42.63	-25.00	-17.63	H
5070.00	-35.85	5.90	3.00	10.81	-30.94	-25.00	-5.94	V
7605.00	-38.40	7.24	3.00	12.35	-33.29	-25.00	-8.29	V

NR Band 7_Channel Bandwidth 50MHz_DFT-BPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5090.00	-40.48	5.96	3.00	10.95	-35.49	-25.00	-10.49	H
7635.00	-46.28	7.31	3.00	12.41	-41.18	-25.00	-16.18	H
5090.00	-33.43	5.96	3.00	10.95	-28.44	-25.00	-3.44	V
7635.00	-38.66	7.31	3.00	12.41	-33.56	-25.00	-8.56	V

NR Band 7_Channel Bandwidth 50MHz_CP-QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5050.00	-39.11	5.88	3.00	10.78	-34.21	-25.00	-9.21	H
7575.00	-46.85	7.21	3.00	12.31	-41.75	-25.00	-16.75	H
5050.00	-33.65	5.88	3.00	10.78	-28.75	-25.00	-3.75	V
7575.00	-36.58	7.21	3.00	12.31	-31.48	-25.00	-6.48	V

NR Band 7_Channel Bandwidth 50MHz_CP-QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-40.76	5.90	3.00	10.81	-35.85	-25.00	-10.85	H
7605.00	-47.28	7.24	3.00	12.35	-42.17	-25.00	-17.17	H
5070.00	-33.87	5.90	3.00	10.81	-28.96	-25.00	-3.96	V
7605.00	-39.85	7.24	3.00	12.35	-34.74	-25.00	-9.74	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

*NR Band 7_Channel Bandwidth 50MHz_CP-QPSK_High Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5090.00	-38.14	5.96	3.00	10.95	-33.15	-25.00	-8.15	H
7635.00	-46.52	7.31	3.00	12.41	-41.42	-25.00	-16.42	H
5090.00	-34.69	5.96	3.00	10.95	-29.70	-25.00	-4.70	V
7635.00	-36.26	7.31	3.00	12.41	-31.16	-25.00	-6.16	V

NR Band 38_Channel Bandwidth 40MHz_DFT-BPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5180.00	-39.05	7.13	3.00	9.74	-36.44	-25.00	-11.44	H
7770.00	-47.10	8.28	3.00	10.46	-44.92	-25.00	-19.92	H
5180.00	-33.56	7.13	3.00	9.74	-30.95	-25.00	-5.95	V
7770.00	-36.54	8.28	3.00	10.46	-34.36	-25.00	-9.36	V

NR Band 38_Channel Bandwidth 40MHz_DFT-BPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-39.60	7.18	3.00	9.78	-37.00	-25.00	-12.00	H
7785.00	-45.52	8.31	3.00	10.52	-43.31	-25.00	-18.31	H
5190.00	-33.30	7.18	3.00	9.78	-30.70	-25.00	-5.70	V
7785.00	-37.12	8.31	3.00	10.52	-34.91	-25.00	-9.91	V

NR Band 38_Channel Bandwidth 40MHz_DFT-BPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5200.00	-40.59	7.25	3.00	9.82	-38.02	-25.00	-13.02	H
7800.00	-45.59	8.41	3.00	10.61	-43.39	-25.00	-18.39	H
5200.00	-34.74	7.25	3.00	9.82	-32.17	-25.00	-7.17	V
7800.00	-36.82	8.41	3.00	10.61	-34.62	-25.00	-9.62	V

NR Band 38_Channel Bandwidth 40MHz_CP-QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5180.00	-39.48	7.13	3.00	9.74	-36.87	-25.00	-11.87	H
7770.00	-44.72	8.28	3.00	10.46	-42.54	-25.00	-17.54	H
5180.00	-35.83	7.13	3.00	9.74	-33.22	-25.00	-8.22	V
7770.00	-37.73	8.28	3.00	10.46	-35.55	-25.00	-10.55	V

NR Band 38_Channel Bandwidth 40MHz_CP-QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-40.04	7.18	3.00	9.78	-37.44	-25.00	-12.44	H
7785.00	-46.51	8.31	3.00	10.52	-44.30	-25.00	-19.30	H
5190.00	-34.27	7.18	3.00	9.78	-31.67	-25.00	-6.67	V
7785.00	-36.20	8.31	3.00	10.52	-33.99	-25.00	-8.99	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

*NR Band 38_Channel Bandwidth 40MHz_CP-QPSK_High Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5200.00	-40.64	7.25	3.00	9.82	-38.07	-25.00	-13.07	H
7800.00	-44.42	8.41	3.00	10.61	-42.22	-25.00	-17.22	H
5200.00	-35.94	7.25	3.00	9.82	-33.37	-25.00	-8.37	V
7800.00	-37.15	8.41	3.00	10.61	-34.95	-25.00	-9.95	V

NR Band 41_Channel Bandwidth 100MHz_DFT-BPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5092.02	-41.08	7.18	3.00	9.76	-38.50	-25.00	-13.50	H
7638.03	-47.14	8.29	3.00	11.34	-44.09	-25.00	-19.09	H
5092.02	-36.90	7.18	3.00	9.76	-34.32	-25.00	-9.32	V
7638.03	-39.35	8.29	3.00	11.34	-36.30	-25.00	-11.30	V

NR Band 41_Channel Bandwidth 100MHz_DFT-BPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5185.98	-40.23	7.22	3.00	9.81	-37.64	-25.00	-12.64	H
7778.97	-45.31	8.35	3.00	11.44	-42.22	-25.00	-17.22	H
5185.98	-35.18	7.22	3.00	9.81	-32.59	-25.00	-7.59	V
7778.97	-37.99	8.35	3.00	11.44	-34.90	-25.00	-9.90	V

NR Band 41_Channel Bandwidth 100MHz_DFT-BPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5280.00	-39.58	7.31	3.00	9.86	-37.03	-25.00	-12.03	H
7920.00	-46.80	8.45	3.00	11.49	-43.76	-25.00	-18.76	H
5280.00	-35.59	7.31	3.00	9.86	-33.04	-25.00	-8.04	V
7920.00	-38.00	8.45	3.00	11.49	-34.96	-25.00	-9.96	V

NR Band 41_Channel Bandwidth 100MHz_CP-QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5092.02	-41.79	7.18	3.00	9.76	-39.21	-25.00	-14.21	H
7638.03	-45.87	8.29	3.00	11.34	-42.82	-25.00	-17.82	H
5092.02	-35.66	7.18	3.00	9.76	-33.08	-25.00	-8.08	V
7638.03	-37.12	8.29	3.00	11.34	-34.07	-25.00	-9.07	V

NR Band 41_Channel Bandwidth 100MHz_CP-QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5185.98	-41.95	7.22	3.00	9.81	-39.36	-25.00	-14.36	H
7778.97	-44.30	8.35	3.00	11.44	-41.21	-25.00	-16.21	H
5185.98	-36.08	7.22	3.00	9.81	-33.49	-25.00	-8.49	V
7778.97	-36.37	8.35	3.00	11.44	-33.28	-25.00	-8.28	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**NR Band 41_Channel Bandwidth 100MHz_CP-QPSK_High Channel**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5280.00	-39.46	7.31	3.00	9.86	-36.91	-25.00	-11.91	H
7920.00	-45.04	8.45	3.00	11.49	-42.00	-25.00	-17.00	H
5280.00	-33.40	7.31	3.00	9.86	-30.85	-25.00	-5.85	V
7920.00	-38.73	8.45	3.00	11.49	-35.69	-25.00	-10.69	V

NR Band 77(3450 MHz ~ 3550 MHz)_Channel Bandwidth 100MHz_DFT-BPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
6999.96	-38.05	8.41	3.00	10.35	-36.11	-13.00	-23.11	H
10499.94	-46.42	9.89	3.00	12.51	-43.80	-13.00	-30.80	H
6999.96	-34.57	8.41	3.00	10.35	-32.63	-13.00	-19.63	V
10499.94	-39.45	9.89	3.00	12.51	-36.83	-13.00	-23.83	V

NR Band 77(3450 MHz ~ 3550 MHz)_Channel Bandwidth 100MHz_DFT-BPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
6999.96	-39.75	8.41	3.00	10.35	-37.81	-13.00	-24.81	H
10499.94	-46.11	9.89	3.00	12.51	-43.49	-13.00	-30.49	H
6999.96	-36.35	8.41	3.00	10.35	-34.41	-13.00	-21.41	V
10499.94	-38.83	9.89	3.00	12.51	-36.21	-13.00	-23.21	V

NR Band 77(3700 MHz ~ 3980 MHz)_Channel Bandwidth 100MHz_DFT-BPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
7500.00	-41.89	9.01	3.00	10.51	-40.39	-13.00	-27.39	H
11250.00	-44.08	9.87	3.00	12.68	-41.27	-13.00	-28.27	H
7500.00	-35.62	9.01	3.00	10.51	-34.12	-13.00	-21.12	V
11250.00	-37.80	9.87	3.00	12.68	-34.99	-13.00	-21.99	V

NR Band 77(3700 MHz ~ 3980 MHz)_Channel Bandwidth 100MHz_CP-QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
7680.00	-38.73	9.13	3.00	10.62	-37.24	-13.00	-24.24	H
11520.00	-45.52	9.87	3.00	12.69	-42.70	-13.00	-29.70	H
7680.00	-33.11	9.13	3.00	10.62	-31.62	-13.00	-18.62	V
11520.00	-36.58	9.87	3.00	12.69	-33.76	-13.00	-20.76	V

NR Band 77(3700 MHz ~ 3980 MHz)_Channel Bandwidth 100MHz_CP-QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
7860.00	-41.36	9.14	3.00	10.67	-39.83	-13.00	-26.83	H
11790.00	-47.20	9.92	3.00	12.71	-44.41	-13.00	-31.41	H
7860.00	-35.70	9.14	3.00	10.67	-34.17	-13.00	-21.17	V
11790.00	-37.43	9.92	3.00	12.71	-34.64	-13.00	-21.64	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**NR Band 77(3700 MHz ~ 3980 MHz)_Channel Bandwidth 100MHz_ CP-QPSK _ Low Channel**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
7500.00	-38.86	9.01	3.00	10.51	-37.36	-13.00	-24.36	H
11250.00	-47.11	9.87	3.00	12.68	-44.30	-13.00	-31.30	H
7500.00	-35.33	9.01	3.00	10.51	-33.83	-13.00	-20.83	V
11250.00	-38.89	9.87	3.00	12.68	-36.08	-13.00	-23.08	V

NR Band 77(3700 MHz ~ 3980 MHz)_Channel Bandwidth 100MHz_ DFT-BPSK _ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
7680.00	-39.17	9.13	3.00	10.62	-37.68	-13.00	-24.68	H
11520.00	-44.44	9.87	3.00	12.69	-41.62	-13.00	-28.62	H
7680.00	-35.44	9.13	3.00	10.62	-33.95	-13.00	-20.95	V
11520.00	-38.23	9.87	3.00	12.69	-35.41	-13.00	-22.41	V

NR Band 77(3700 MHz ~ 3980 MHz)_Channel Bandwidth 100MHz_ DFT-BPSK _ High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
7860.00	-38.47	9.14	3.00	10.67	-36.94	-13.00	-23.94	H
11790.00	-44.50	9.92	3.00	12.71	-41.71	-13.00	-28.71	H
7860.00	-34.26	9.14	3.00	10.67	-32.73	-13.00	-19.73	V
11790.00	-39.95	9.92	3.00	12.71	-37.16	-13.00	-24.16	V

NR Band 78(3450 MHz ~ 3550 MHz)_Channel Bandwidth 100MHz_ DFT-BPSK _ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
6999.96	-41.82	8.41	3.00	10.35	-39.88	-13.00	-26.88	H
10499.94	-46.70	9.89	3.00	12.51	-44.08	-13.00	-31.08	H
6999.96	-36.63	8.41	3.00	10.35	-34.69	-13.00	-21.69	V
10499.94	-36.82	9.89	3.00	12.51	-34.20	-13.00	-21.20	V

NR Band 78(3450 MHz ~ 3550 MHz)_Channel Bandwidth 100MHz_ CP-QPSK _ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
6999.96	-39.73	8.41	3.00	10.35	-37.79	-13.00	-24.79	H
10499.94	-45.89	9.89	3.00	12.51	-43.27	-13.00	-30.27	H
6999.96	-34.72	8.41	3.00	10.35	-32.78	-13.00	-19.78	V
10499.94	-38.84	9.89	3.00	12.51	-36.22	-13.00	-23.22	V

NR Band 78(3700 MHz ~ 3800 MHz)_Channel Bandwidth 100MHz_ CP-QPSK _ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
7500.00	-38.80	8.52	3.00	10.41	-36.91	-13.00	-23.91	H
11250.00	-47.46	9.94	3.00	12.60	-44.80	-13.00	-31.80	H
7500.00	-35.21	8.52	3.00	10.41	-33.32	-13.00	-20.32	V
11250.00	-39.01	9.94	3.00	12.60	-36.35	-13.00	-23.35	V



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

*NR Band 78(3700 MHz ~ 3800 MHz)_Channel Bandwidth 100MHz_ CP-QPSK _ Middle Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
7500.00	-41.63	8.52	3.00	10.41	-39.74	-13.00	-26.74	H
11250.00	-46.63	9.94	3.00	12.60	-43.97	-13.00	-30.97	H
7500.00	-34.38	8.52	3.00	10.41	-32.49	-13.00	-19.49	V
11250.00	-39.09	9.94	3.00	12.60	-36.43	-13.00	-23.43	V

Notes: All channel bandwidth & all Modulation were tested and the report only recorded the worst modulation of DFT-BPSK&CP-QPSK were tested,the report recorded the worst data.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




4.7 Frequency Stability under Temperature & Voltage Variations

LIMIT

According to FCC §2.1055, §22.355, §27.54 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

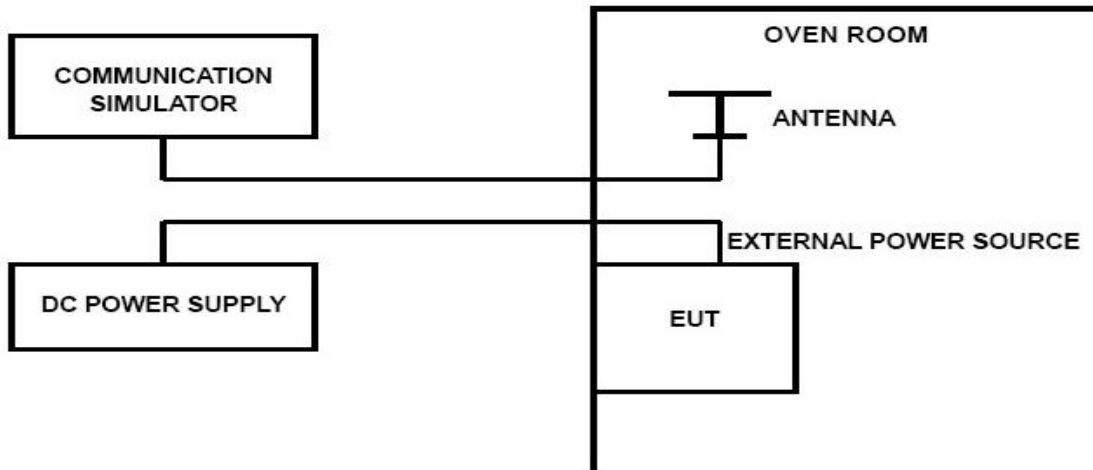

TEST PROCEDURE

The EUT was setup according to TIA-603-E

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of Anritsu MT8000A DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the MT8000A and in a simulated call on middle channel for NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78; measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the MT8000A and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.



**TEST RESULTS****Remark:**

We were tested all RB Configuration refer 3GPP TS138 521 for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78; recorded worst case for each Channel Bandwidth of NR Band 5, NR Band 7, NR Band 38, NR Band 41, NR Band 77, NR Band 78.

NR Band 5, DFT-256QAM, 20MHz bandwidth (worst case of all bandwidths and all modulations)

NR Band 5					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	-8	-0.010	±2.50	PASS
VN	20	33	0.040	±2.50	PASS
VH	20	-11	-0.013	±2.50	PASS
VN	-30	38	0.046	±2.50	PASS
VN	-20	41	0.050	±2.50	PASS
VN	-10	-3	-0.004	±2.50	PASS
VN	0	-45	-0.055	±2.50	PASS
VN	10	47	0.057	±2.50	PASS
VN	20	48	0.058	±2.50	PASS
VN	30	-23	-0.028	±2.50	PASS
VN	40	-38	-0.046	±2.50	PASS
VN	50	15	0.018	±2.50	PASS

NR Band 5, CP-256QAM, 20MHz bandwidth (worst case of all bandwidths and all modulations)

NR Band 5					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	0	0.000	±2.50	PASS
VN	20	10	0.012	±2.50	PASS
VH	20	18	0.022	±2.50	PASS
VN	-30	3	0.004	±2.50	PASS
VN	-20	33	0.040	±2.50	PASS
VN	-10	39	0.047	±2.50	PASS
VN	0	-47	-0.057	±2.50	PASS
VN	10	-40	-0.049	±2.50	PASS
VN	20	23	0.028	±2.50	PASS
VN	30	-47	-0.057	±2.50	PASS
VN	40	-21	-0.025	±2.50	PASS
VN	50	-7	-0.008	±2.50	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

*NR Band 7, DFT-256QAM, 50MHz bandwidth (worst case of all bandwidths and all modulations)*

NR Band 7					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	28	0.011	±2.50	PASS
VN	20	41	0.016	±2.50	PASS
VH	20	31	0.012	±2.50	PASS
VN	-30	16	0.006	±2.50	PASS
VN	-20	-42	-0.017	±2.50	PASS
VN	-10	21	0.008	±2.50	PASS
VN	0	-34	-0.014	±2.50	PASS
VN	10	-3	-0.001	±2.50	PASS
VN	20	16	0.006	±2.50	PASS
VN	30	18	0.007	±2.50	PASS
VN	40	49	0.020	±2.50	PASS
VN	50	-38	-0.015	±2.50	PASS

NR Band 7, CP-256QAM, 50MHz bandwidth (worst case of all bandwidths and all modulations)

NR Band 7					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	-2	-0.001	±2.50	PASS
VN	20	-38	-0.015	±2.50	PASS
VH	20	10	0.004	±2.50	PASS
VN	-30	22	0.009	±2.50	PASS
VN	-20	-38	-0.015	±2.50	PASS
VN	-10	-23	-0.009	±2.50	PASS
VN	0	41	0.016	±2.50	PASS
VN	10	-38	-0.015	±2.50	PASS
VN	20	47	0.019	±2.50	PASS
VN	30	14	0.006	±2.50	PASS
VN	40	-21	-0.008	±2.50	PASS
VN	50	15	0.006	±2.50	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

*NR Band 38, DFT-256QAM, 40MHz bandwidth (worst case of all bandwidths and all modulations)*

NR Band 38					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	-17	-0.007	±2.50	PASS
VN	20	8	0.003	±2.50	PASS
VH	20	-11	-0.004	±2.50	PASS
VN	-30	0	0.000	±2.50	PASS
VN	-20	5	0.002	±2.50	PASS
VN	-10	15	0.006	±2.50	PASS
VN	0	5	0.002	±2.50	PASS
VN	10	-45	-0.018	±2.50	PASS
VN	20	49	0.019	±2.50	PASS
VN	30	50	0.019	±2.50	PASS
VN	40	-31	-0.012	±2.50	PASS
VN	50	18	0.007	±2.50	PASS

NR Band 38, CP-256QAM, 40MHz bandwidth (worst case of all bandwidths and all modulations)

NR Band 38					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	13	0.005	±2.50	PASS
VN	20	19	0.007	±2.50	PASS
VH	20	1	0.000	±2.50	PASS
VN	-30	47	0.018	±2.50	PASS
VN	-20	0	0.000	±2.50	PASS
VN	-10	-7	-0.003	±2.50	PASS
VN	0	50	0.019	±2.50	PASS
VN	10	-12	-0.005	±2.50	PASS
VN	20	50	0.019	±2.50	PASS
VN	30	-18	-0.007	±2.50	PASS
VN	40	-17	-0.007	±2.50	PASS
VN	50	-24	-0.009	±2.50	PASS

NR Band 41, DFT-256QAM, 100MHz bandwidth (worst case of all bandwidths and all modulations)

NR Band 41					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	0	0.000	±2.50	PASS
VN	20	-33	-0.013	±2.50	PASS
VH	20	-9	-0.004	±2.50	PASS
VN	-30	-1	0.000	±2.50	PASS
VN	-20	-1	0.000	±2.50	PASS
VN	-10	-22	-0.009	±2.50	PASS
VN	0	-10	-0.004	±2.50	PASS
VN	10	24	0.010	±2.50	PASS
VN	20	34	0.014	±2.50	PASS
VN	30	-14	-0.006	±2.50	PASS
VN	40	-24	-0.010	±2.50	PASS
VN	50	45	0.018	±2.50	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

*NR Band 41, CP-256QAM, 100MHz bandwidth (worst case of all bandwidths and all modulations)***NR Band 41**

DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	-21	-0.008	±2.50	PASS
VN	20	-22	-0.009	±2.50	PASS
VH	20	5	0.002	±2.50	PASS
VN	-30	-16	-0.006	±2.50	PASS
VN	-20	-11	-0.004	±2.50	PASS
VN	-10	-16	-0.006	±2.50	PASS
VN	0	-21	-0.008	±2.50	PASS
VN	10	-24	-0.010	±2.50	PASS
VN	20	49	0.020	±2.50	PASS
VN	30	-18	-0.007	±2.50	PASS
VN	40	16	0.006	±2.50	PASS
VN	50	-4	-0.002	±2.50	PASS

*NR Band 77(3450 MHz ~ 3550 MHz), DFT-256QAM, 100MHz bandwidth (worst case of all bandwidths and all modulations)***NR Band 77**

DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	42	0.012	±2.50	PASS
VN	20	93	0.027	±2.50	PASS
VH	20	22	0.006	±2.50	PASS
VN	-30	64	0.019	±2.50	PASS
VN	-20	89	0.026	±2.50	PASS
VN	-10	57	0.017	±2.50	PASS
VN	0	90	0.026	±2.50	PASS
VN	10	64	0.019	±2.50	PASS
VN	20	43	0.012	±2.50	PASS
VN	30	83	0.024	±2.50	PASS
VN	40	87	0.025	±2.50	PASS
VN	50	0	0.000	±2.50	PASS

*NR Band 77(3450 MHz ~ 3550 MHz), CP-256QAM, 100MHz bandwidth (worst case of all bandwidths and all modulations)***NR Band 77**

DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	63	0.018	±2.50	PASS
VN	20	0	0.000	±2.50	PASS
VH	20	65	0.019	±2.50	PASS
VN	-30	16	0.005	±2.50	PASS
VN	-20	78	0.023	±2.50	PASS
VN	-10	9	0.003	±2.50	PASS
VN	0	72	0.021	±2.50	PASS
VN	10	98	0.028	±2.50	PASS
VN	20	4	0.001	±2.50	PASS
VN	30	74	0.021	±2.50	PASS
VN	40	14	0.004	±2.50	PASS
VN	50	88	0.026	±2.50	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NR Band 77(3700 MHz ~ 3980 MHz), DFT-256QAM, 100MHz bandwidth (worst case of all bandwidths and all modulations)

NR Band 77					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	97	0.026	±2.50	PASS
VN	20	90	0.024	±2.50	PASS
VH	20	69	0.019	±2.50	PASS
VN	-30	90	0.024	±2.50	PASS
VN	-20	36	0.010	±2.50	PASS
VN	-10	63	0.017	±2.50	PASS
VN	0	9	0.002	±2.50	PASS
VN	10	70	0.019	±2.50	PASS
VN	20	30	0.008	±2.50	PASS
VN	30	8	0.002	±2.50	PASS
VN	40	65	0.018	±2.50	PASS
VN	50	93	0.025	±2.50	PASS

NR Band 77(3700 MHz ~ 3980 MHz), CP-256QAM, 100MHz bandwidth (worst case of all bandwidths and all modulations)

NR Band 77					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	31	0.008	±2.50	PASS
VN	20	98	0.026	±2.50	PASS
VH	20	4	0.001	±2.50	PASS
VN	-30	83	0.022	±2.50	PASS
VN	-20	57	0.015	±2.50	PASS
VN	-10	76	0.021	±2.50	PASS
VN	0	9	0.002	±2.50	PASS
VN	10	40	0.011	±2.50	PASS
VN	20	88	0.024	±2.50	PASS
VN	30	70	0.019	±2.50	PASS
VN	40	79	0.021	±2.50	PASS
VN	50	18	0.005	±2.50	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NR Band 78(3450 MHz ~ 3550 MHz), DFT-256QAM, 100MHz bandwidth (worst case of all bandwidths and all modulations)

NR Band 78					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	57	0.017	±2.50	PASS
VN	20	83	0.024	±2.50	PASS
VH	20	37	0.011	±2.50	PASS
VN	-30	80	0.023	±2.50	PASS
VN	-20	80	0.023	±2.50	PASS
VN	-10	50	0.014	±2.50	PASS
VN	0	85	0.025	±2.50	PASS
VN	10	16	0.005	±2.50	PASS
VN	20	74	0.021	±2.50	PASS
VN	30	4	0.001	±2.50	PASS
VN	40	2	0.001	±2.50	PASS
VN	50	27	0.008	±2.50	PASS

NR Band 78(3450 MHz ~ 3550 MHz), CP-256QAM, 100MHz bandwidth (worst case of all bandwidths and all modulations)

NR Band 78					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	20	0.006	±2.50	PASS
VN	20	8	0.002	±2.50	PASS
VH	20	38	0.011	±2.50	PASS
VN	-30	87	0.025	±2.50	PASS
VN	-20	56	0.016	±2.50	PASS
VN	-10	76	0.022	±2.50	PASS
VN	0	91	0.026	±2.50	PASS
VN	10	67	0.019	±2.50	PASS
VN	20	79	0.023	±2.50	PASS
VN	30	52	0.015	±2.50	PASS
VN	40	13	0.004	±2.50	PASS
VN	50	41	0.012	±2.50	PASS

NR Band 78(3700 MHz ~ 3800 MHz), DFT-256QAM, 100MHz bandwidth (worst case of all bandwidths and all modulations)

NR Band 78					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	8	0.002	±2.50	PASS
VN	20	32	0.009	±2.50	PASS
VH	20	66	0.018	±2.50	PASS
VN	-30	44	0.012	±2.50	PASS
VN	-20	35	0.009	±2.50	PASS
VN	-10	52	0.014	±2.50	PASS
VN	0	7	0.002	±2.50	PASS
VN	10	56	0.015	±2.50	PASS
VN	20	94	0.025	±2.50	PASS
VN	30	21	0.006	±2.50	PASS
VN	40	50	0.014	±2.50	PASS
VN	50	70	0.019	±2.50	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NR Band 78(3700 MHz ~ 3800 MHz), CP-256QAM, 100MHz bandwidth (worst case of all bandwidths and all modulations)

NR Band 78					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
VL	20	72	0.019	±2.50	PASS
VN	20	47	0.013	±2.50	PASS
VH	20	56	0.015	±2.50	PASS
VN	-30	10	0.003	±2.50	PASS
VN	-20	71	0.019	±2.50	PASS
VN	-10	50	0.014	±2.50	PASS
VN	0	62	0.017	±2.50	PASS
VN	10	48	0.013	±2.50	PASS
VN	20	56	0.015	±2.50	PASS
VN	30	26	0.007	±2.50	PASS
VN	40	0	0.000	±2.50	PASS
VN	50	18	0.005	±2.50	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5 Test Setup Photos of the EUT

Pleaserefer to separated files for Test Setup Photos of the EUT.

6 External Photos of the EUT

Pleaserefer to separated files for External Photos of the EUT.

7 Internal Photos of the EUT

Pleaserefer to separated files for Internal Photos of the EUT.

-----THE END OF TEST REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity