

TEST REPORT

Report No.: BCTC2411568200-1E

Applicant: M2AiM Services LLC

Product Name: GPS collar for Hunting Dogs

Test Model: DOGZE 4G

Tested Date: 2024-11-04 to 2024-12-05

Issued Date: 2024-12-05


Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2BMTM-DOGZE4G

Product Name: GPS collar for Hunting Dogs
Trademark: DOGZE, HUNTPOWER
Model/Type reference: DOGZE 4G
Prepared For: M2AiM Services LLC
Address: 10409 Pacific Palisades Ave.Las Vegas, Nevada 89144-1221, United States
Manufacturer: M2AiM Services LLC
Address: 10409 Pacific Palisades Ave.Las Vegas, Nevada 89144-1221, United States
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2024-11-04
Sample tested Date: 2024-11-04 to 2024-12-05
Issue Date: 2024-12-05
Report No.: BCTC2411568200-1E
Test Standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part22 Subpart H
FCC CFR Title 47 Part24 Subpart E
ANSI/ TIA/ EIA-603-D-2010
FCC KDB 971168 D01 Power Meas. License Digital Systems v02v02
Test Results: PASS
Remark: This is GSM radio test report.

Tested by:



Lei Chen/Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	4
2. Test Summary	5
3. Measurement Uncertainty	6
4. Product Information And Test Setup	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	8
4.4 Test Mode	8
5. Test Facility And Test Instrument Used	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. RF Output Power	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	12
6.3 Test procedure	13
6.4 Test Result	13
7. Peak-to-average Ratio(PAR) of Transmitter	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	16
7.4 Test Result	16
8. Emission Bandwidth	24
8.1 Block Diagram Of Test Setup	24
8.2 Limit	24
8.3 Test procedure	24
8.4 Test Result	24
9. Out of Band Emissions at Antenna Terminal	32
9.1 Block Diagram Of Test Setup	32
9.2 Limit	32
9.3 Test procedure	32
9.4 Test Result	32
10. Spurious Radiated Emissions	43
10.1 Block Diagram Of Test Setup	43
10.2 Limit	44
10.3 Test procedure	44
10.4 Test Result	45
11. Frequency Stability	47
11.1 Block Diagram Of Test Setup	47
11.2 Limit	47
11.3 Test procedure	47
11.4 Test Result	48
12. EUT Photographs	49
13. EUT Test Setup Photographs	50

(Note: N/A Means Not Applicable)


1. Version

Report No.	Issue Date	Description	Approved
BCTC2411568200-1E	2024-12-05	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	RF Exposure	§1.1307, §2.1093	PASS
2	RF Output Power	§22.913, §24.232	PASS
3	Peak-to-average Ratio(PAR) of Transmitter	§22.913, §24.232	PASS
4	Emission Bandwidth	§22.917, §24.238	PASS
5	Spurious Emissions at Antenna Terminal	§22.917, §24.238	PASS
6	Spurious Radiation Emissions	§22.917, §24.238	PASS
7	Out of Band Emissions	§22.917, §24.238	PASS
8	Frequency Stability	§22.355, §24.235	PASS

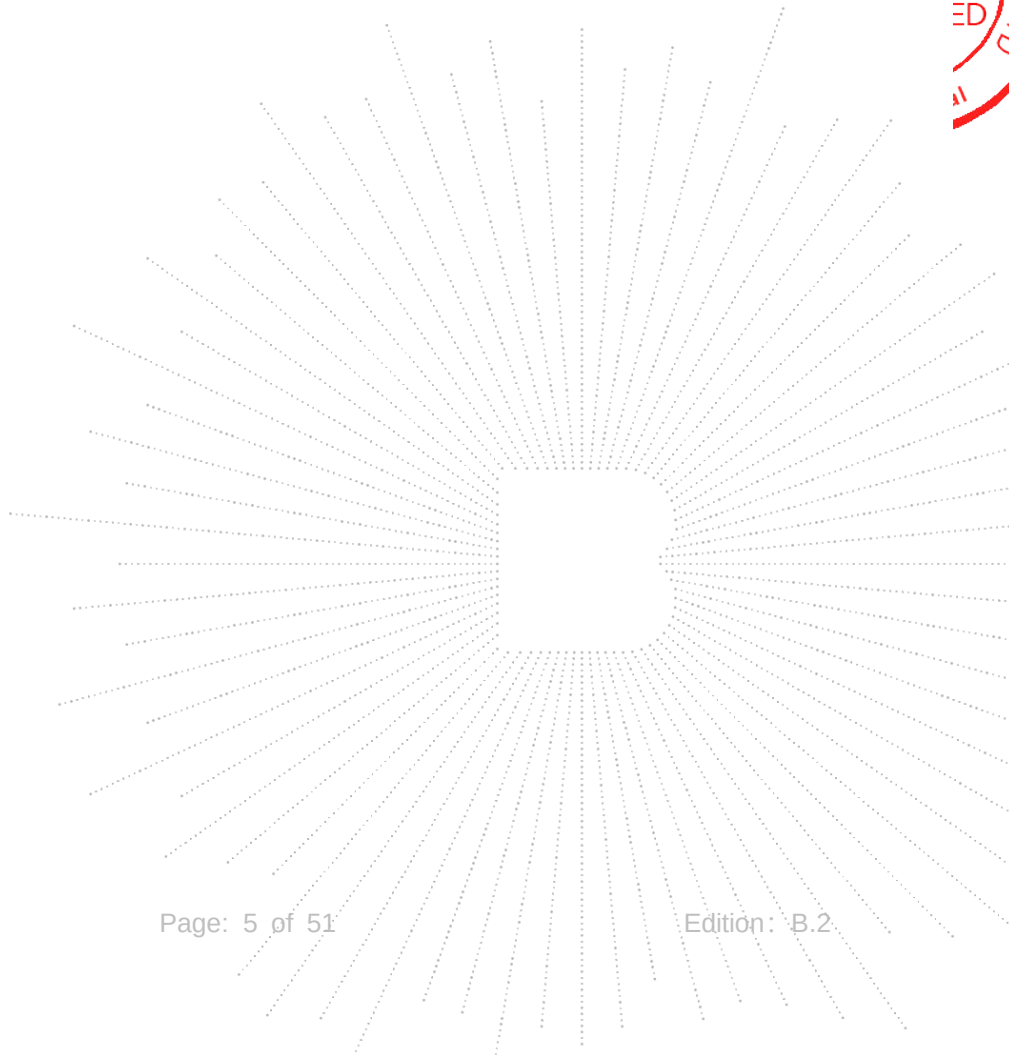

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C



4. Product Information And Test Setup

4.1 Product Information

Model/Type reference:	DOGZE 4G
Model differences:	N/A
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	GPRS/EGPRS 850: TX: 824~849MHz; RX: 869~894MHz; GPRS/EGPRS 1900: TX:1850~1910MHz; RX:1930~1990MHz;
GPRS Class:	Class 12
Max RF Output Power:	GPRS 850: 33.31dBm GPRS 1900: 30.62dBm EGPRS 850: 28.07dBm EGPRS 1900: 28.24dBm
Type of Modulation:	GSM with GMSK Modulation, EGPRS with 8PSK Modulation
Type of Emission:	GPRS 850: 245KGXW GPRS 1900: 249KGXW EGPRS 850: 254KG7W EGPRS 1900: 258KG7W
Antenna installation:	FPC antenna GSM850: 1 dBi GSM1900: 1 dBi
Antenna Gain:	Remark: ☐ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. ☒ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Connecting I/O Port(s)	Please refer to the User's Manual
Ratings:	DC 3.7V from battery, DC 5V from USB

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	GPS collar for Hunting Dogs	DOGZE, HUNTPOWER	DOGZE 4G	N/A	EUT

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Test Mode

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GPRS/EGPRS	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GPRS/EGPRS	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017

5.2 Test Instrument Used

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Radio frequency control box	MAIWEI	MW100-RFC B	\	\	\
Software	MAIWEI	MTS 8310	\	\	\


Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Communication test set	R&S	CMW500	126173	Nov. 11. 2024	Nov. 10, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\
Band filter	HX Microwave	HXLBQ-DTD 10	\	\	\
Band filter	HX Microwave	HXLBQ-GTA 11	\	\	\
Band filter	HX Microwave	HXLBQ-GTA 16	\	\	\

TE
TC
OV
t See

6. RF Output Power


6.1 Block Diagram Of Test Setup

Conducted output power test method:

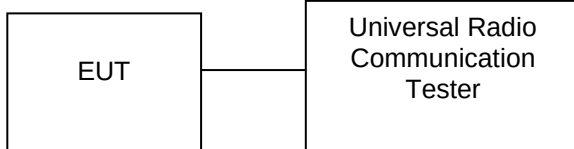


Radiated power test method:


(A) Radiated Emission Test-Up Frequency Below 30MHz

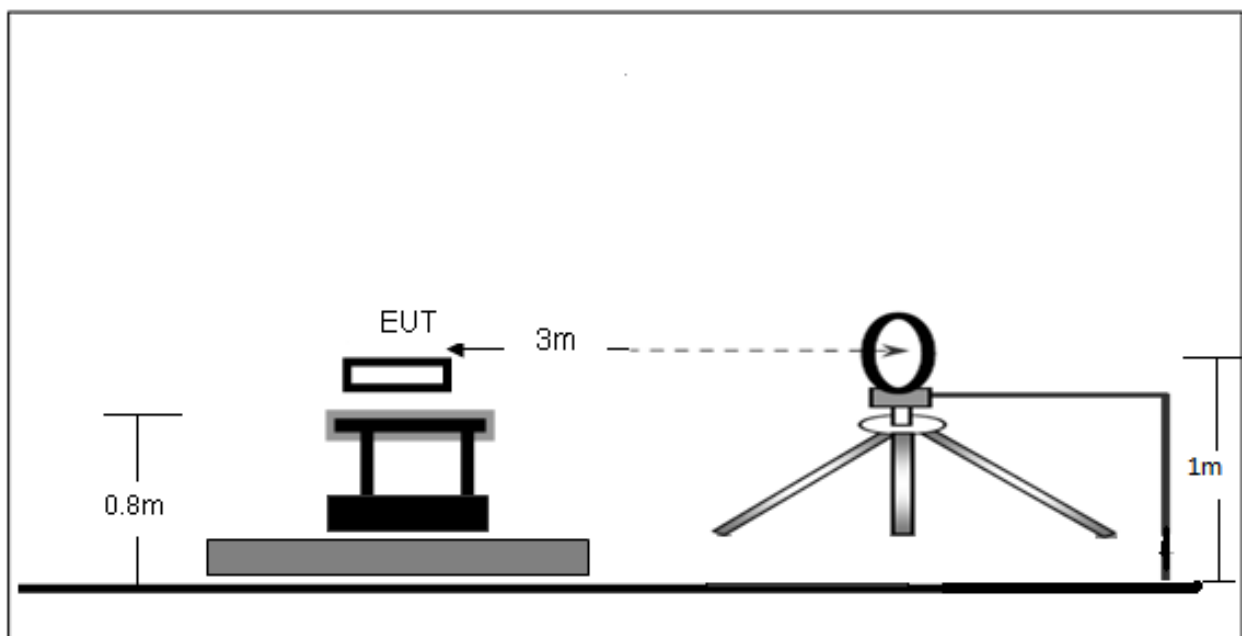

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

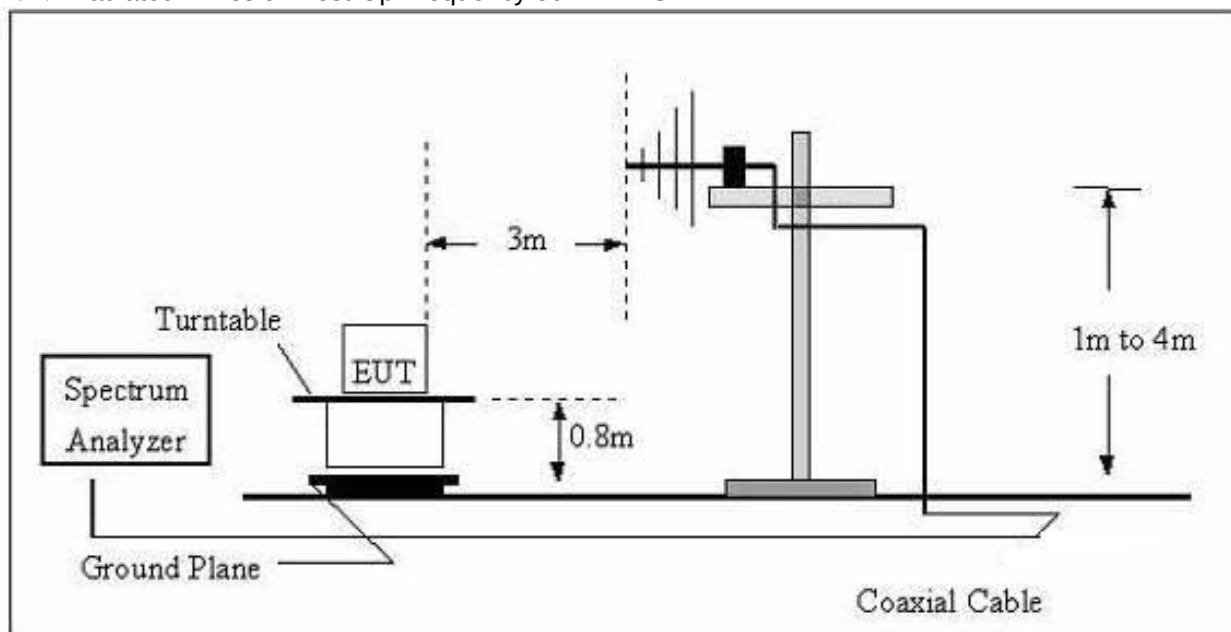

(C) Radiated Emission Test-Up Frequency Above 1GHz

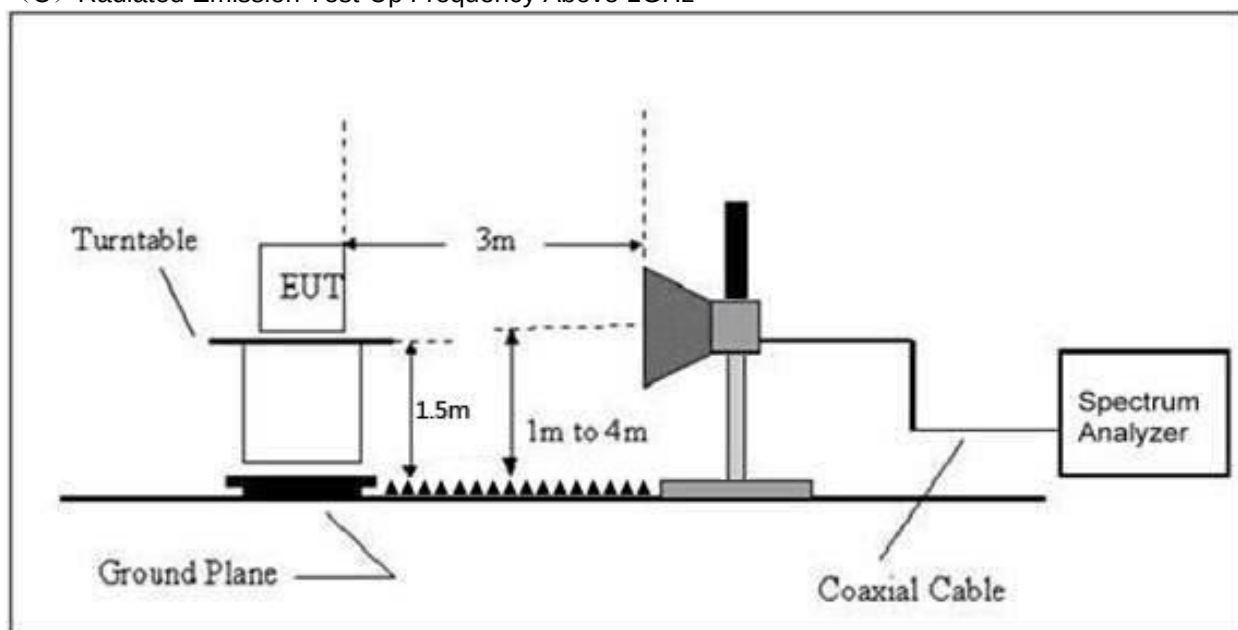

6.2 Limit

According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

6.3 Test procedure

Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

6.4 Test Result

ERP For GPRS Mode GSM850

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 22H Limits (dBm)	Result
Low Channel						
824.2	H	54.37	-26.29	28.08	38.45	PASS
824.2	V	54.25	-26.29	27.96	38.45	PASS
Middle Channel						
836.6	H	55.72	-26.35	29.37	38.45	PASS
836.6	V	54.87	-26.35	28.52	38.45	PASS
High Channel						
848.8	H	54.41	-26.42	27.99	38.45	PASS
848.8	V	54.14	-26.42	27.72	38.45	PASS

EIRP For GPRS Mode PCS1900

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 24E Limits (dBm)	Result
Low Channel						
1850.2	H	54.40	-26.93	27.47	33.00	PASS
1850.2	V	54.34	-26.93	27.41	33.00	PASS
Middle Channel						
1880	H	55.56	-26.86	28.70	33.00	PASS
1880	V	54.89	-26.86	28.03	33.00	PASS
High Channel						
1909.8	H	54.35	-26.80	27.55	33.00	PASS
1909.8	V	54.99	-26.80	28.19	33.00	PASS

ERP For EGPRS Mode GSM850

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 22H Limits (dBm)	Result
Low Channel						
824.2	H	55.82	-26.29	29.53	38.45	PASS
824.2	V	55.35	-26.29	29.06	38.45	PASS
Middle Channel						
836.6	H	56.26	-26.35	29.91	38.45	PASS
836.6	V	54.89	-26.35	28.54	38.45	PASS
High Channel						
848.8	H	56.82	-26.42	30.40	38.45	PASS
848.8	V	54.95	-26.42	28.53	38.45	PASS

EIRP For EGPRS Mode PCS1900

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 24E Limits (dBm)	Result
Low Channel						
1850.2	H	55.31	-26.93	28.38	33.00	PASS
1850.2	V	55.07	-26.93	28.14	33.00	PASS
Middle Channel						
1880	H	55.18	-26.86	28.32	33.00	PASS
1880	V	55.31	-26.86	28.45	33.00	PASS
High Channel						
1909.8	H	55.55	-26.80	28.75	33.00	PASS
1909.8	V	55.35	-26.80	28.55	33.00	PASS



Max. Conducted Output Power

For Cellular Band (GSM850)


Band	GSM850			FCC Part 22.913 Limit (dBm)
Channel	128	190	251	
Frequency(MHz)	824.2	836.6	848.8	
GPRS Slot -1	33.04	33.31	33.31	38.45
GPRS Slot -2	32.94	33.13	33.2	38.45
GPRS Slot -3	31.33	31.57	31.68	38.45
GPRS Slot -4	29.56	29.74	29.9	38.45
EGPRS Slot -1	27.19	27.84	28.07	38.45
EGPRS Slot -2	25.49	26.27	26.56	38.45
EGPRS Slot -3	23.62	24.49	24.1	38.45
EGPRS Slot -4	21.05	21.83	22.14	38.45

For PCS Band (GSM1900)

Band	GSM1900			FCC Part 24.232 Limit (dBm)
Channel	512	661	810	
Frequency(MHz)	1850.2	1880	1909.8	
GPRS Slot -1	30.62	30.56	30.35	33.0
GPRS Slot -2	30.56	30.51	30.3	33.0
GPRS Slot -3	29.39	29.46	29.2	33.0
GPRS Slot -4	27.64	27.83	27.37	33.0
EGPRS Slot -1	27.5	28.24	27.03	33.0
EGPRS Slot -2	25.36	26.35	25.53	33.0
EGPRS Slot -3	23.07	24.58	23.61	33.0
EGPRS Slot -4	21.39	22.37	21.51	33.0

7. Peak-to-average Ratio(PAR) of Transmitter

7.1 Block Diagram Of Test Setup

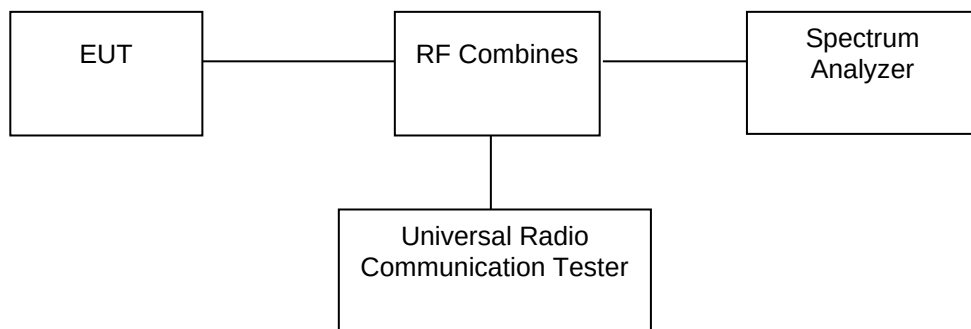

7.2 Limit

According to §22.913(d), Power measurement. Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (see FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


7.3 Test procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded. Record the maximum PAPR level associated with a probability of 0.1%.


7.4 Test Result

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS850	128	824.2	2.86	13.00	PASS
GPRS850	190	836.6	2.79	13.00	PASS
GPRS850	251	848.8	2.91	13.00	PASS
EGPRS850	128	824.2	8.27	13.00	PASS
EGPRS850	190	836.6	7.55	13.00	PASS
EGPRS850	251	848.8	8.15	13.00	PASS


GPRS850 Channel=128

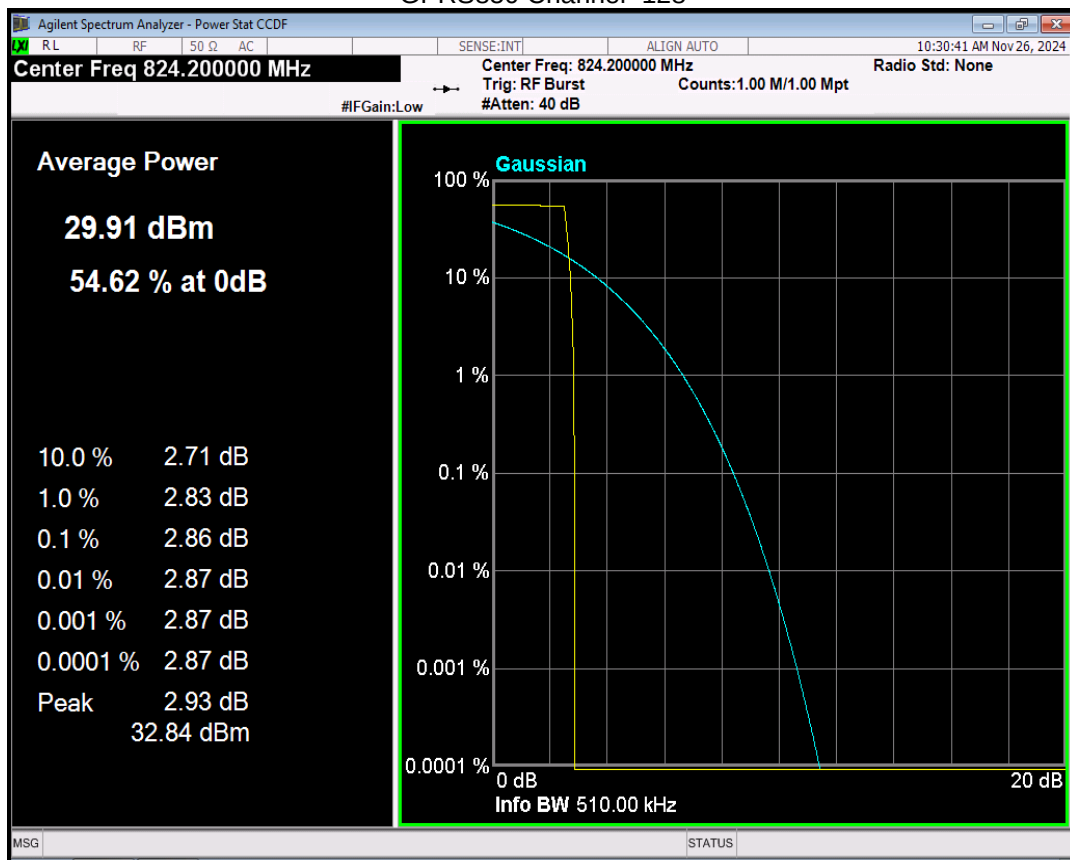


GPRS850 Channel=190

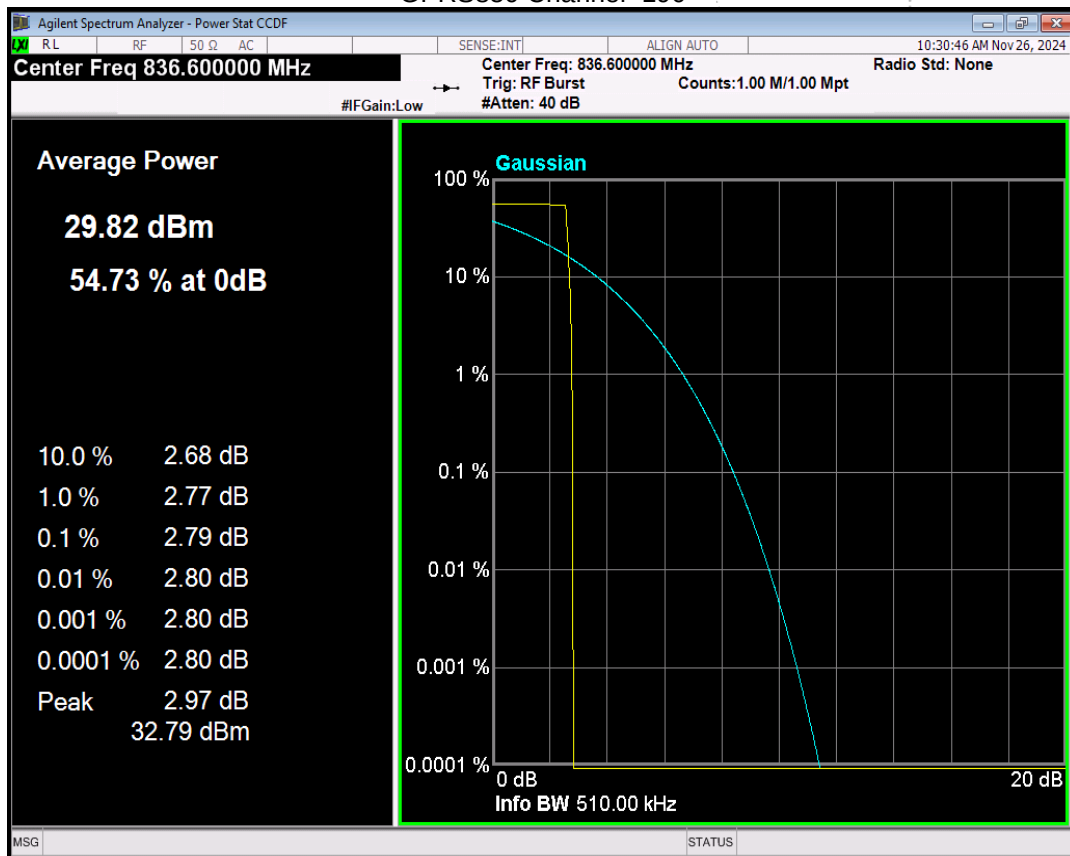


GPRS850 Channel=251

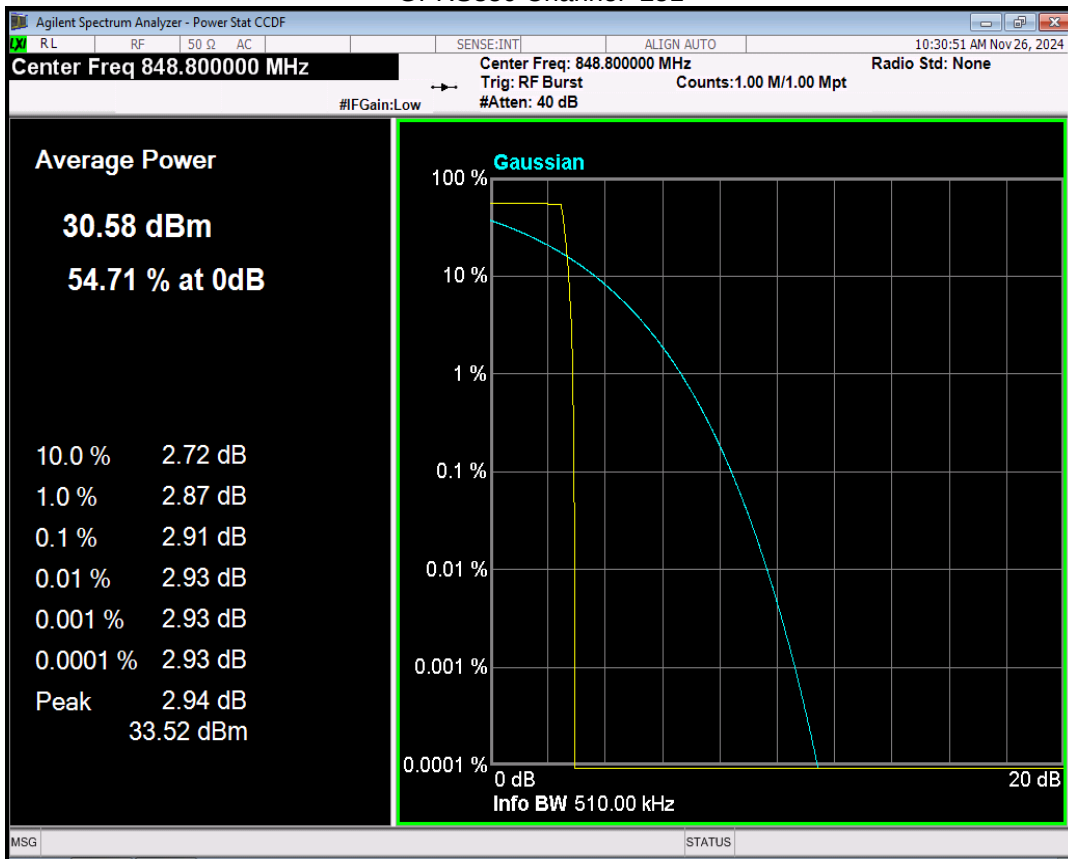


EGPRS850 Channel=128

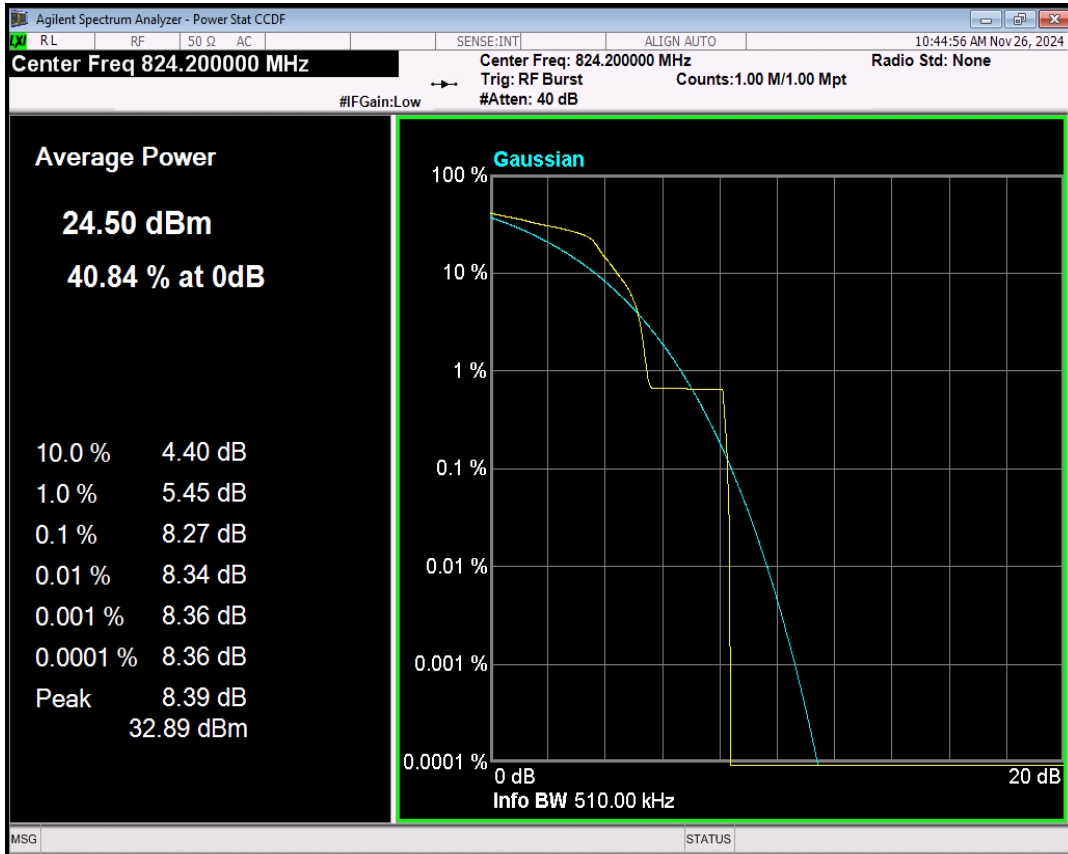


EGPRS850 Channel=190

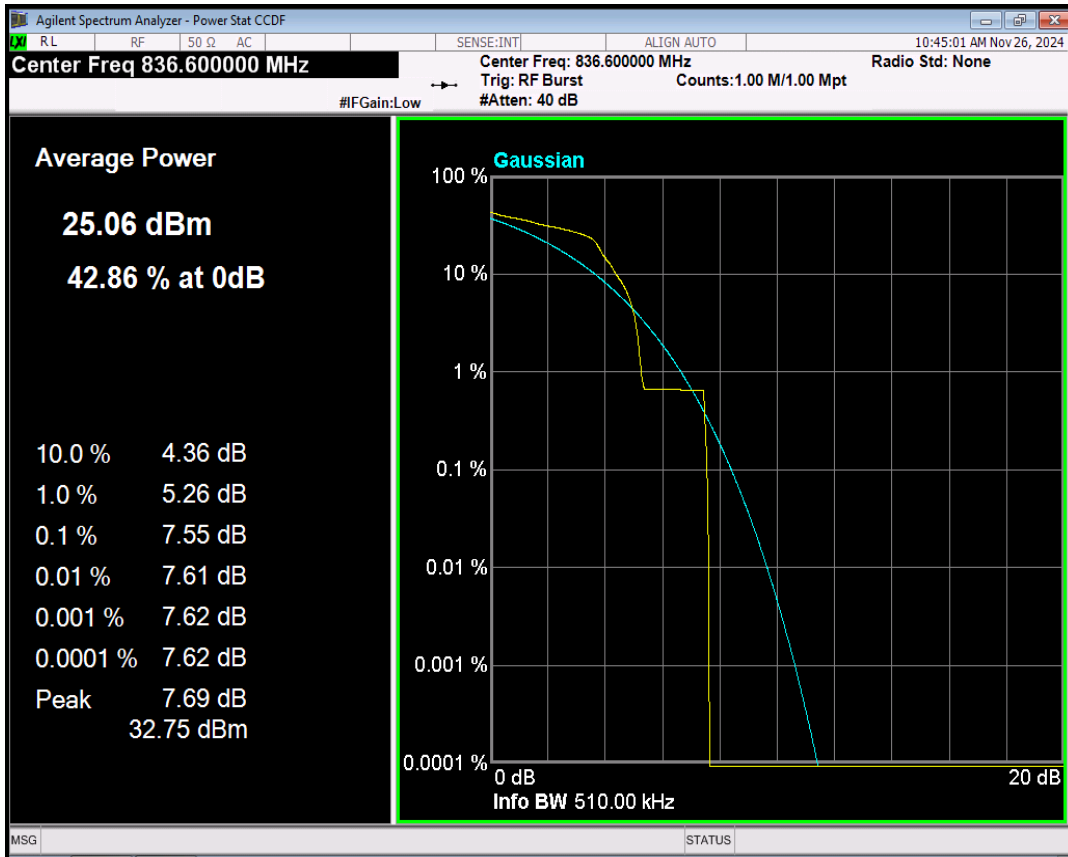


EGPRS850 Channel=251

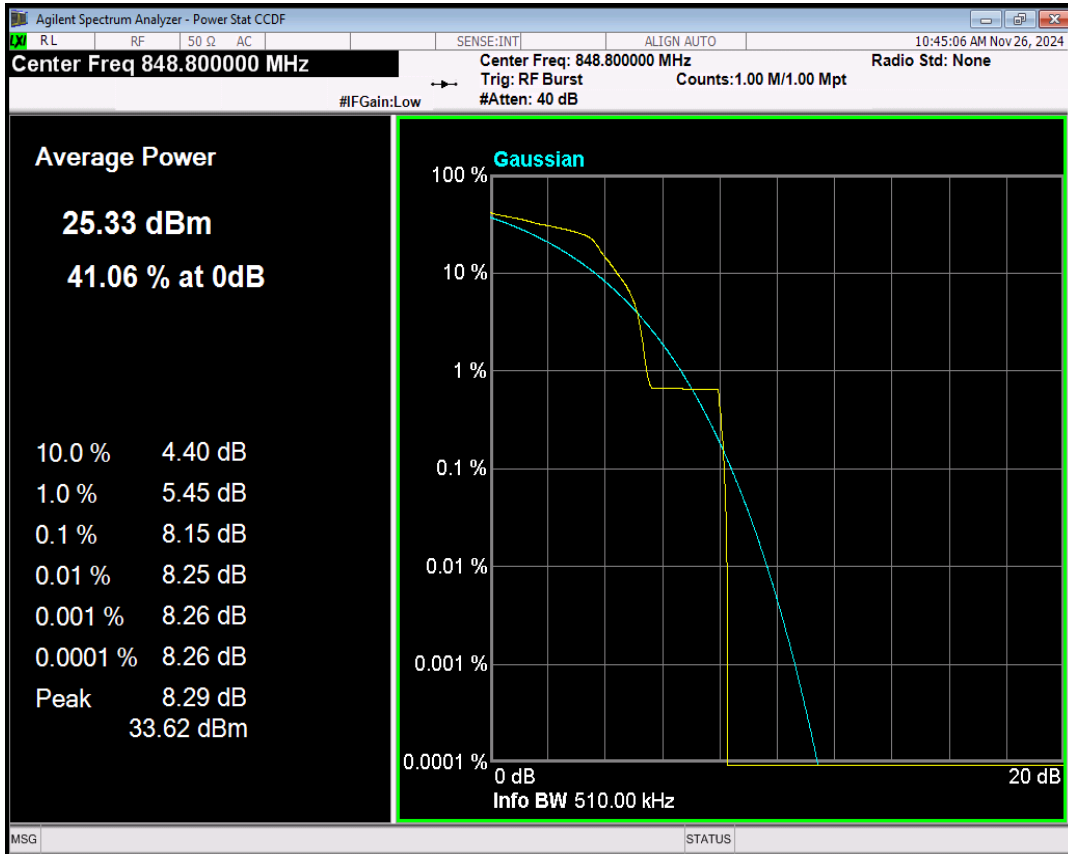


Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.71	13.00	PASS
GPRS1900	661	1880	2.70	13.00	PASS
GPRS1900	810	1909.8	2.71	13.00	PASS
EGPRS1900	512	1850.2	2.93	13.00	PASS
EGPRS1900	661	1880	4.94	13.00	PASS
EGPRS1900	810	1909.8	5.22	13.00	PASS

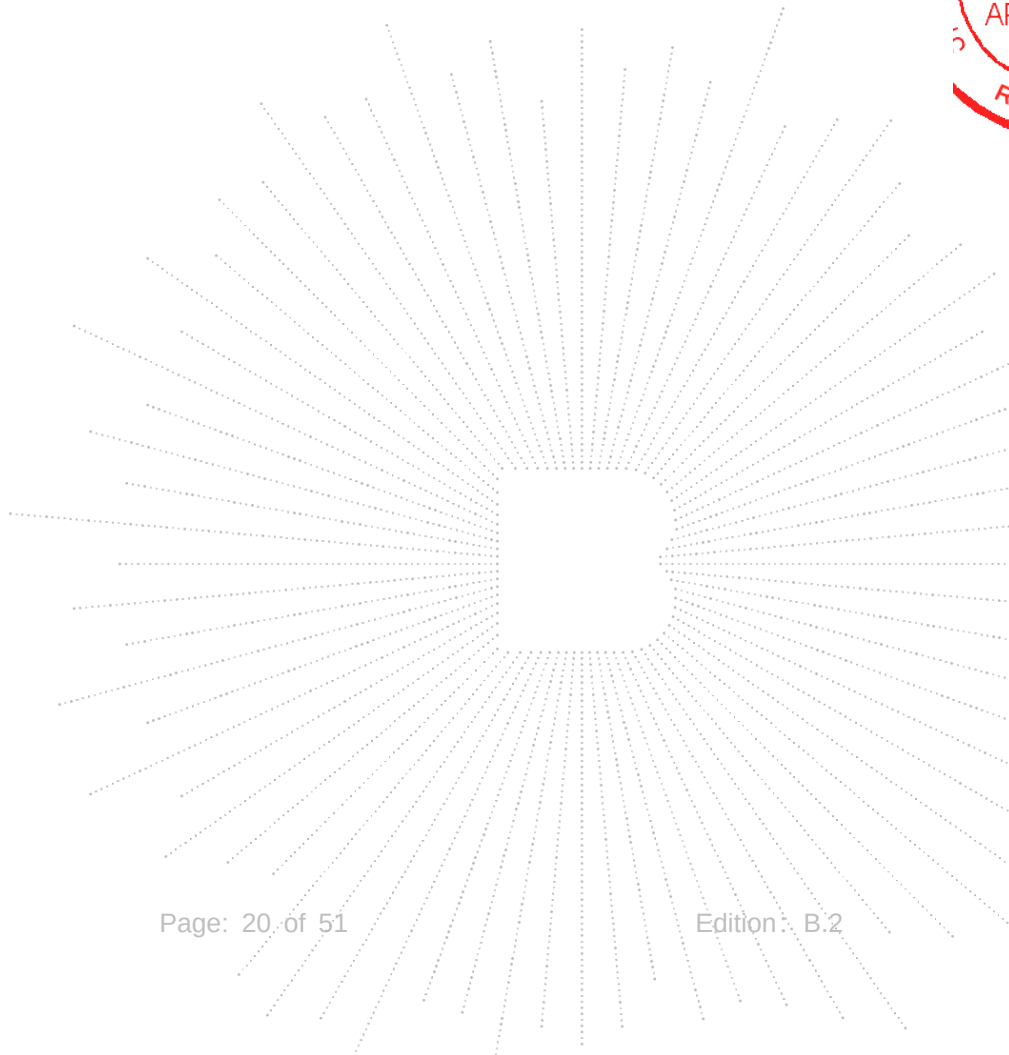


GPRS1900 Channel=512

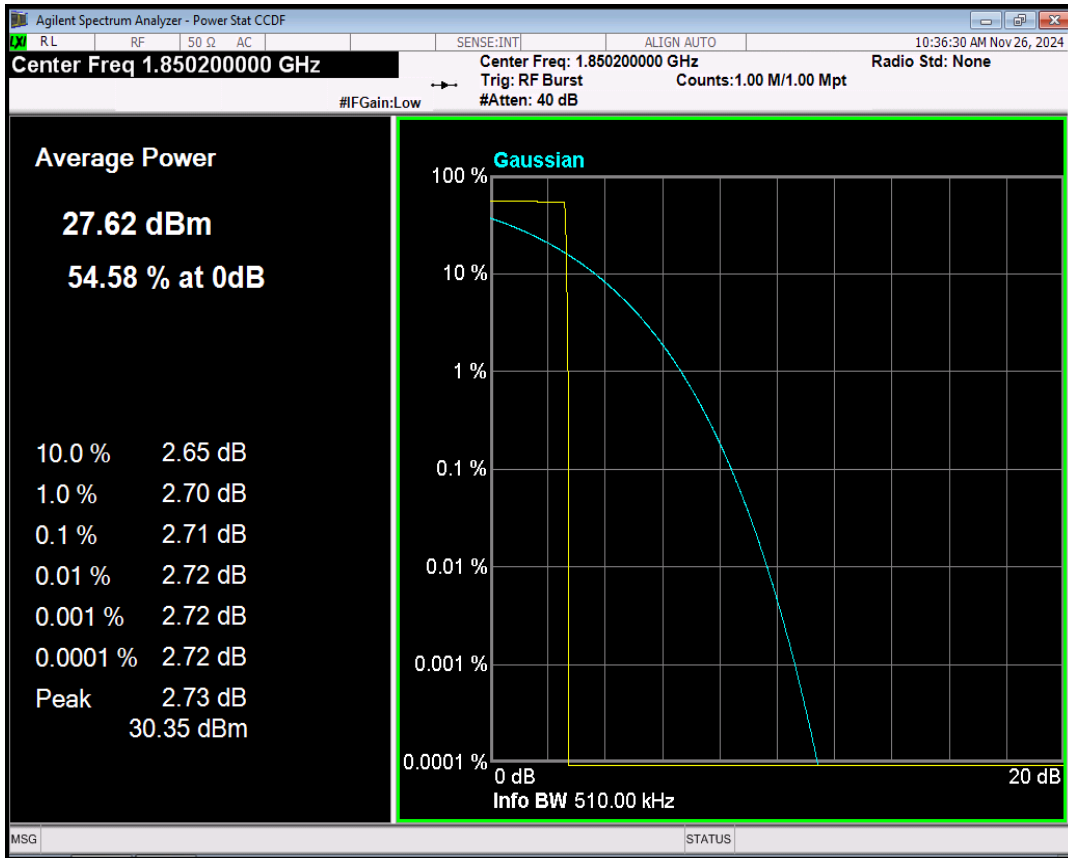


GPRS1900 Channel=810

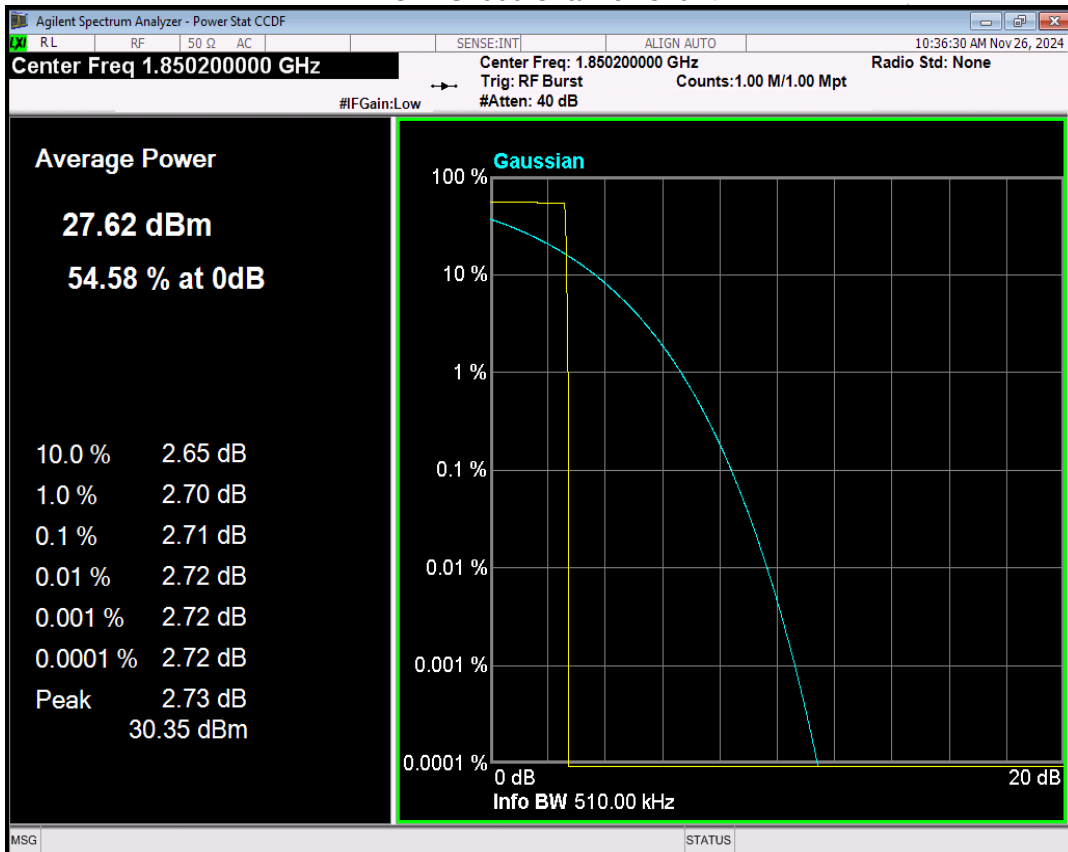


GPRS1900 Channel=661

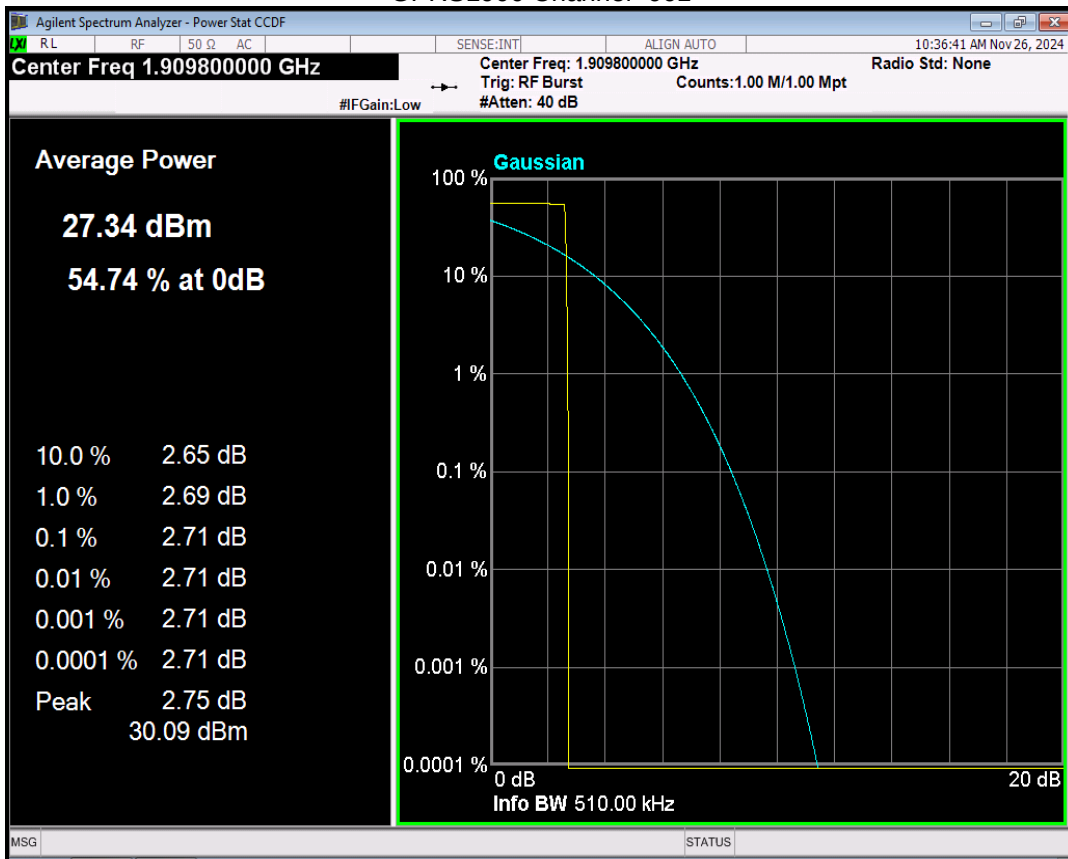


EGPRS1900 Channel=512

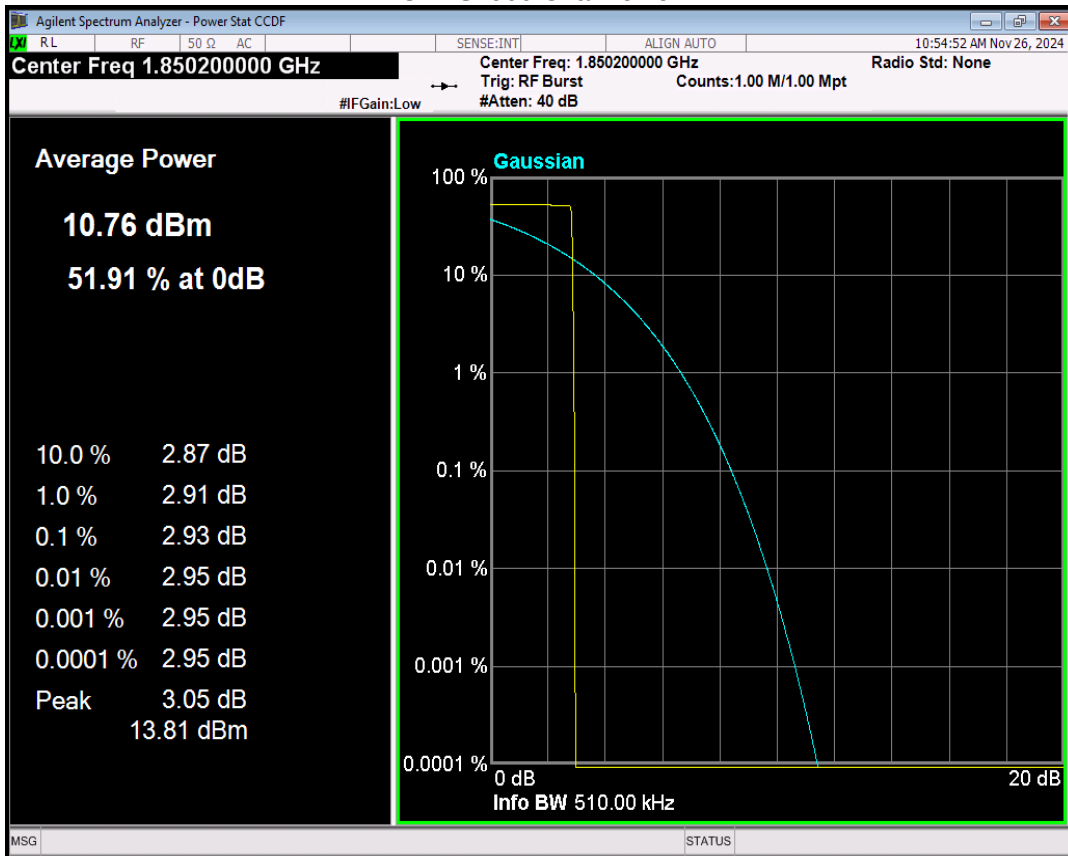

EGPRS1900 Channel=661

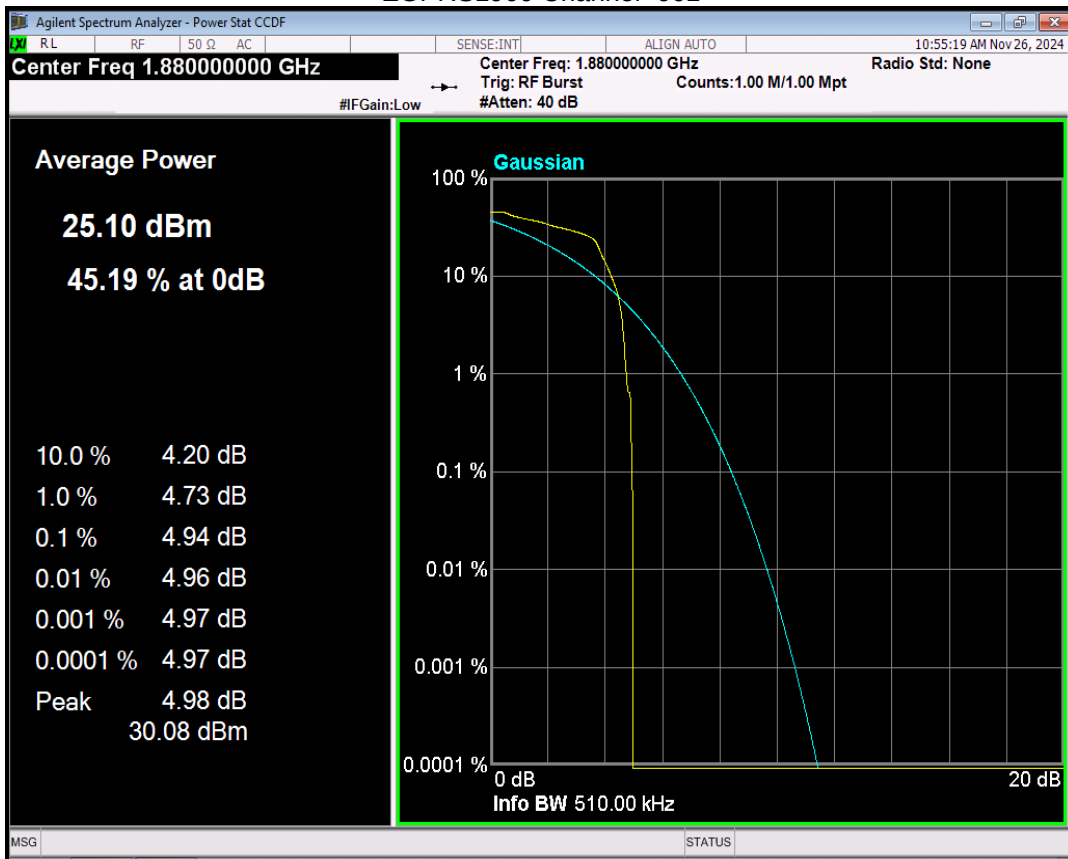


EGPRS1900 Channel=810

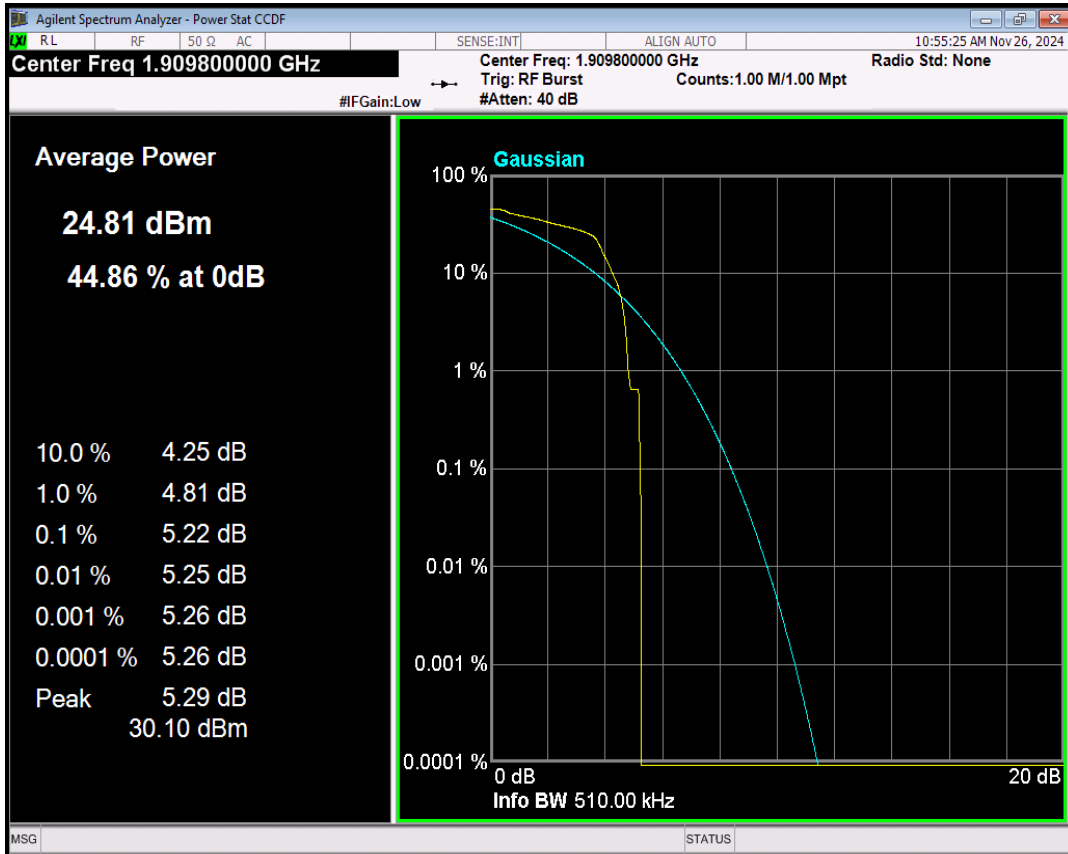

8. Emission Bandwidth

8.1 Block Diagram Of Test Setup

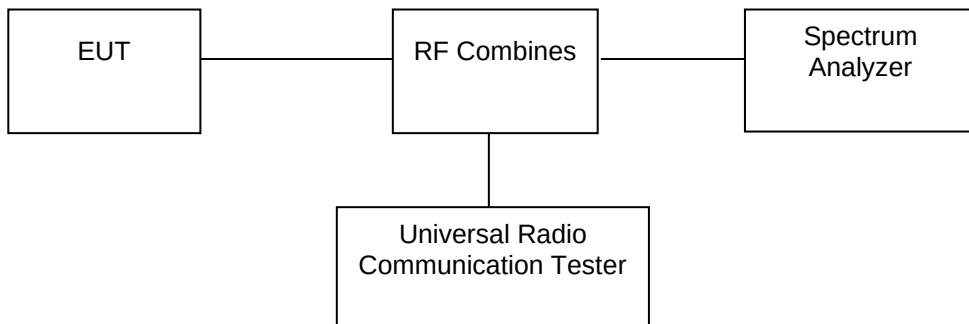

8.2 Limit

According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


8.3 Test procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.


8.4 Test Result

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS850	128	824.2	243.319	306.170	PASS
GPRS850	190	836.6	240.937	302.114	PASS
GPRS850	251	848.8	245.452	315.380	PASS
EGPRS850	128	824.2	249.795	309.585	PASS
EGPRS850	190	836.6	253.563	320.997	PASS
EGPRS850	251	848.8	243.261	302.231	PASS


GPRS850 Channel=128

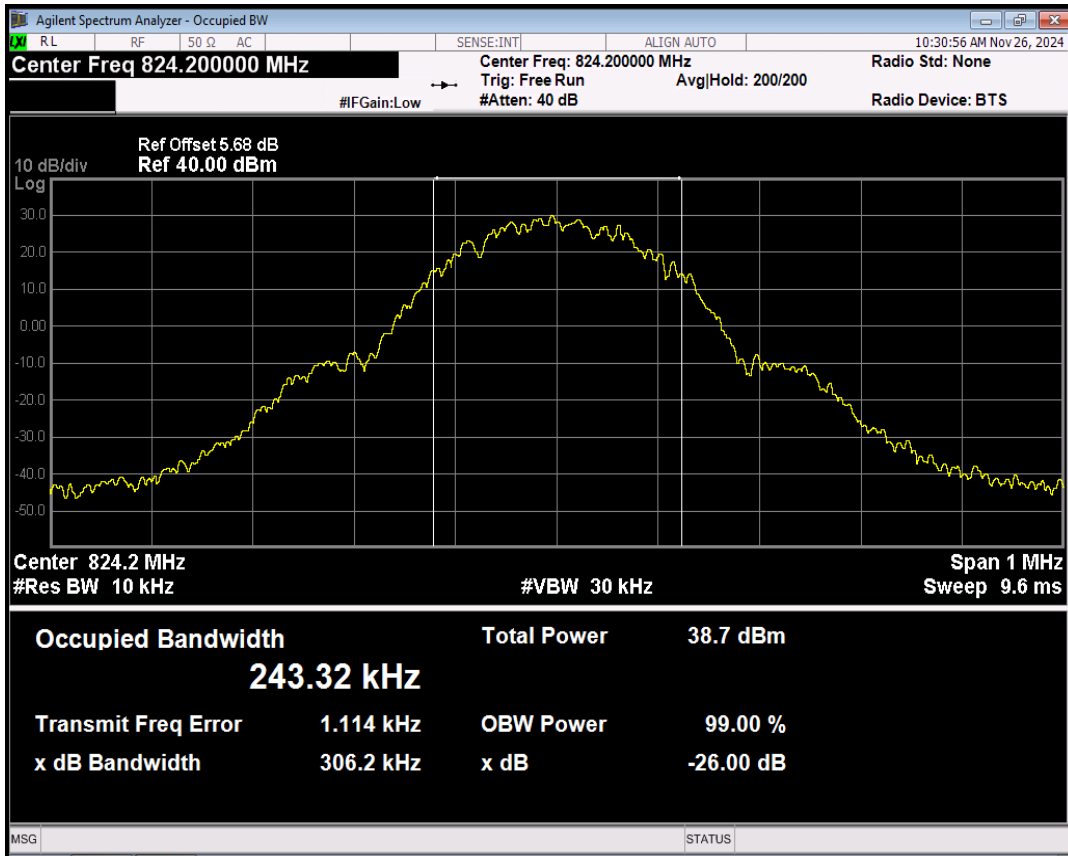


GPRS850 Channel=190

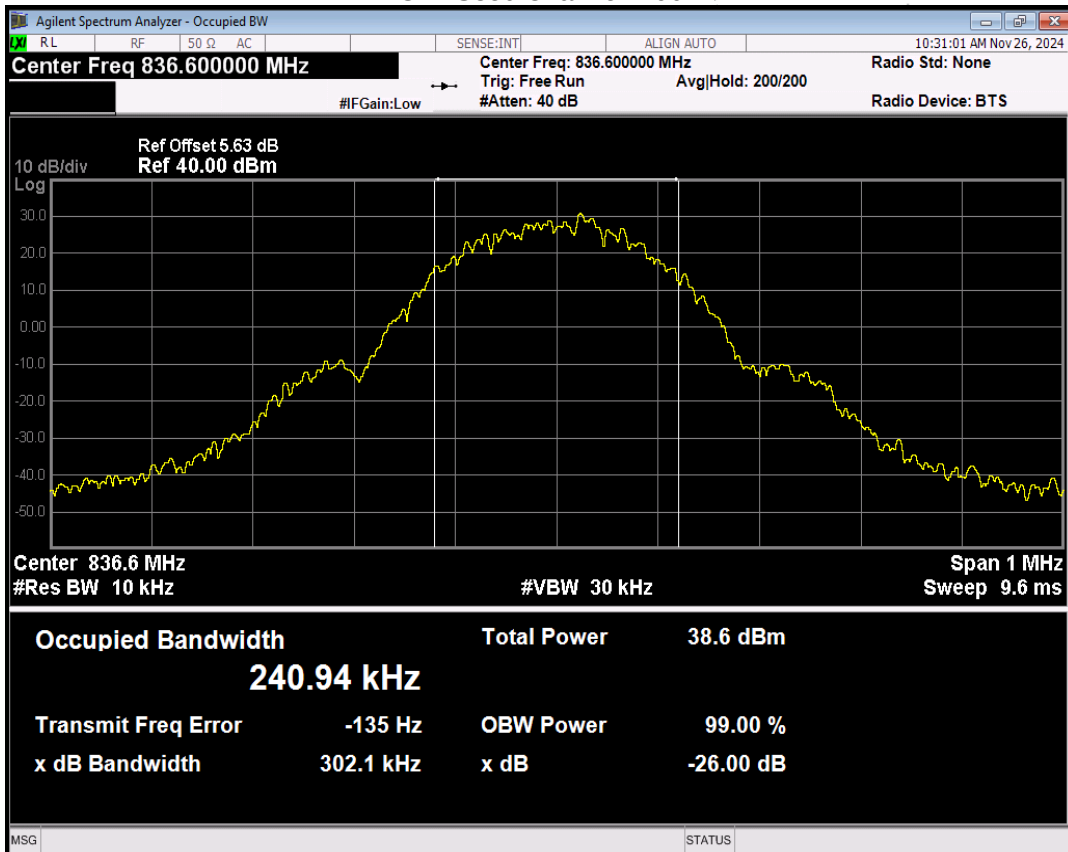


GPRS850 Channel=251

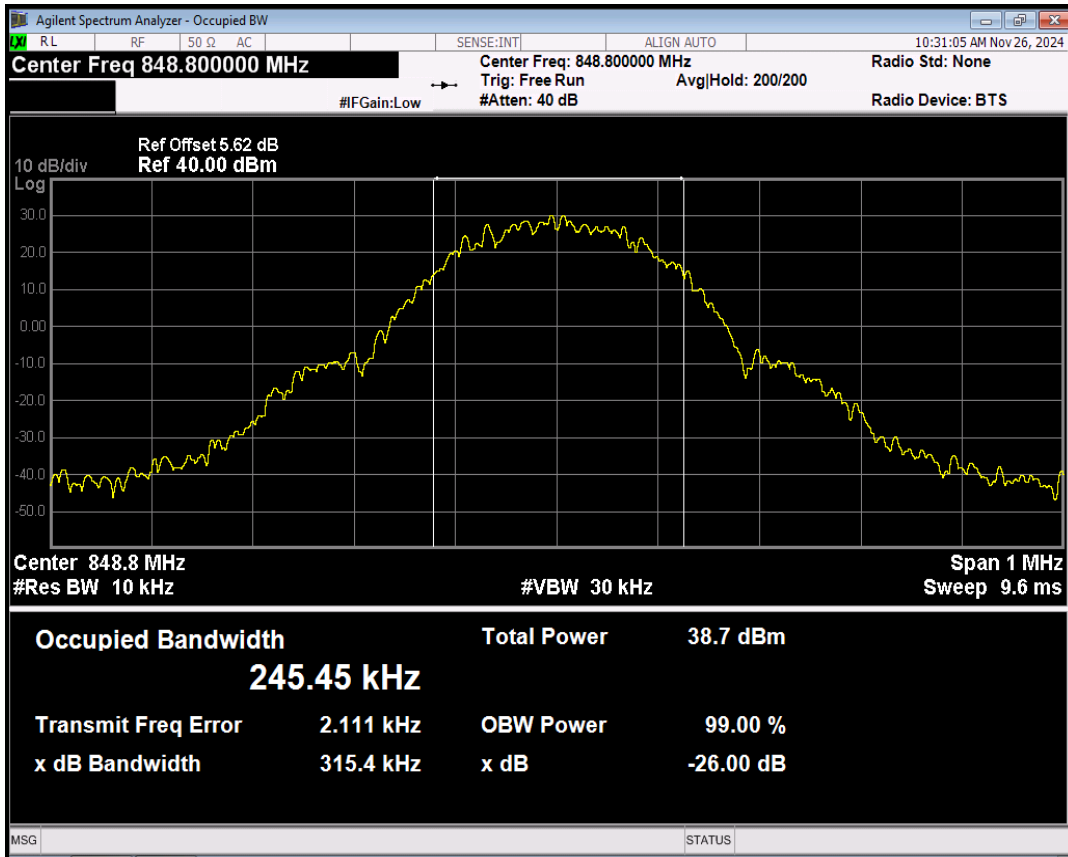


EGPRS850 Channel=128

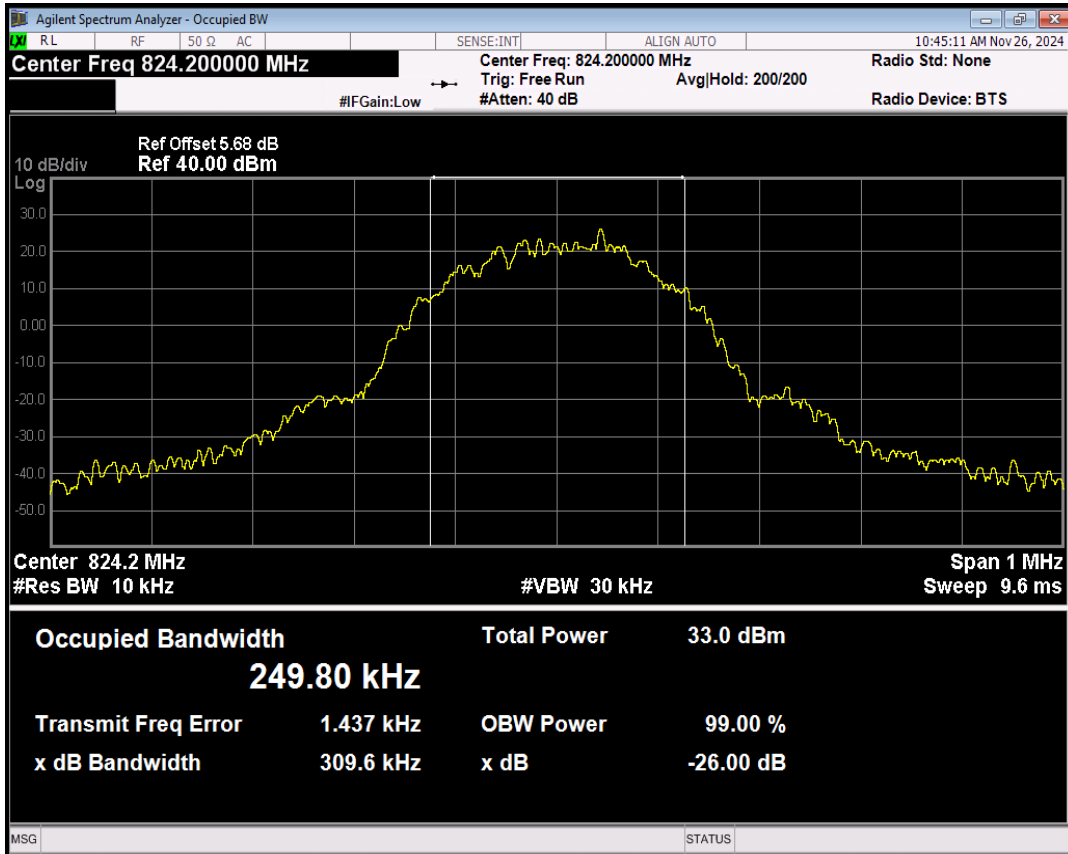

EGPRS850 Channel=190

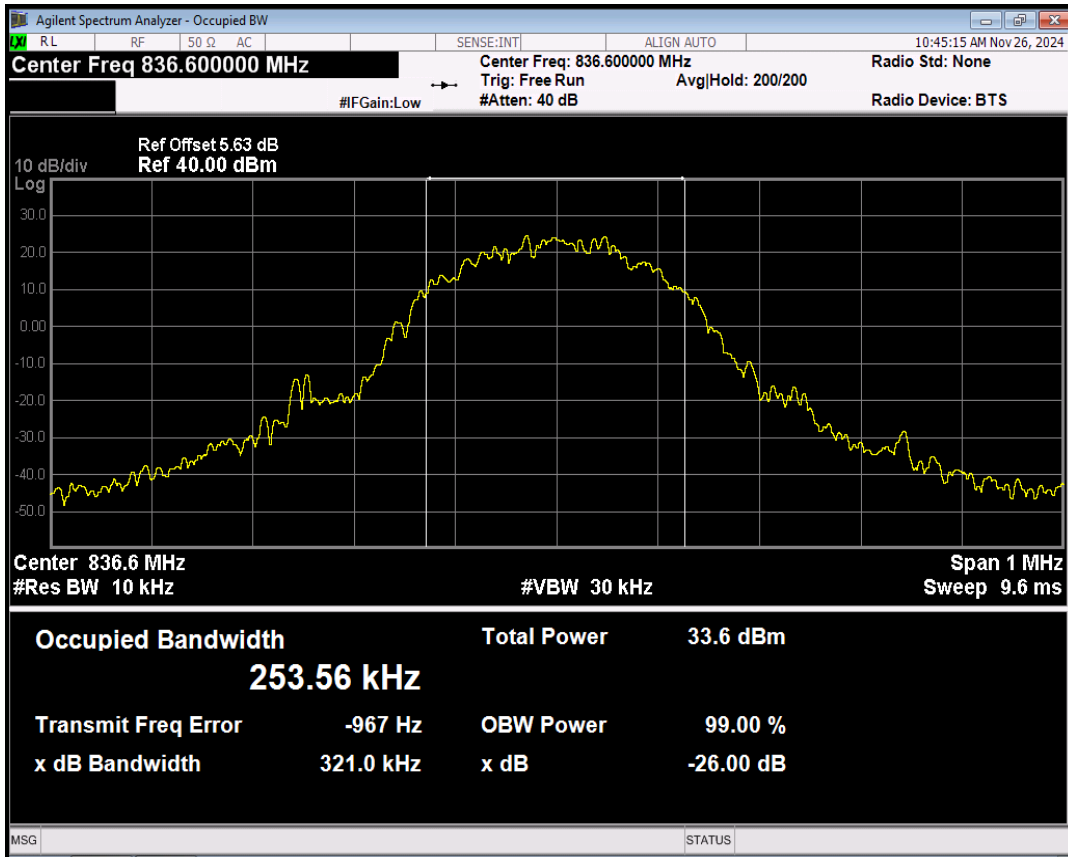


EGPRS850 Channel=251

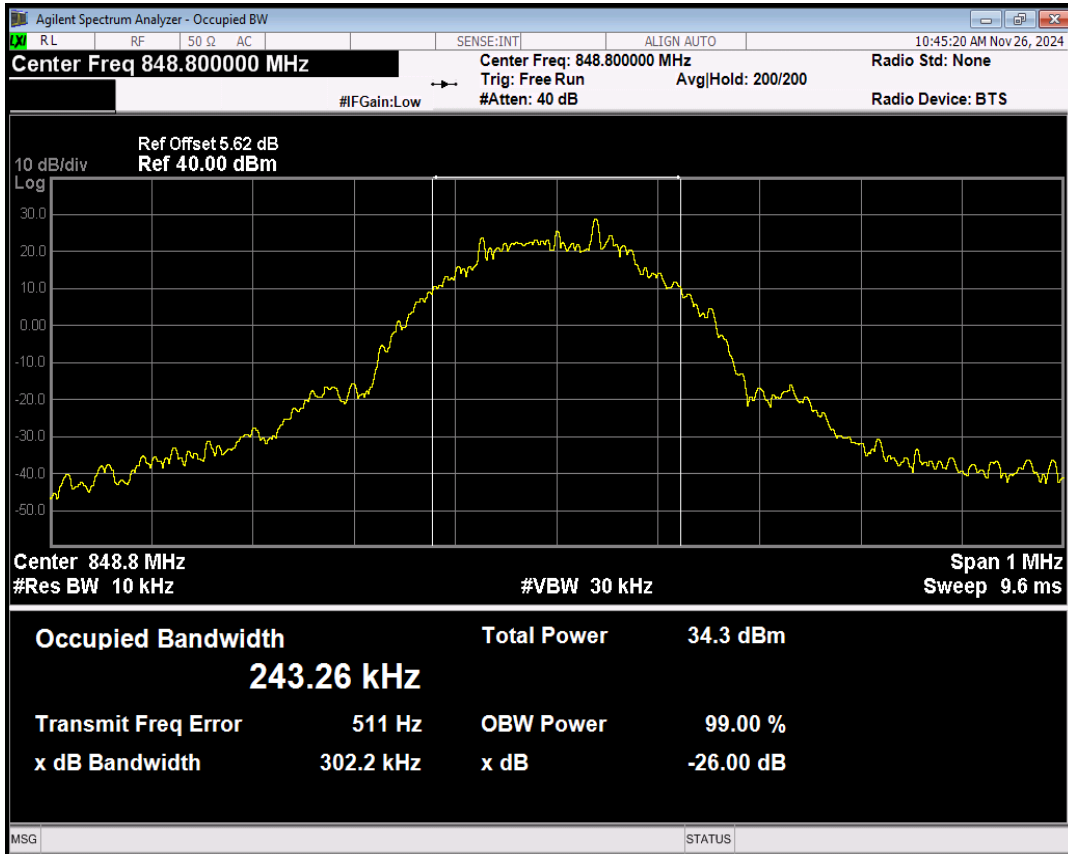


Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	249.173	318.365	PASS
GPRS1900	661	1880	240.698	309.207	PASS
GPRS1900	810	1909.8	248.529	317.385	PASS
EGPRS1900	512	1850.2	253.414	319.607	PASS
EGPRS1900	661	1880	257.883	330.610	PASS
EGPRS1900	810	1909.8	249.865	328.128	PASS


TEST
TC
OVER
t See

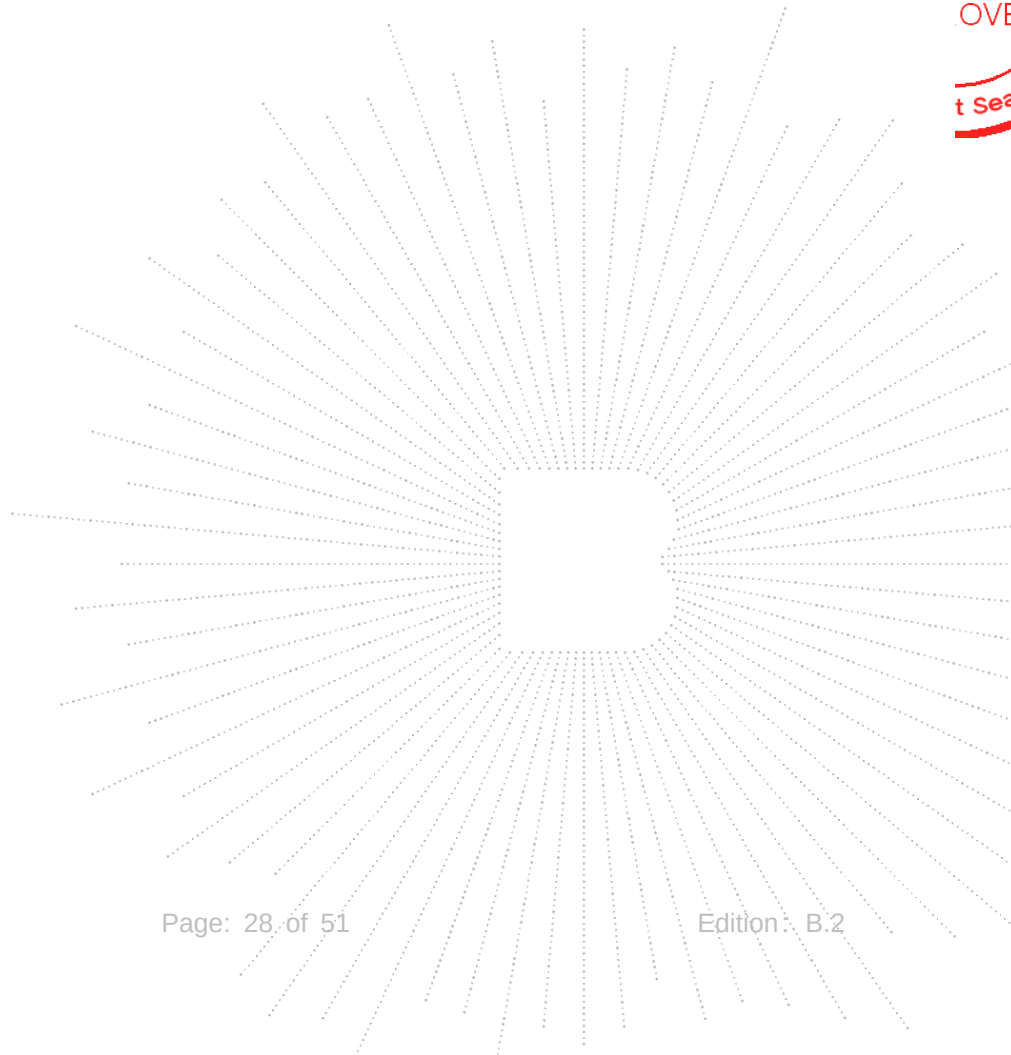


GPRS1900 Channel=512

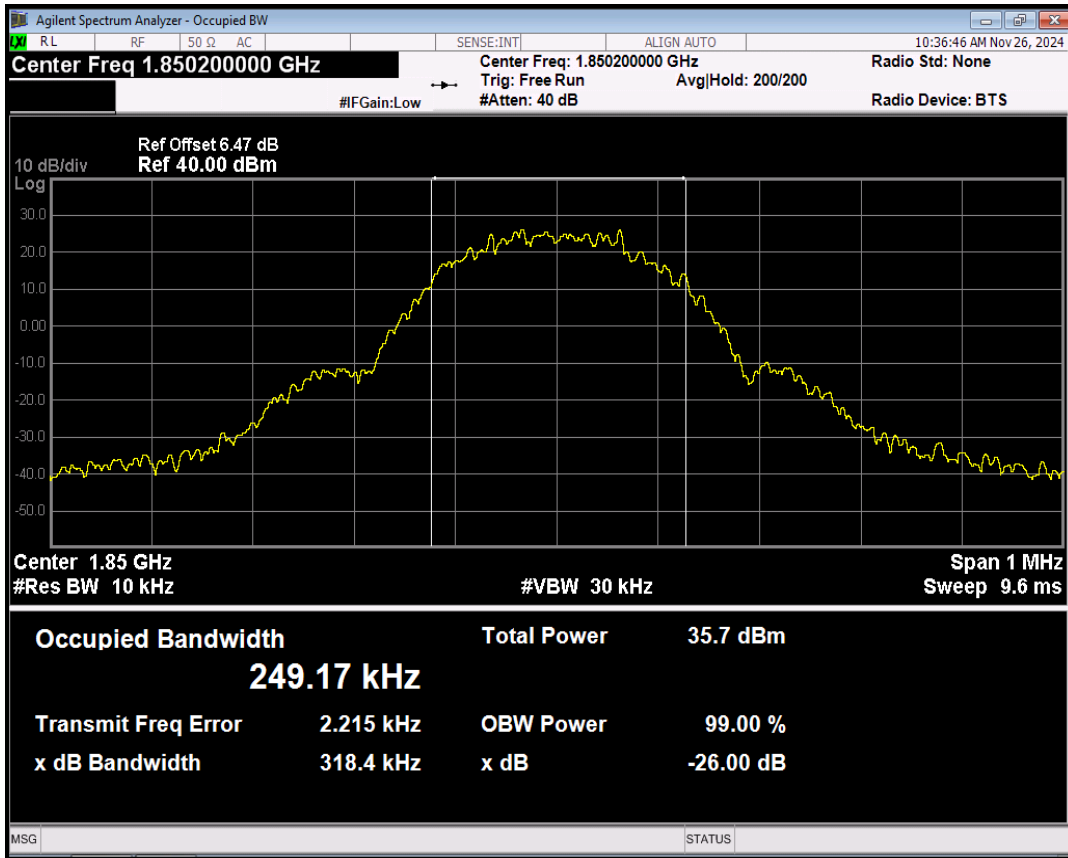


GPRS1900 Channel=661

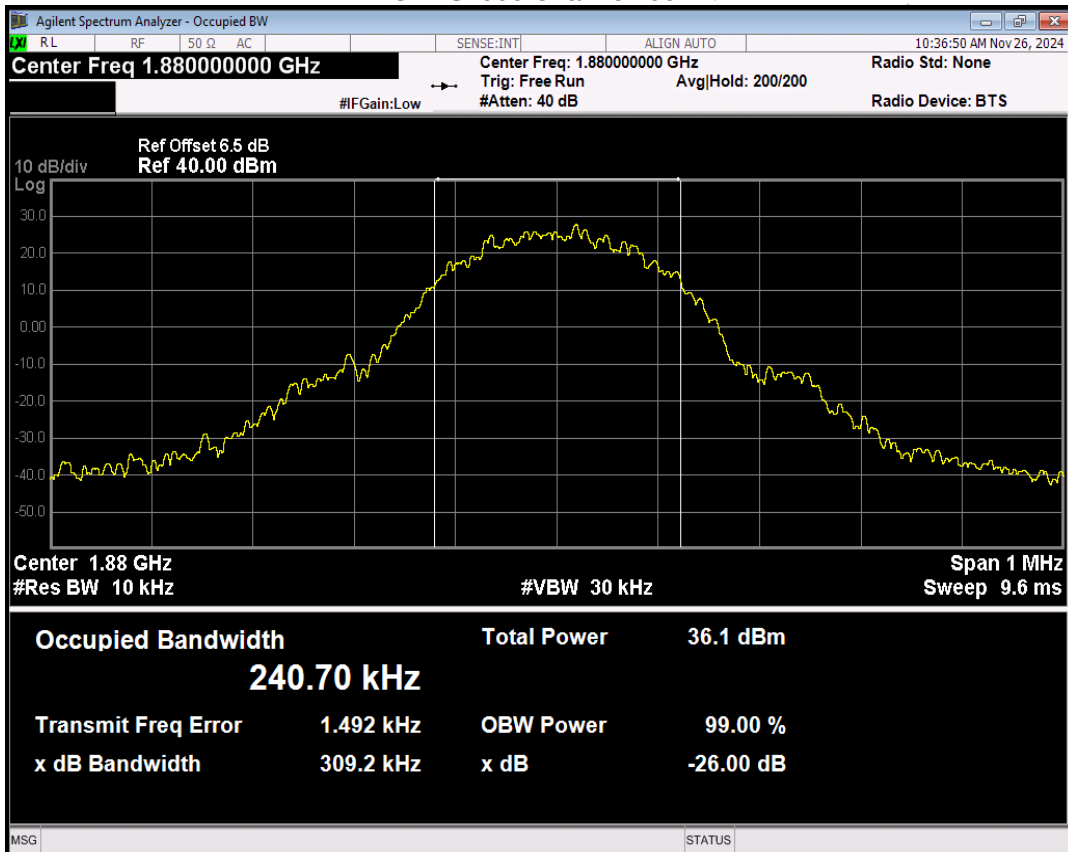


GPRS1900 Channel=810

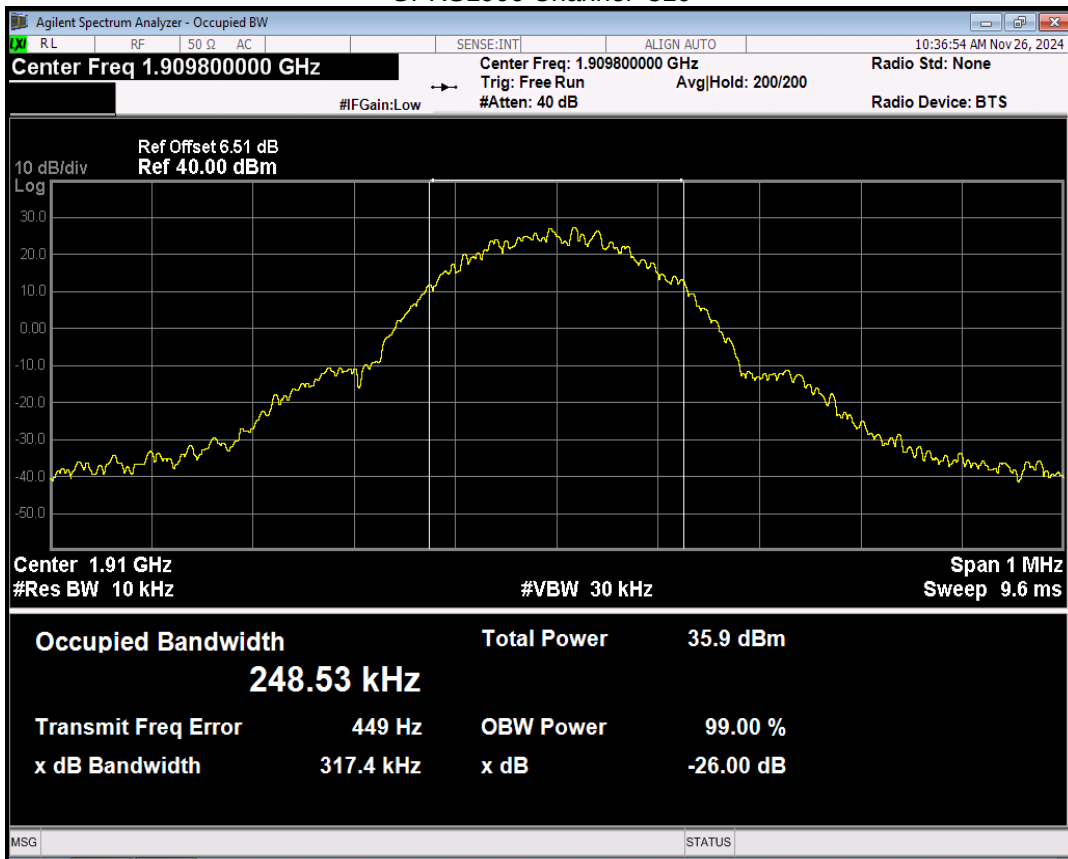


EGPRS1900 Channel=512

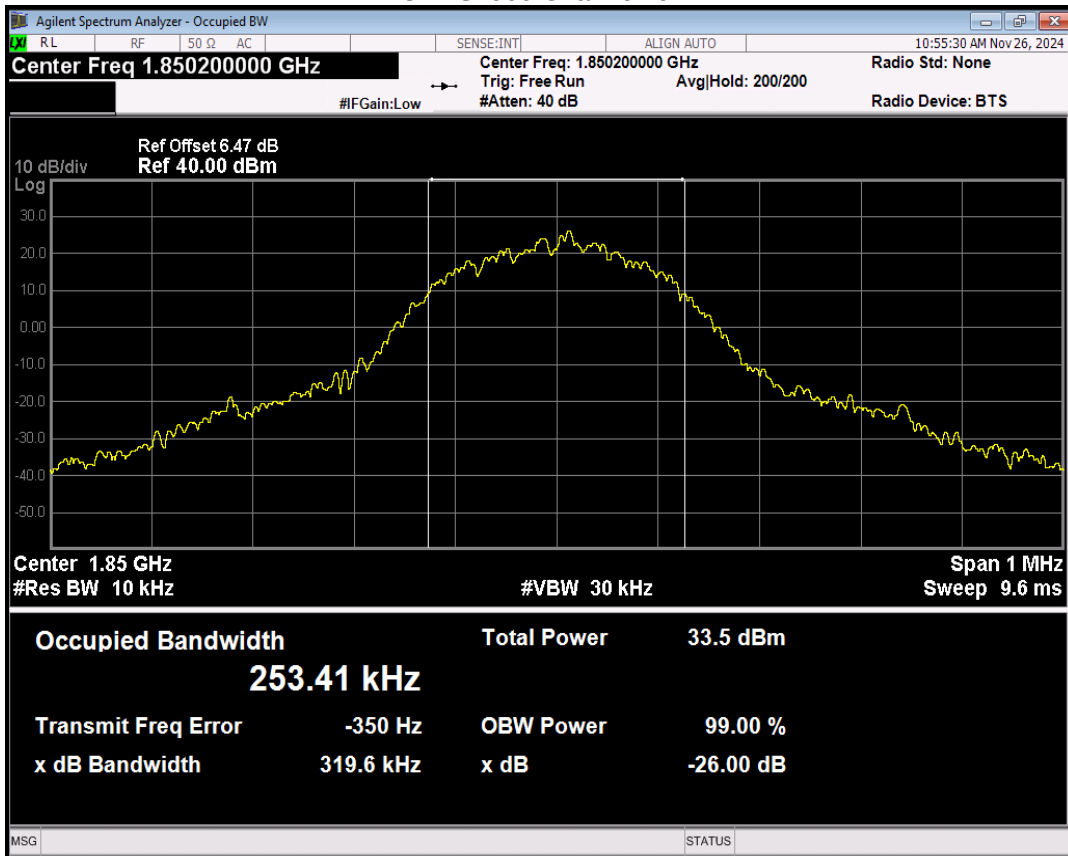

EGPRS1900 Channel=661

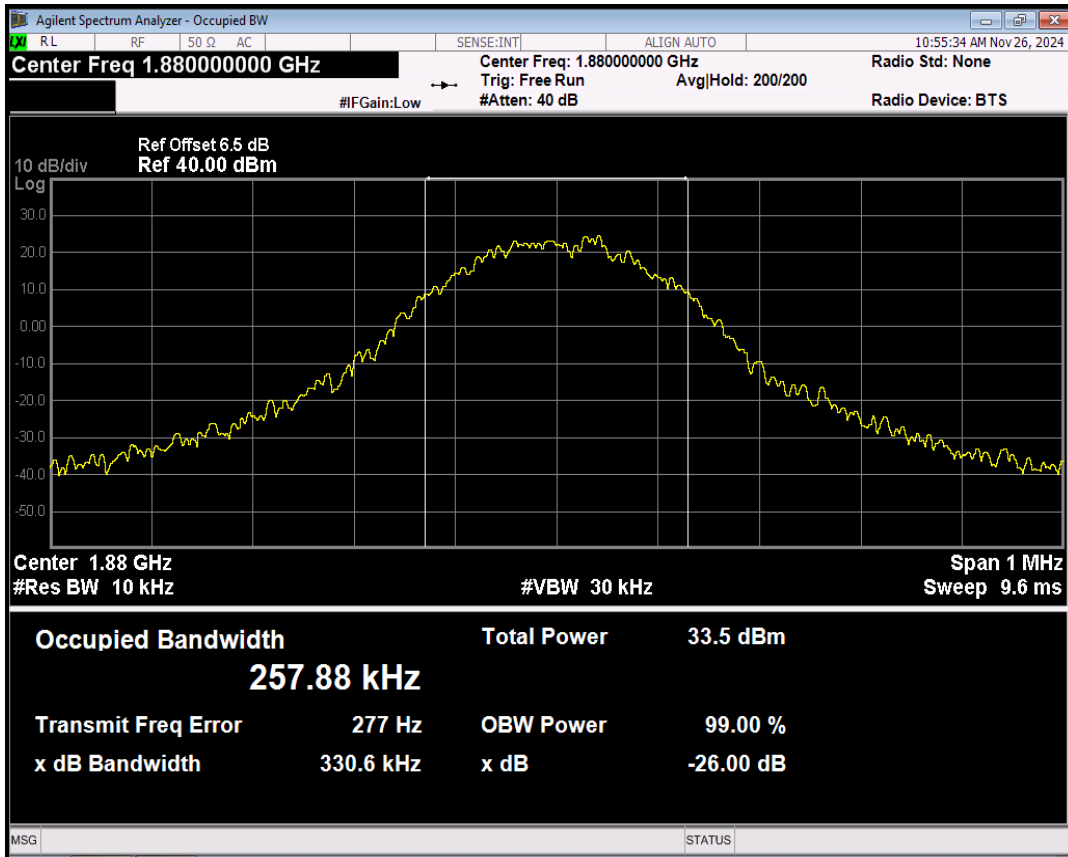


EGPRS1900 Channel=810

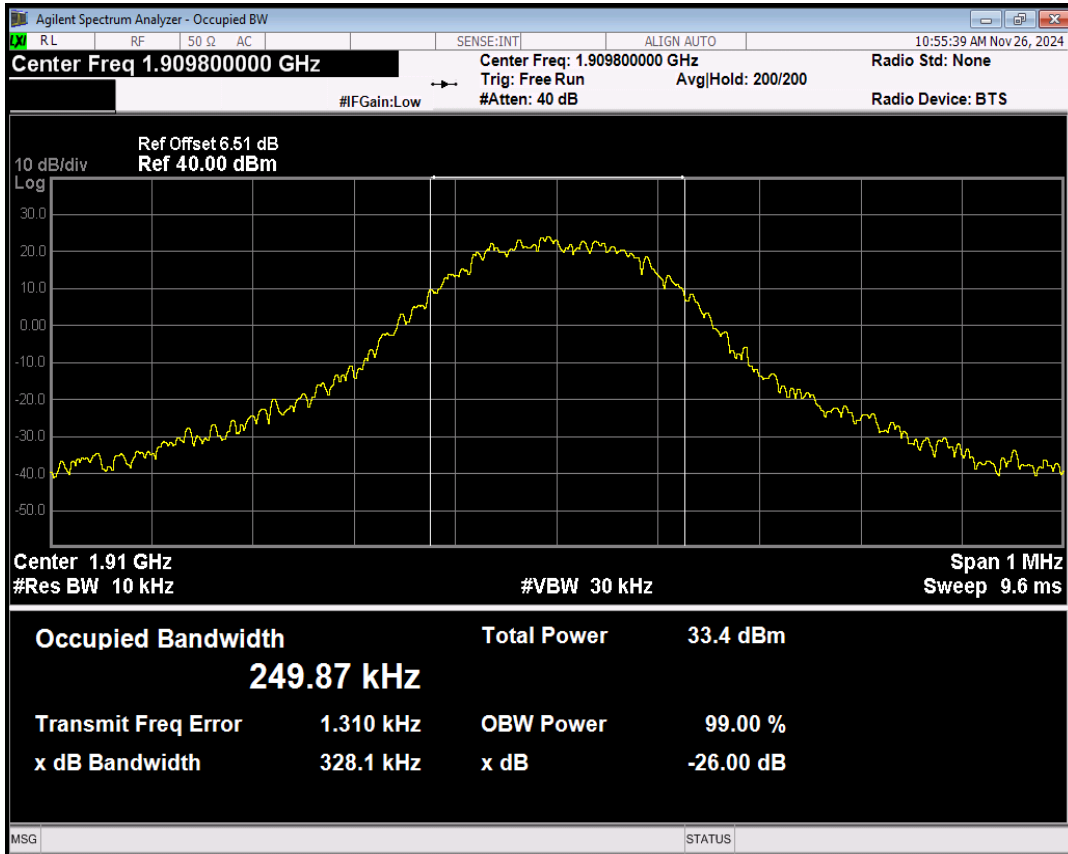

9. Out of Band Emissions at Antenna Terminal

9.1 Block Diagram Of Test Setup

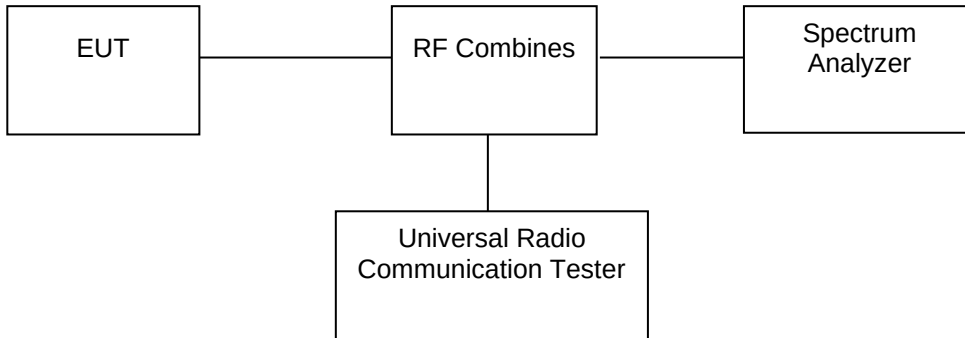

9.2 Limit

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

9.3 Test procedure


The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic

9.4 Test Result


GPRS1900 Channel=512

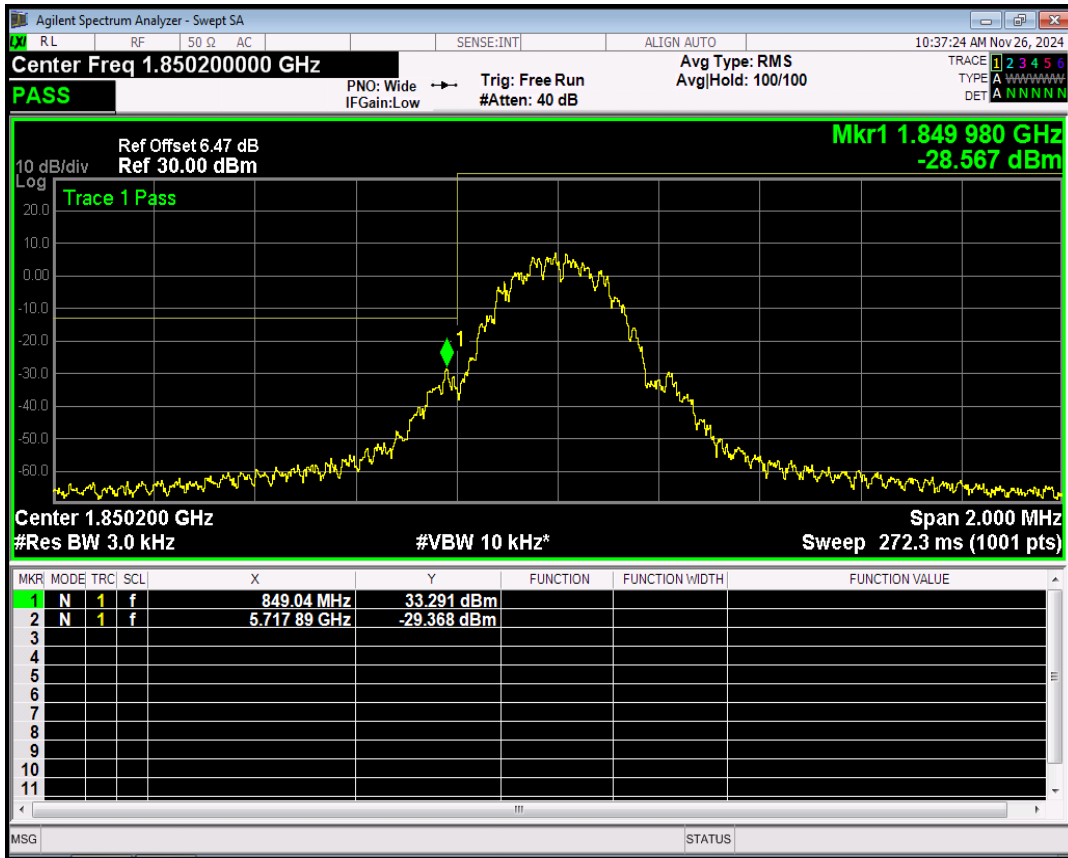


GPRS1900 Channel=810

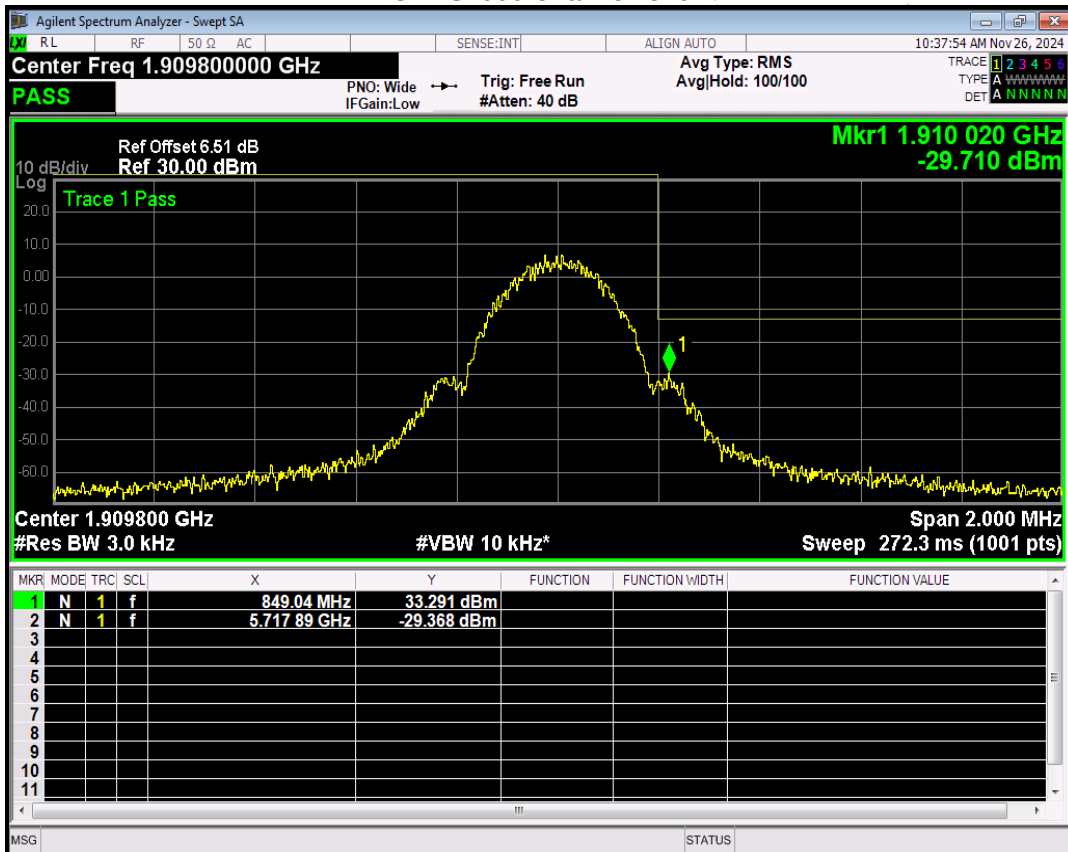


GPRS850 Channel=128

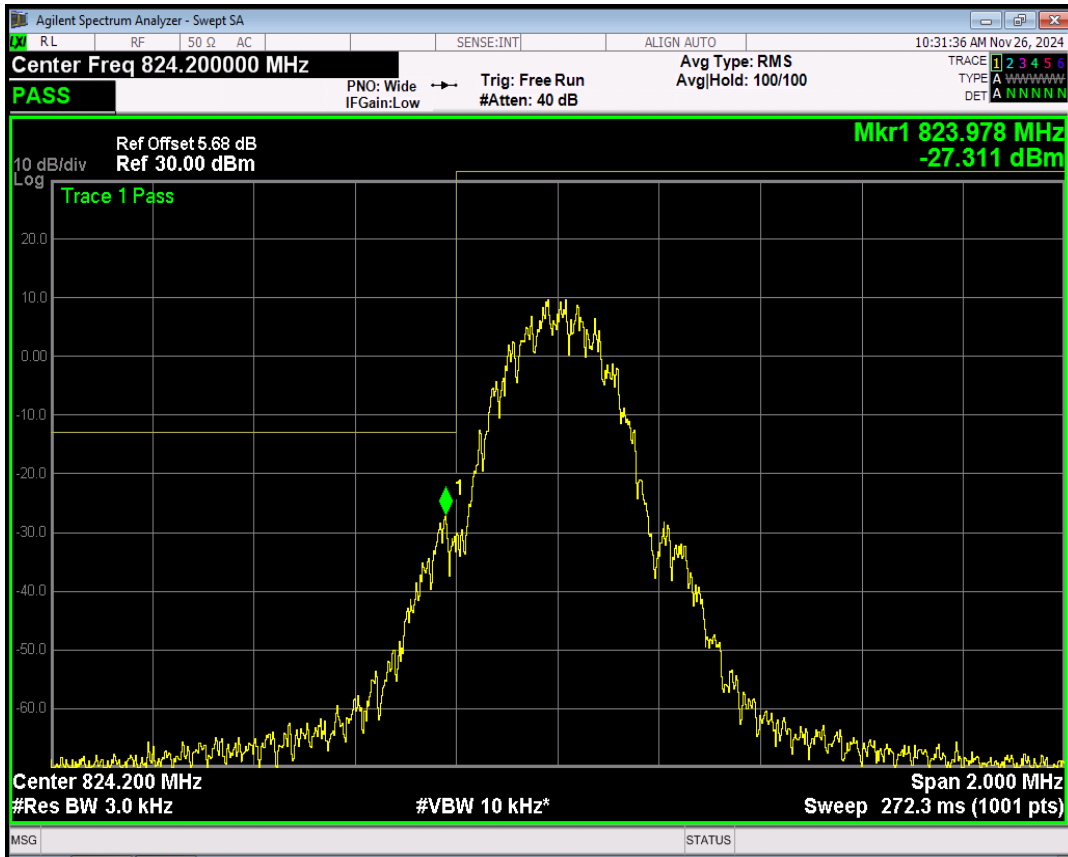


GPRS850 Channel=251

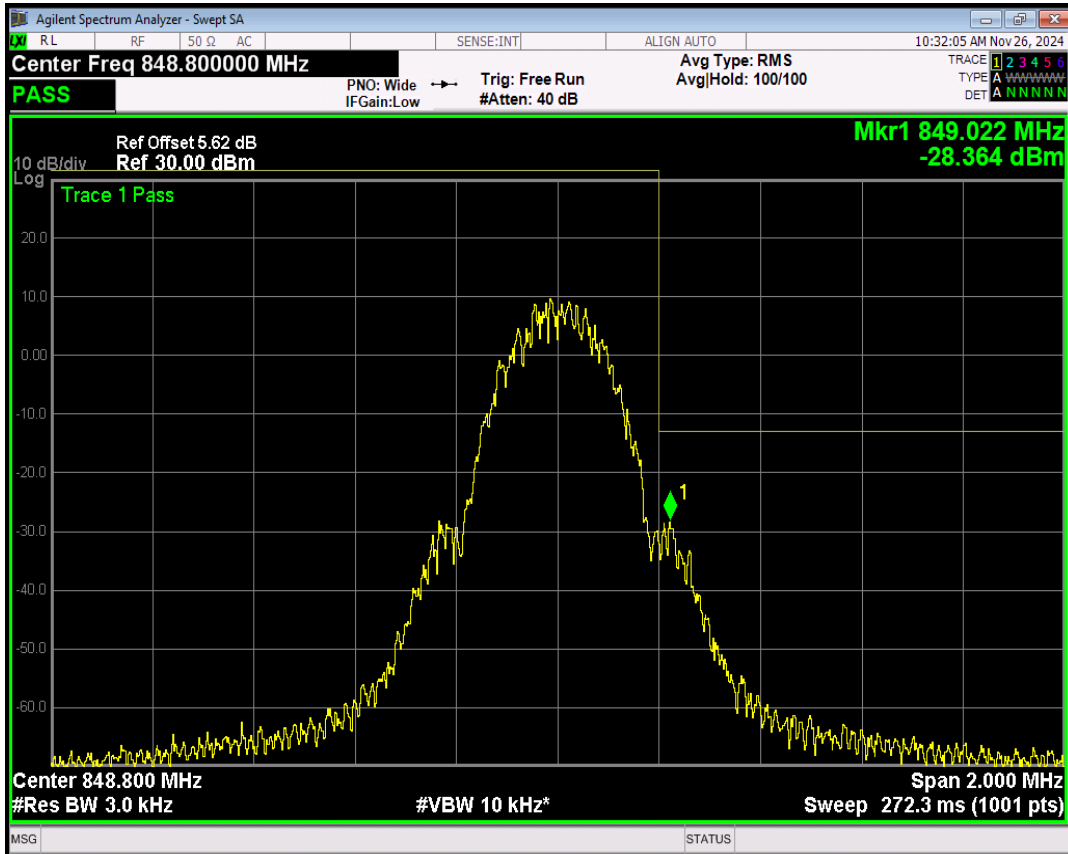


GPRS1900 Channel=512

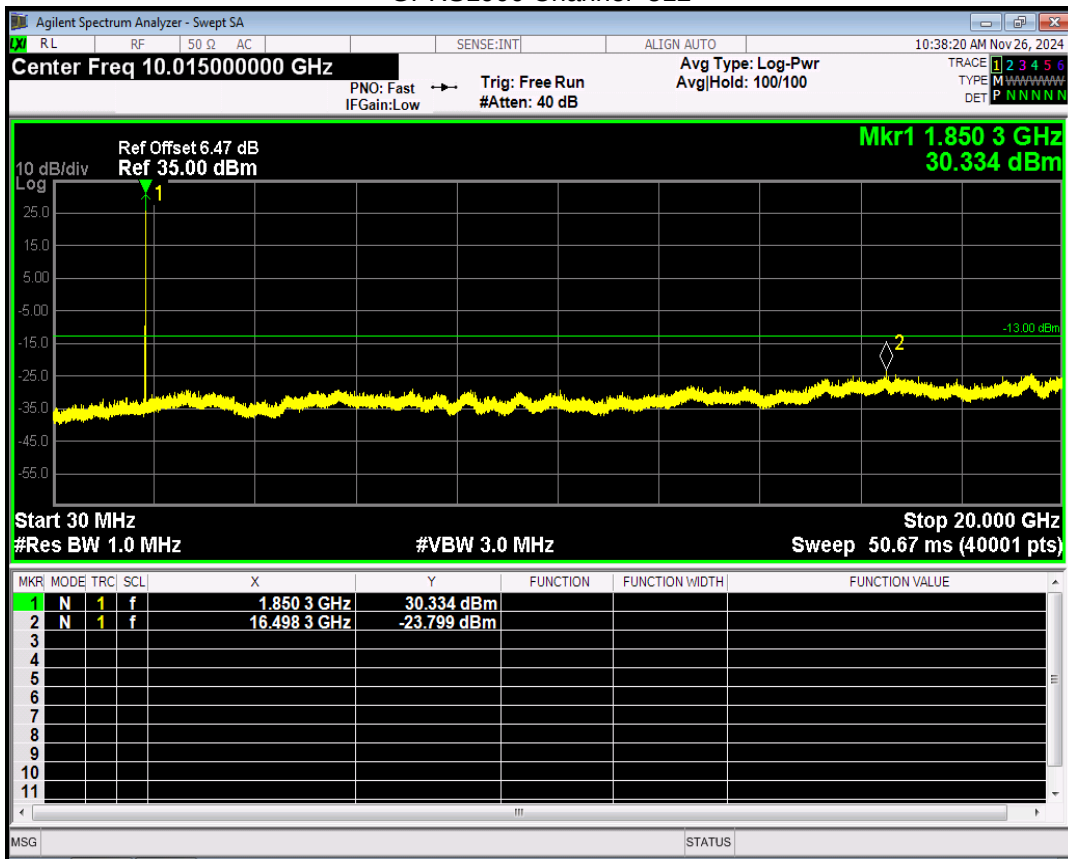


GPRS1900 Channel=661

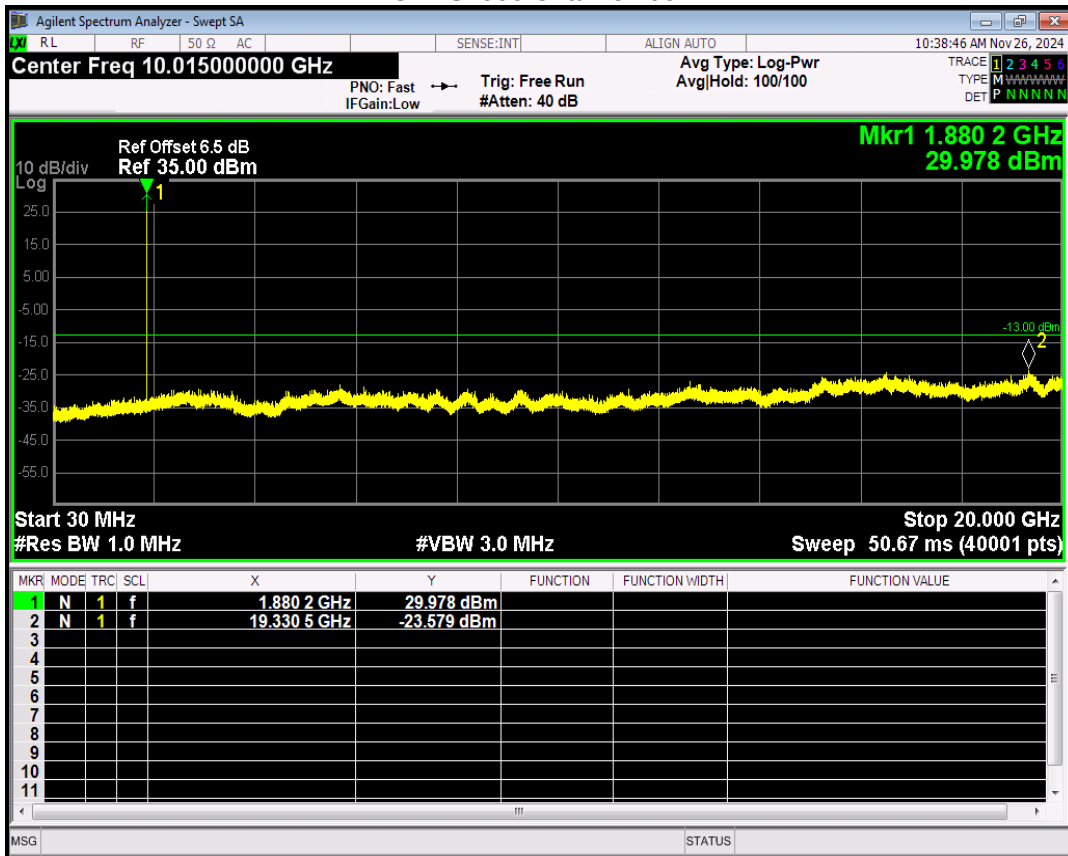


GPRS1900 Channel=810

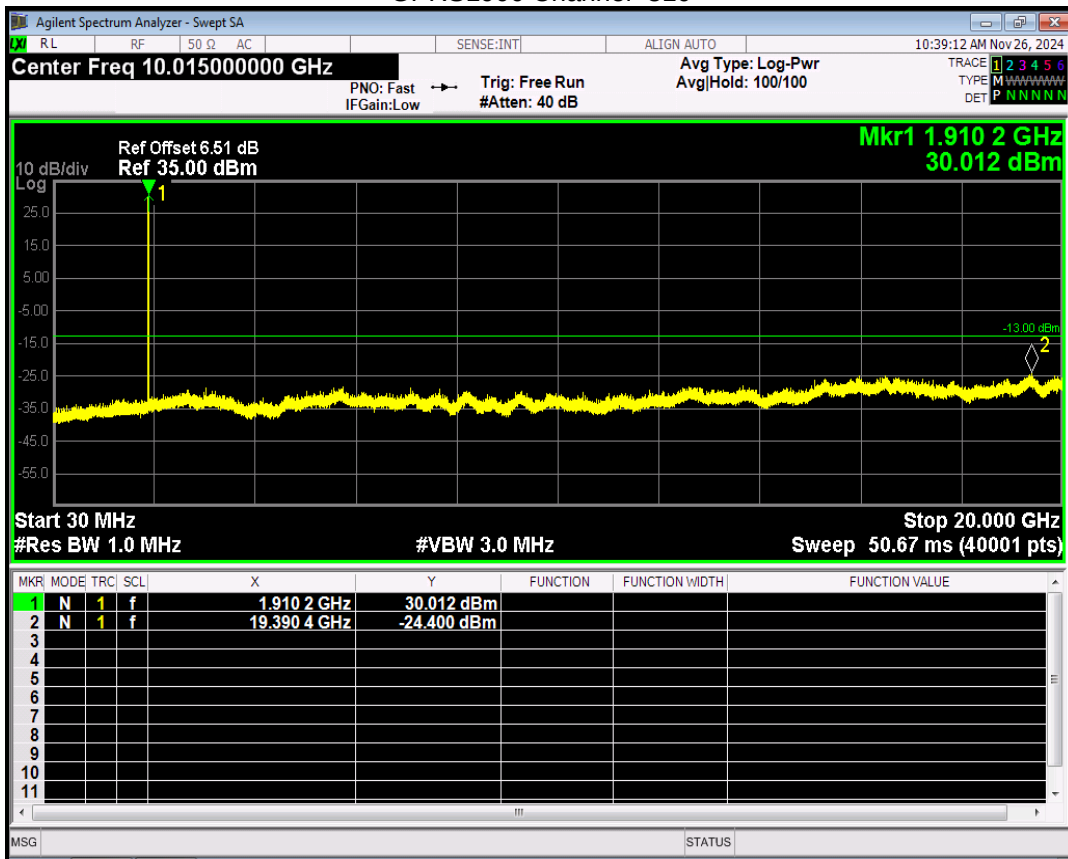


GPRS850 Channel=128

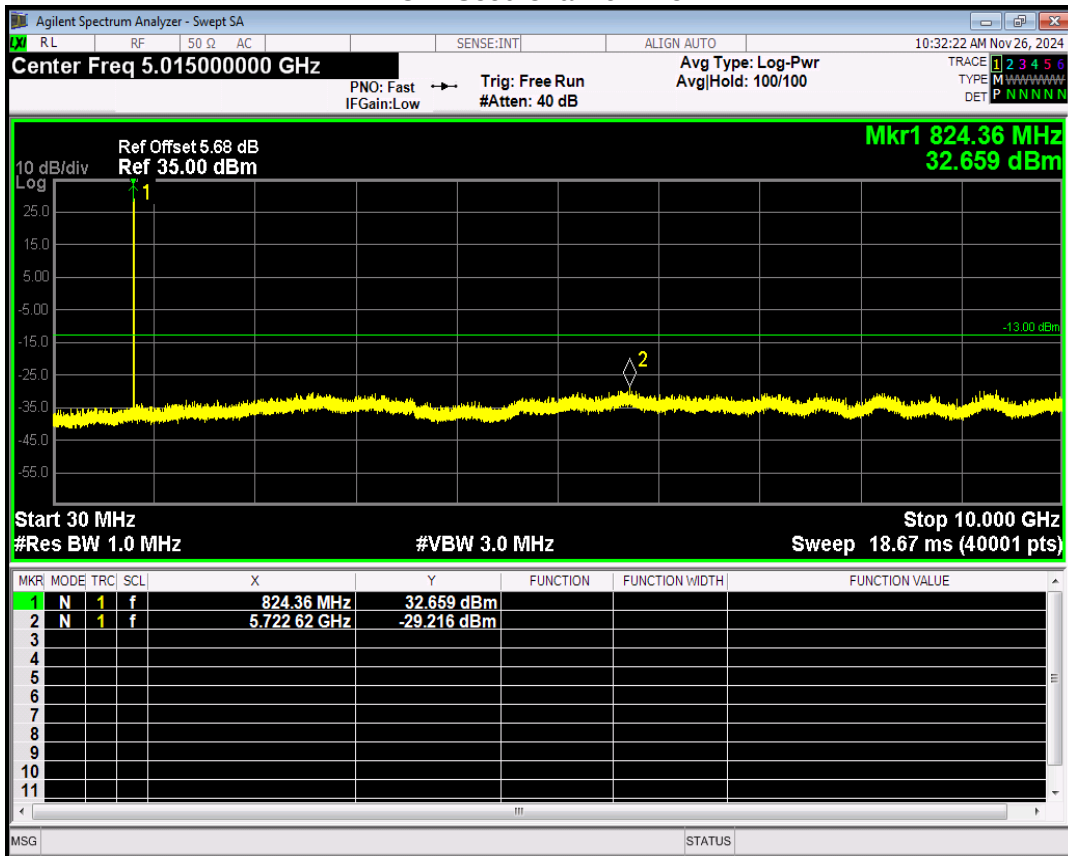


GPRS850 Channel=190

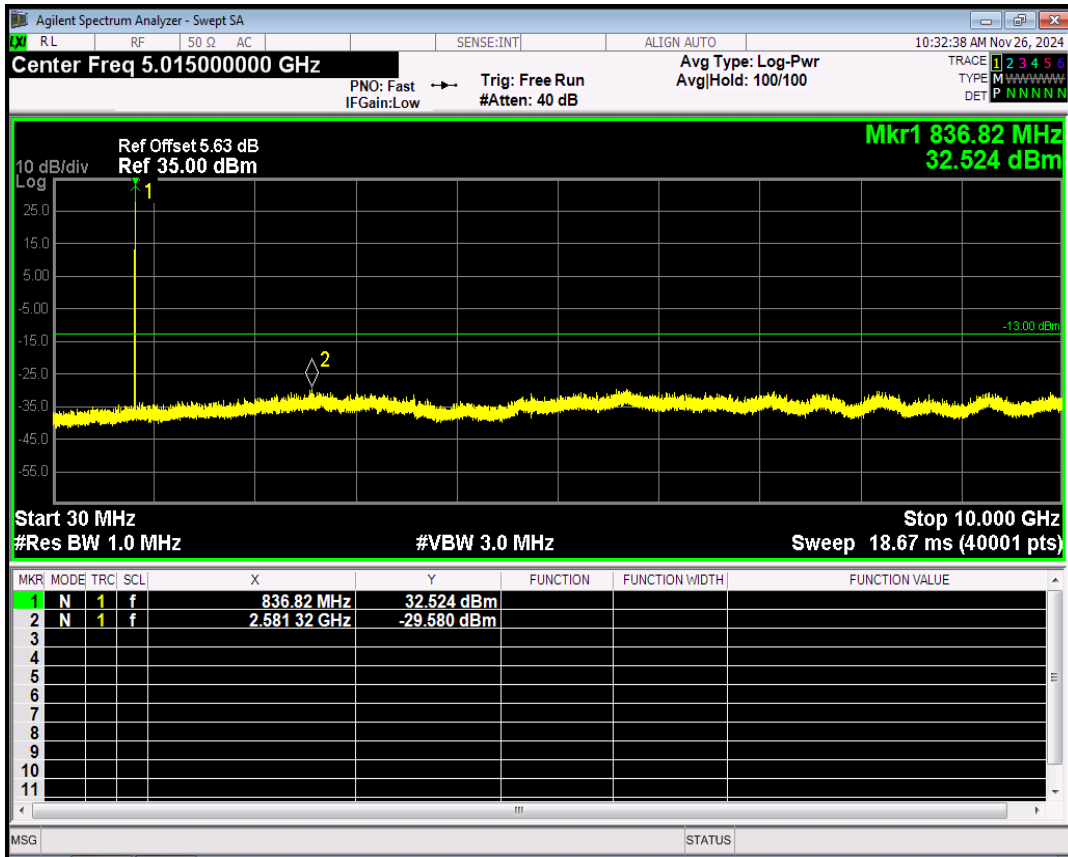


GPRS850 Channel=251

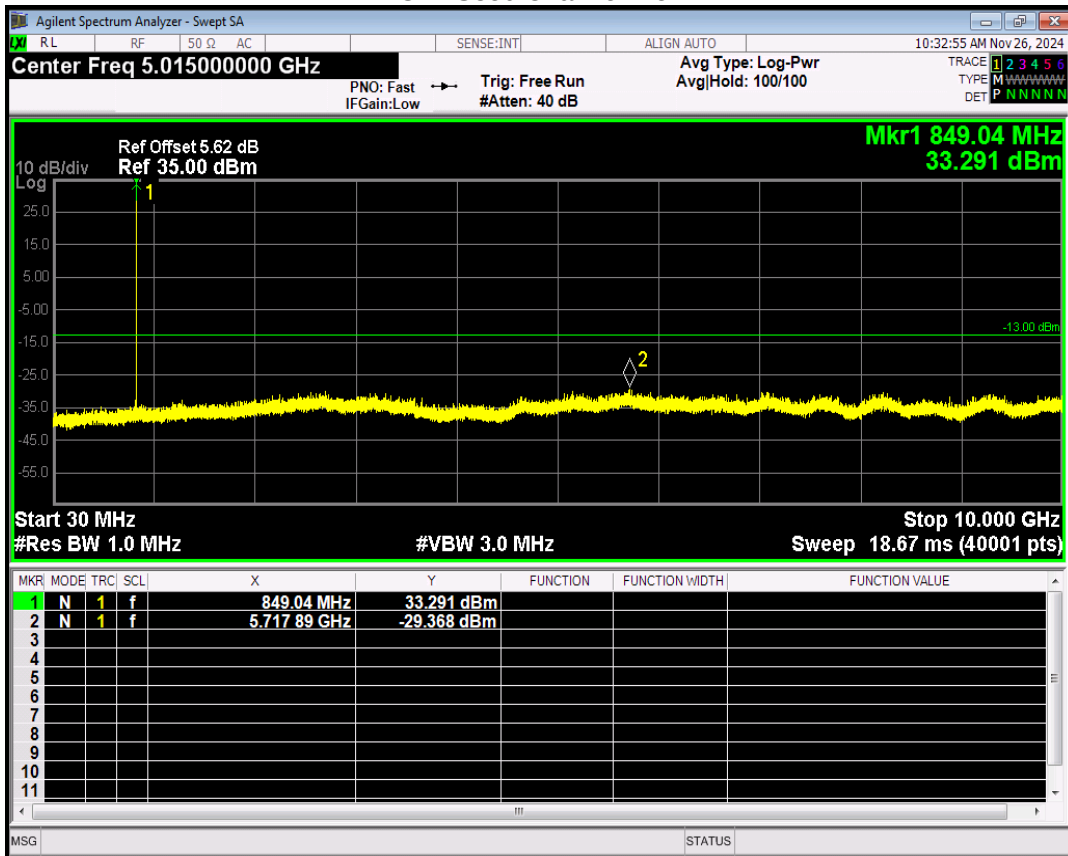


EGPRS1900 Channel=512

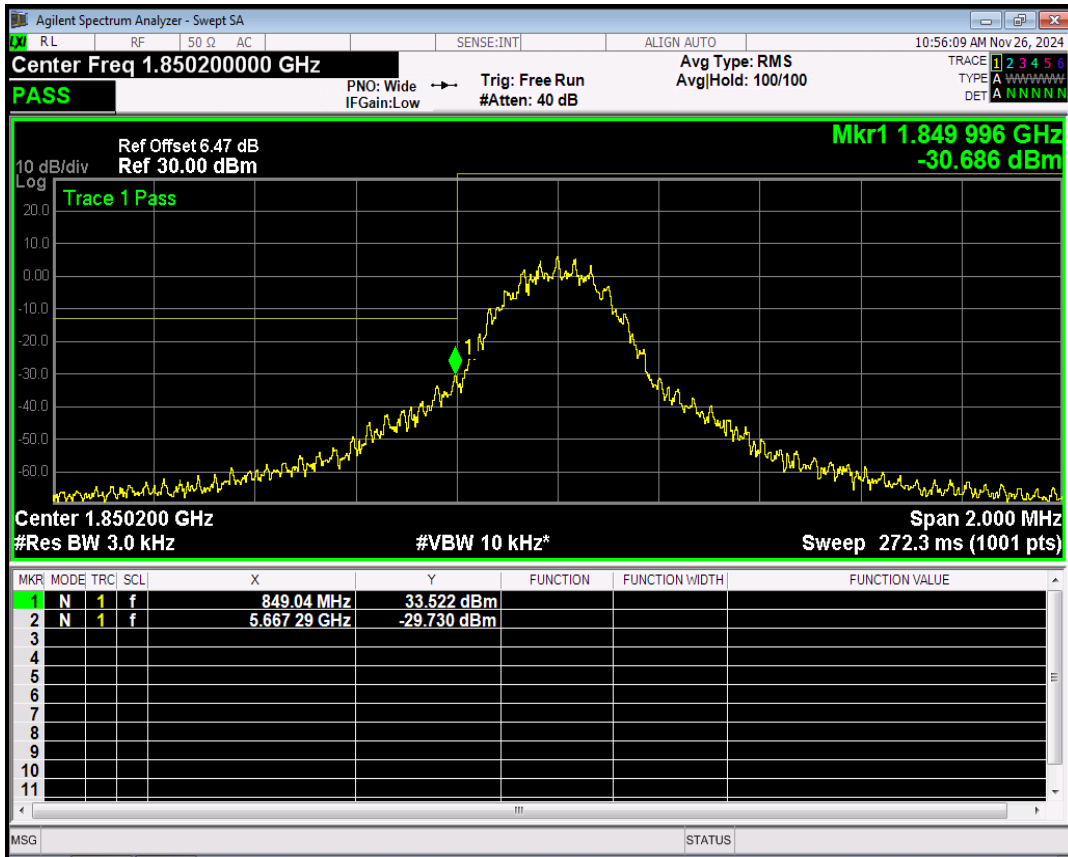


EGPRS1900 Channel=810

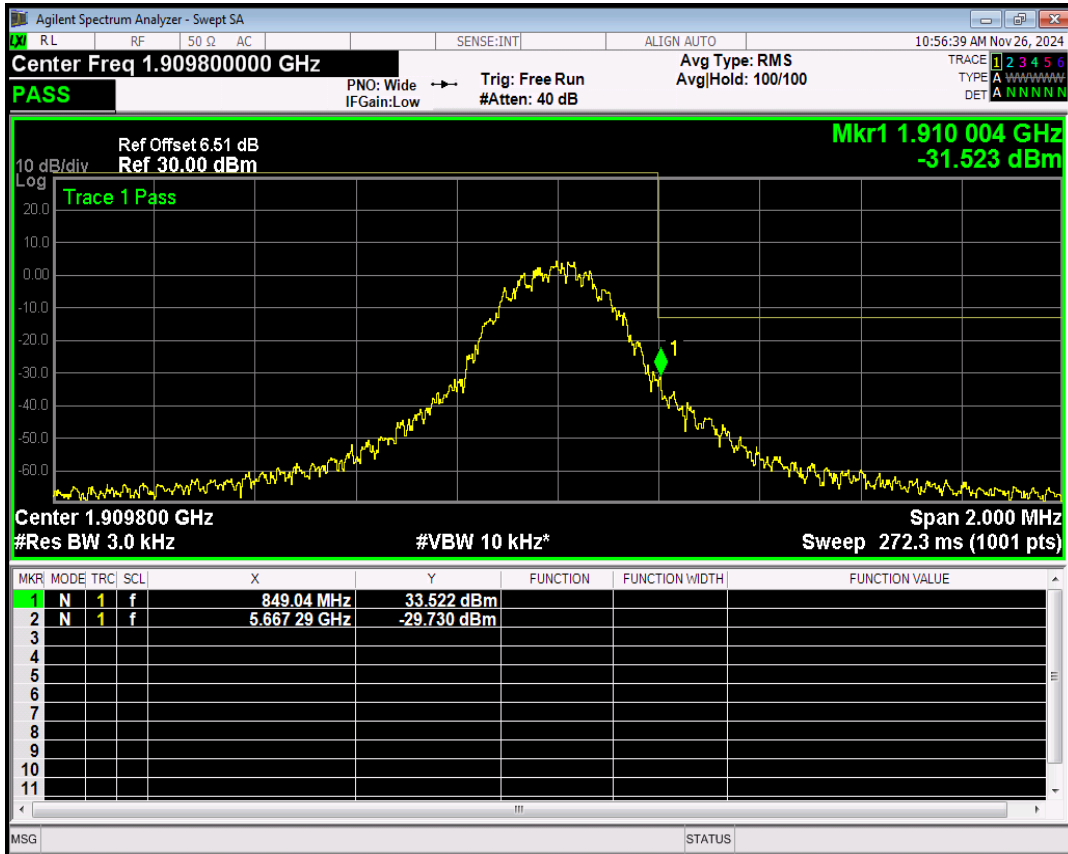


EGPRS850 Channel=128

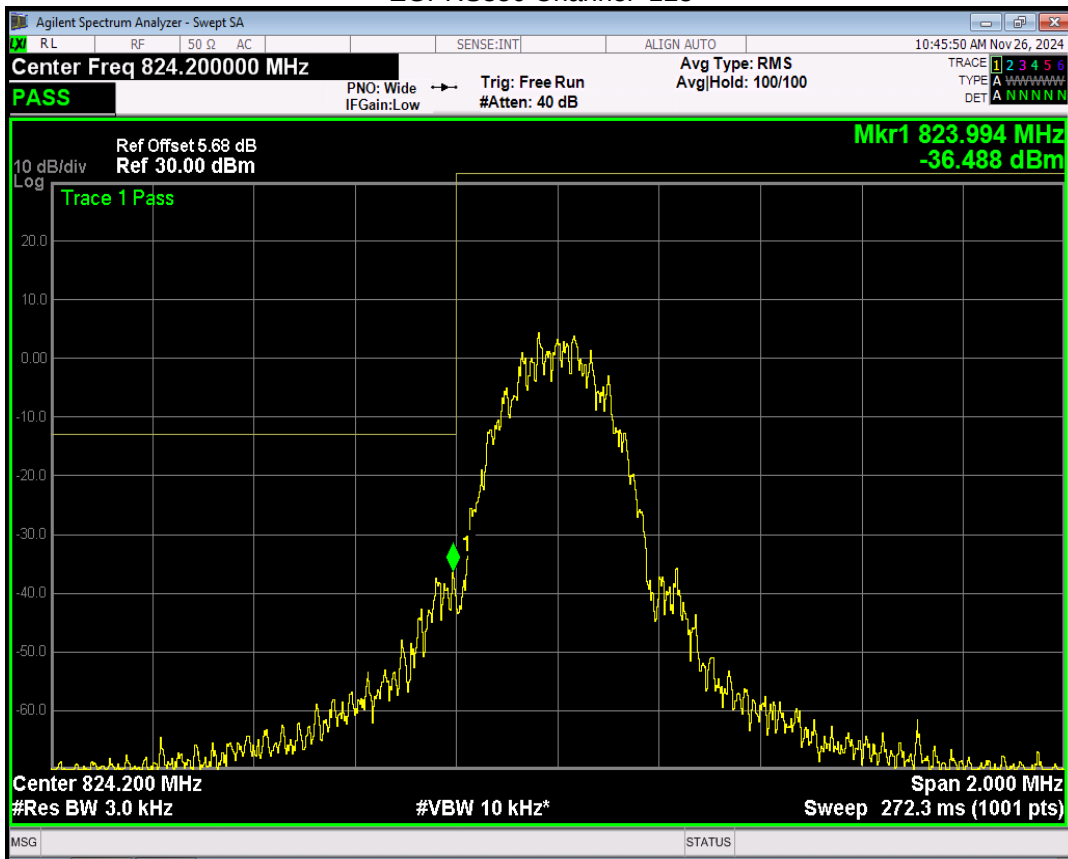


EGPRS850 Channel=251

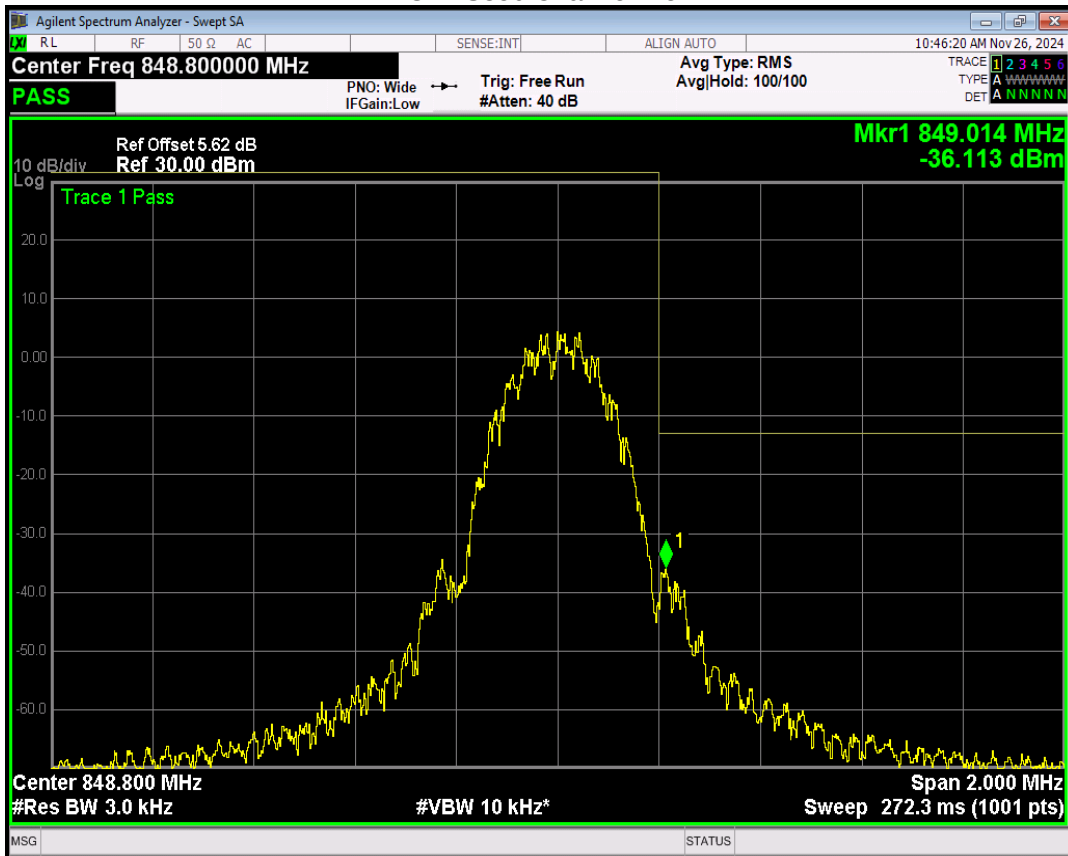


EGPRS1900 Channel=512

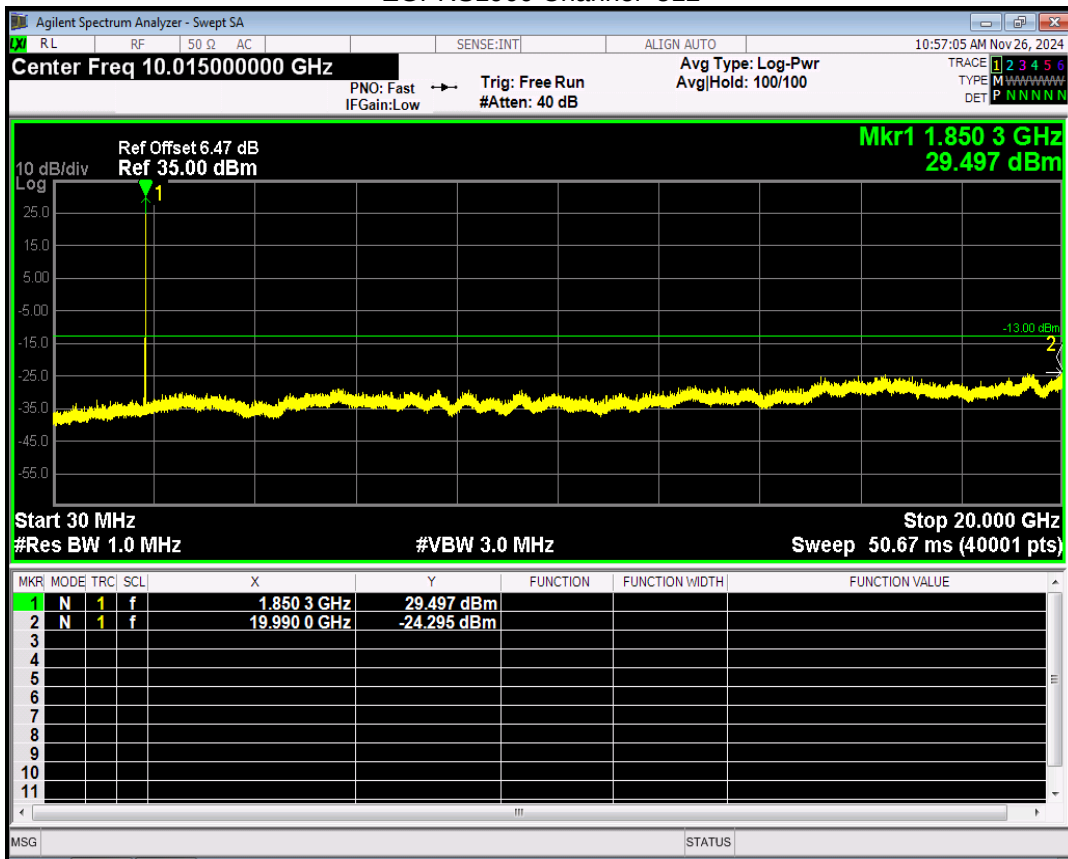


EGPRS1900 Channel=661

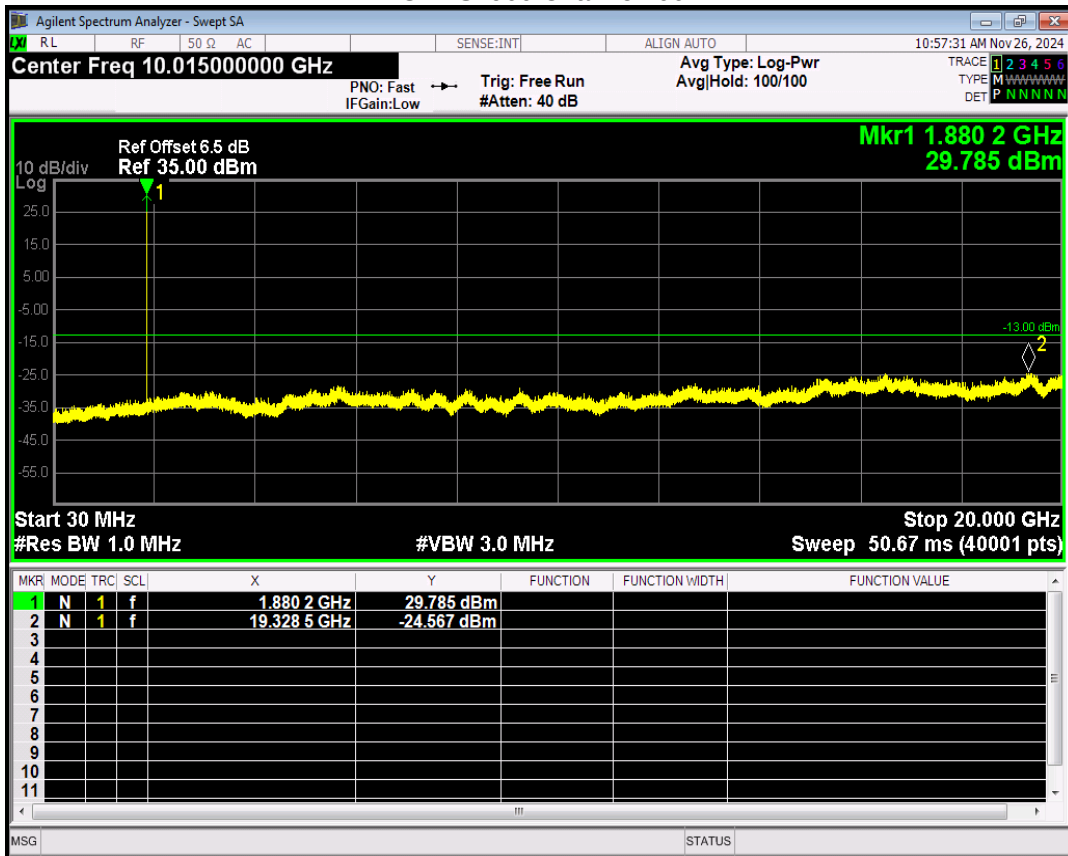


EGPRS1900 Channel=810

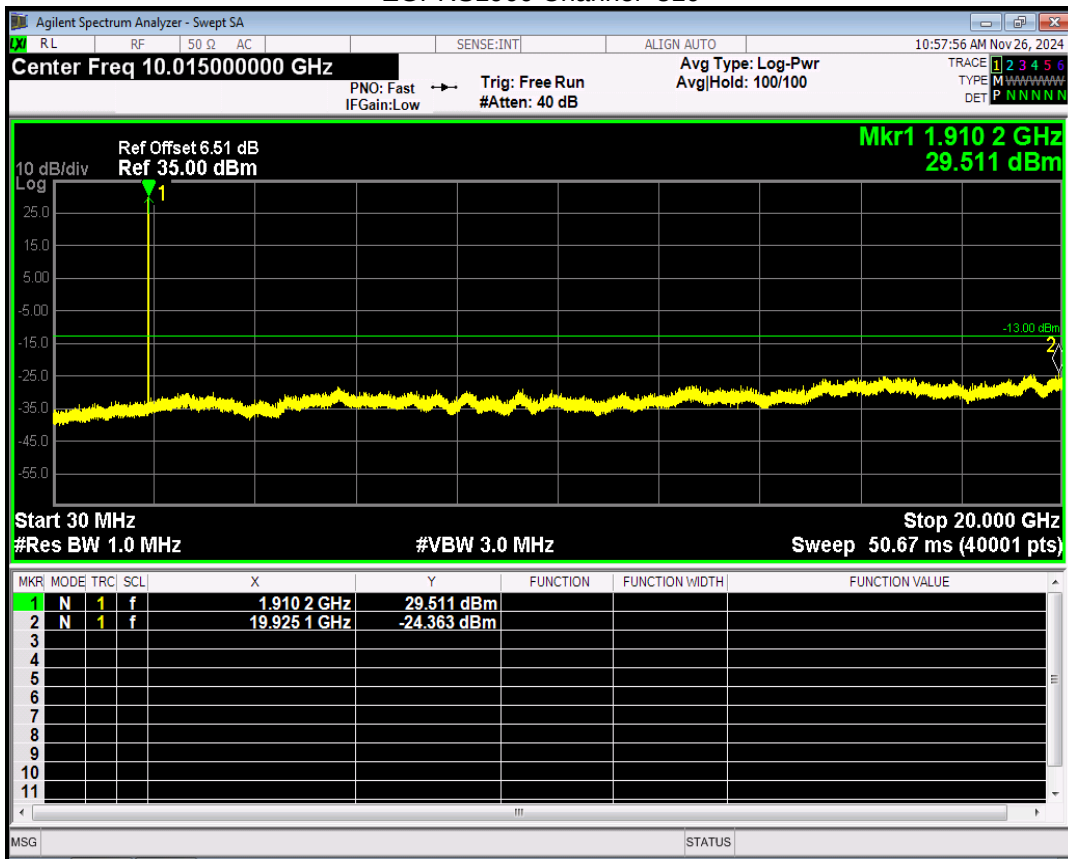


EGPRS850 Channel=128

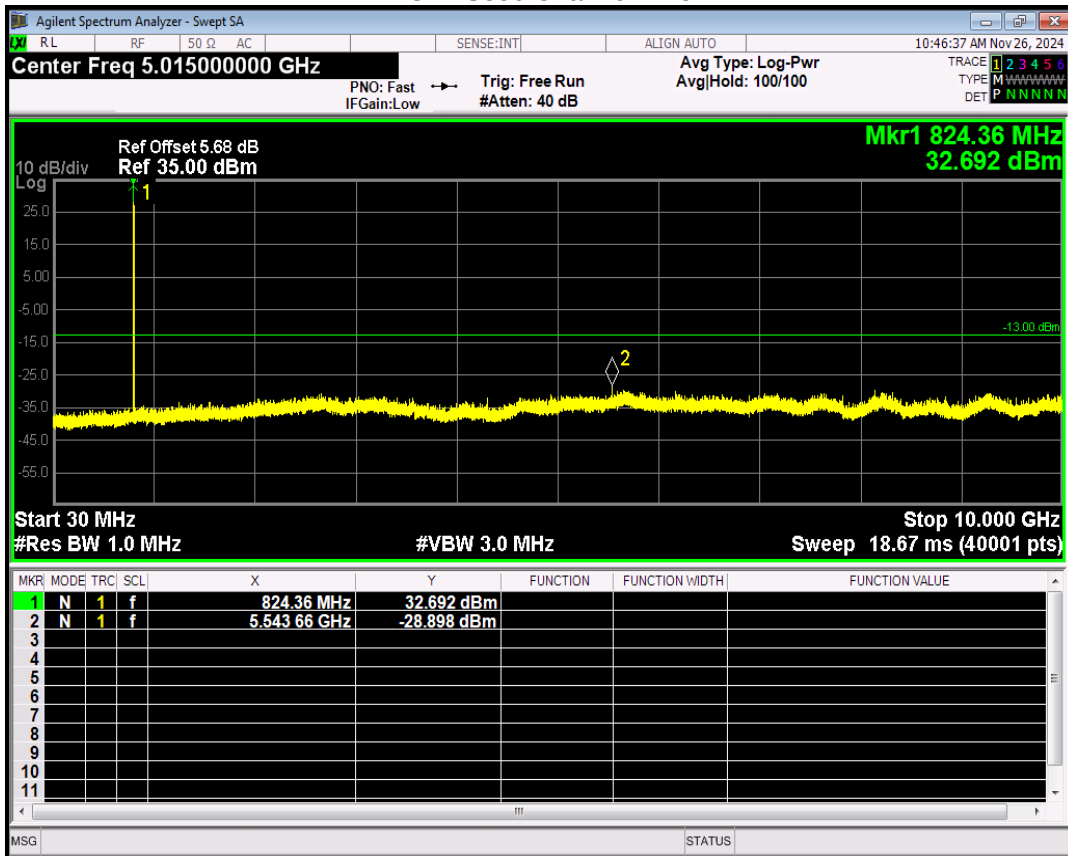

EGPRS850 Channel=190

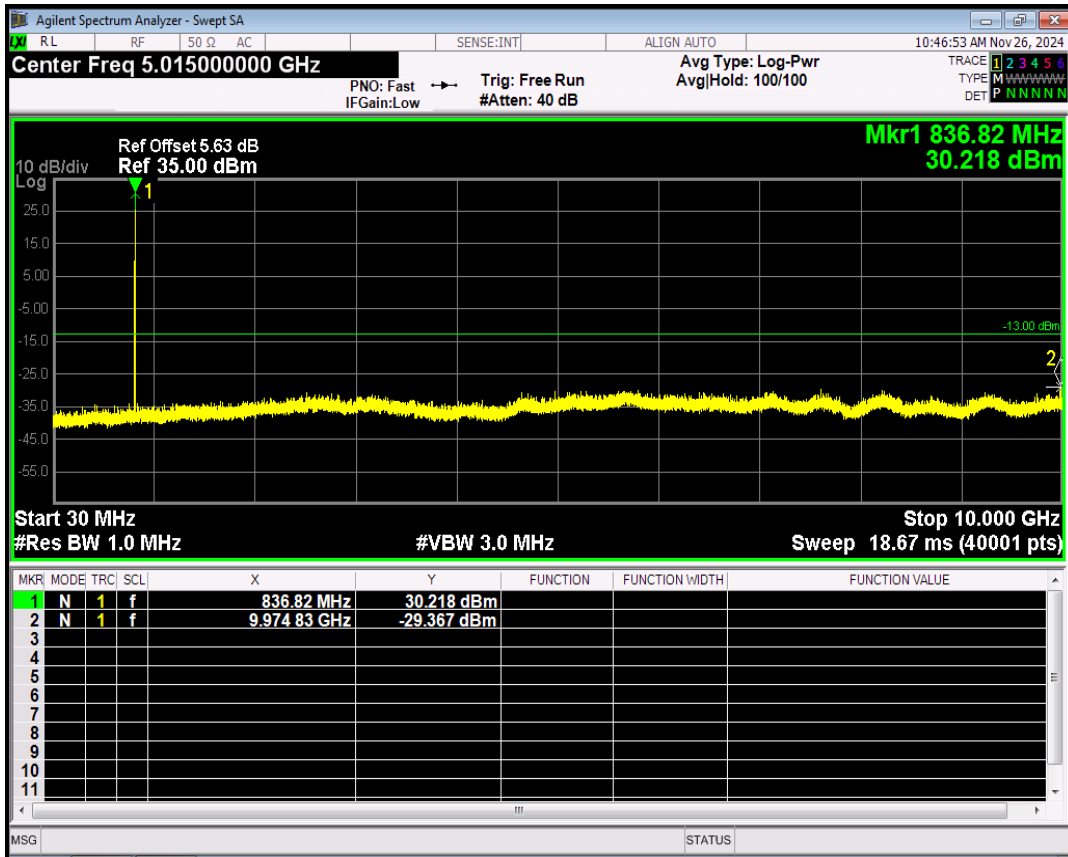


EGPRS850 Channel=251

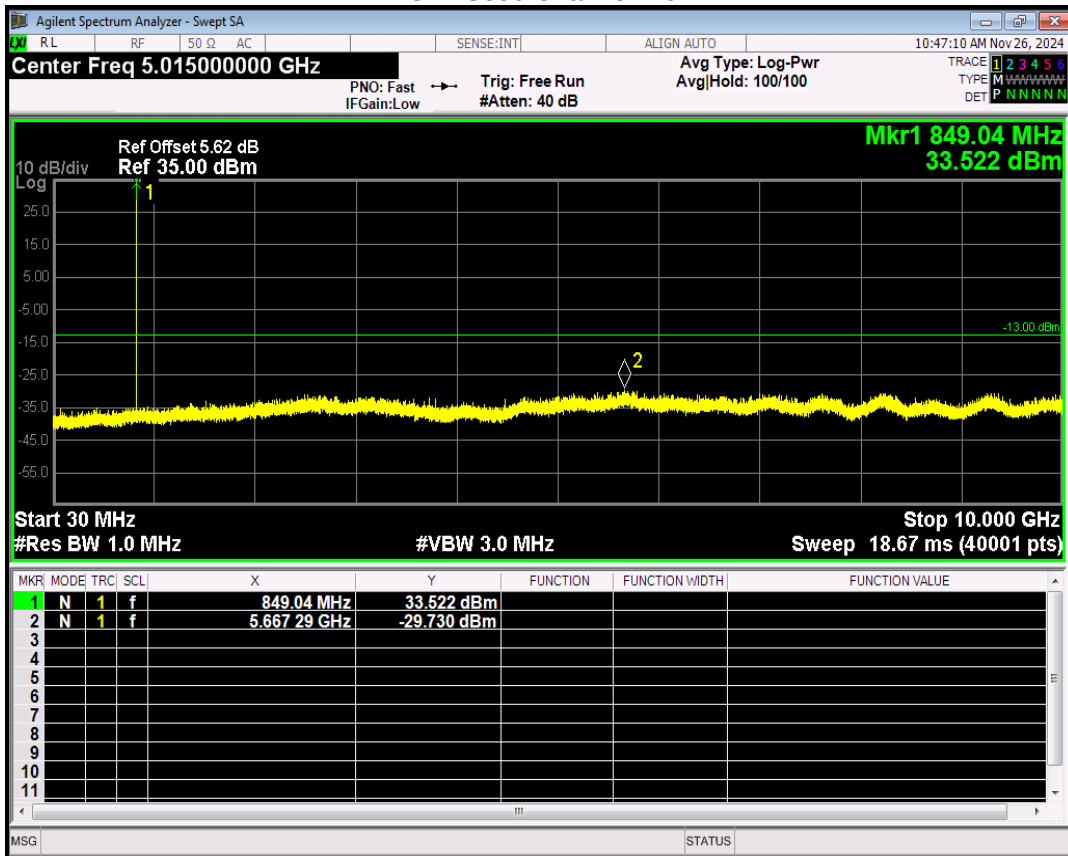


10. Spurious Radiated Emissions

10.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

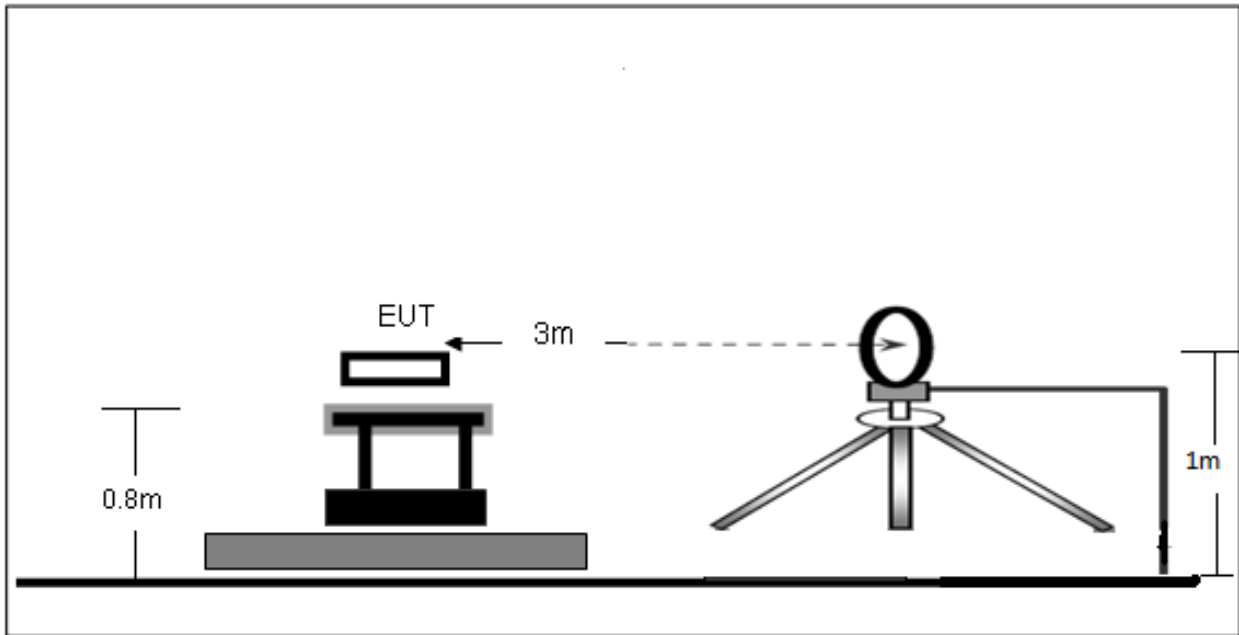

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

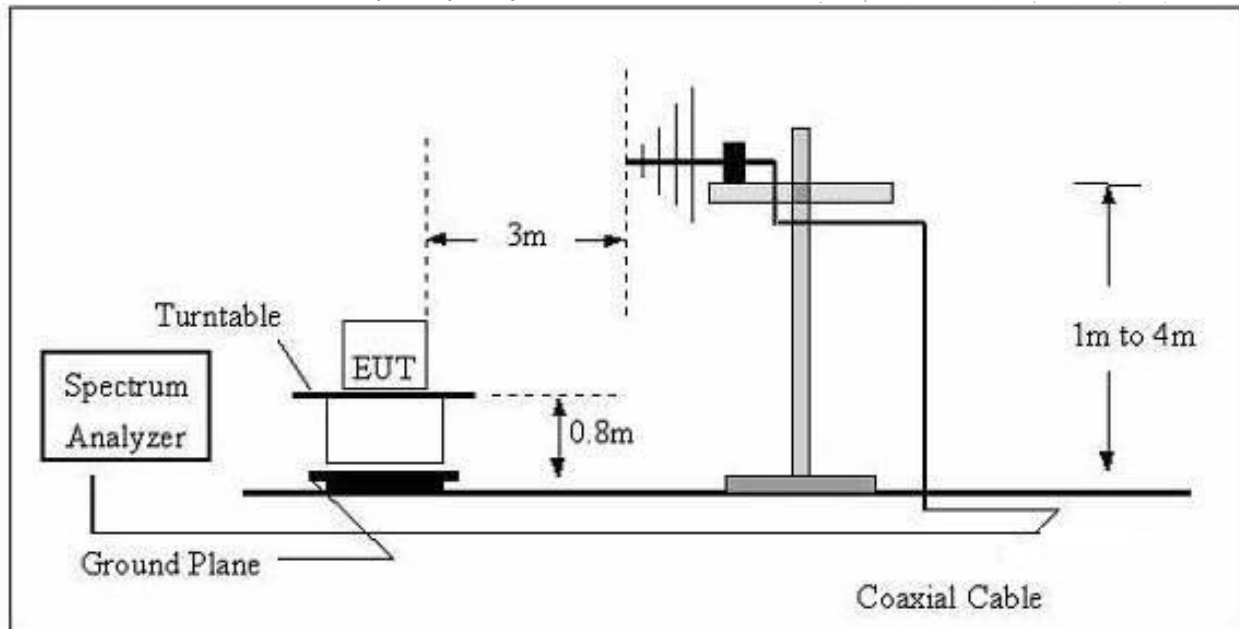

(C) Radiated Emission Test-Up Frequency Above 1GHz

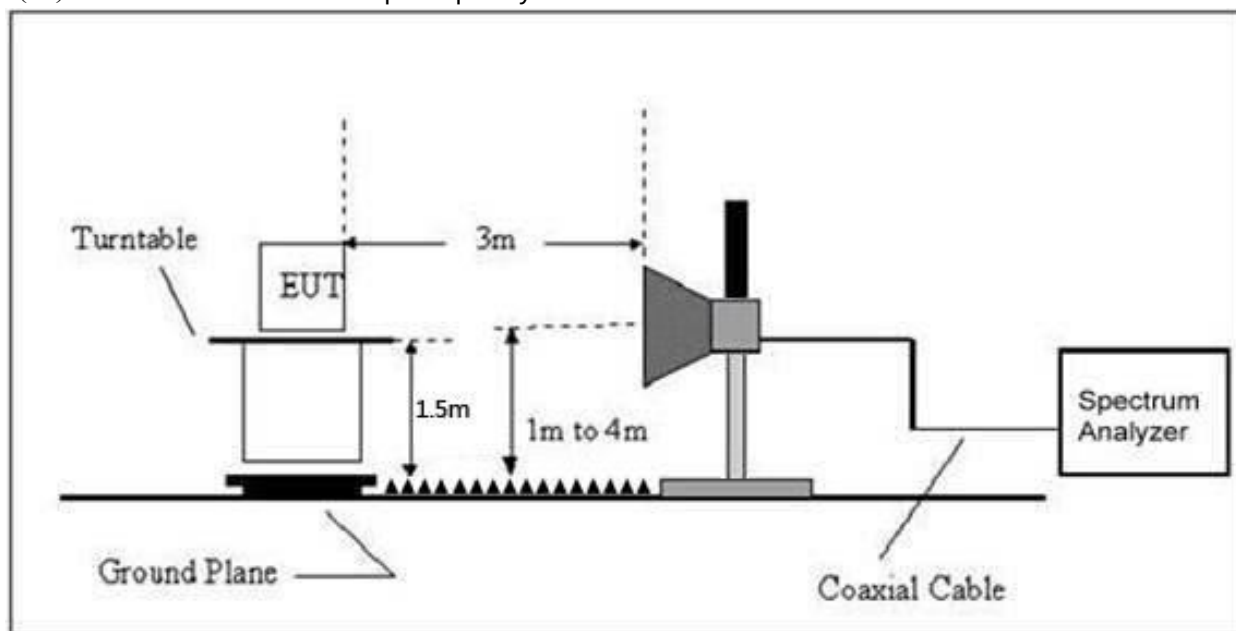

10.2 Limit

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

10.3 Test procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

10.4 Test Result

For Cellular Band GSM850 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (824.2MHz)						
88.67	-15.24	-30.60	-45.84	-13.00	-32.84	H
1648.40	-12.82	-27.29	-40.11	-13.00	-27.11	H
2472.60	-14.39	-25.18	-39.57	-13.00	-26.57	H
88.67	-12.22	-30.60	-42.82	-13.00	-29.82	V
1648.40	-9.49	-27.29	-36.78	-13.00	-23.78	V
2472.60	-8.13	-25.18	-33.31	-13.00	-20.31	V
Middle Channel (836.6MHz)						
88.67	-10.26	-30.60	-40.86	-13.00	-27.86	H
1673.20	-11.72	-27.32	-39.04	-13.00	-26.04	H
2509.80	-13.65	-25.07	-38.72	-13.00	-25.72	H
88.67	-8.47	-30.60	-39.07	-13.00	-26.07	V
1673.20	-6.46	-27.32	-33.78	-13.00	-20.78	V
2509.80	-9.02	-25.07	-34.09	-13.00	-21.09	V
High Channel (848.8MHz)						
88.67	-12.77	-30.60	-43.37	-13.00	-30.37	H
1697.60	-14.33	-27.27	-41.60	-13.00	-28.60	H
2546.40	-10.30	-24.96	-35.26	-13.00	-22.26	H
88.67	-10.09	-30.60	-40.69	-13.00	-27.69	V
1697.60	-6.90	-27.27	-34.17	-13.00	-21.17	V
2546.40	-7.40	-24.96	-32.36	-13.00	-19.36	V


For PCS Band GSM1900 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1850.2MHz)						
88.67	-11.00	-30.60	-41.60	-13.00	-28.60	H
3700.40	-10.69	-22.20	-32.89	-13.00	-19.89	H
5550.60	-15.23	-19.32	-34.55	-13.00	-21.55	H
88.67	-11.70	-30.60	-42.30	-13.00	-29.30	V
3700.40	-9.19	-22.20	-31.39	-13.00	-18.39	V
5550.60	-11.98	-19.32	-31.30	-13.00	-18.30	V
Middle Channel (1880MHz)						
88.67	-14.03	-30.60	-44.63	-13.00	-31.63	H
3760.00	-12.37	-22.08	-34.45	-13.00	-21.45	H
5640.00	-12.08	-19.28	-31.36	-13.00	-18.36	H
88.67	-9.54	-30.60	-40.14	-13.00	-27.14	V
3760.00	-9.04	-22.08	-31.12	-13.00	-18.12	V
5640.00	-10.50	-19.28	-29.78	-13.00	-16.78	V
High Channel (1909.8MHz)						
88.67	-11.15	-30.60	-41.75	-13.00	-28.75	H
3819.60	-9.29	-21.96	-31.25	-13.00	-18.25	H
5729.40	-10.41	-19.24	-29.65	-13.00	-16.65	H
88.67	-9.56	-30.60	-40.16	-13.00	-27.16	V
3819.60	-10.30	-21.96	-32.26	-13.00	-19.26	V
5729.40	-7.89	-19.24	-27.13	-13.00	-14.13	V

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

11. Frequency Stability

11.1 Block Diagram Of Test Setup

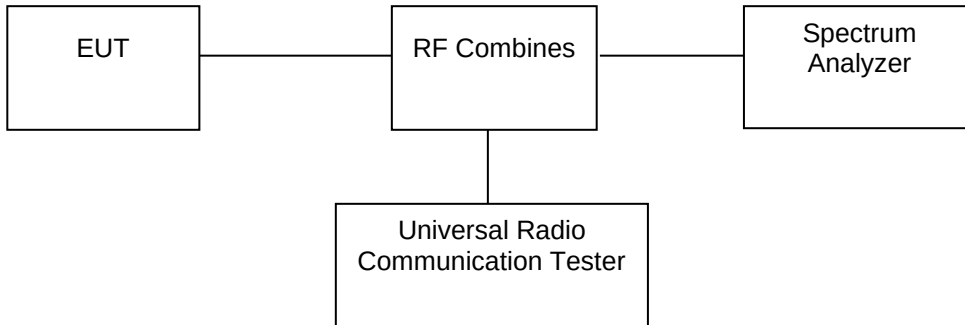

11.2 Limit

FCC Part 22.355: ± 2.5 ppm

FCC Part 24.235:

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

11.3 Test procedure

1. The testing follows FCC KDB 971168 D01v03r01 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01v03r01 Section 9.0.
2. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

11.4 Test Result

Operation Mode	Channel Number	Test Condition		Channel Frequency (MHz)	Freq.Dev. (Hz)	Deviation (ppm)	Limit (ppm)
		Voltage (V)	Temp (°C)				
GSM850	190	VN DC 3.7V	-30	836.60	5.81	0.0069	2.5
			-20	836.60	2.47	0.0030	2.5
			-10	836.60	-1.71	-0.0020	2.5
			0	836.60	1.92	0.0023	2.5
			10	836.60	2.35	0.0028	2.5
			20	836.60	-1.85	-0.0022	2.5
			30	836.60	6.05	0.0072	2.5
			40	836.60	0.61	0.0007	2.5
			50	836.60	1.80	0.0022	2.5
		VL DC 3.15V	20	836.60	2.52	0.0030	2.5
		VH DC 4.26V	20	836.60	3.61	0.0043	2.5
VERDICT				PASS			

Operation Mode	Channel Number	Test Condition		Channel Frequency (MHz)	Freq.Dev. (Hz)	Deviation (ppm)
		Voltage (V)	Temp (°C)			
GSM1900	512	VN DC 3.7V	-30	1850.20	10.62	0.0057
			-20	1850.20	11.80	0.0064
			-10	1850.20	12.88	0.0070
			0	1850.20	16.39	0.0089
			10	1850.20	11.33	0.0061
			20	1850.20	15.49	0.0084
			30	1850.20	12.78	0.0069
			40	1850.20	16.12	0.0087
			50	1850.20	17.75	0.0096
		VL DC 3.15V	20	1850.20	16.77	0.0091
		VH DC 4.26V	20	1850.20	17.92	0.0097
VERDICT			PASS			

Note 1: All modes have been tested with GSM.

Note 2: All modes have been tested, and the worst result recorded was report as below

Note 3: The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Note 4: The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

12. EUT Photographs

EUT Photo 1




EUT Photo 2



NOTE: Appendix-Photographs Of EUT Constructional Details

13. EUT Test Setup Photographs

Radiated Measurement Photos

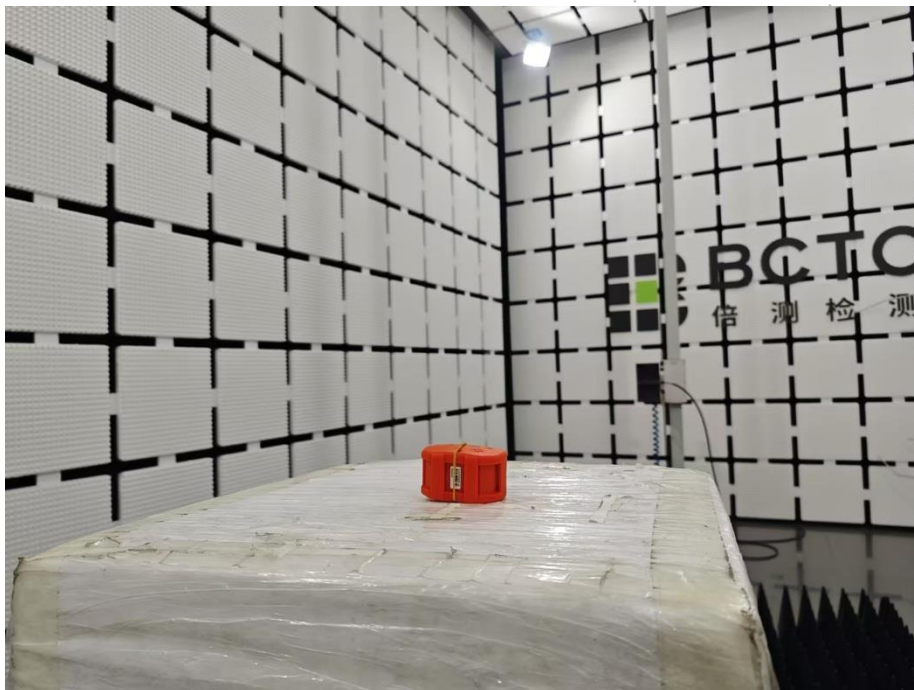

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****