


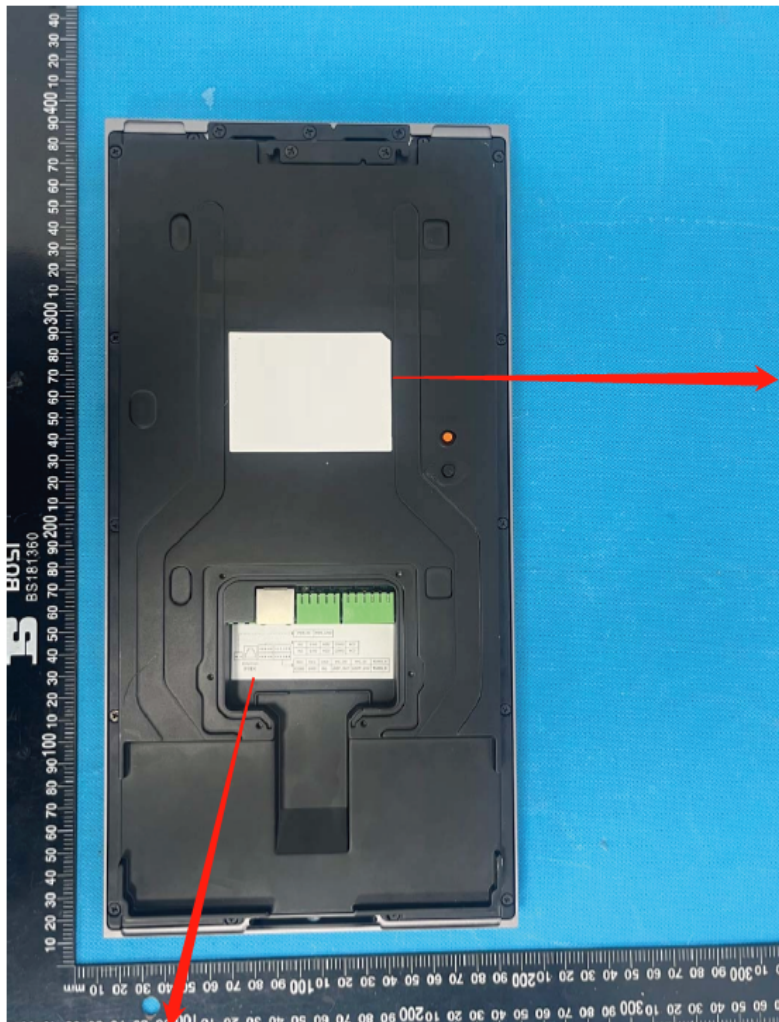

70 mm

53 mm

1VALET

1VALET Smart Intercom

Model:1001

Color:Black

MAC: XXXXXXXXXXXXXXXXX

SN: XXXXXXXXXXXXXXXXX

CE

HVIN: 1001

FCC ID: 2BMUX-1001

IC: 33315-1001

CAN-ICES-3 (B)/NMB-3 (B)

24VDC,1.5A from LPS or 802.3at PoE+

Diagram illustrating the pinout configuration for the 1VALET Smart Intercom PCB. The diagram shows the connection points for Ethernet (POE+), Power (PWR_IN, PWR_GND), and various signal pins (IN2, GND, NO2, COM2, NC2, IN3, GND, NO3, COM3, NC3, NO1, NC1, GND, WG_D0, WG_D1, RS485_A, COM1, GND, IN1, LOOP_OUT, LOOP_GND, RS485_B).

Ethernet (POE+)		PWR_IN		PWR_GND	
IN2	GND	NO2	COM2	NC2	
IN3	GND	NO3	COM3	NC3	
NO1	NC1	GND	WG_D0	WG_D1	RS485_A
COM1	GND	IN1	LOOP_OUT	LOOP_GND	RS485_B