

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:	KOWIN
CUSTOMER:	
客 戶 料 號:	
CUST P/N:	
音 澤 料 號:	
BESOFTP/N:	
產 品 型 號:	14.9-0.08*24-11T-7.1UH-L10MM
DESC:	
日 期:	2024/01/09
DATE:	
版 本:	A.0
Version:	

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
何立成	马莉	但可清	

DongGuan YinZe Electronic Technology CO., LTD

Factory Address:3/F, Building D, No. 40, Fulong Education Road, Shipai Town, Dongguan City, Guangdong Province, China


Version Change History

[illegible]


SPECIFICATION

產品型號: DESC 14.9-0.08*24-11T- 7.1UH-L10MM	版本 Rev: A.0	客戶 CUST: KOWIN
		音澤料號 Fine P/N:
		客戶料號 CUST P/N:

一、尺寸 DIMENSION:(mm)

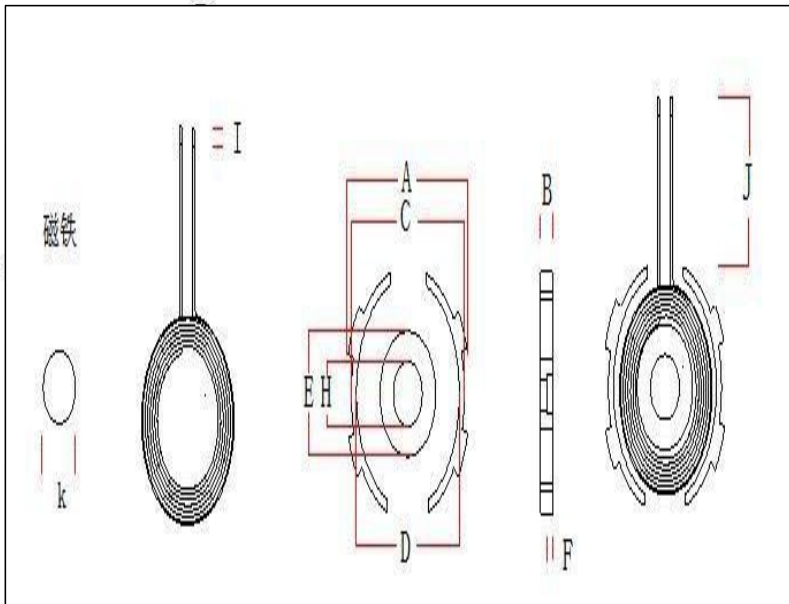

A	24.5 ± 0.5
B	2.7 ± 0.5
C	23.7 ± 0.25
D	20.5 ± 1
E	14.5 ± 0.3
H	7.5 ± 0.3
I	2 ± 1
J	10 ± 2
K	$7.5 * 2.0$

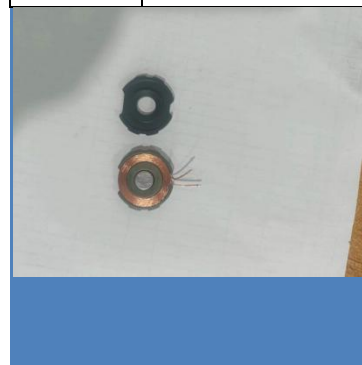

二、原理图SCHEMATIC DIAGRAM:



序号 NO.	端子		线径	圈数	绕线方向
	TERMINAL		WIRE	Turns	Winding Direction
1	S	F	Hot Air Line 0.08*24P	11TS	Normalcy

三、绕线参数 Winding Specification:

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25 ±10℃, 湿度 RELATIVE HUMIDITY:65 ±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.7uH ±20% Solenoid	100KHz/1V	LCZ METER 1062B
2	IND.	S-F	7.1uH ±10% Magnetizing sheet	100KHz/1V	LCZ METER 1062B
3	Q 值	S-F	≤35	100KHz/1V	LCZ METER 1062B
4	DCR	S-F			

擬制/日期 PREPARED BY/DATE

審核/日期 CHECKED BY/DATE

SPECIFICATION

序号 number	材料名称 Material name	品名描述 Description	制造商 Manufacturer
1	Enameled wire 0.08*24 strands	Hot air enameled wire 0.08*24 strands	
2	Lead Free Tin Strips	Lead Free Tin Strips	
3	magnetic disk	Φ24.5*12.7mm Manganese-zinc hard magnetic sheet	
4	Glue	201 Glue	
5	Magnets	7.5*2mm	
6	Perforated double sided tape	Round Diameter 17mm(ref)Backing	

產 品 型 號: DESC	CLB	版本	客戶 CUST:	
		Rev: A.0	音澤料號 Fine P/N:	
			客戶料號 CUST P/N:	
擬制/日期 PREPARED BY/DATE				
Dan keqing 2024/01/09				