



Transmitter Manual


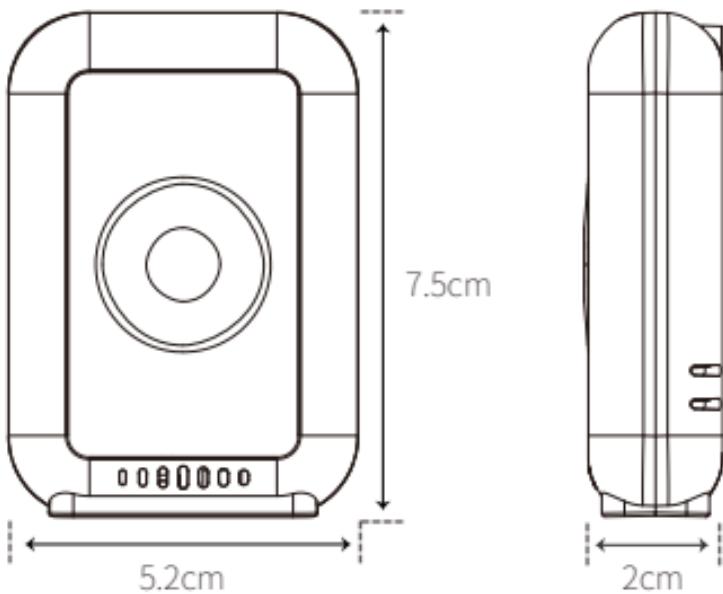


1.1 Fixed channel:

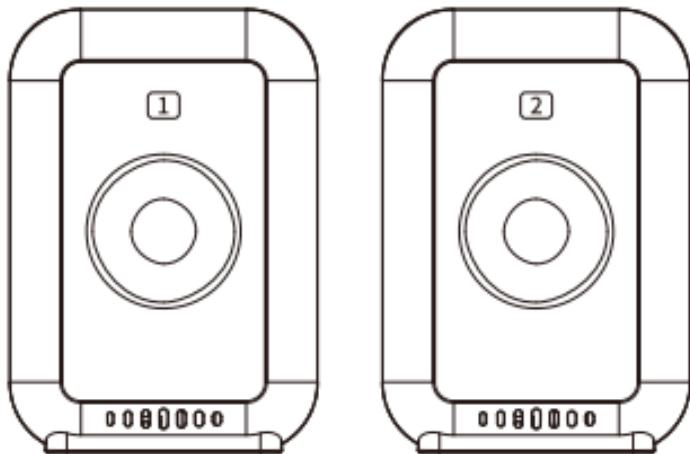


Product front view

Product back view:

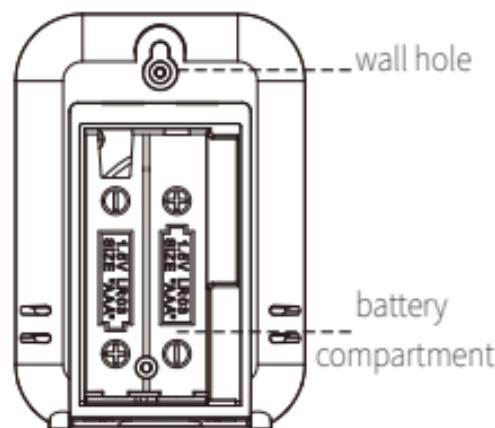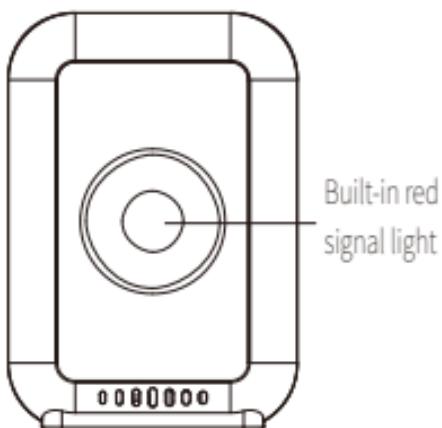


Channel: the number in front of the housing indicates the current channel code.

1.2 Adjustable channel:

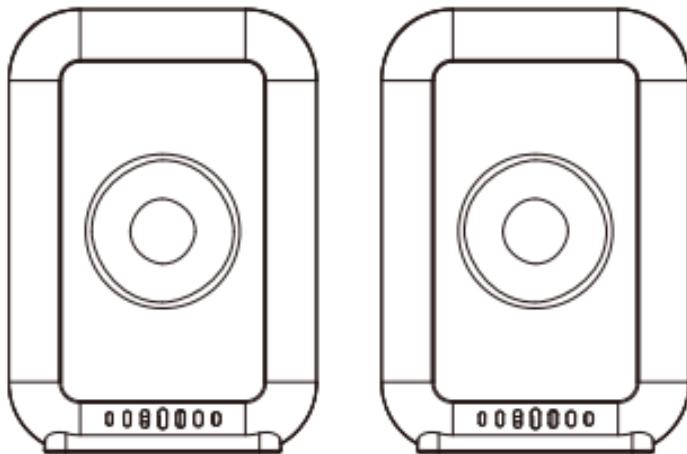


Product front view

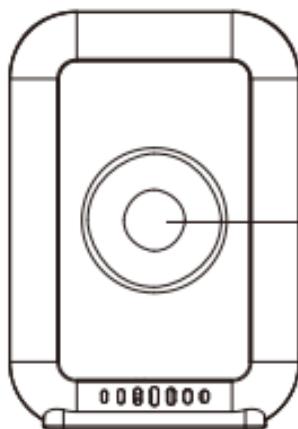

Built-in red
signal light

Product back view:

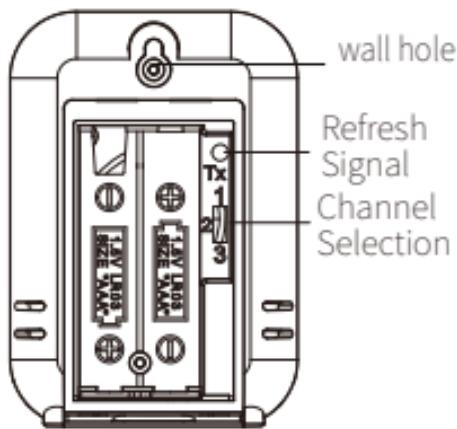


wall hole
Refresh
Signal
Channel
Selection

Channel selection method:
switch the corresponding number
means selecting the current channel code

3.Power supply method::

Transmitter power supply: 2 pcs AAA batteries
(batteries is not included in shipment).

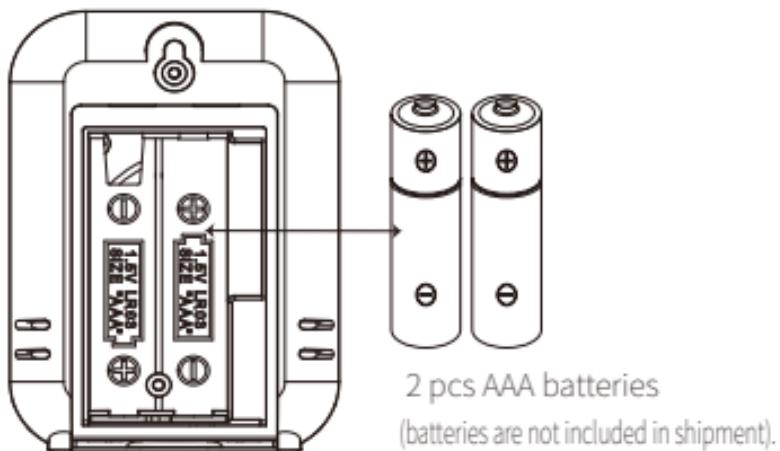


4.Transmitter power-on:




After the transmitter is powered on, the red light flashes once and automatically transmits the signal to the receiver.

The transmitter battery cover can be opened as shown in the figure below:

The opening at the
bottom of the transmitter

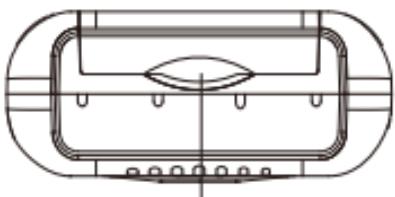

Lift upward
Open the battery cover

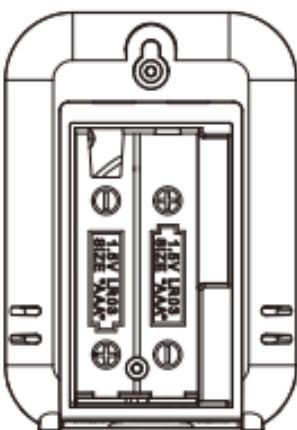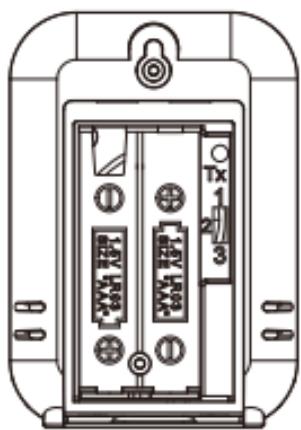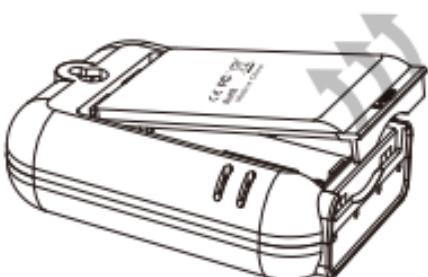


5.Temperature measurement range:

Outdoor temperature range: -40 to 60°C(-40°F to 140°F)

Temperature accuracy: $\pm 1^{\circ}\text{C}$;

6.Transmitter Installation:

If install the transmitter outdoor, use screws or nails to secure it to the wall. It is recommended to install the transmitter on a north-facing wall in a shaded area. Direct sunlight and radiant heat sources can lead to inaccurate temperature readings.

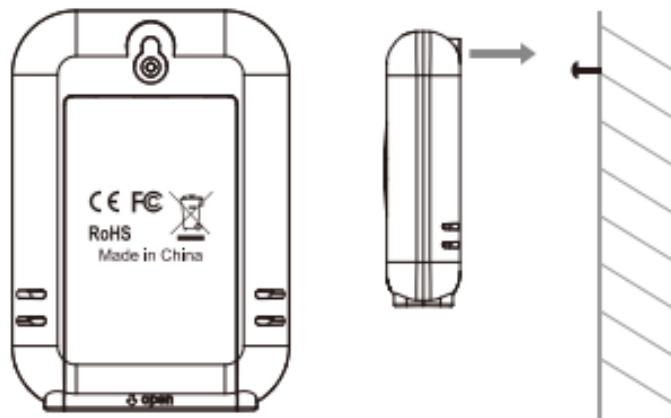

FCC CE RoHS

Made in China

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.