


## Inverted F Antenna Specification

### Summary

| ITEM                 | ANT SPEC                            |         |         |          |         |         |
|----------------------|-------------------------------------|---------|---------|----------|---------|---------|
| Model Name           | 2.4G ANT                            |         |         |          |         |         |
| Center Frequency     | Horizontal                          |         |         | Vertical |         |         |
|                      | 2400MHz                             | 2450MHz | 2500MHz | 2400MHz  | 2450MHz | 2500MHz |
|                      | -1.73                               | -0.84   | -0.68   | -6.15    | -3.7    | -2.32   |
| MAX. Gain            | -0.68dBi                            |         |         |          |         |         |
| Polarization         | Horizontal and Vertical             |         |         |          |         |         |
| Azimuth Beam Pattern | Omni-directional                    |         |         |          |         |         |
| Impedance            | 50 Ohm                              |         |         |          |         |         |
| Antenna Length       | 38.20mm                             |         |         |          |         |         |
| Manufacture          | Shenzhen Qijiang Technology Limited |         |         |          |         |         |

Address : Room 205, Floor 2, Building E, Bantian International Center, NO.5, Huancheng South Road Bantian Street, Longgang District, Shenzhen, China


### Antenna Photo & Length (mm)

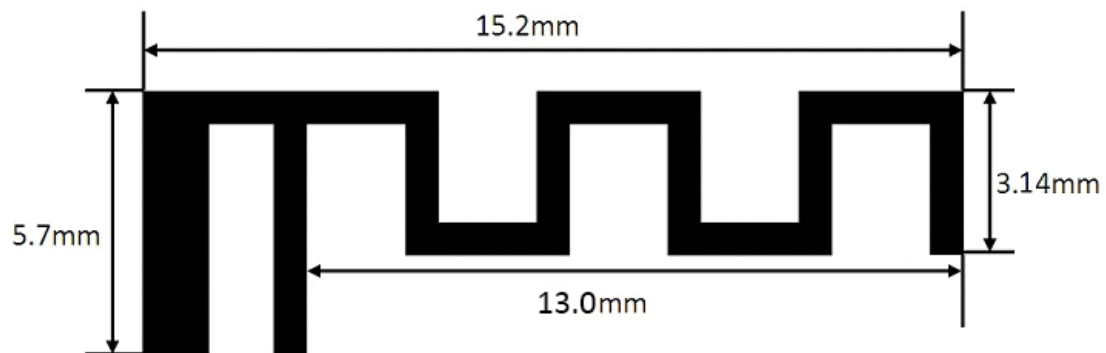

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div

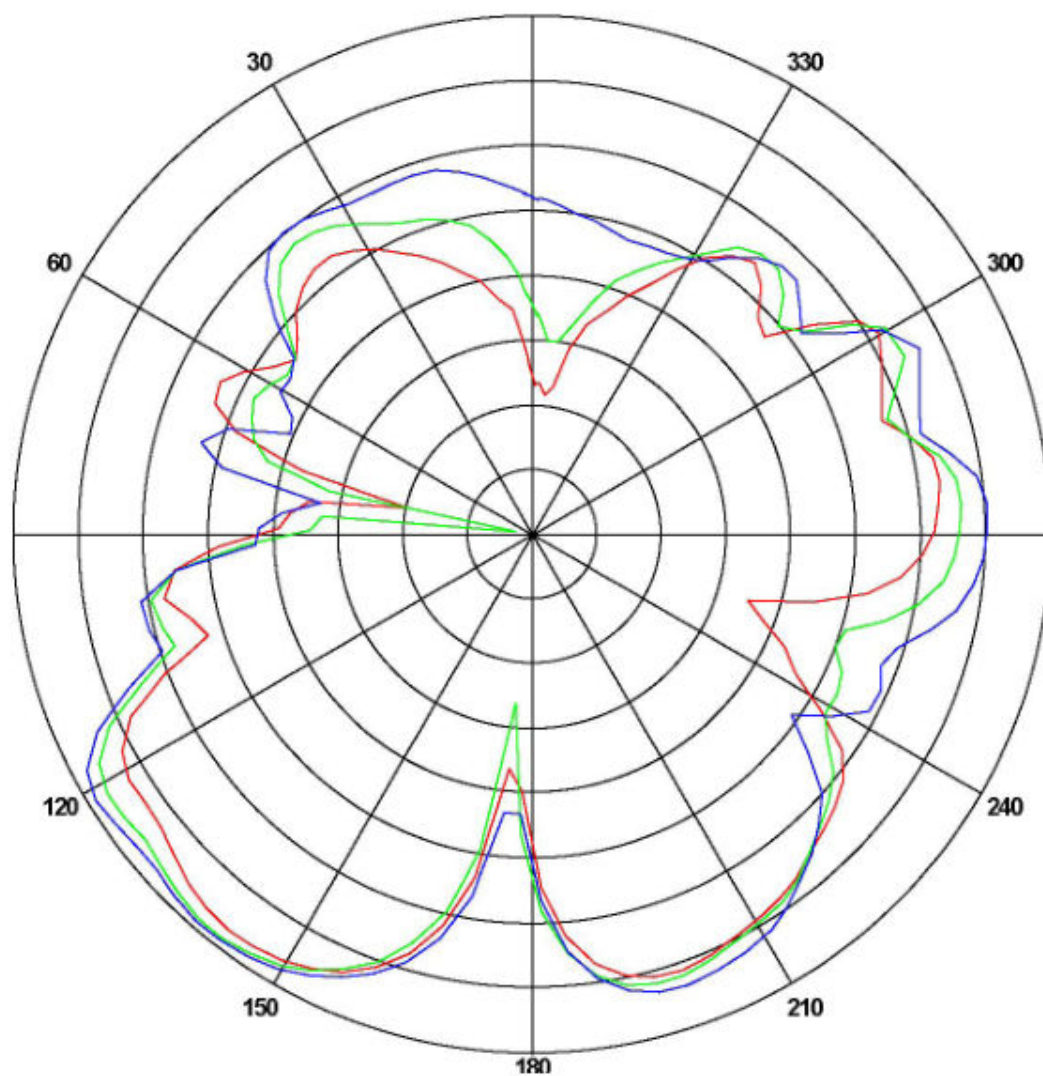


| Frequency<br>(MHz) | Gain(dB)  |          |          |
|--------------------|-----------|----------|----------|
|                    | Max       | Min      | Avg      |
| 2400               | -1.73178  | -30.0815 | -8.48713 |
| 2450               | -0.845801 | -38.5605 | -7.88012 |
| 2500               | -0.685586 | -24.0318 | -6.79139 |

Vertical: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div

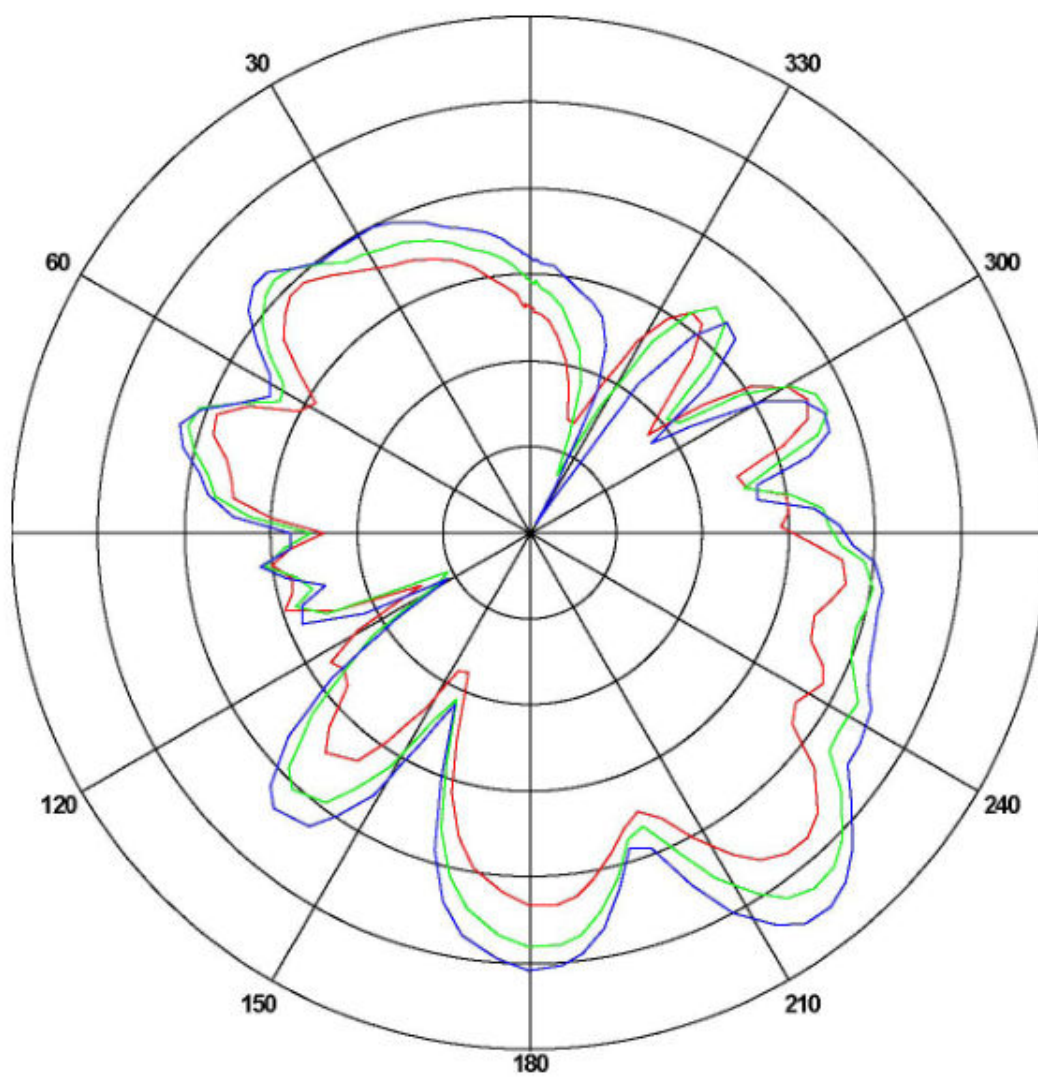

| Frequency<br>(MHz) | Gain(dB) |          |          |
|--------------------|----------|----------|----------|
|                    | Max      | Min      | Avg      |
| 2400               | -6.1530  | -24.1420 | -13.0295 |
| 2450               | -3.7054  | -26.5836 | -10.6700 |
| 2500               | -2.32122 | -30.4301 | -9.70536 |