



Appendix B

Detailed Test Results

1. GSM
GSM850 for Head& Body
GSM1900 for Head& Body
2. WCDMA
WCDMA Band II for Head& Body
WCDMA Band IV for Head& Body
WCDMA Band V for Head& Body
3. LTE
LTE Band 7 for Head& Body
LTE Band 12 for Head& Body
LTE Band 13 for Head& Body
LTE Band 25 for Head& Body
LTE Band 26 for Head& Body
LTE Band 41 for Head& Body
LTE Band 66 for Head& Body
LTE Band 71 for Head& Body
4. NR
5G NR Band 2 for Head& Body
5G NR Band 5 for Head& Body
5G NR Band 7 for Head& Body
5G NR Band 25 for Head& Body
5G NR Band 26 for Head& Body
5G NR Band 38 for Head& Body
5G NR Band 41 for Head& Body
5G NR Band 66 for Head& Body
5G NR Band 71 for Head& Body
5G NR Band 77 for Head& Body



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5G NR Band 78 for Head& Body
5. WIFI
WIFI 2.4GHz for Head& Body
WIFI 5.2GHz for Head& Body
WIFI 5.3GHz for Head& Body
WIFI 5.5GHz for Head& Body
WIFI 5.8GHz for Head& Body



Date:2025/4/11

Test Laboratory: LCS-SAR Lab

GSM 850 190CH Left Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, GSM (0); Frequency: 836.8 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.273$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.159 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.849 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.163 W/kg

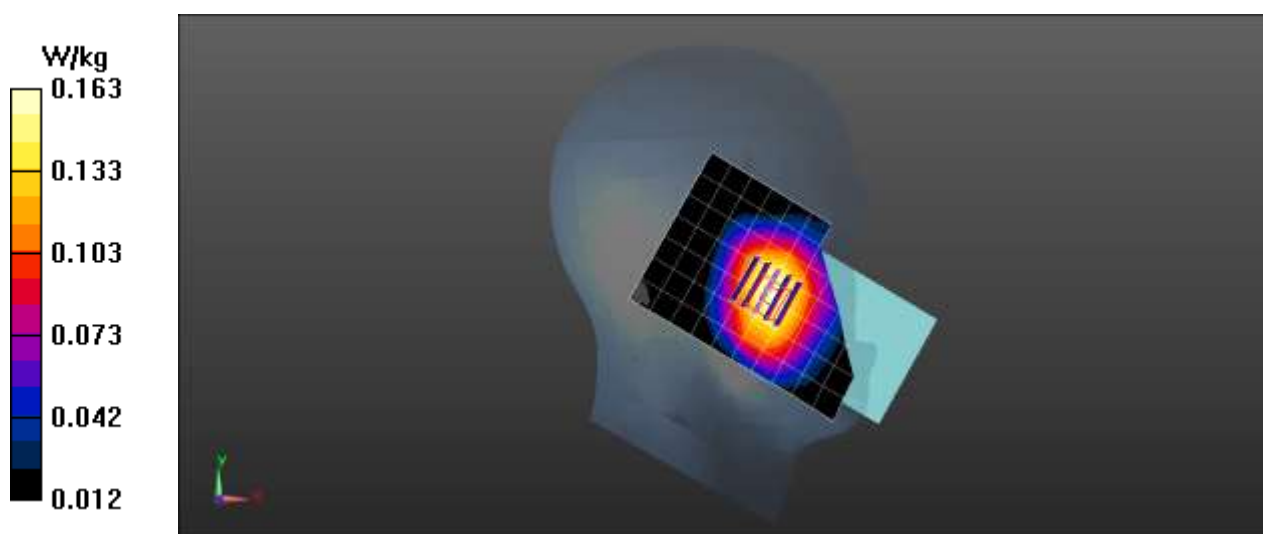

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/11

Test Laboratory: LCS-SAR Lab

GSM 850 GPRS 3TX 190CH Rear side 10mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, GSM (0); Frequency: 836.8 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.273$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.417 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.625 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.353 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.233 W/kg

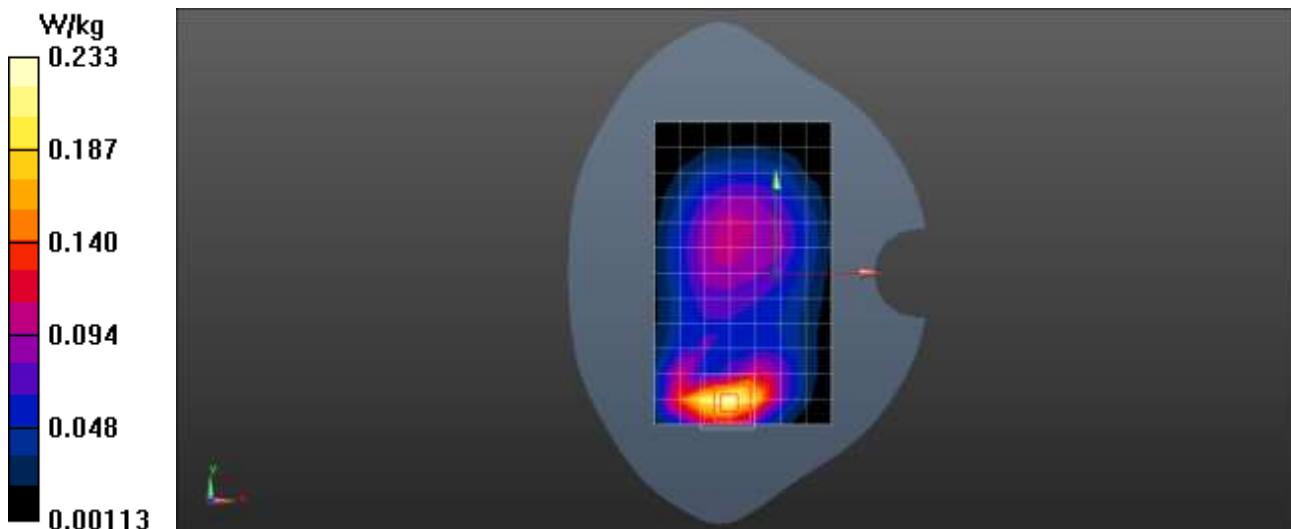

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/11

Test Laboratory: LCS-SAR Lab

GSM 850 GPRS 3TX 190CH Rear side 5mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, GSM (0); Frequency: 836.8 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.273$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.417 W/kg**Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.231 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.439 W/kg

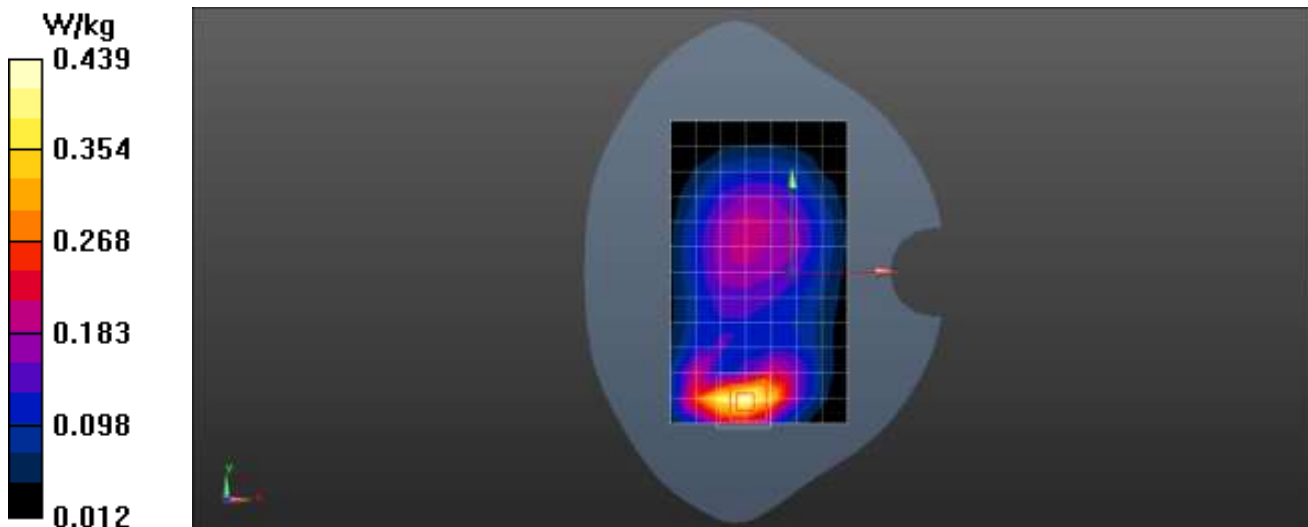

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

GSM 1900 661CH Right Cheek

DUT: Smart Phone; Type: BraX3; Serial:A250303080-1

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.453$ S/m; $\epsilon_r = 40.371$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.673 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.37 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.335 W/kg

Maximum value of SAR (measured) = 0.680 W/kg

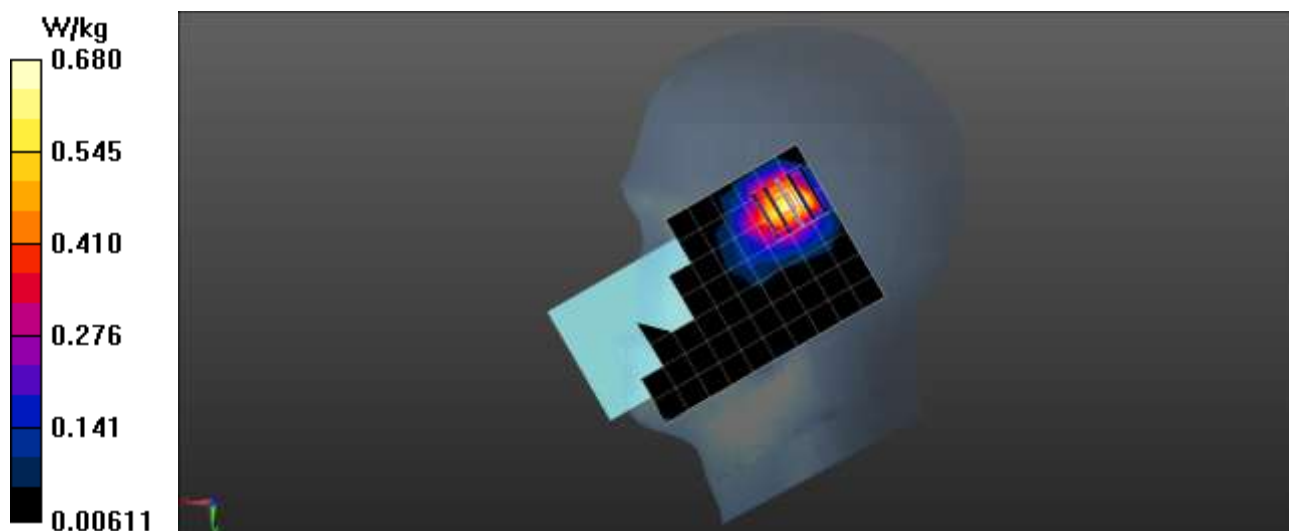

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

GSM 1900 GPRS 3TX 512CH Rear side 10mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.471$ S/m; $\epsilon_r = 40.394$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.796 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.27 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.783 W/kg

SAR(1 g) = 0.567 W/kg; SAR(10 g) = 0.297 W/kg

Maximum value of SAR (measured) = 0.777 W/kg

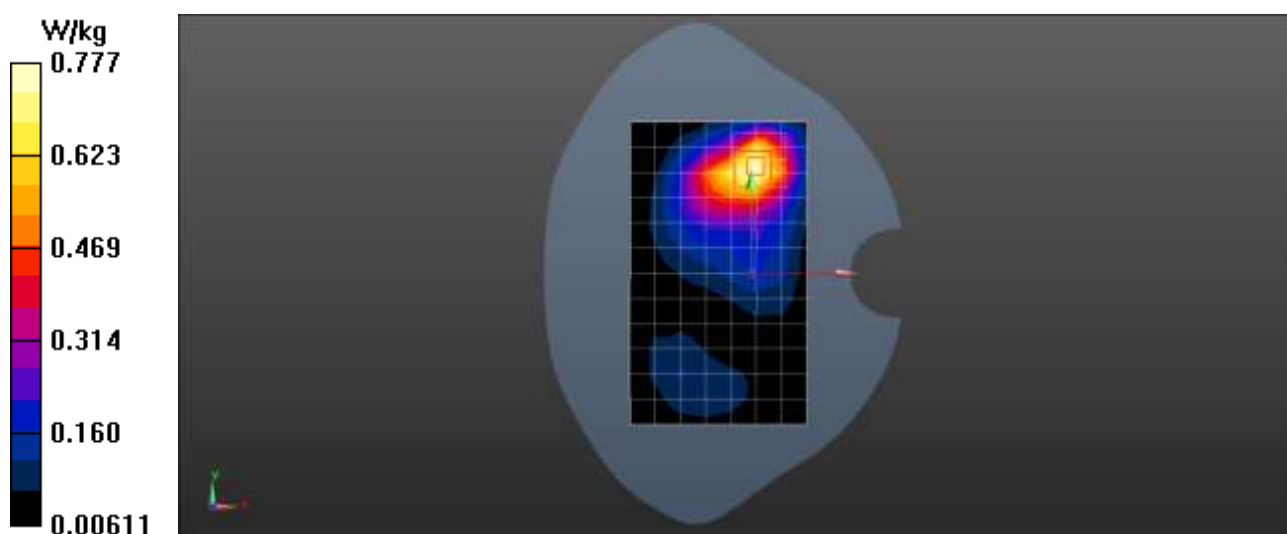

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

GSM 1900 GPRS 3TX 512CH Rear side 5mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.471$ S/m; $\epsilon_r = 40.394$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.934 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.63 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.785 W/kg

SAR(1 g) = 0.706 W/kg; SAR(10 g) = 0.376 W/kg

Maximum value of SAR (measured) = 0.911 W/kg

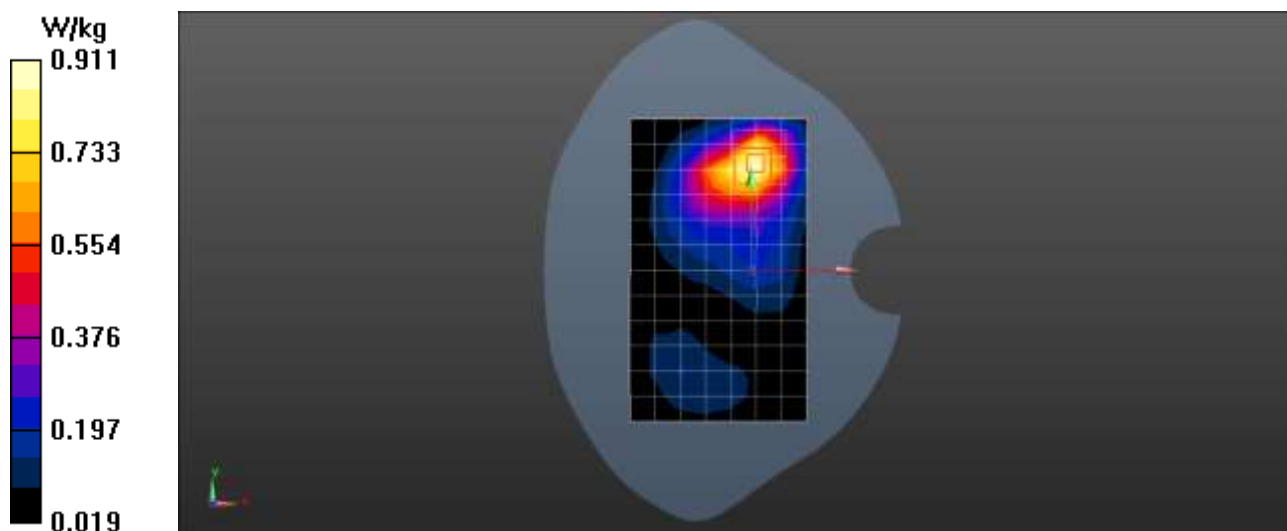

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

WCDMA B2 RMC 9400CH Right Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1


Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.443 \text{ S/m}$; $\epsilon_r = 40.327$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

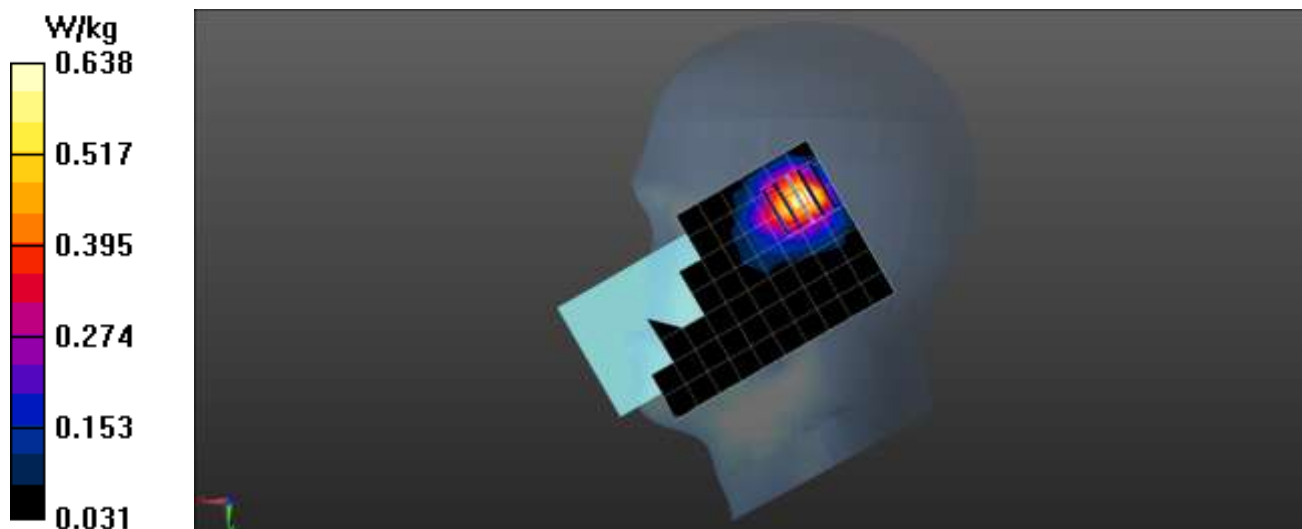Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.646 W/kg **Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.53 V/m ; Power Drift = 0.11 dB Peak SAR (extrapolated) = 0.704 W/kg **SAR(1 g) = 0.579 W/kg ; SAR(10 g) = 0.267 W/kg** Maximum value of SAR (measured) = 0.638 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

WCDMA B2 RMC 9400CH Rear side 10mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1


Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.443 \text{ S/m}$; $\epsilon_r = 40.327$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

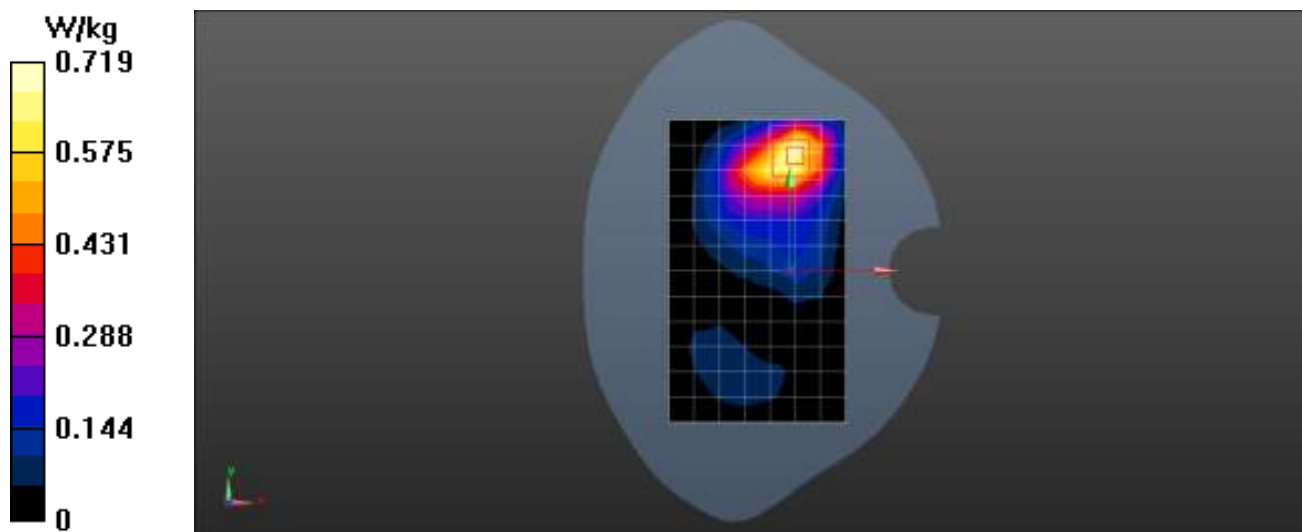Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.742 W/kg **Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.243 V/m ; Power Drift = 0.19 dB Peak SAR (extrapolated) = 1.12 W/kg **SAR(1 g) = 0.495 W/kg ; SAR(10 g) = 0.267 W/kg** Maximum value of SAR (measured) = 0.719 W/kg 

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

WCDMA B2 RMC 9400CH Rear side 5mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.443 \text{ S/m}$; $\epsilon_r = 40.327$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.864 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.472 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.653 W/kg

SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 0.842 W/kg

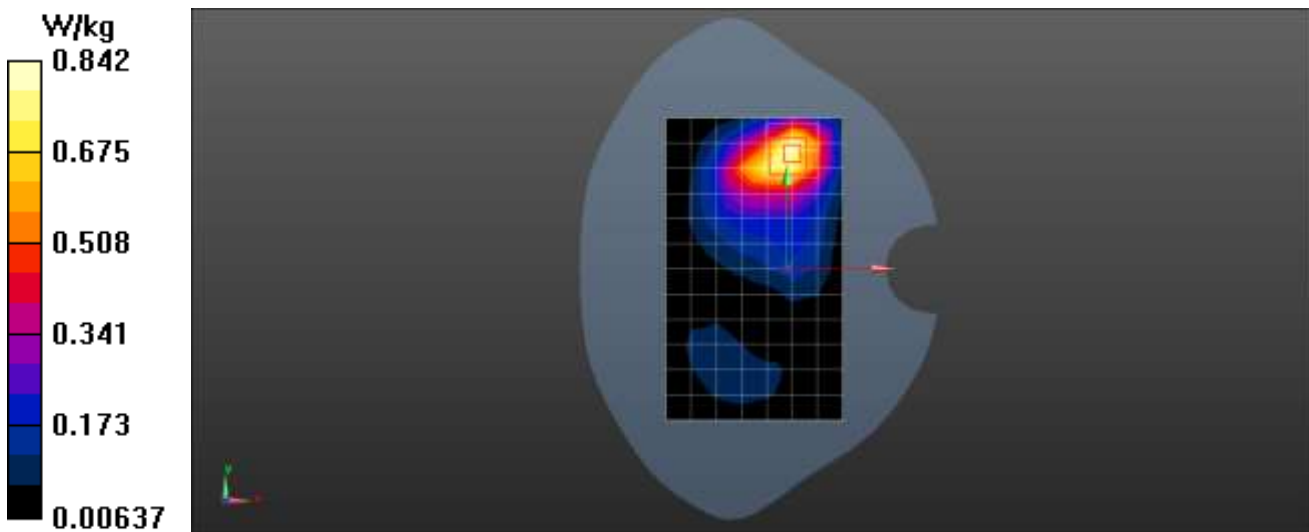

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/12

Test Laboratory: LCS-SAR Lab

WCDMA B4 RMC 1312CH Right Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 40.183$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.531 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.493 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.751 W/kg

SAR(1 g) = 0.469 W/kg; SAR(10 g) = 0.247 W/kg

Maximum value of SAR (measured) = 0.527 W/kg

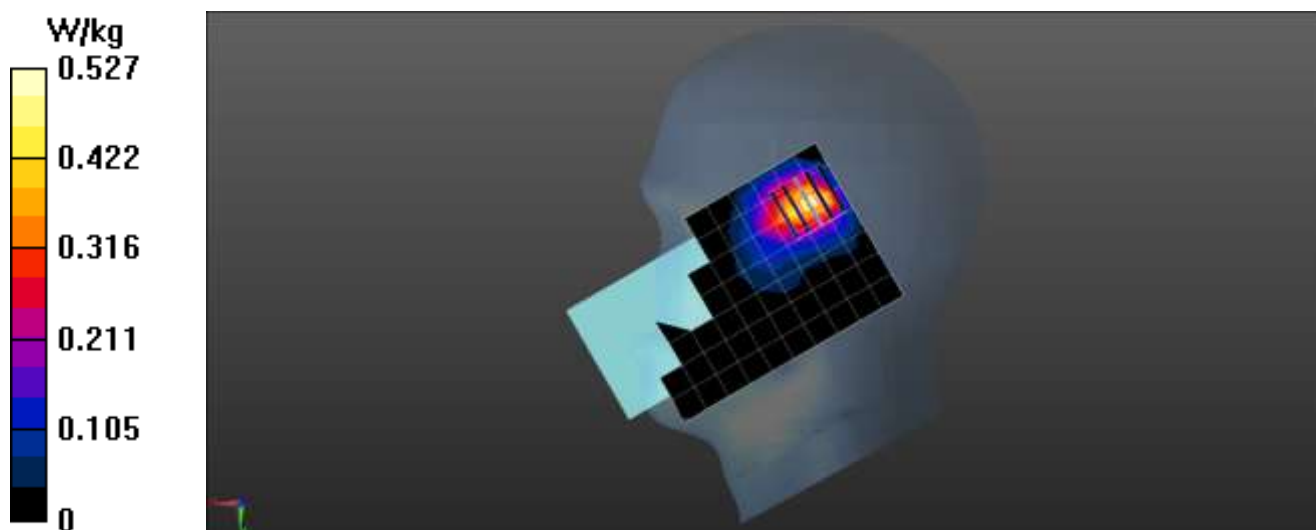

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/12

Test Laboratory: LCS-SAR Lab

WCDMA B4 RMC 1312CH Rear side 10mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1


Communication System: UID 0, WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1712.4 \text{ MHz}$; $\sigma = 1.376 \text{ S/m}$; $\epsilon_r = 40.183$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

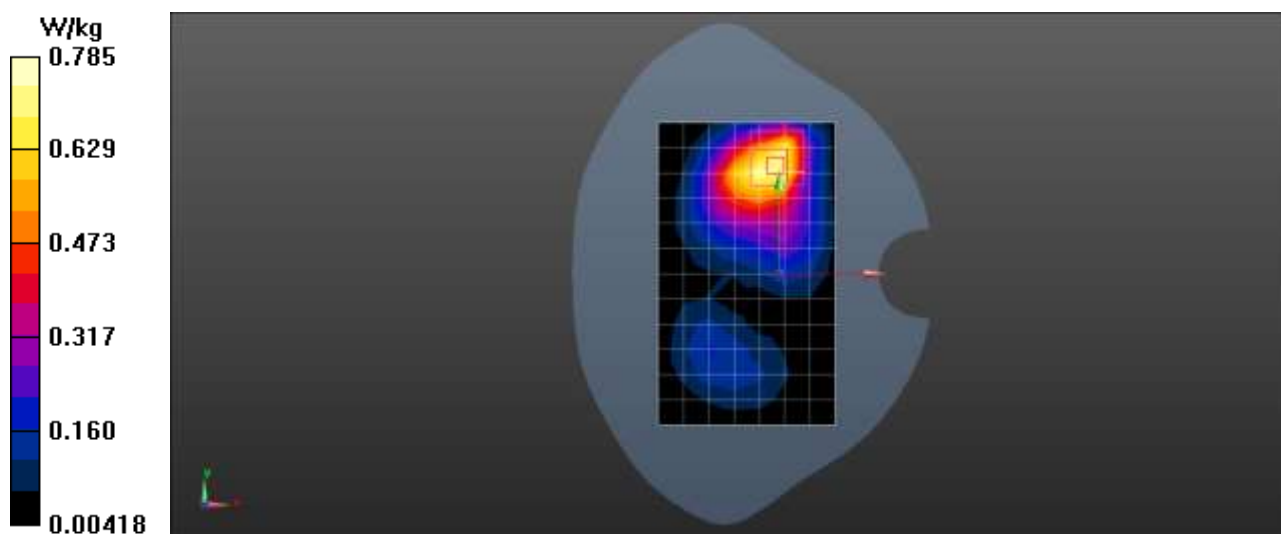Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.944 W/kg **Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.253 V/m ; Power Drift = 0.11 dB Peak SAR (extrapolated) = 1.09 W/kg **SAR(1 g) = 0.511 W/kg ; SAR(10 g) = 0.268 W/kg** Maximum value of SAR (measured) = 0.785 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/12

Test Laboratory: LCS-SAR Lab

WCDMA B4 RMC 1312CH Rear side 5mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1712.4 \text{ MHz}$; $\sigma = 1.376 \text{ S/m}$; $\epsilon_r = 40.183$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.944 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.472 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.763 W/kg

SAR(1 g) = 0.687 W/kg; SAR(10 g) = 0.364 W/kg

Maximum value of SAR (measured) = 0.902 W/kg

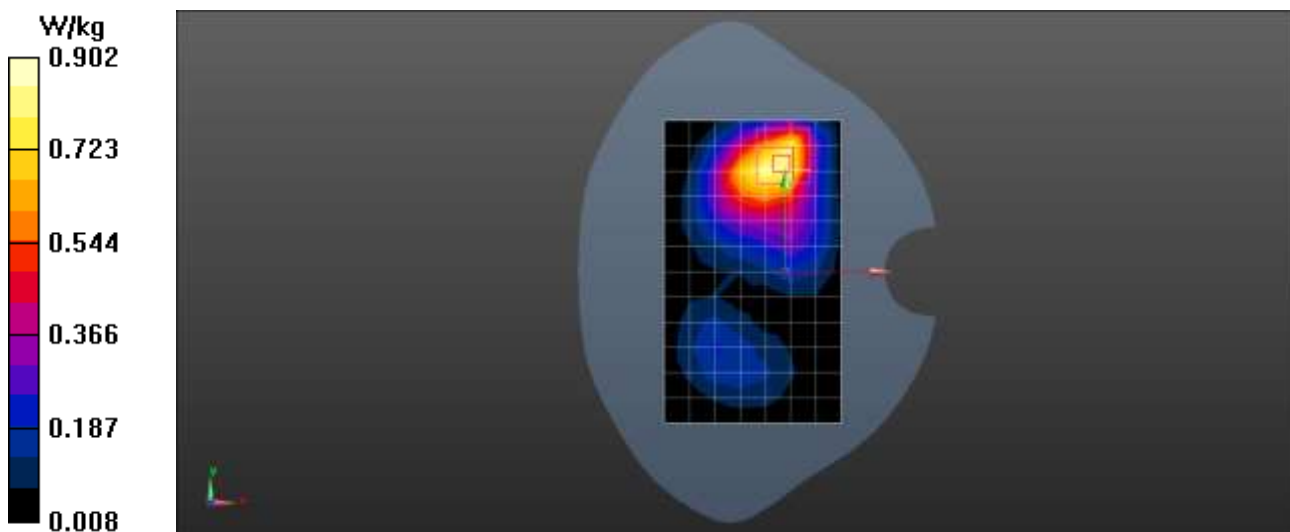

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/11

Test Laboratory: LCS-SAR Lab

WCDMA B5 RMC 4233CH Right Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1


Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6 \text{ MHz}$; $\sigma = 0.896 \text{ S/m}$; $\epsilon_r = 42.073$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

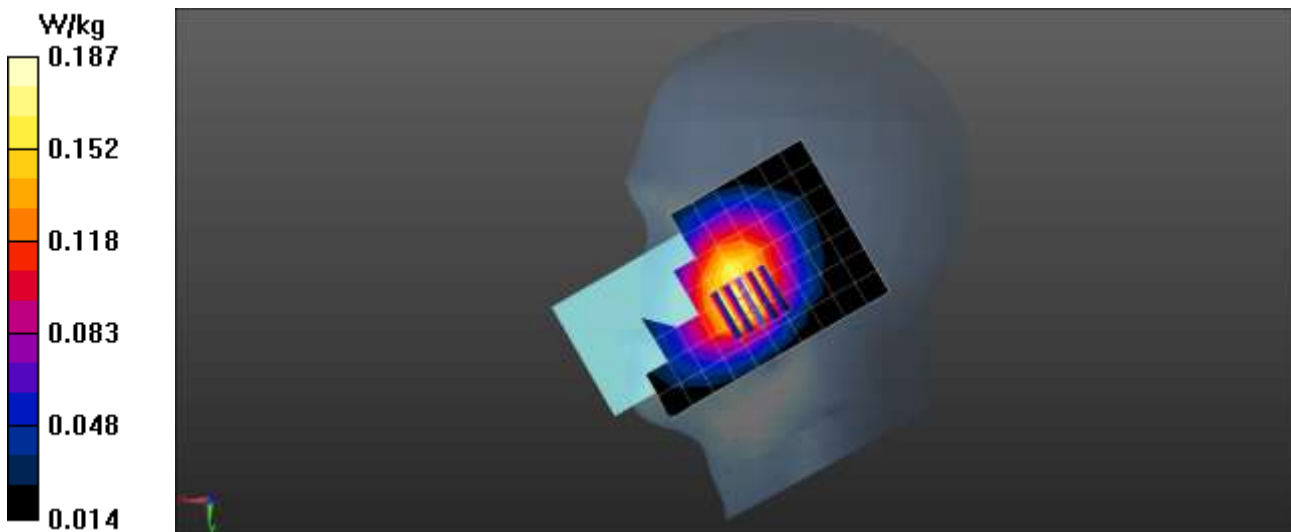Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.193 W/kg **Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.182 V/m ; Power Drift = -0.17 dB Peak SAR (extrapolated) = 0.207 W/kg **SAR(1 g) = 0.154 W/kg ; SAR(10 g) = 0.086 W/kg** Maximum value of SAR (measured) = 0.187 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/11

Test Laboratory: LCS-SAR Lab

WCDMA B5 RMC 4233CH Rear side 10mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6 \text{ MHz}$; $\sigma = 0.896 \text{ S/m}$; $\epsilon_r = 42.073$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.387 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.231 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.464 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.365 W/kg

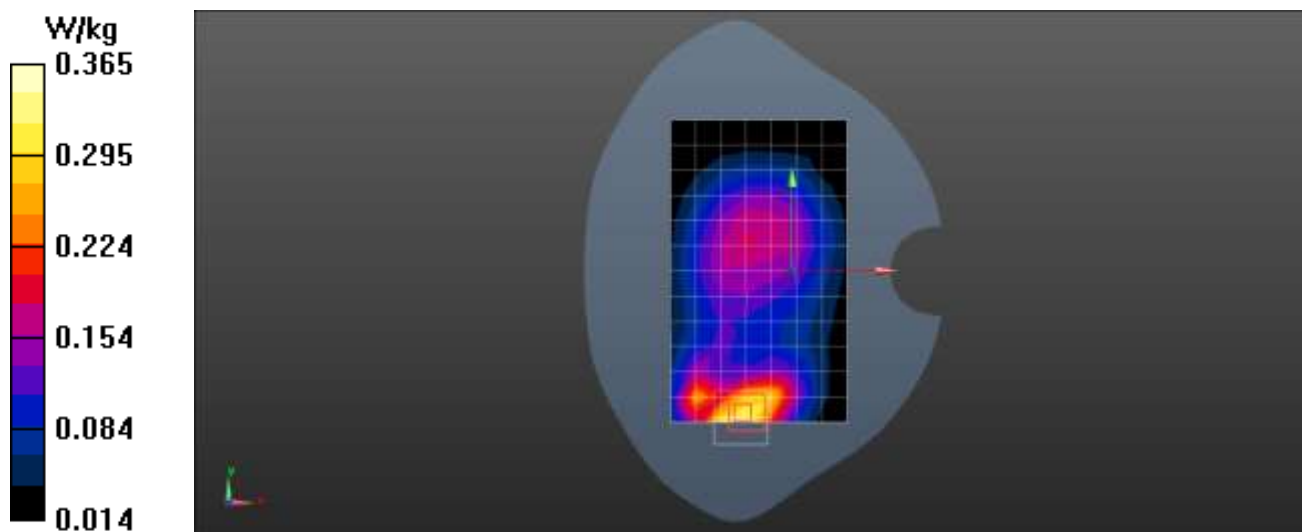

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/11

Test Laboratory: LCS-SAR Lab

WCDMA B5 RMC 4233CH Rear side 5mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6 \text{ MHz}$; $\sigma = 0.896 \text{ S/m}$; $\epsilon_r = 42.073$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.532 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.349 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.483 W/kg

SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.528 W/kg

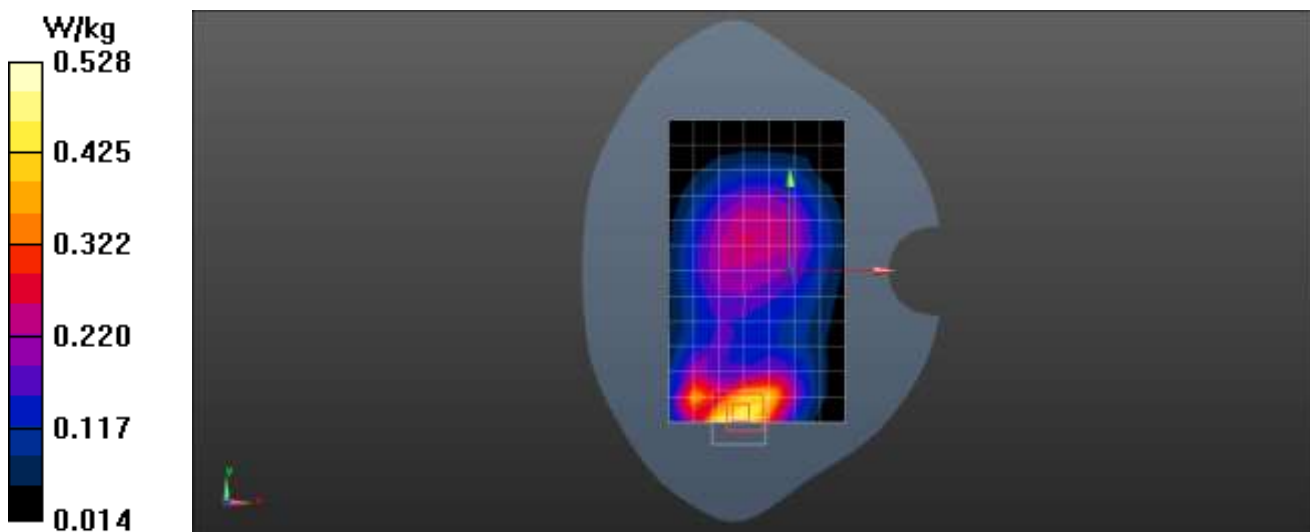

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 20850CH 1RB99 Right Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.971$ S/m; $\epsilon_r = 39.682$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.949 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.739 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.832 W/kg

SAR(1 g) = 0.602 W/kg; SAR(10 g) = 0.324 W/kg

Maximum value of SAR (measured) = 0.974 W/kg

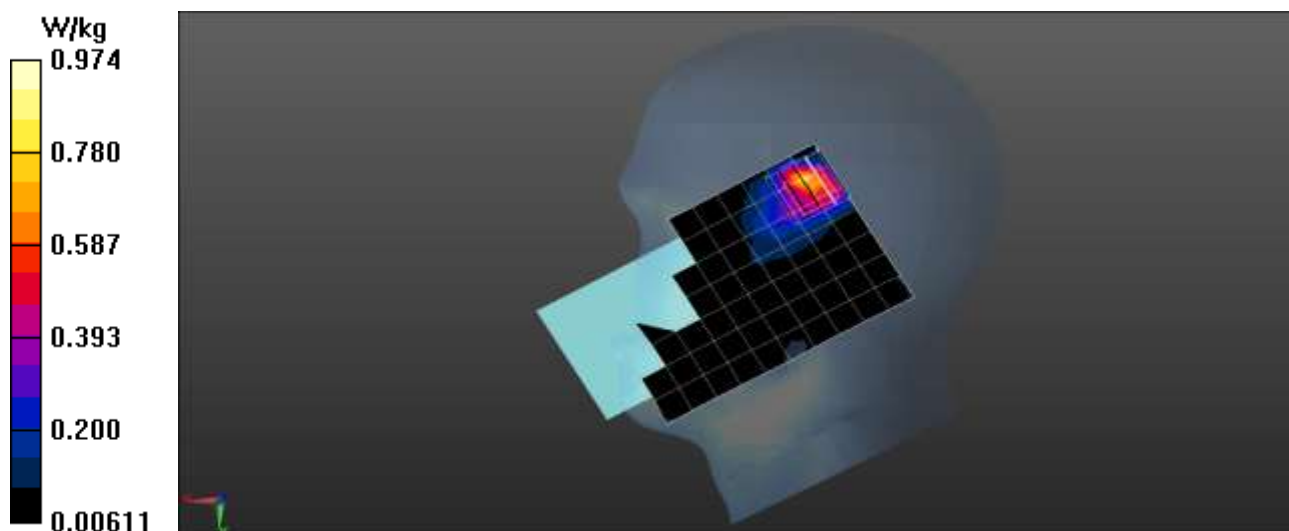

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 20850CH 1RB99 Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.971$ S/m; $\epsilon_r = 39.682$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.842 W/kg


Configuration/Rear side 5mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.285 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.825 W/kg

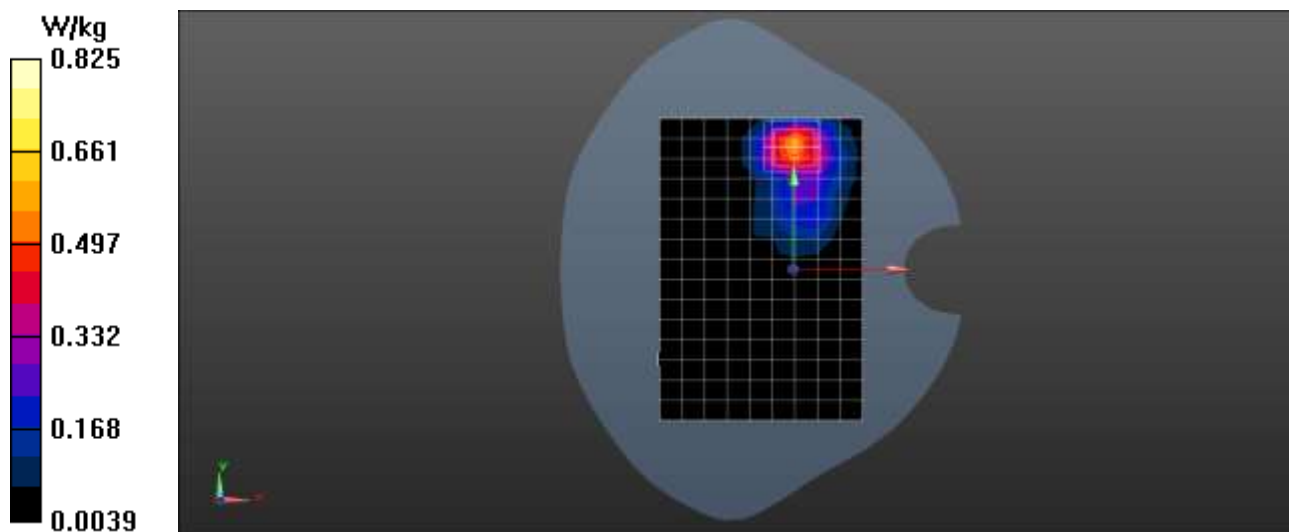

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 20850CH 1RB99 Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.971$ S/m; $\epsilon_r = 39.682$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.873 W/kg

Configuration/Rear side 5mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.476 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.712 W/kg; SAR(10 g) = 0.384 W/kg

Maximum value of SAR (measured) = 0.902 W/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/10

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23060CH 1RB0 Left Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1


Communication System: UID 0, LTE-FDD (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 42.735$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

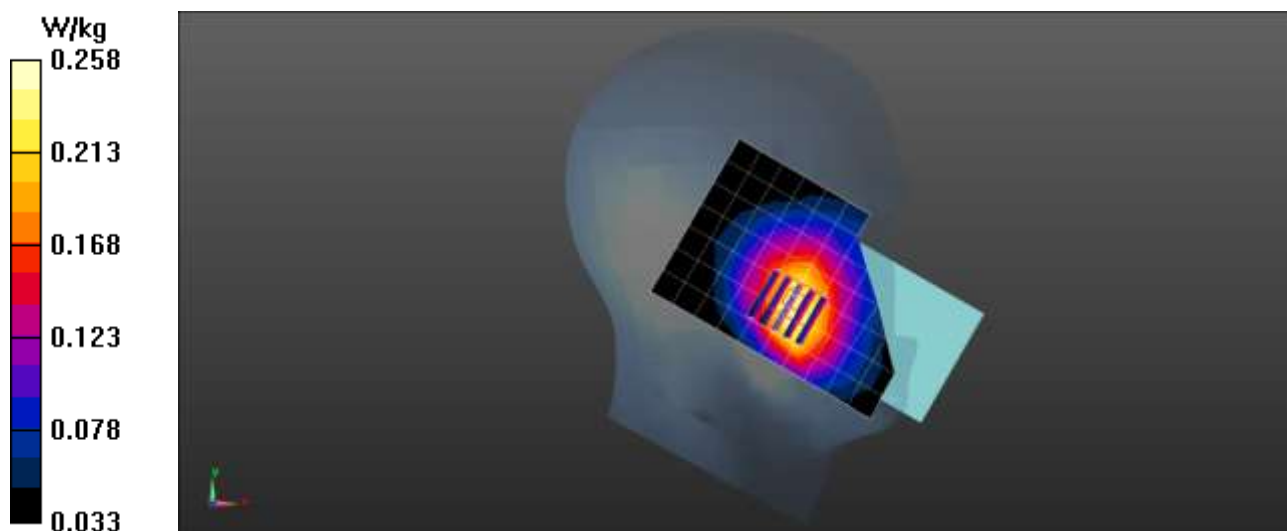Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.274 W/kg **Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.275 V/m ; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.293 W/kg **SAR(1 g) = 0.208 W/kg ; SAR(10 g) = 0.116 W/kg** Maximum value of SAR (measured) = 0.258 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/10

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23060CH 1RB0 Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**


Communication System: UID 0, LTE-FDD (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 42.735$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

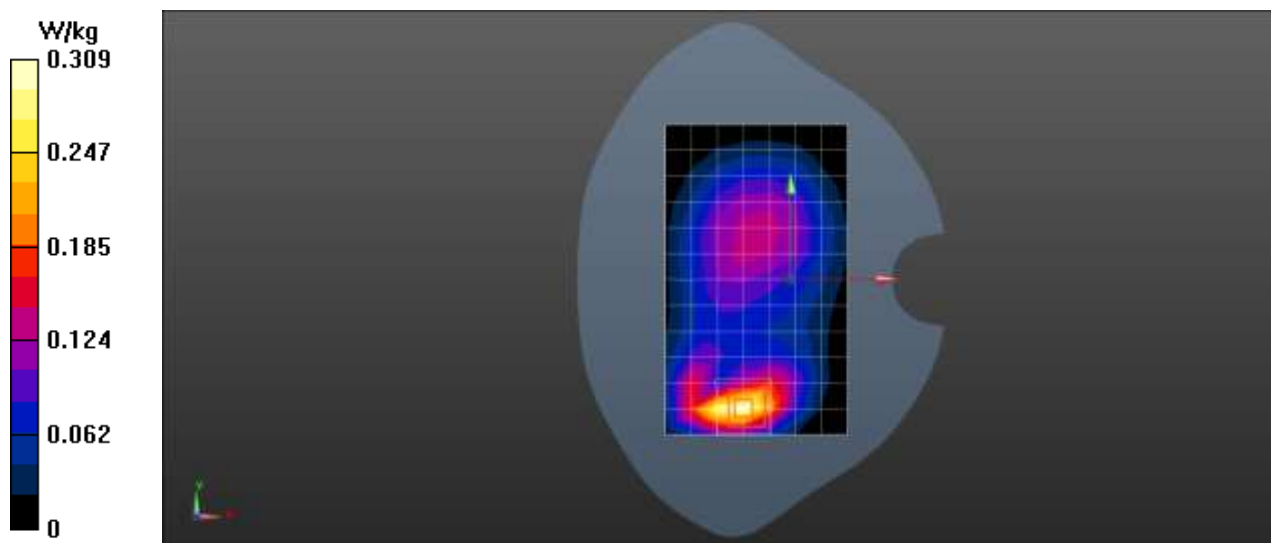Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.327 W/kg **Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.226 V/m ; Power Drift = 0.11 dB Peak SAR (extrapolated) = 0.432 W/kg **SAR(1 g) = 0.216 W/kg ; SAR(10 g) = 0.121 W/kg** Maximum value of SAR (measured) = 0.309 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/10

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23060CH 1RB0 Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 42.735$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.496 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.627 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.364 W/kg

SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 0.508 W/kg

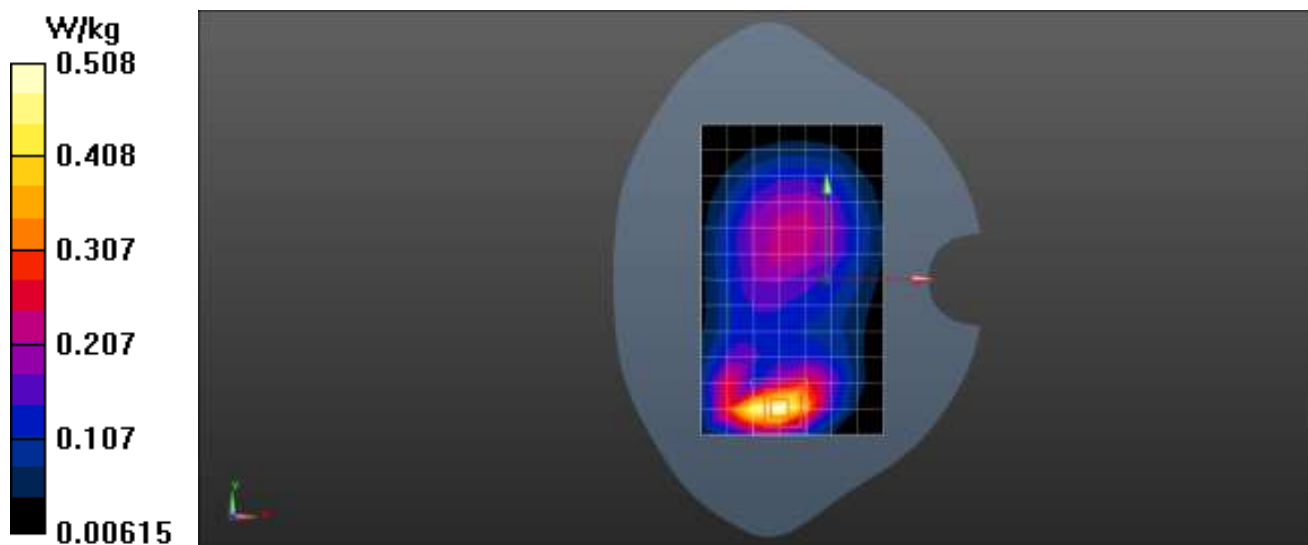

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/10

Test Laboratory: LCS-SAR Lab

LTE B13 10M QPSK 23230CH 1RB49 Left Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1


Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 42.843$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

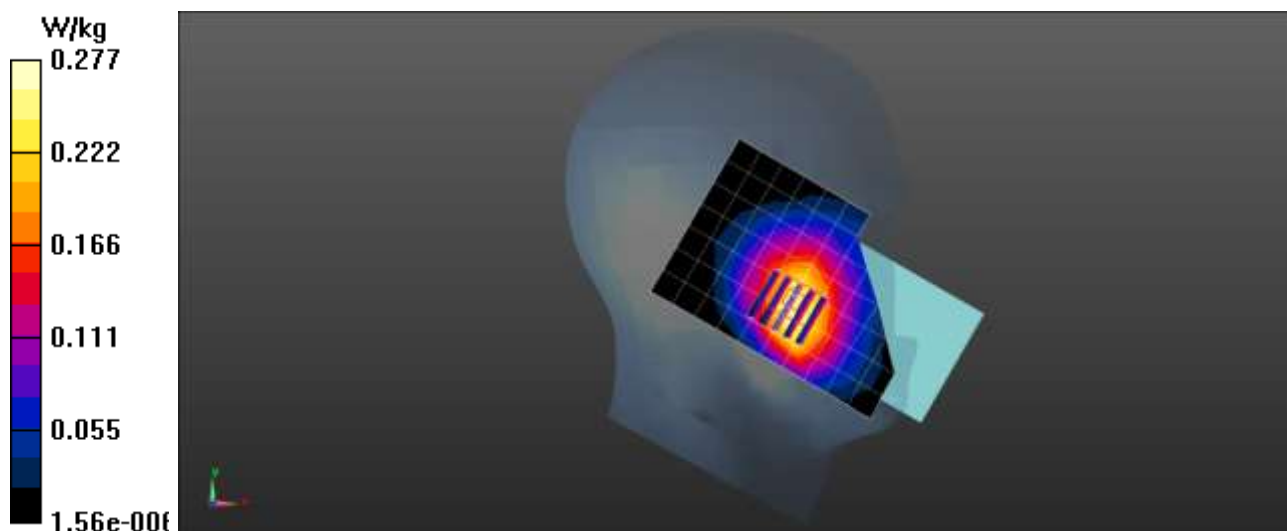Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.262 W/kg **Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.846 V/m ; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.284 W/kg **SAR(1 g) = 0.194 W/kg ; SAR(10 g) = 0.108 W/kg** Maximum value of SAR (measured) = 0.277 W/kg 

Date: 2025/4/10

Test Laboratory: LCS-SAR Lab

LTE B13 10M QPSK 23230CH 1RB49 Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 42.843$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.286 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.957 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.263 W/kg

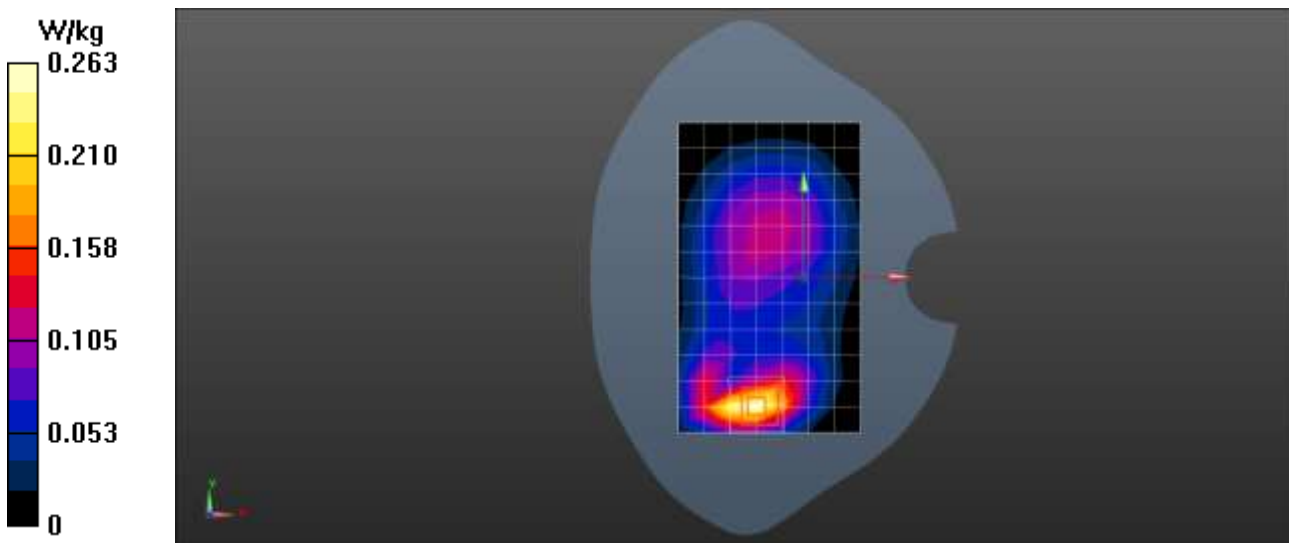

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/10

Test Laboratory: LCS-SAR Lab

LTE B13 10M QPSK 23230CH 1RB49 Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 42.843$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.368 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.486 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.377 W/kg

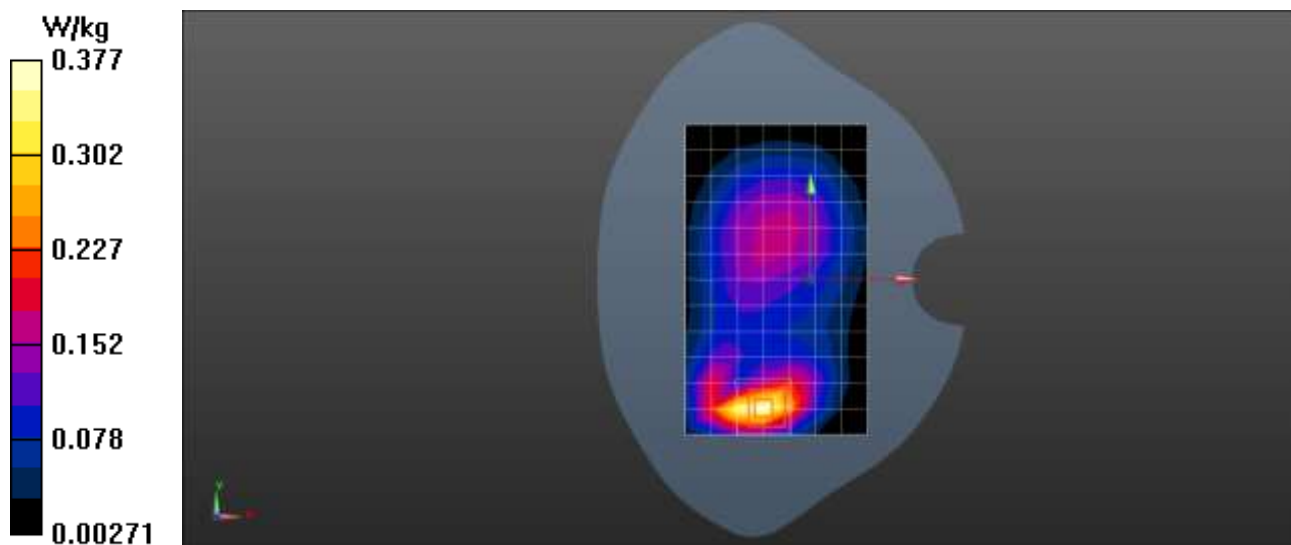

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

LTE B25 20M QPSK 26590CH 1RB49 Right Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1


Communication System: UID 0, LTE-FDD (0); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1905 \text{ MHz}$; $\sigma = 1.436 \text{ S/m}$; $\epsilon_r = 40.472$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

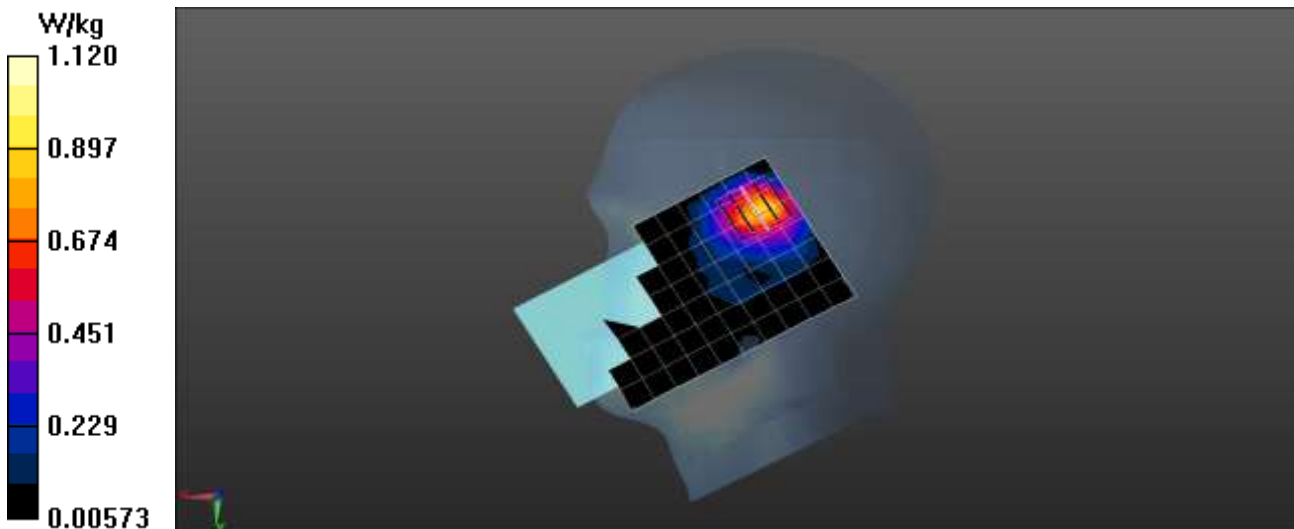Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 1.18 W/kg **Configuration/Head/Zoom Scan (5x5x7)//Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 15.74 V/m ; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.926 W/kg **SAR(1 g) = 0.702 W/kg ; SAR(10 g) = 0.364 W/kg** Maximum value of SAR (measured) = 1.12 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

LTE B25 20M QPSK 26590CH 1RB49 Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**


Communication System: UID 0, LTE-FDD (0); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1905 \text{ MHz}$; $\sigma = 1.436 \text{ S/m}$; $\epsilon_r = 40.472$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

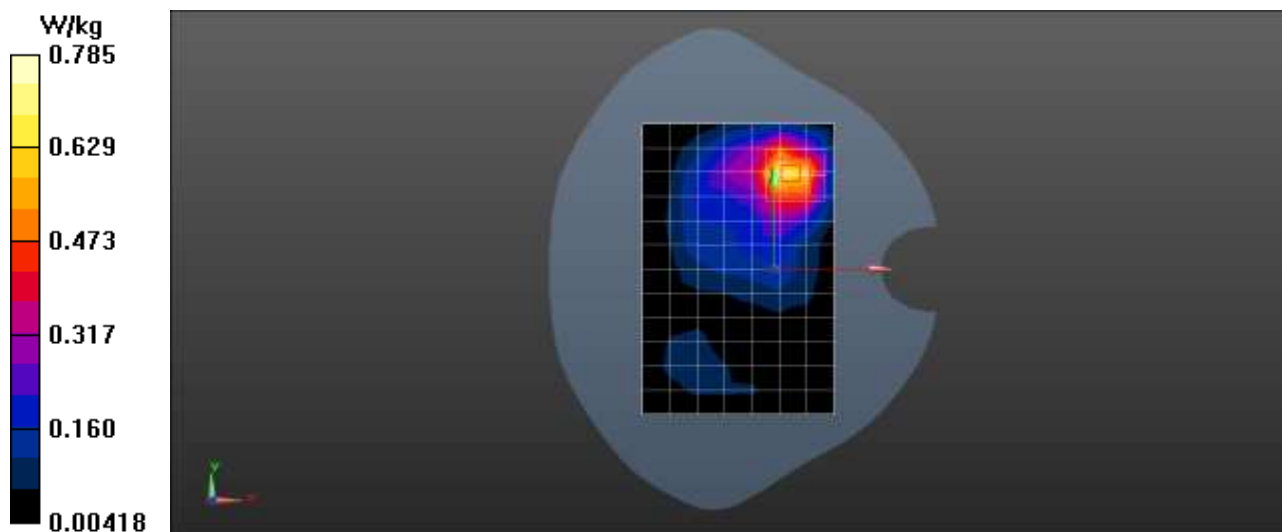Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.802 W/kg **Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.374 V/m ; Power Drift = -0.13 dB Peak SAR (extrapolated) = 1.05 W/kg **SAR(1 g) = 0.529 W/kg ; SAR(10 g) = 0.276 W/kg** Maximum value of SAR (measured) = 0.785 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

LTE B25 20M QPSK 26590CH 1RB49 Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1905$ MHz; $\sigma = 1.436$ S/m; $\epsilon_r = 40.472$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.891 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.032 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.711 W/kg; SAR(10 g) = 0.382 W/kg

Maximum value of SAR (measured) = 0.918 W/kg

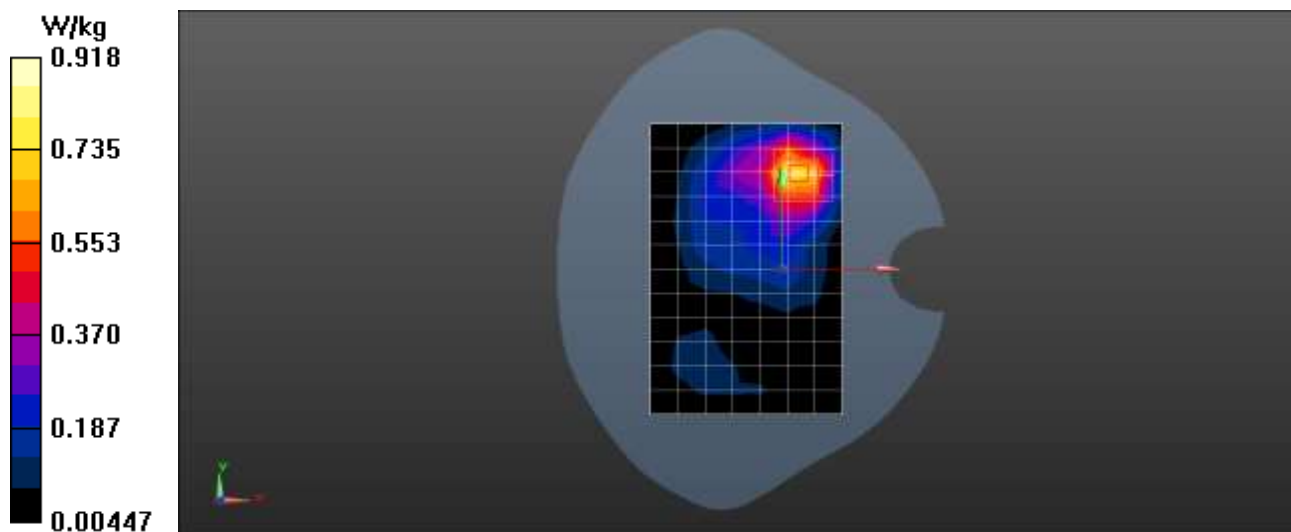

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/11

Test Laboratory: LCS-SAR Lab

LTE B26 15M QPSK 26965CH 1RB0 Left Cheek**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 841.5 \text{ MHz}$; $\sigma = 0.896 \text{ S/m}$; $\epsilon_r = 41.379$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.258 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.346 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.269 W/kg

SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.254 W/kg

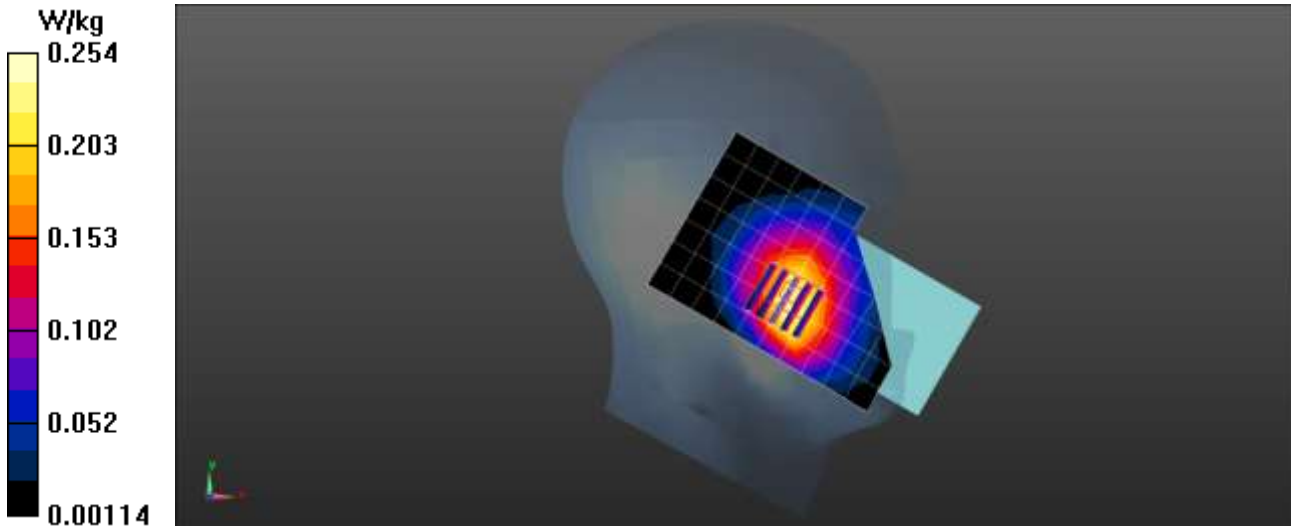

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/11

Test Laboratory: LCS-SAR Lab

LTE B26 15M QPSK 26965CH 1RB0 Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 841.5 \text{ MHz}$; $\sigma = 0.896 \text{ S/m}$; $\epsilon_r = 41.379$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.386 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.427 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

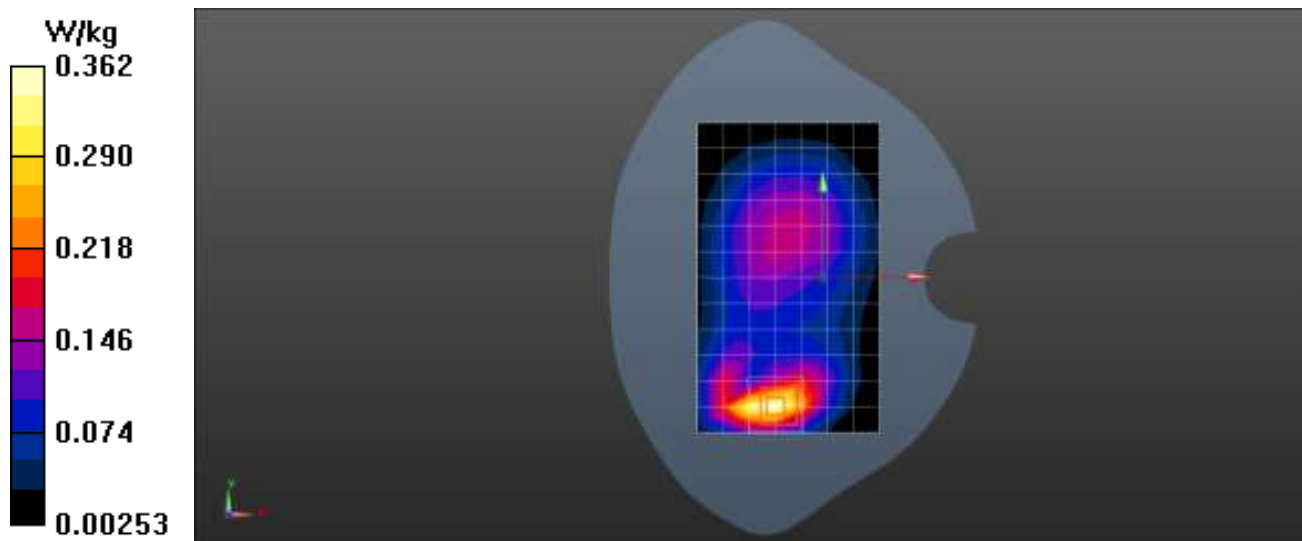

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/11

Test Laboratory: LCS-SAR Lab

LTE B26 15M QPSK 26965CH 1RB0 Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 841.5 \text{ MHz}$; $\sigma = 0.896 \text{ S/m}$; $\epsilon_r = 41.379$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.451 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.425 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 0.492 W/kg

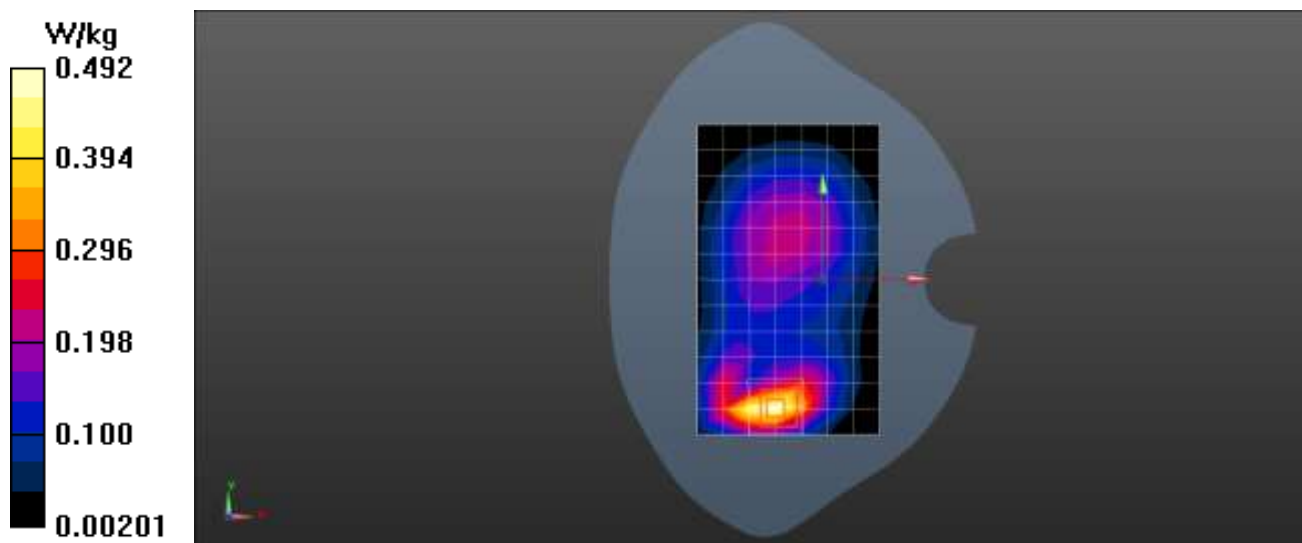

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

TE B41 20M QPSK 40620CH 1RB49 Right Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, LTE-TDD (0); Frequency: 2593 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.942$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.841 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.67 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.631 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 0.955 W/kg

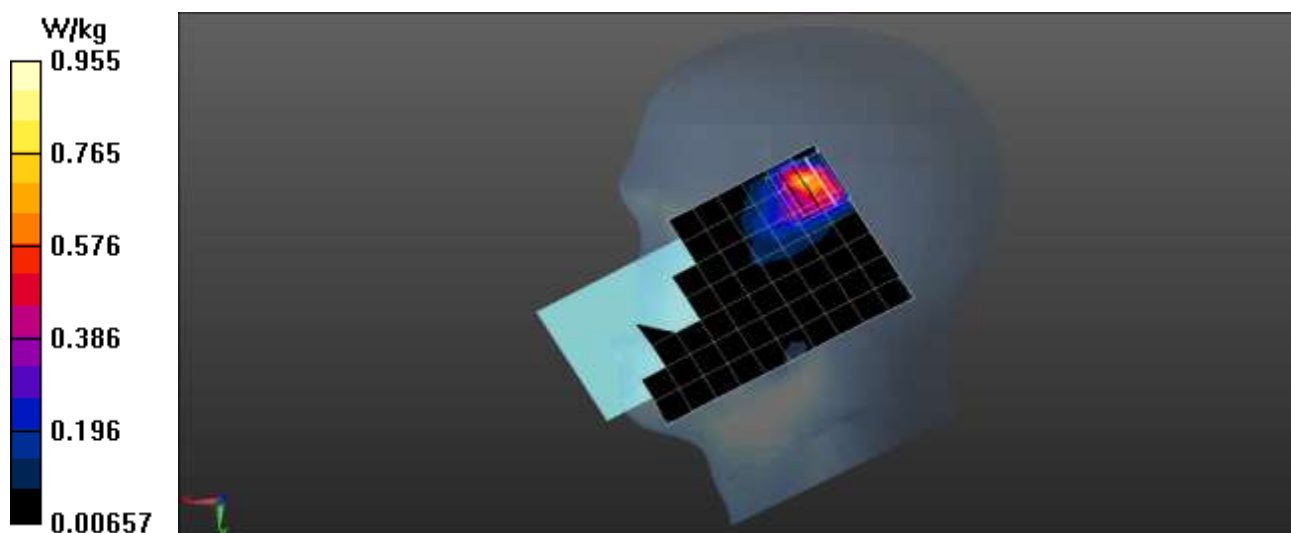

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

LTE B41 20M QPSK 40620CH 1RB0 Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 2593 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.942 \text{ S/m}$; $\epsilon_r = 39.763$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (10x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.983 W/kg


Configuration/Rear side 5mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.08 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.688 W/kg; SAR(10 g) = 0.359 W/kg

Maximum value of SAR (measured) = 0.955 W/kg

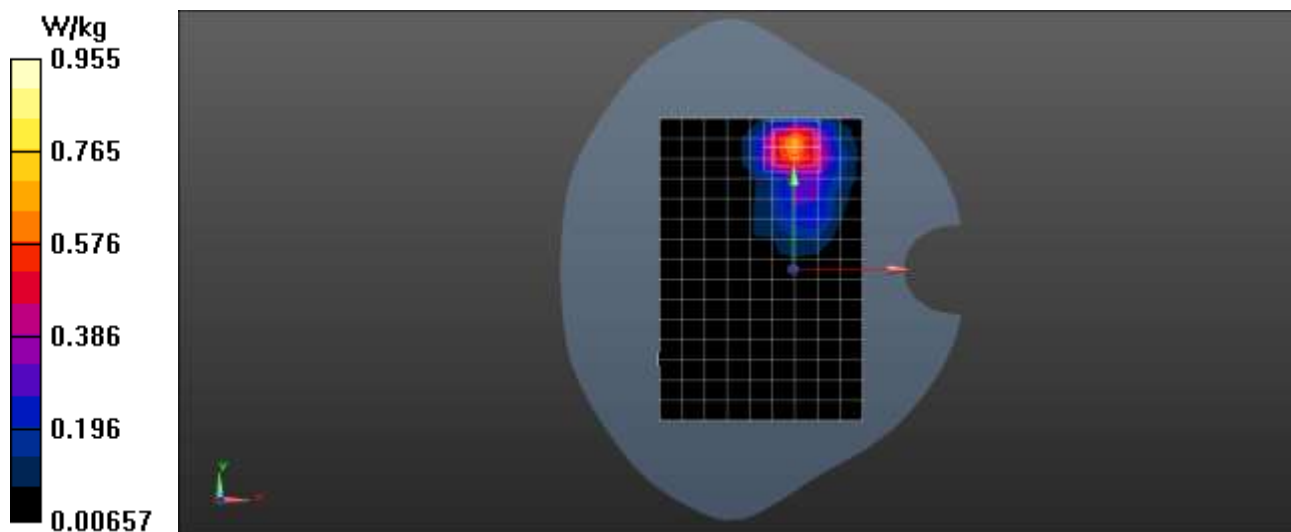

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

LTE B41 20M QPSK 40620CH 1RB0 Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**


Communication System: UID 0, LTE-TDD (0); Frequency: 2593 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.942 \text{ S/m}$; $\epsilon_r = 39.763$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

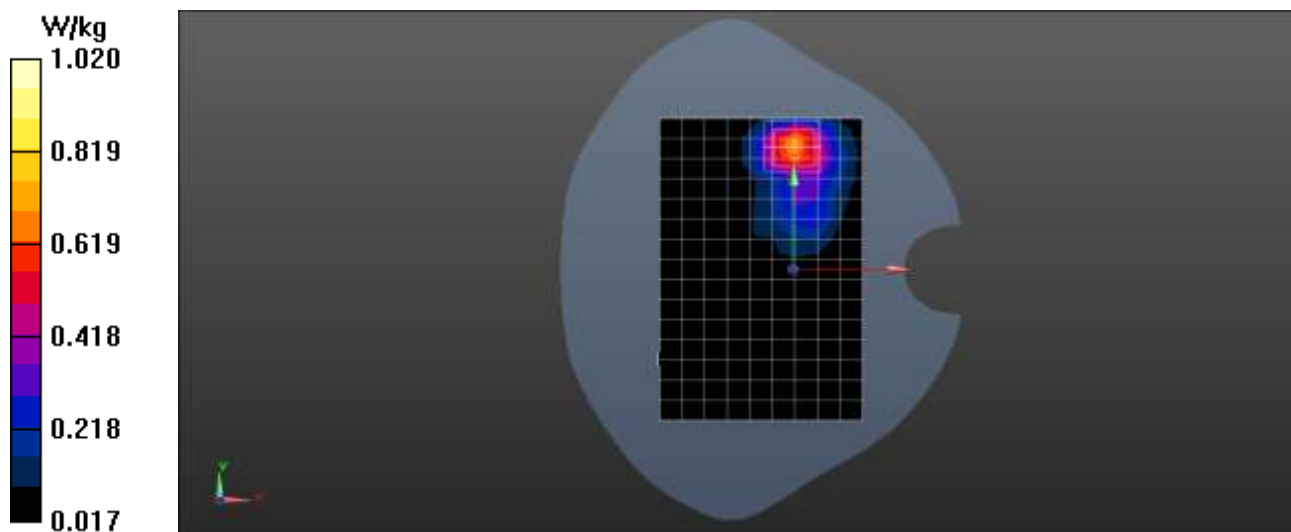Configuration/Rear side 5mm/Area Scan (10x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 1.08 W/kg **Configuration/Rear side 5mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 15.27V/m ; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.838 W/kg **SAR(1 g) = 0.711 W/kg ; SAR(10 g) = 0.387 W/kg** Maximum value of SAR (measured) = 1.02 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/12

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132572CH 1RB99 Right Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 40.347$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.09 W/kg


Configuration/Head/Zoom Scan (5x5x7)//Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.52 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.883 W/kg

SAR(1 g) = 0.669 W/kg; SAR(10 g) = 0.378 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

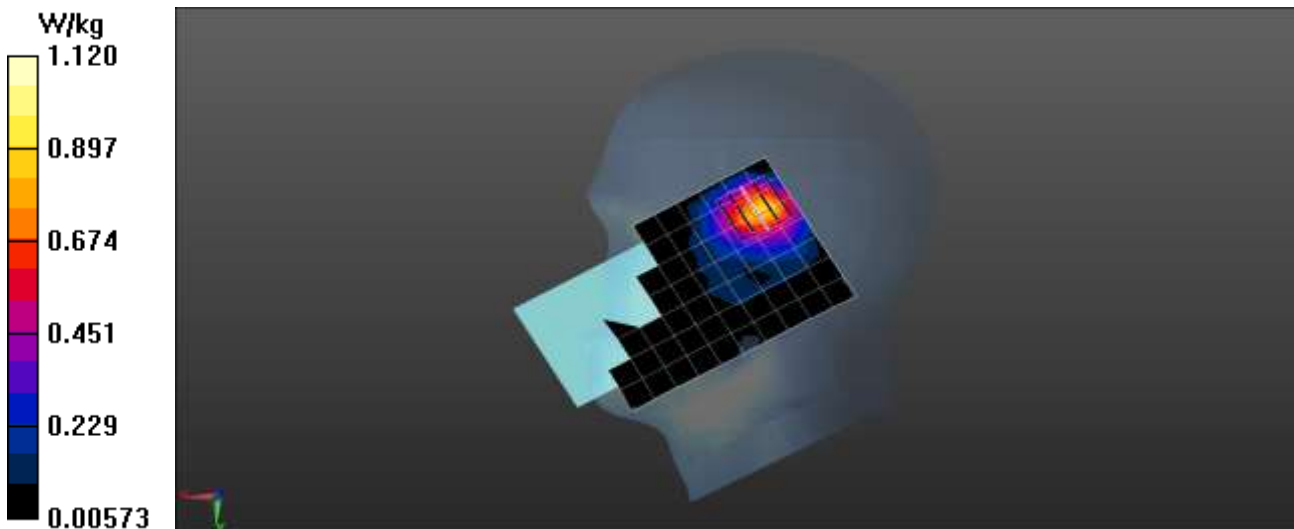

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/12

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132572CH 1RB99 Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 40.347$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.786 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.228 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.772 W/kg

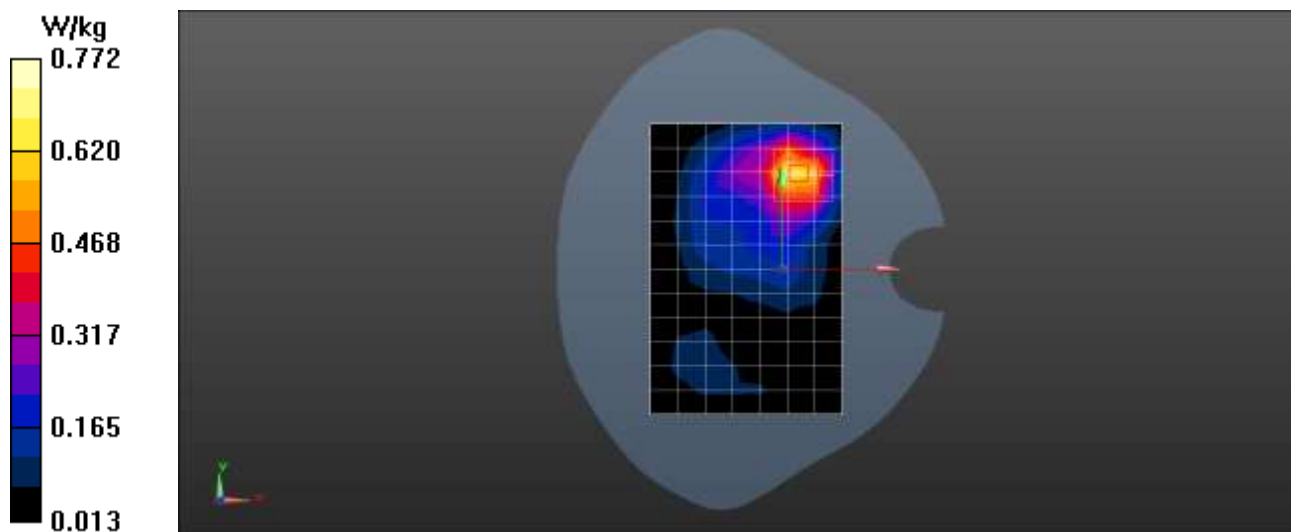

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/12

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132572CH 1RB99 Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 40.347$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.791 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.974 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.534 W/kg

SAR(1 g) = 0.668 W/kg; SAR(10 g) = 0.375 W/kg

Maximum value of SAR (measured) = 0.802 W/kg

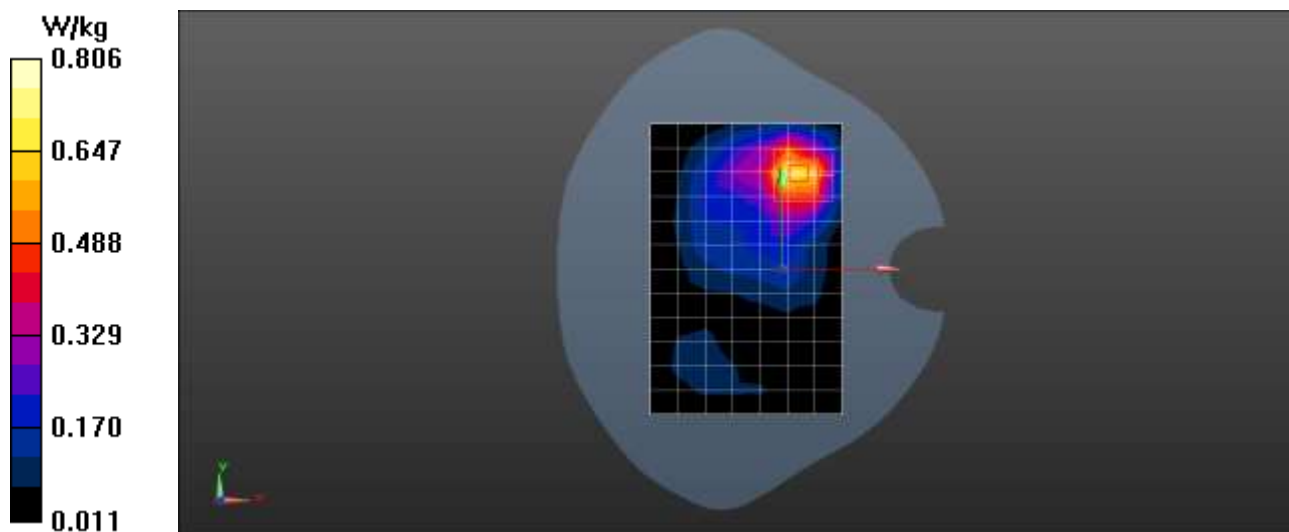

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/10

Test Laboratory: LCS-SAR Lab

LTE B71 10M QPSK 133372CH 1RB0 Left Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1


Communication System: UID 0, LTE-FDD (0); Frequency: 688 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 688 \text{ MHz}$; $\sigma = 0.933 \text{ S/m}$; $\epsilon_r = 42.842$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

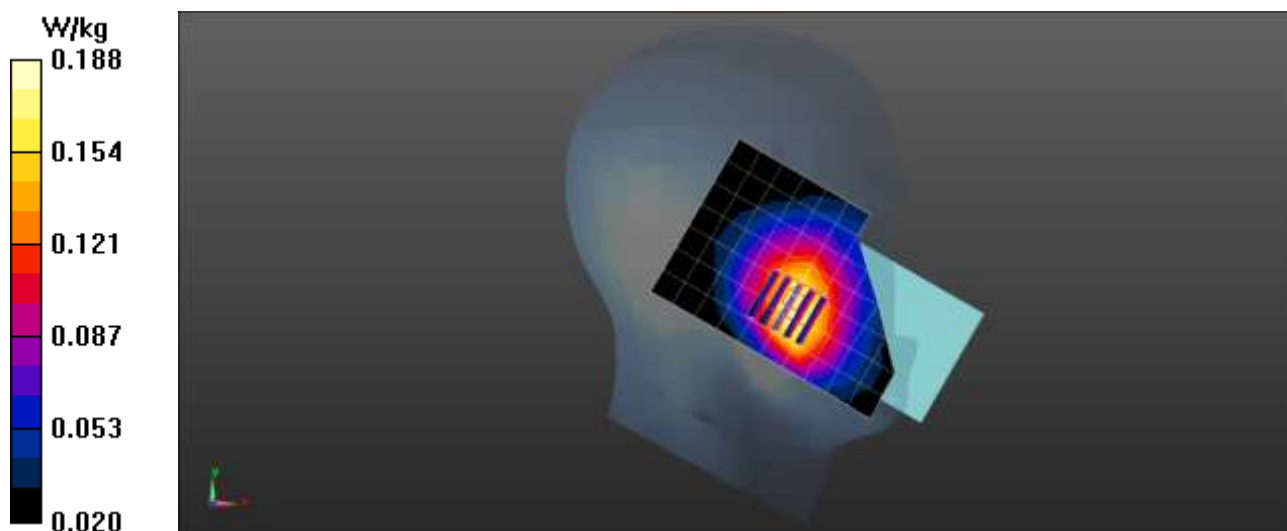Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.193 W/kg **Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.112 V/m ; Power Drift = 0.15 dB Peak SAR (extrapolated) = 0.212 W/kg **SAR(1 g) = 0.157 W/kg ; SAR(10 g) = 0.083 W/kg** Maximum value of SAR (measured) = 0.188 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/10

Test Laboratory: LCS-SAR Lab

LTE B71 10M QPSK 133372CH 1RB0 Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**


Communication System: UID 0, LTE-FDD (0); Frequency: 688 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 688 \text{ MHz}$; $\sigma = 0.933 \text{ S/m}$; $\epsilon_r = 42.842$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

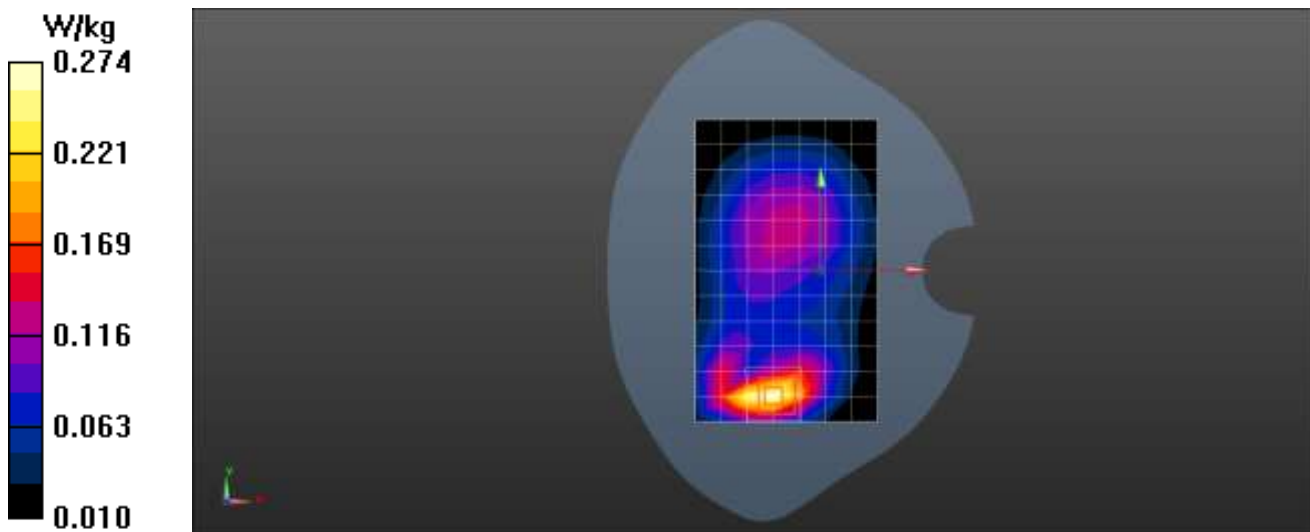Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.295 W/kg **Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.795 V/m ; Power Drift = 0.10 dB Peak SAR (extrapolated) = 0.397 W/kg **SAR(1 g) = 0.184 W/kg ; SAR(10 g) = 0.097 W/kg** Maximum value of SAR (measured) = 0.274 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/10

Test Laboratory: LCS-SAR Lab

LTE B71 10M QPSK 133372CH 1RB0 Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**


Communication System: UID 0, LTE-FDD (0); Frequency: 688 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 688 \text{ MHz}$; $\sigma = 0.933 \text{ S/m}$; $\epsilon_r = 42.842$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

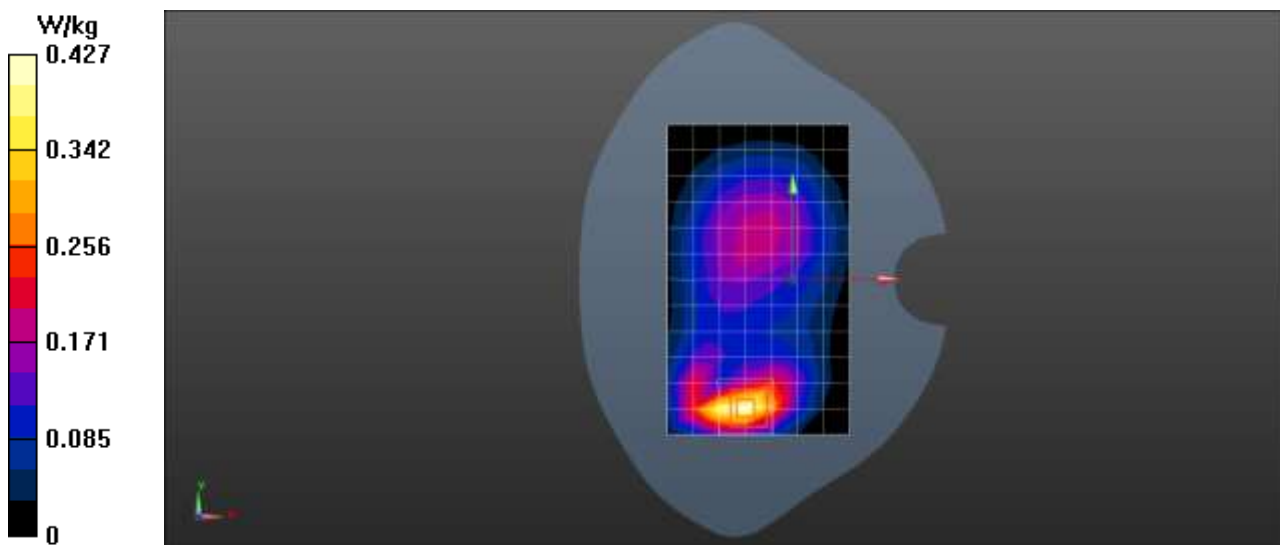Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.387 W/kg **Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.527 V/m ; Power Drift = -0.16 dB Peak SAR (extrapolated) = 0.335 W/kg **SAR(1 g) = 0.285 W/kg ; SAR(10 g) = 0.156 W/kg** Maximum value of SAR (measured) = 0.427 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

5G NR n2 40M 15KHz OFDM 1RB 378000CH Right Cheek**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 1890 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1890$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 40.424$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.783 W/kg


Configuration/Head/Zoom Scan (5x5x7)//Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.15 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.634 W/kg

SAR(1 g) = 0.547 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.772 W/kg

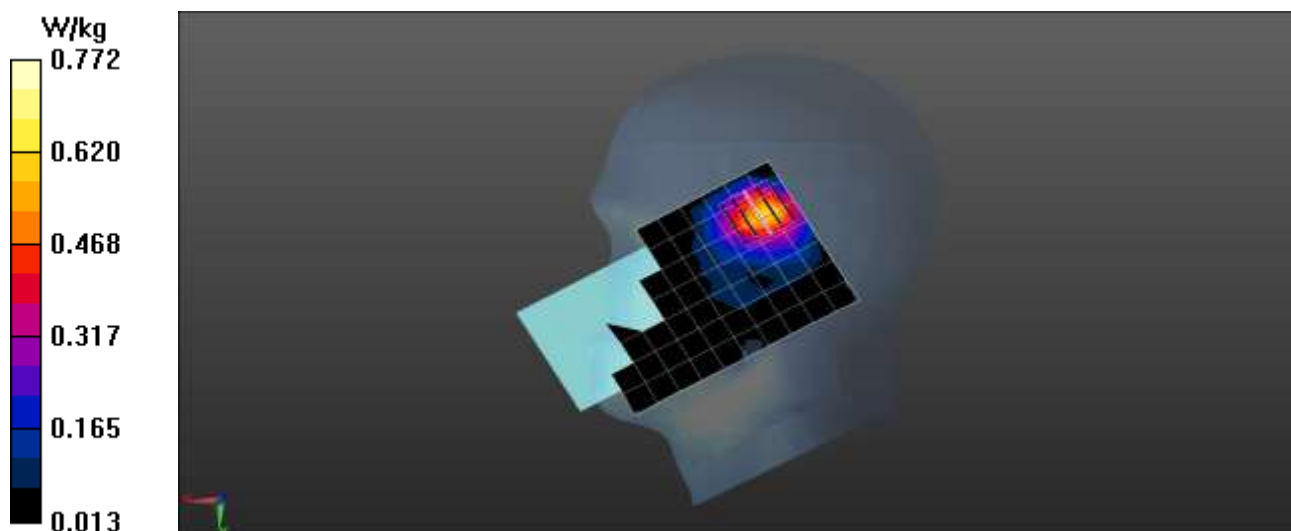

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

5G NR n2 40M 15KHz OFDM 1RB 378000CH Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 1890 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1890$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 40.424$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.732 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.482 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.266 W/kg

Maximum value of SAR (measured) = 0.708 W/kg

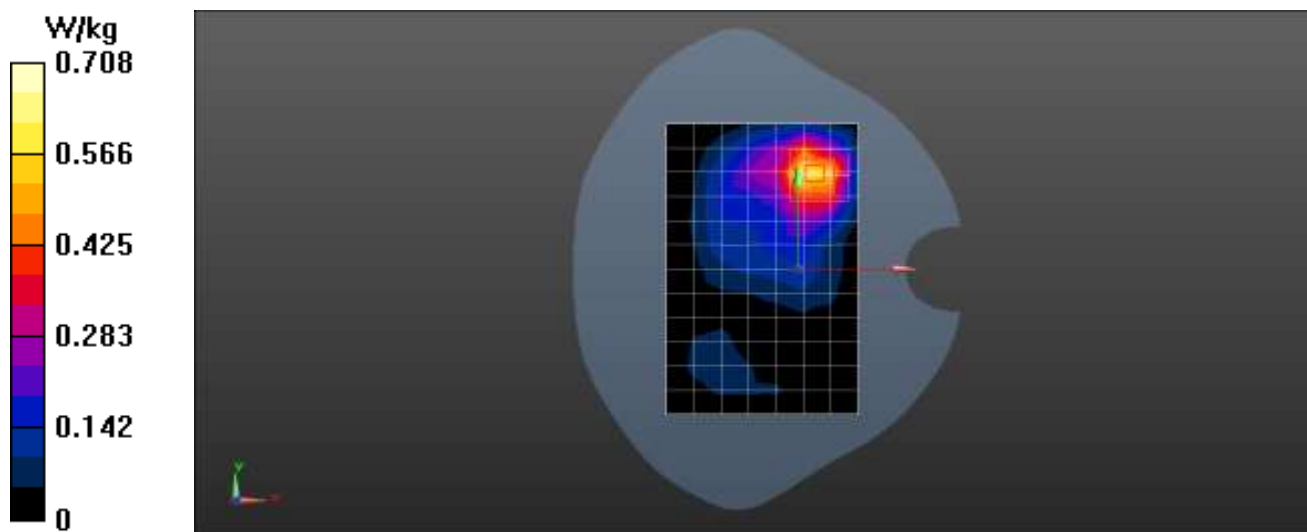

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

5G NR n2 40M 15KHz OFDM 1RB 378000CH Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 1890 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1890$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 40.424$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.19 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.256 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.983 W/kg

SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

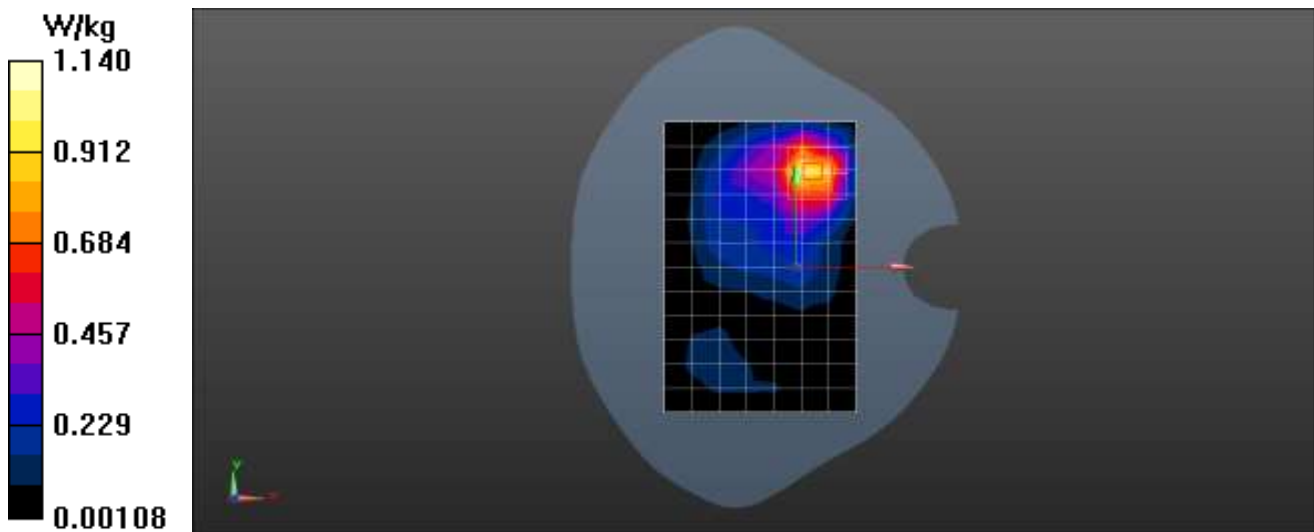

Date: 2025/4/11

Test Laboratory: LCS-SAR Lab

5G NR n5 20M 15KHz OFDM 1RB 165800CH Left Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1


Communication System: UID 0, 5G NR (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 829 \text{ MHz}$; $\sigma = 0.921 \text{ S/m}$; $\epsilon_r = 42.834$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

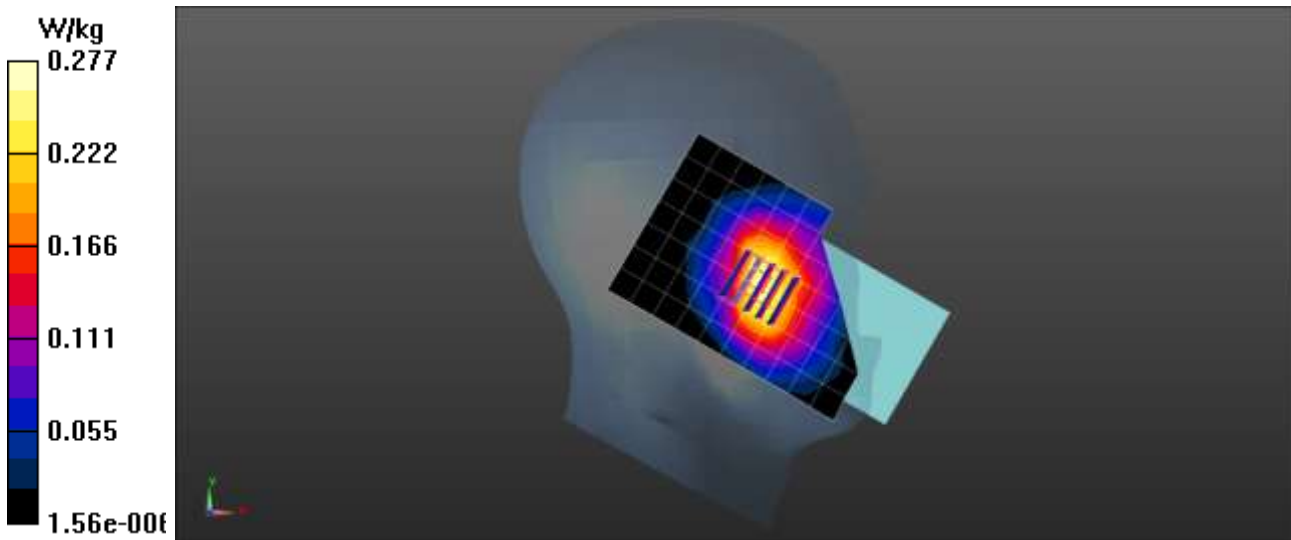Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.283 W/kg **Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.462 V/m ; Power Drift = 0.14 dB Peak SAR (extrapolated) = 0.213 W/kg **SAR(1 g) = 0.183 W/kg ; SAR(10 g) = 0.105 W/kg** Maximum value of SAR (measured) = 0.277 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/11

Test Laboratory: LCS-SAR Lab

5G NR n5 20M 15KHz OFDM 1RB 165800CH Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.834$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.347 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.325 V/m; Power Drift = -0.19dB

Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.323 W/kg

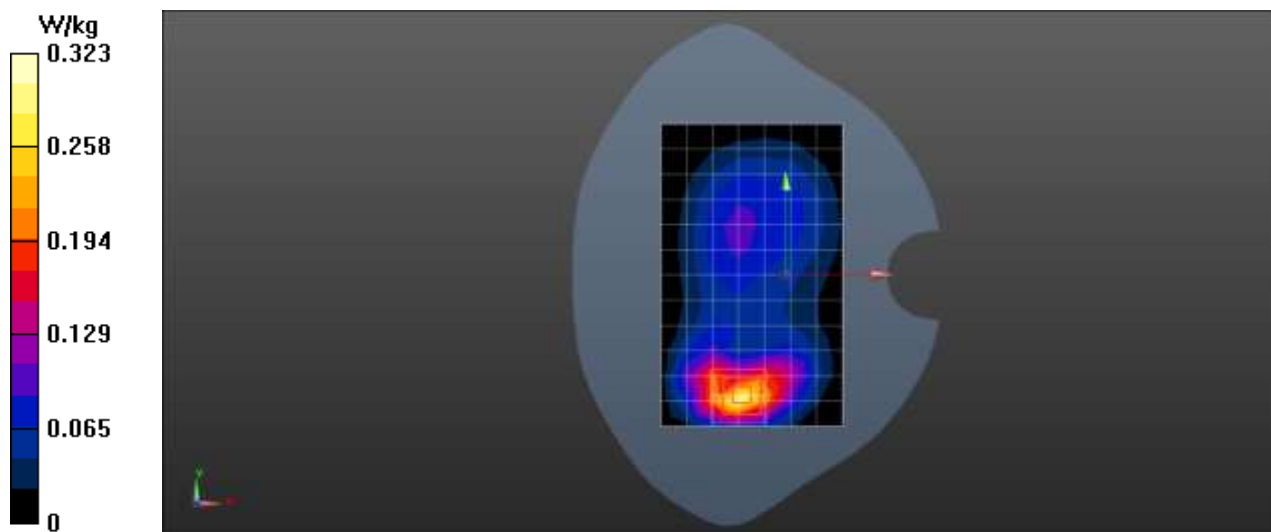

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/11

Test Laboratory: LCS-SAR Lab

5G NR n5 20M 15KHz OFDM 1RB 165800CH Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.834$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.384 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.442 V/m; Power Drift = -0.01dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.408 W/kg

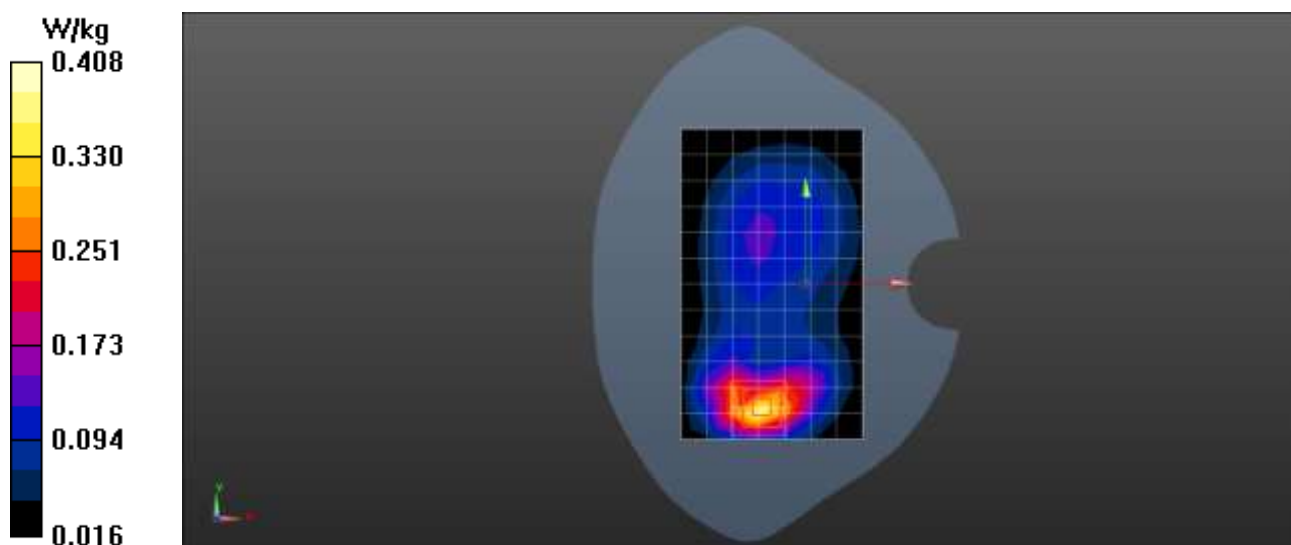

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/15


Test Laboratory: LCS-SAR Lab

5G NR n7 50M 15KHz OFDM 1RB 509000CH Right Cheek**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 2545 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2545 \text{ MHz}$; $\sigma = 1.893 \text{ S/m}$; $\epsilon_r = 39.974$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

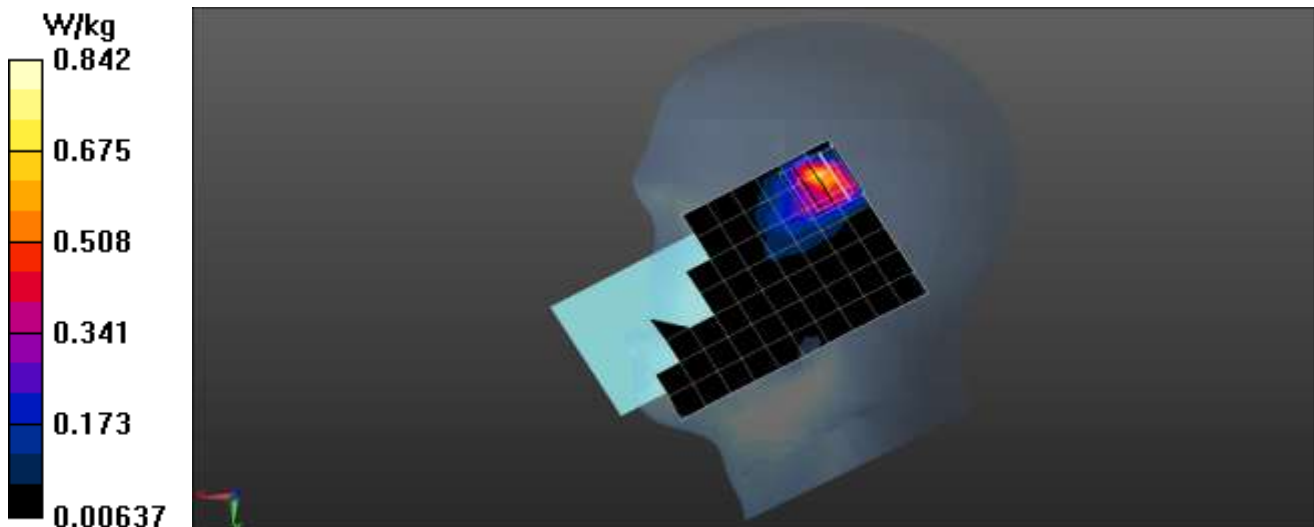Configuration/Head/Area Scan (10x15x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.834 W/kg **Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.775 V/m ; Power Drift = 0.15 dB Peak SAR (extrapolated) = 0.547 W/kg **SAR(1 g) = 0.523 W/kg ; SAR(10 g) = 0.284 W/kg** Maximum value of SAR (measured) = 0.842 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

5G NR n7 50M 15KHz OFDM 1RB 509000CH Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2545$ MHz; $\sigma = 1.893$ S/m; $\epsilon_r = 39.974$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.798 W/kg


Configuration/Rear side 5mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.684 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.557 W/kg; SAR(10 g) = 0.289 W/kg

Maximum value of SAR (measured) = 0.779 W/kg

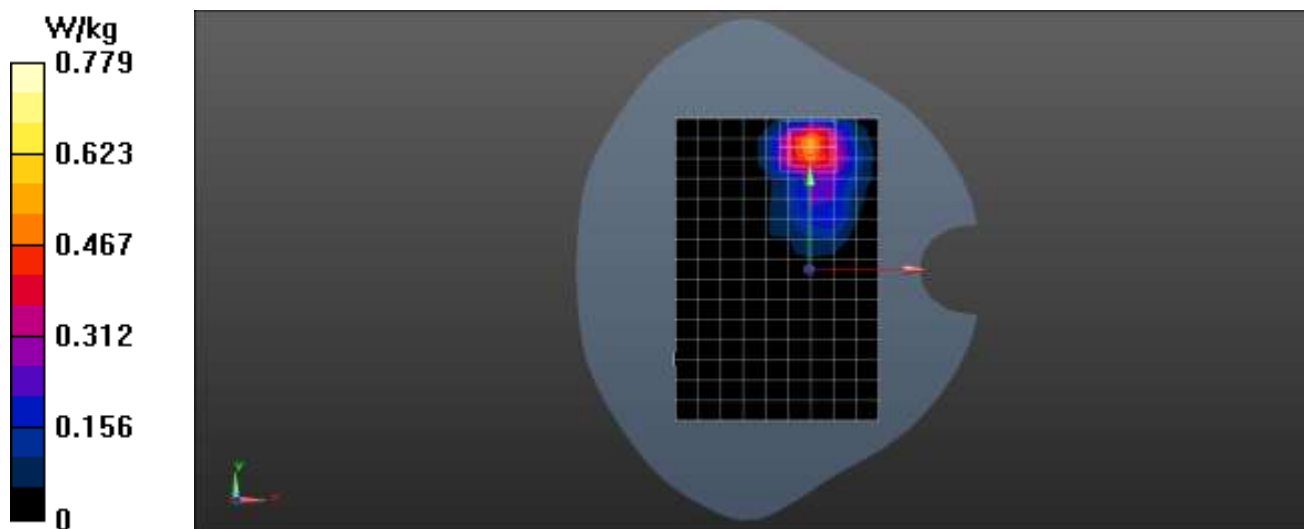

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

5G NR n7 50M 15KHz OFDM 1RB 509000CH Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2545$ MHz; $\sigma = 1.893$ S/m; $\epsilon_r = 39.974$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.896 W/kg


Configuration/Rear side 5mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.765 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.375 W/kg

Maximum value of SAR (measured) = 0.903 W/kg

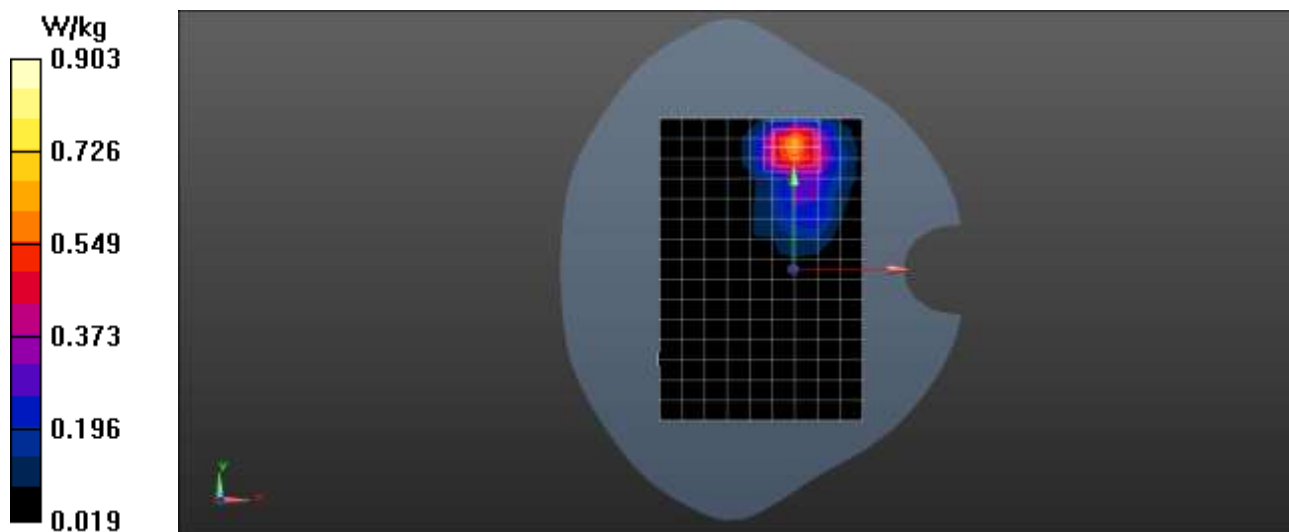

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

5G NR n25 40M 15KHz OFDM 1RB 374000CH Right Cheek**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 1870 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1870$ MHz; $\sigma = 1.436$ S/m; $\epsilon_r = 40.408$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.15 W/kg


Configuration/Head/Zoom Scan (5x5x7)//Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.56 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.913 W/kg

SAR(1 g) = 0.663 W/kg; SAR(10 g) = 0.354 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

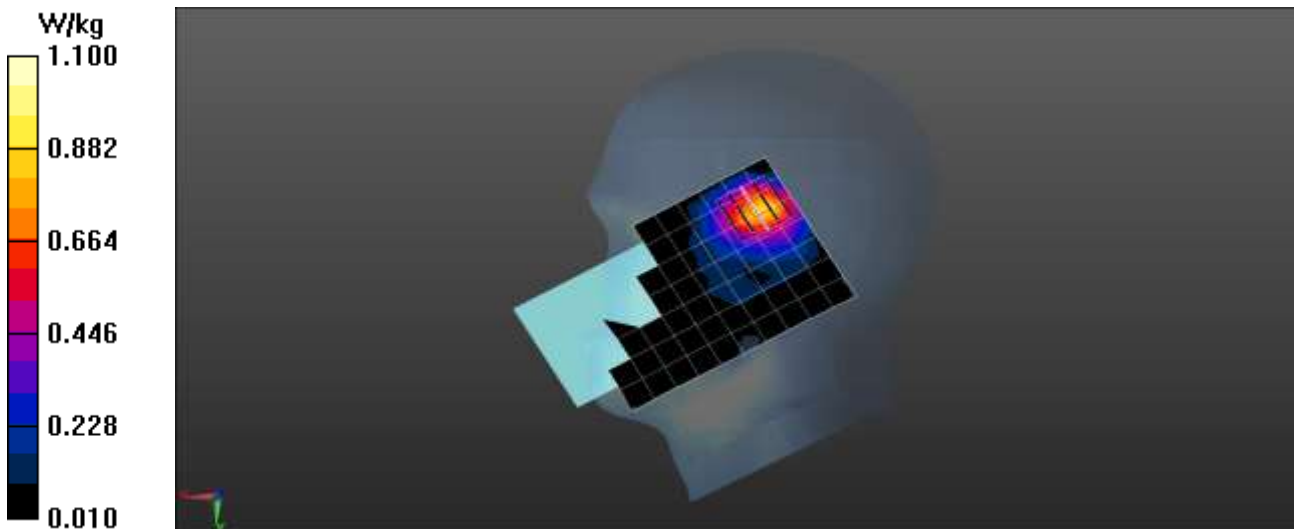

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

5G NR n25 40M 15KHz OFDM 1RB 374000CH Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 1870 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1870$ MHz; $\sigma = 1.436$ S/m; $\epsilon_r = 40.408$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.736 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.449 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.918 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 0.711 W/kg

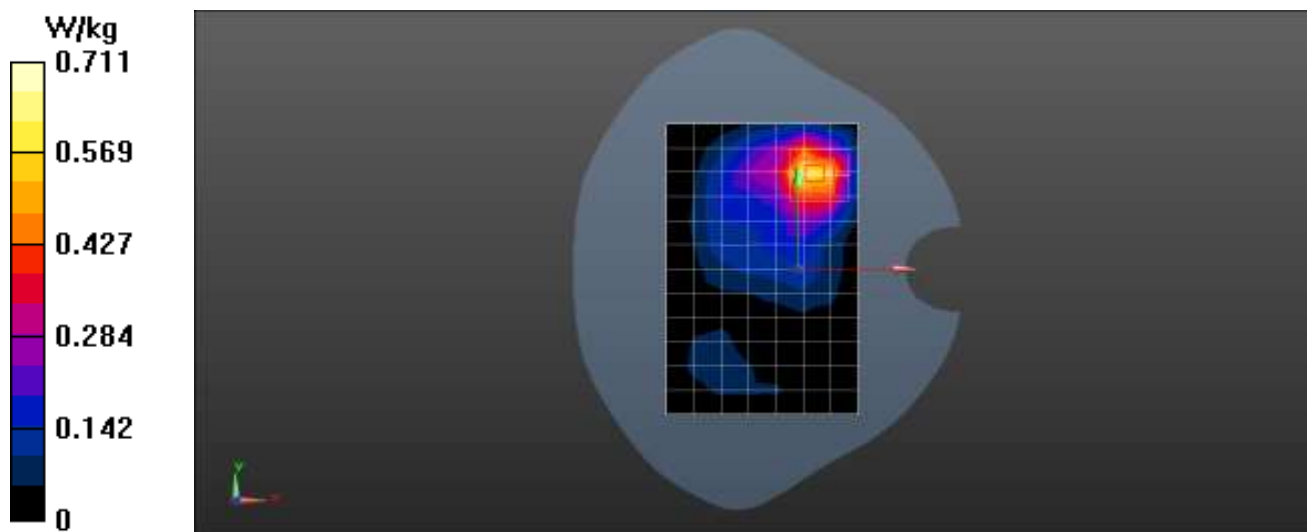

Date: 2025/4/14

Test Laboratory: LCS-SAR Lab

5G NR n25 40M 15KHz OFDM 1RB 374000CH Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 1870 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1870$ MHz; $\sigma = 1.436$ S/m; $\epsilon_r = 40.408$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.894 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.527 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.668 W/kg; SAR(10 g) = 0.373 W/kg

Maximum value of SAR (measured) = 0.929 W/kg

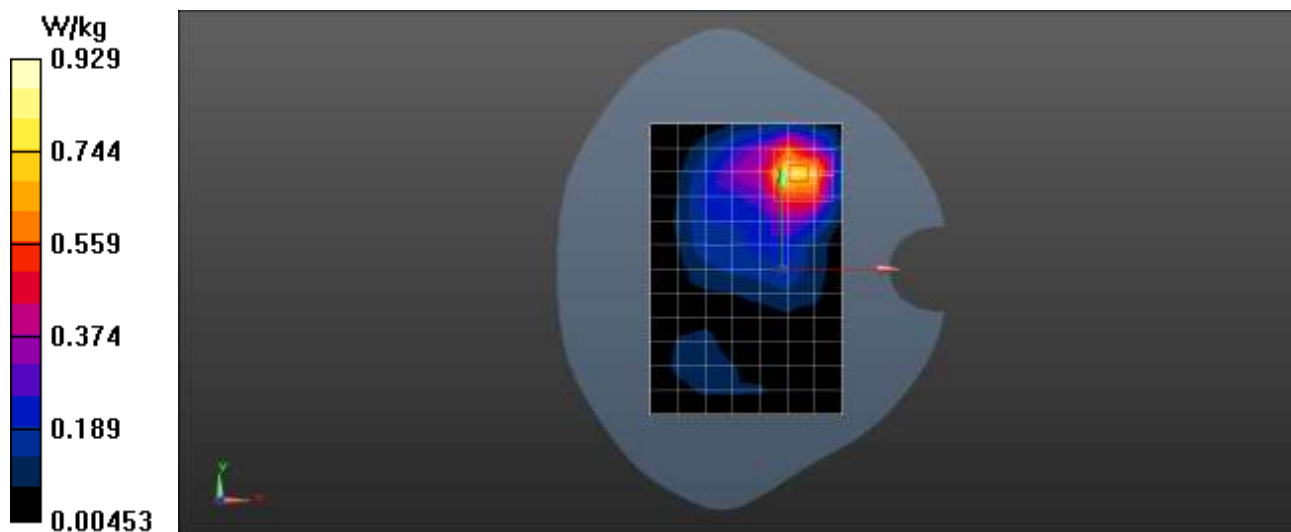

Date: 2025/4/11

Test Laboratory: LCS-SAR Lab

5G NR n26 20M 15KHz OFDM 1RB 167800CH Left Cheek**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**


Communication System: UID 0, 5G NR (0); Frequency: 839 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 839 \text{ MHz}$; $\sigma = 0.922 \text{ S/m}$; $\epsilon_r = 42.874$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

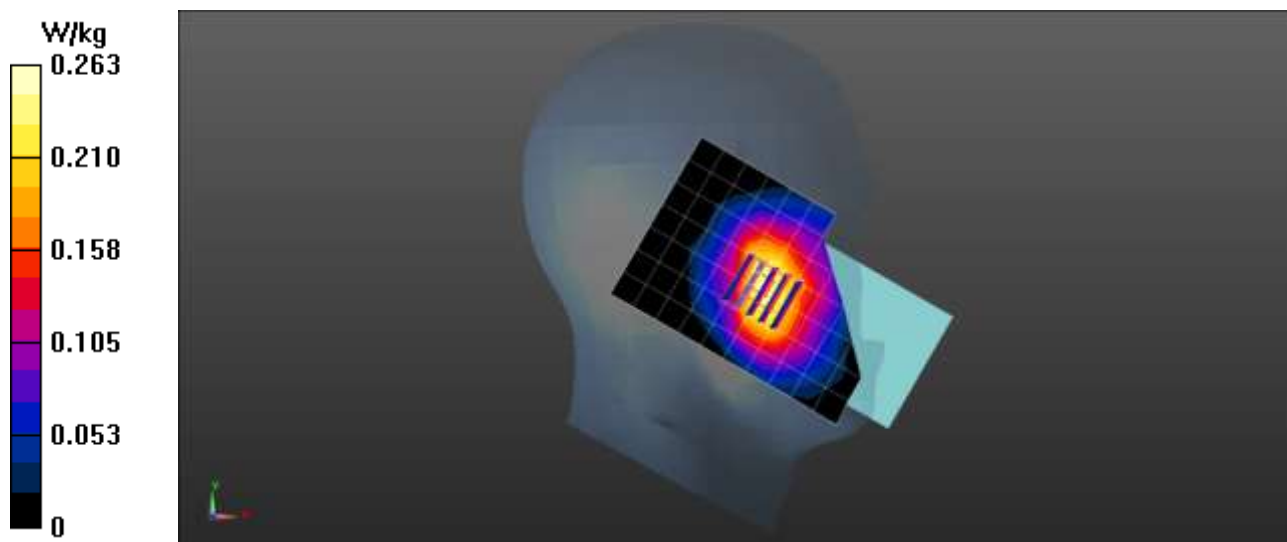Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.272 W/kg **Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.047 V/m ; Power Drift = 0.15 dB Peak SAR (extrapolated) = 0.376 W/kg **SAR(1 g) = 0.192 W/kg ; SAR(10 g) = 0.118 W/kg** Maximum value of SAR (measured) = 0.263 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/11

Test Laboratory: LCS-SAR Lab

5G NR n26 20M 15KHz OFDM 1RB 167800CH Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 839 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 839$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.874$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.368 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.749 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.340 W/kg

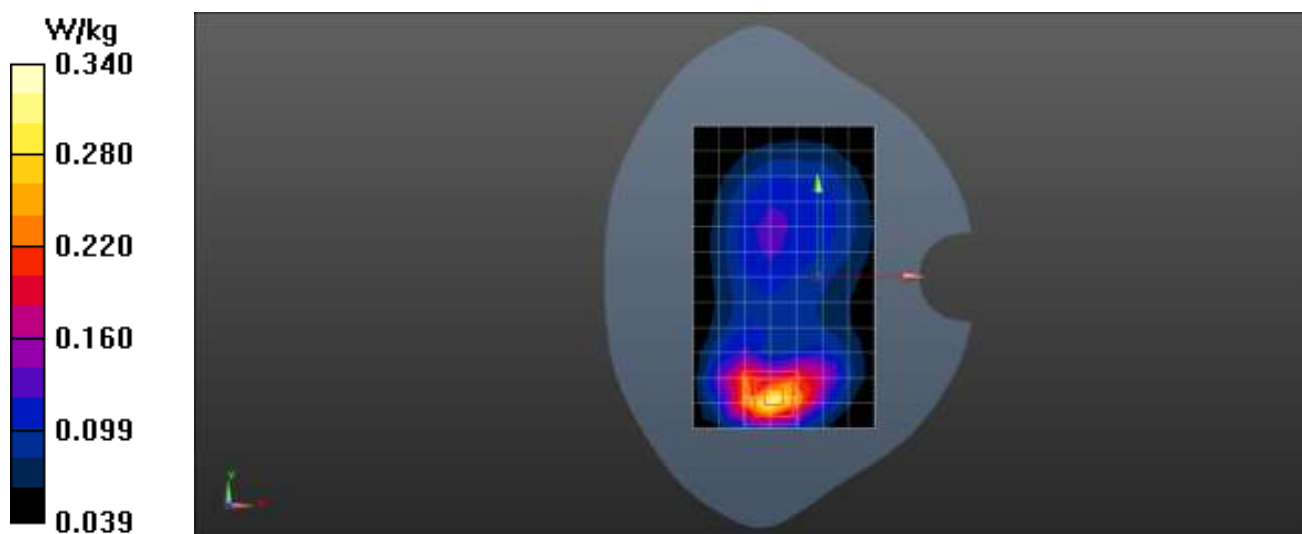

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/11

Test Laboratory: LCS-SAR Lab

5G NR n26 20M 15KHz OFDM 1RB 167800CH Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 839 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 839$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.874$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.547 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.647 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.525 W/kg

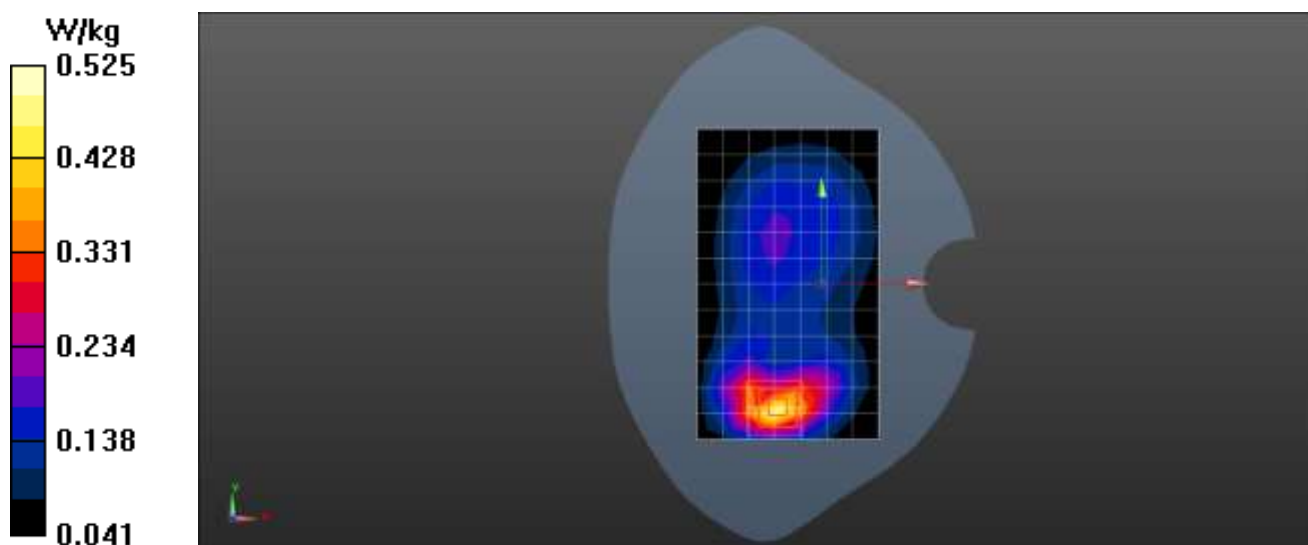

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date:2025/4/15

Test Laboratory: LCS-SAR Lab

5G NR n38 20M 15KHz OFDM 1RB 520000CH Right Cheek

DUT: Smart Phone; Type: BraX3; Serial: KX9NF4


Communication System: UID 0, 5G NR (0); Frequency: 2600 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.986$ S/m; $\epsilon_r = 40.143$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.853 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.571 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.786 W/kg
SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.308W/kg
Maximum value of SAR (measured) = 0.842 W/kg

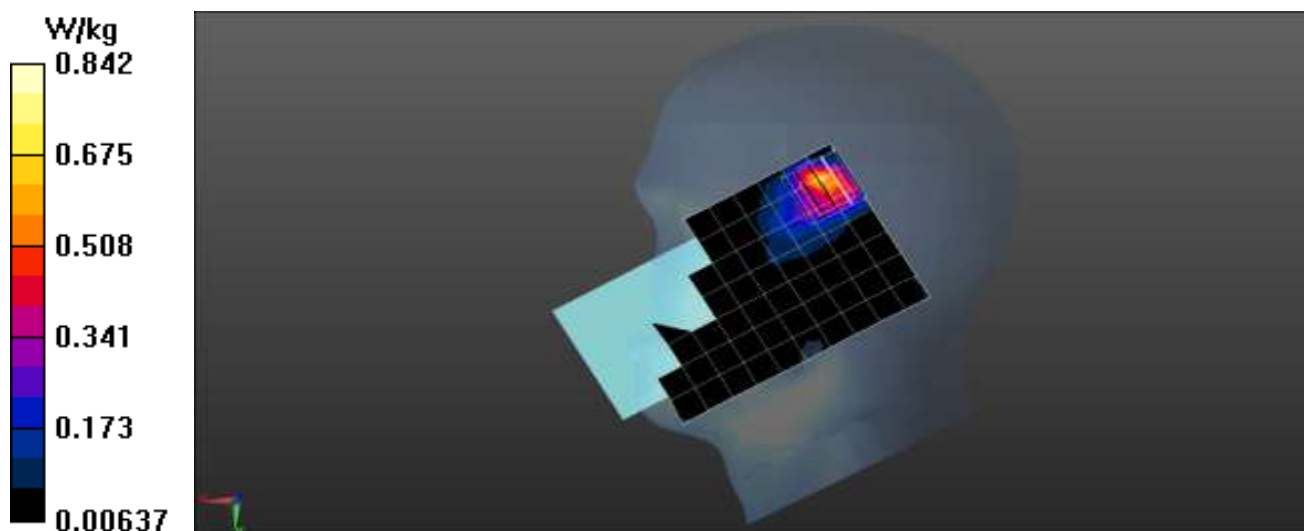

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

5G NR n38 20M 15KHz OFDM 1RB 520000CH Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.986$ S/m; $\epsilon_r = 40.143$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.667 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.947 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.839 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.644 W/kg

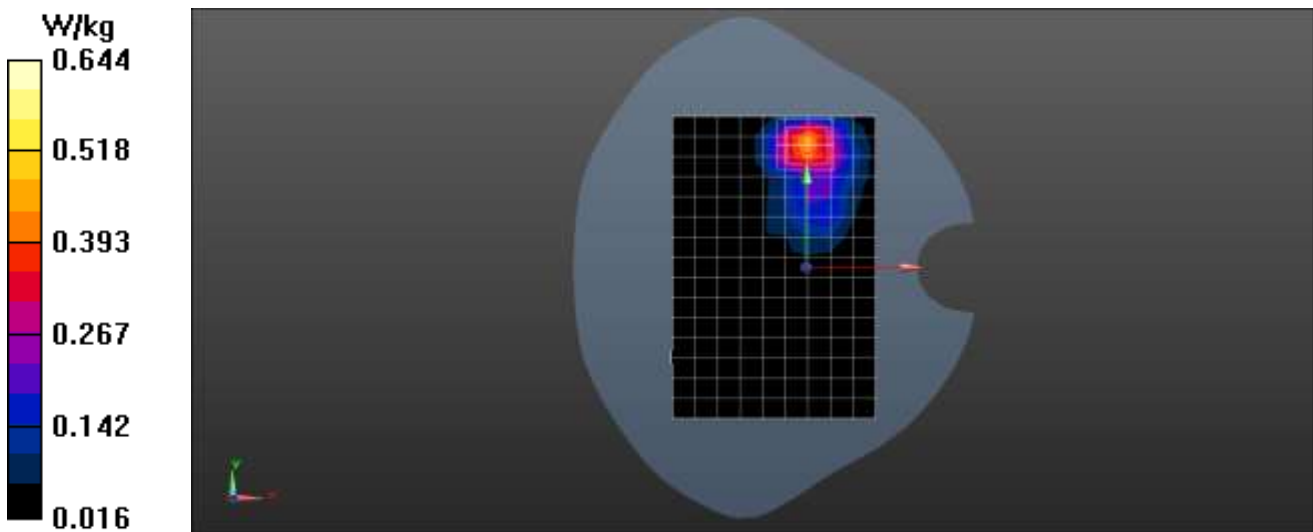

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

5G NR n38 20M 15KHz OFDM 1RB 520000CH Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.986$ S/m; $\epsilon_r = 40.143$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.924 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.624 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.772 W/kg

SAR(1 g) = 0.592 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 0.931 W/kg

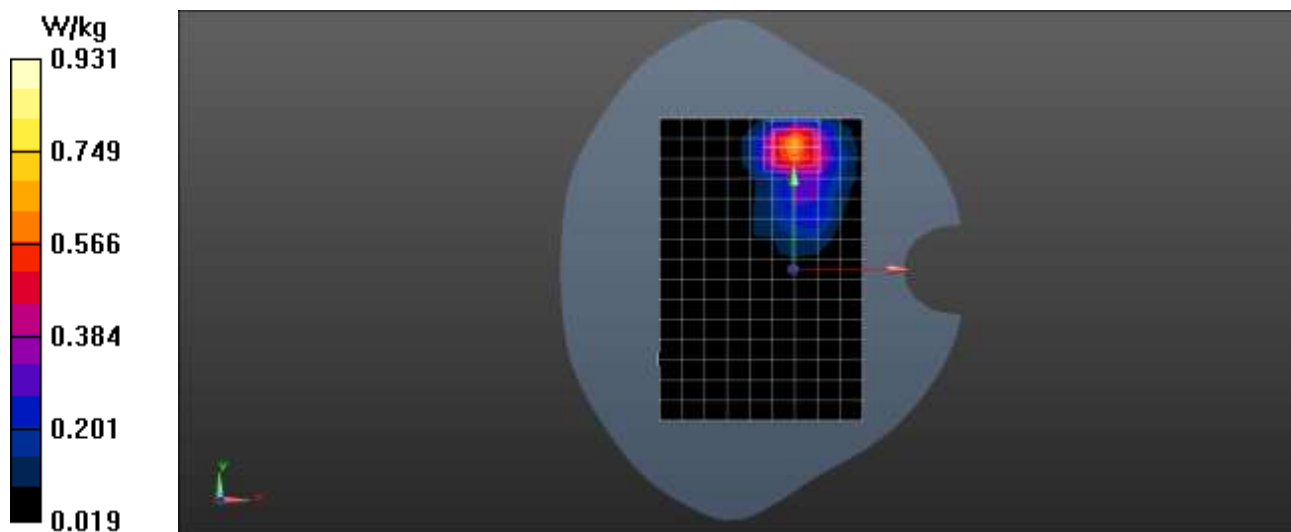

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

5G NR n41 100M 30KHz OFDM 1RB 518598CH Right Cheek**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**


Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.972$ S/m; $\epsilon_r = 39.896$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.813 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.413 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.557 W/kg
SAR(1 g) = 0.537 W/kg; SAR(10 g) = 0.284 W/kg
Maximum value of SAR (measured) = 0.821 W/kg

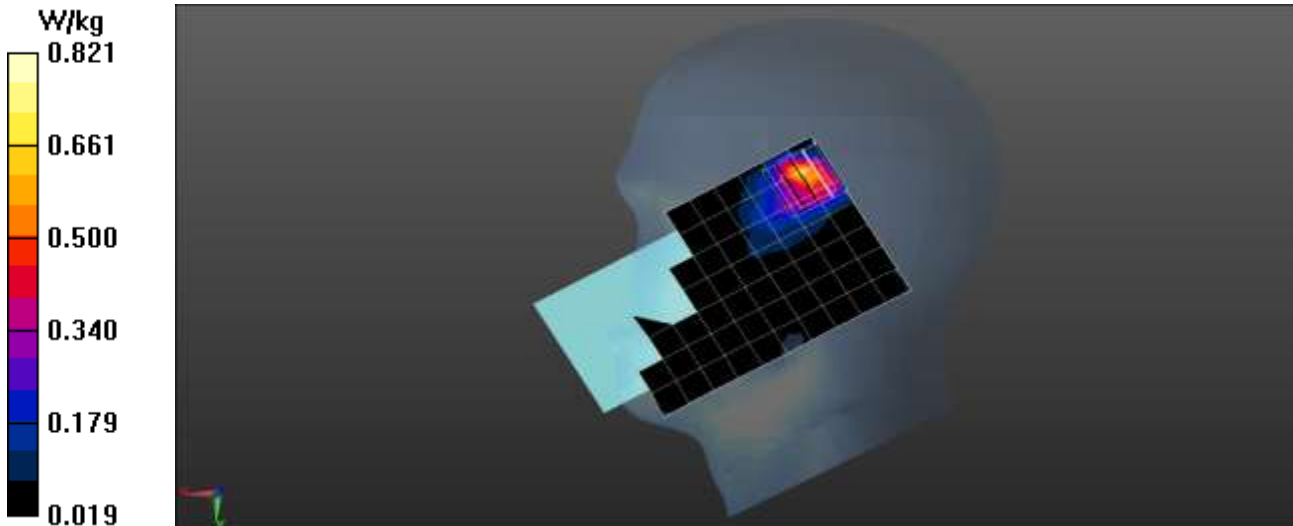

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

5G NR n41 100M 30KHz OFDM 1RB 518598CH Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.972$ S/m; $\epsilon_r = 39.896$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.663 W/kg


Configuration/Rear side 5mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.684 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.923 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 0.639 W/kg

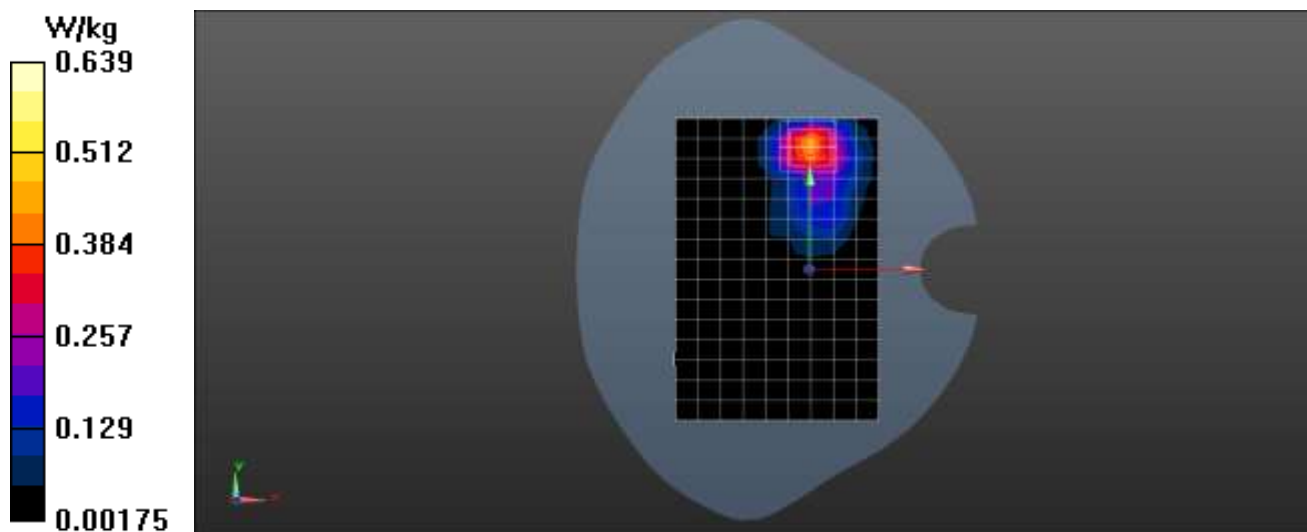

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

5G NR n41 100M 30KHz OFDM 1RB 518598CH Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.972$ S/m; $\epsilon_r = 39.896$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.902 W/kg


Configuration/Rear side 5mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.413 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.633 W/kg; SAR(10 g) = 0.337 W/kg

Maximum value of SAR (measured) = 0.893 W/kg

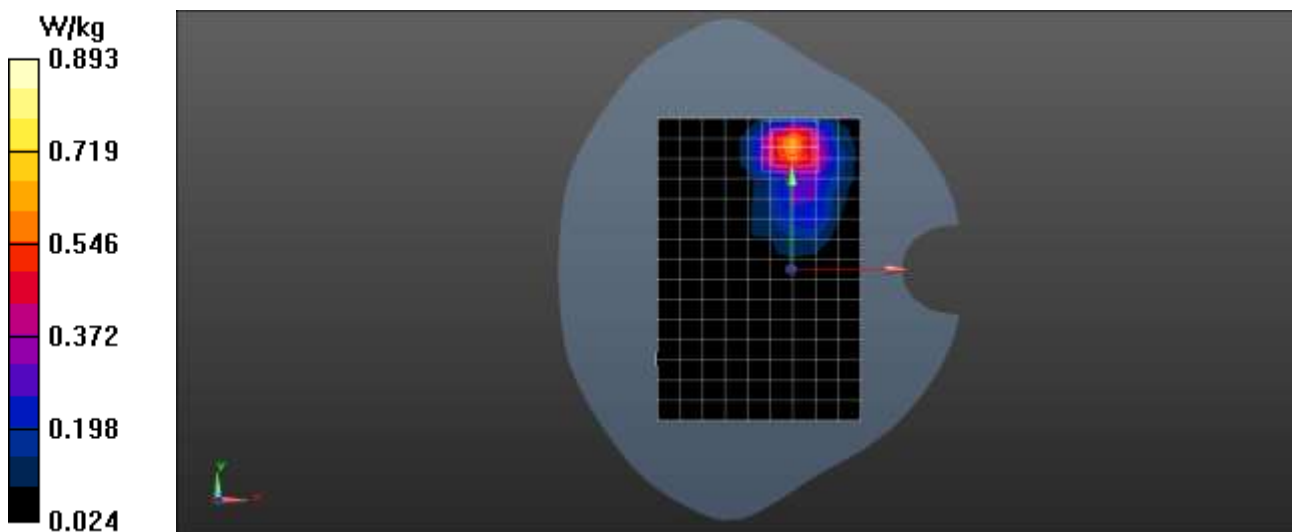

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/12

Test Laboratory: LCS-SAR Lab

5G NR n66 40M 15KHz OFDM 1RB 349000CH Right Cheek**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**


Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.394$ S/m; $\epsilon_r = 40.473$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.09 W/kg

Configuration/Head/Zoom Scan (5x5x7)//Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.37 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.847 W/kg
SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.332 W/kg
Maximum value of SAR (measured) = 1.12 W/kg

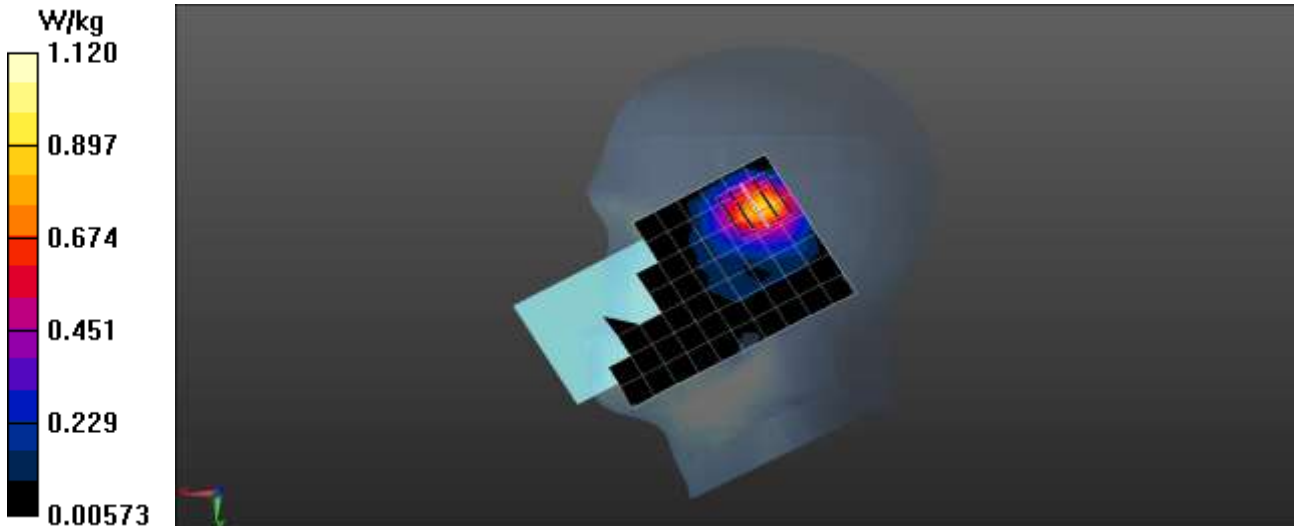

Date: 2025/4/12

Test Laboratory: LCS-SAR Lab

5G NR n66 40M 15KHz OFDM 1RB 349000CH Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.394$ S/m; $\epsilon_r = 40.473$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.694 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.849 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.695 W/kg

SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.229 W/kg

Maximum value of SAR (measured) = 0.671 W/kg

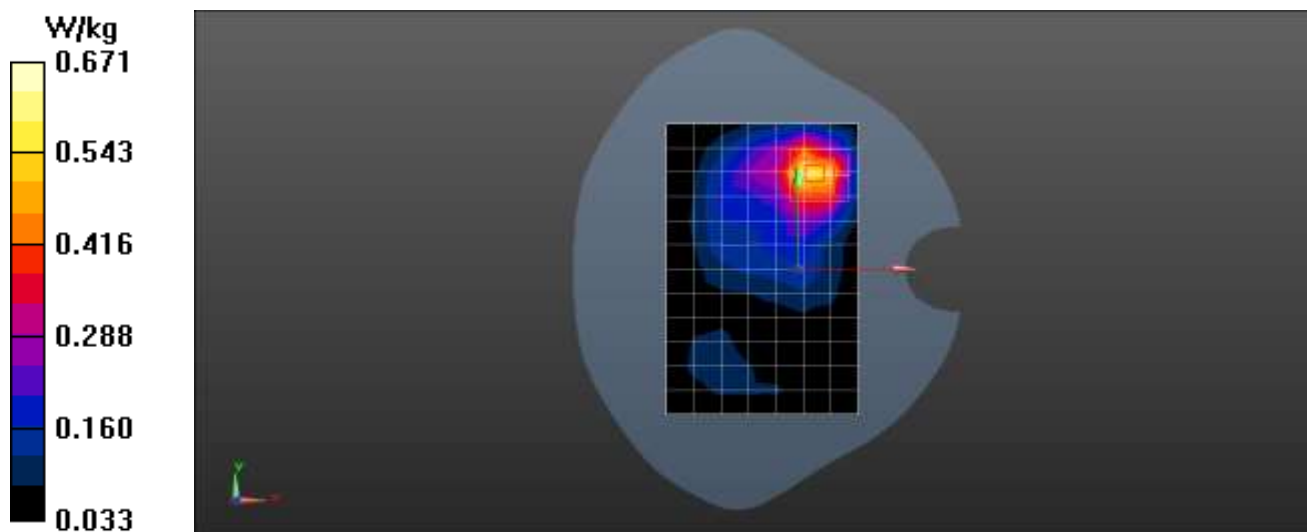

Date: 2025/4/12

Test Laboratory: LCS-SAR Lab

5G NR n66 40M 15KHz OFDM 1RB 349000CH Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.394 \text{ S/m}$; $\epsilon_r = 40.473$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.809 W/kg


Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.628 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.668 W/kg; SAR(10 g) = 0.359 W/kg

Maximum value of SAR (measured) = 0.802 W/kg

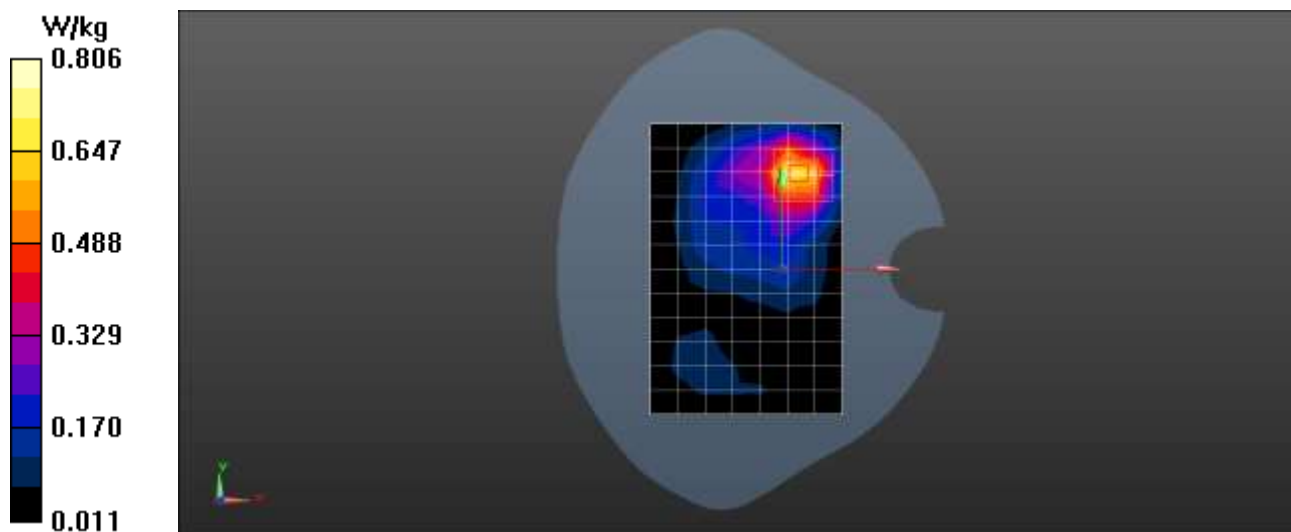

Date: 2025/4/10

Test Laboratory: LCS-SAR Lab

5G NR n71 20M 15KHz OFDM 1RB 134600CH Left Cheek**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 688 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 688$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 42.842$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.192 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.784 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.188 W/kg

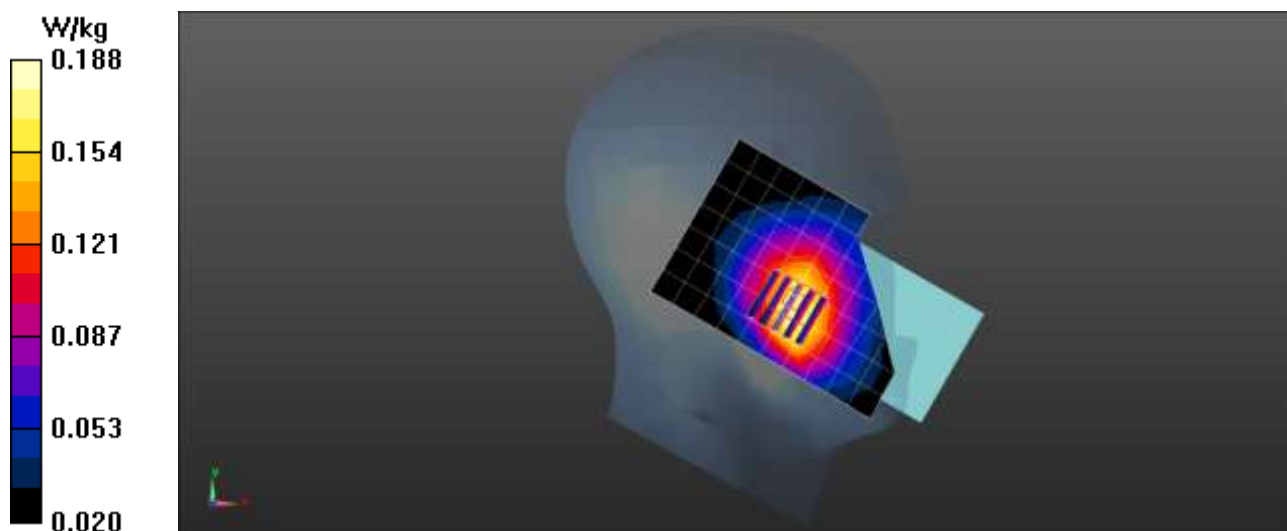

Date: 2025/4/10

Test Laboratory: LCS-SAR Lab

5G NR n71 20M 15KHz OFDM 1RB 134600CH Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**


Communication System: UID 0, 5G NR (0); Frequency: 688 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 688 \text{ MHz}$; $\sigma = 0.933 \text{ S/m}$; $\epsilon_r = 42.842$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.292 W/kg

Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

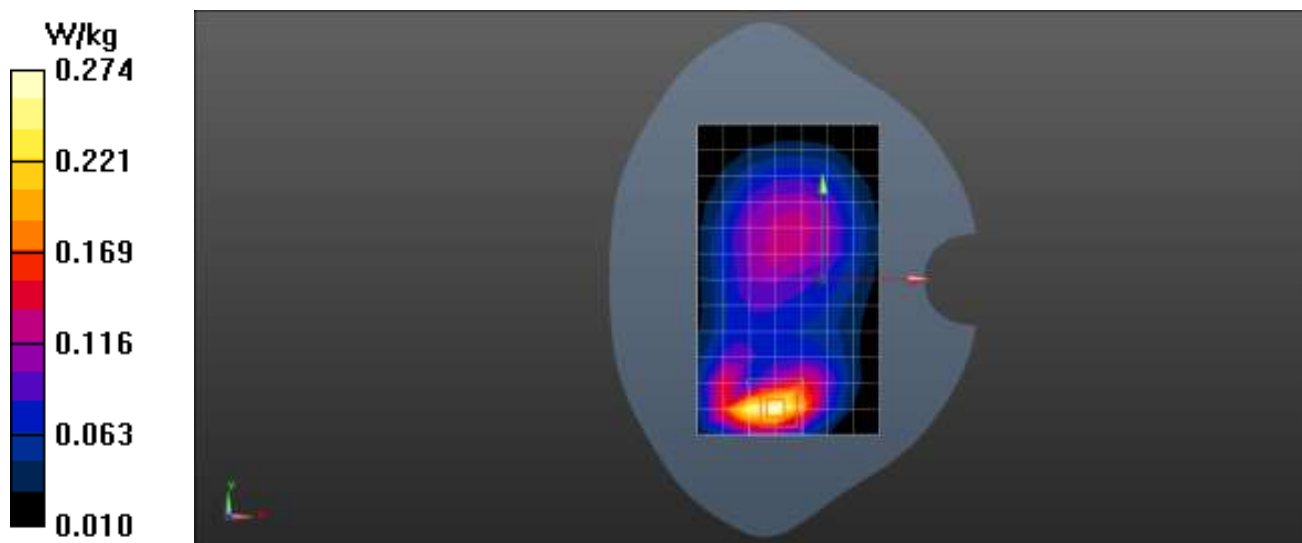Reference Value = 2.467 V/m ; Power Drift = 0.13 dB Peak SAR (extrapolated) = 0.386 W/kg **SAR(1 g) = 0.176 W/kg ; SAR(10 g) = 0.087 W/kg** Maximum value of SAR (measured) = 0.274 W/kg 

Date: 2025/4/10

Test Laboratory: LCS-SAR Lab

5G NR n71 20M 15KHz OFDM 1RB 134600CH Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**


Communication System: UID 0, 5G NR (0); Frequency: 688 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 688 \text{ MHz}$; $\sigma = 0.933 \text{ S/m}$; $\epsilon_r = 42.842$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.312 W/kg

Configuration/Rear side 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

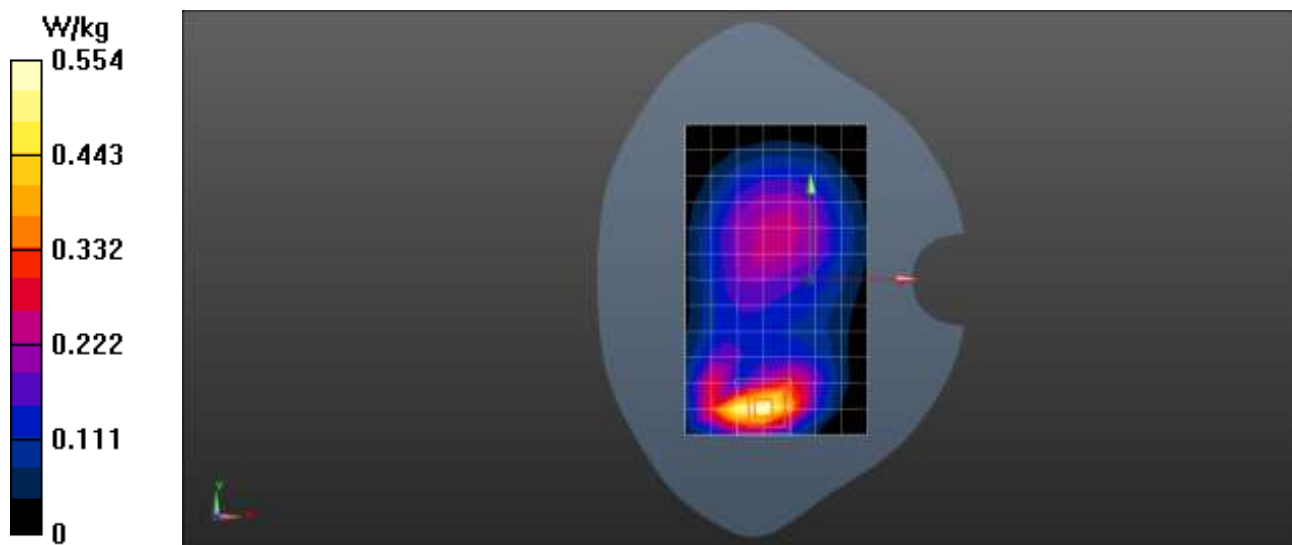Reference Value = 3.232 V/m ; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.268 W/kg **SAR(1 g) = 0.286 W/kg ; SAR(10 g) = 0.161 W/kg** Maximum value of SAR (measured) = 0.554 W/kg 

Date: 2025/4/16

Test Laboratory: LCS-SAR Lab



5G NR n77 100M 30KHz OFDM 662000CH 1RB Left Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1


Communication System: UID 0, 5G NR (0); Frequency: 3930 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 3930$ MHz; $\sigma = 3.083$ S/m; $\epsilon_r = 37.215$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(6.45, 6.45, 6.45); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.983 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 7.423 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.867 W/kg
SAR(1 g) = 0.663 W/kg; SAR(10 g) = 0.368 W/kg
Maximum value of SAR (measured) = 0.998 W/kg

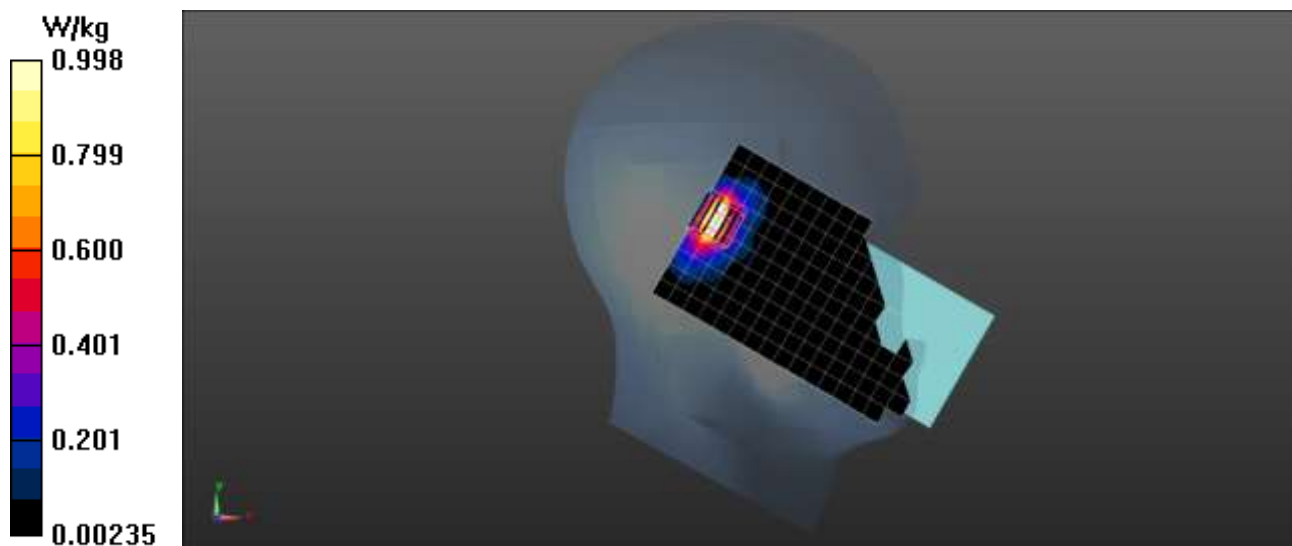

Date: 2025/4/16

Test Laboratory: LCS-SAR Lab

5G NR n77 100M 30KHz OFDM 662000CH 1RB Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency:3930 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 3930$ MHz; $\sigma = 3.083$ S/m; $\epsilon_r = 37.215$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(6.45, 6.45, 6.45); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Rear side 5mm /Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.572 W/kg


Configuration/Rear side 5mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.384 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.724 W/kg

SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.545 W/kg

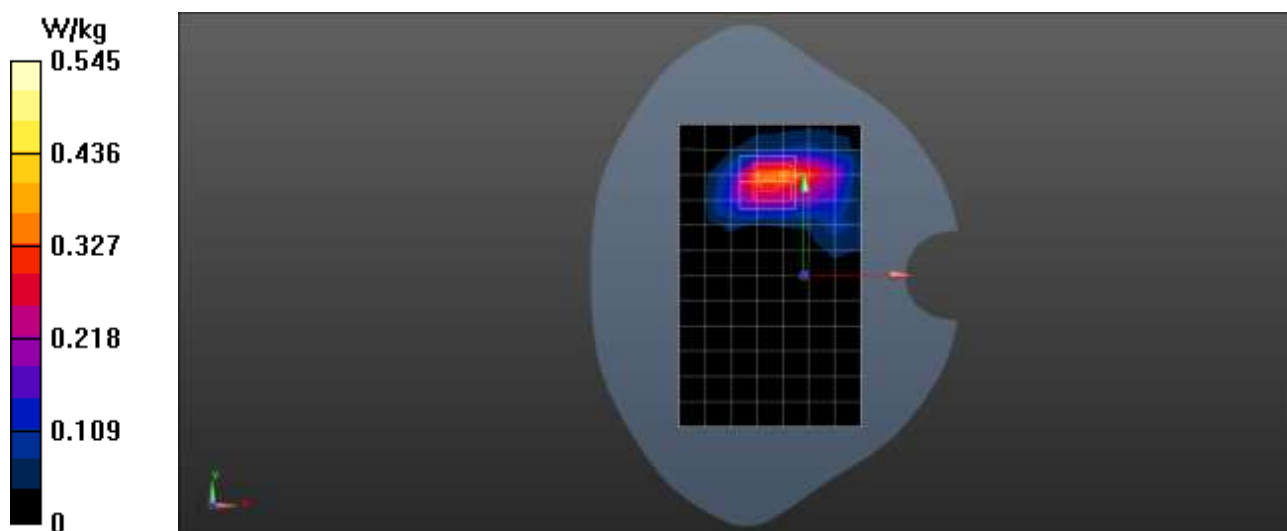

Date: 2025/4/16

Test Laboratory: LCS-SAR Lab

5G NR n77 100M 30KHz OFDM 662000CH 1RB Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency:3930 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 3930$ MHz; $\sigma = 3.083$ S/m; $\epsilon_r = 37.215$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(6.45, 6.45, 6.45); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Rear side 5mm /Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.762 W/kg


Configuration/Rear side 5mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.642 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.811 W/kg

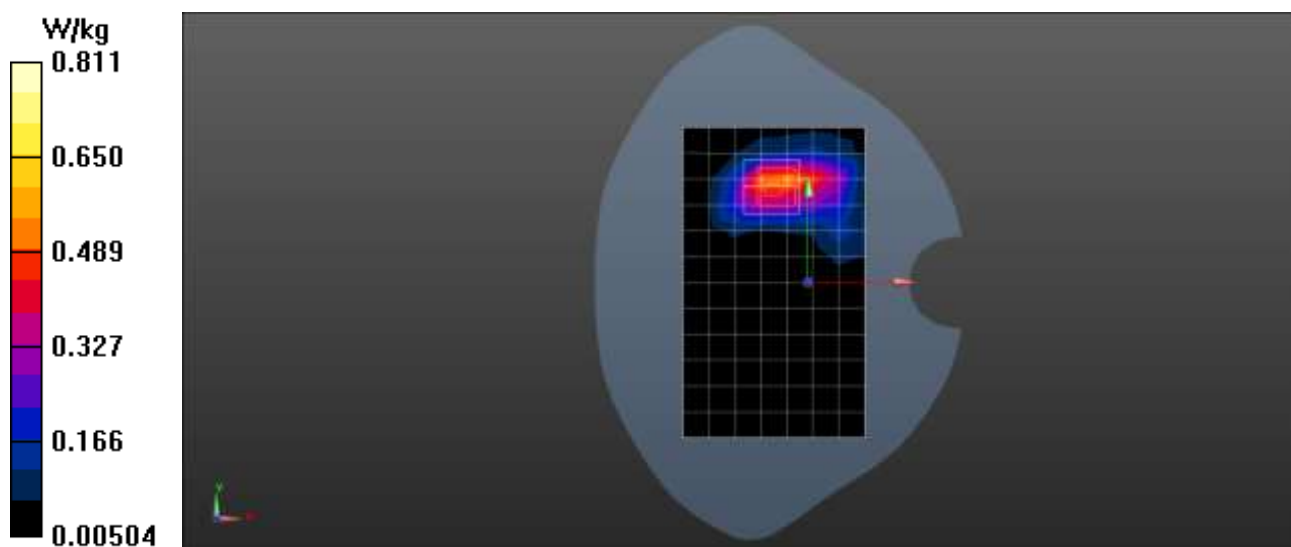

Date: 2025/4/16

Test Laboratory: LCS-SAR Lab



5G NR n78 100M 30KHz OFDM 1RB 650000CH Left Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1


Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 3750$ MHz; $\sigma = 3.142$ S/m; $\epsilon_r = 38.463$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(6.45, 6.45, 6.45); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.965 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 11.57 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 1.36 W/kg
SAR(1 g) = 0.642 W/kg; SAR(10 g) = 0.337 W/kg
 Maximum value of SAR (measured) = 0.986 W/kg

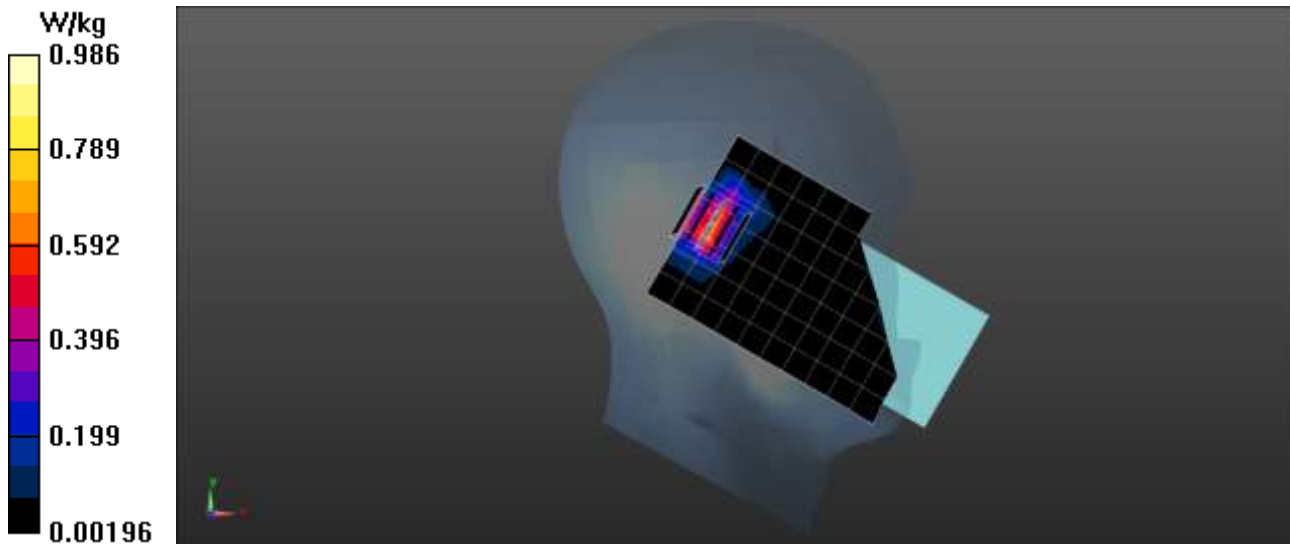

Date: 2025/4/16

Test Laboratory: LCS-SAR Lab

5G NR n78 100M 30KHz OFDM 1RB 650000CH Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 3750$ MHz; $\sigma = 3.142$ S/m; $\epsilon_r = 38.463$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(6.45, 6.45, 6.45); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Rear side 5mm /Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.603 W/kg


Configuration/Rear side 5mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.726 W/kg

SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.589 W/kg

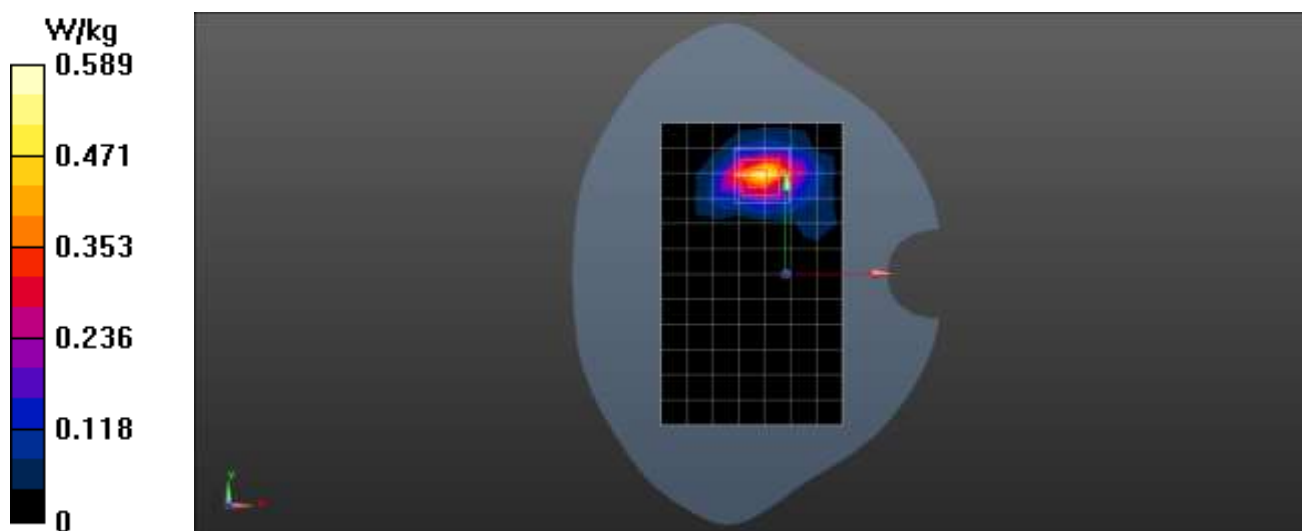

Date: 2025/4/16

Test Laboratory: LCS-SAR Lab

5G NR n78 100M 30KHz OFDM 1RB 650000CH Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 3750$ MHz; $\sigma = 3.142$ S/m; $\epsilon_r = 38.463$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(6.45, 6.45, 6.45); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Rear side 5mm /Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.767 W/kg


Configuration/Rear side 5mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.457 W/kg

SAR(1 g) = 0.534 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.801 W/kg

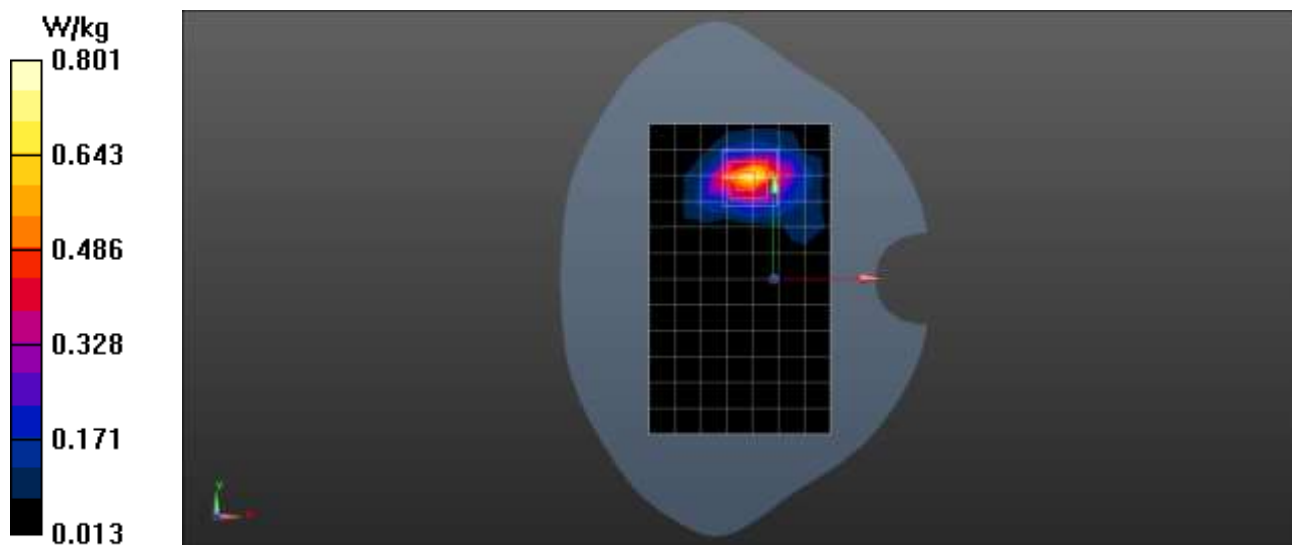

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

WLAN 2.4G 802.11b 1CH Right Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1.003

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.836 \text{ S/m}$; $\epsilon_r = 39.764$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.43, 7.43, 7.43); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x15x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.309 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.615 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.328 W/kg

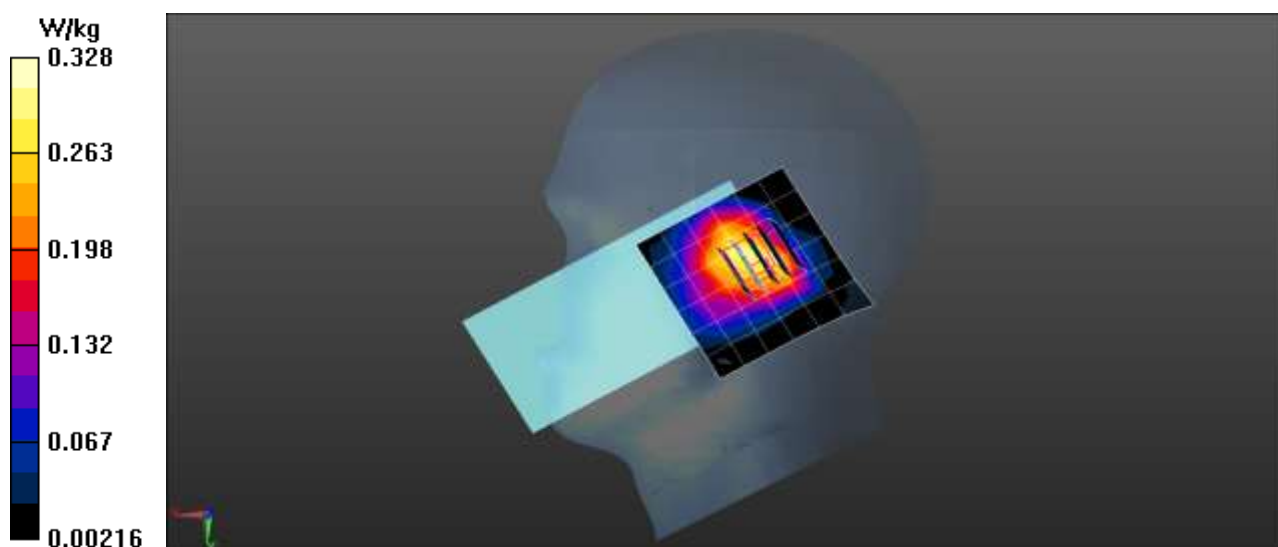

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

WLAN 2.4G 802.11b 1CH Rear side 10mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1.003

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.836 \text{ S/m}$; $\epsilon_r = 39.764$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.43, 7.43, 7.43); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (10x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.214 W/kg


Configuration/Rear side 5mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.175 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.197W/kg

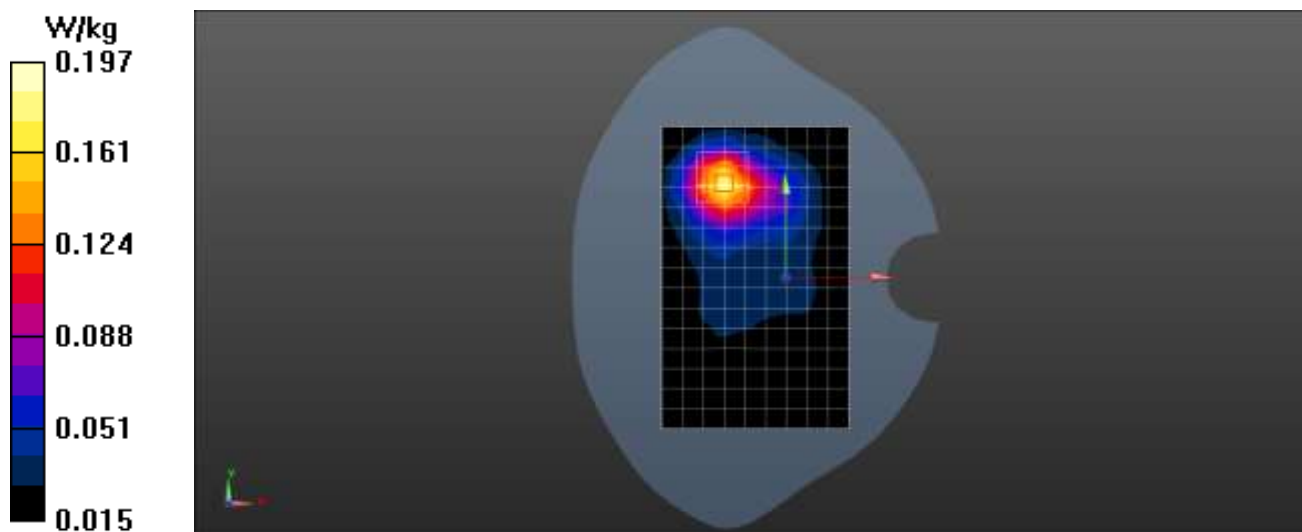

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/15

Test Laboratory: LCS-SAR Lab

WLAN 2.4G 802.11b 1CH Rear side 5mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1.003

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.836 \text{ S/m}$; $\epsilon_r = 39.764$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.43, 7.43, 7.43); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 5mm/Area Scan (10x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.459 W/kg


Configuration/Rear side 5mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.880 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.439 W/kg

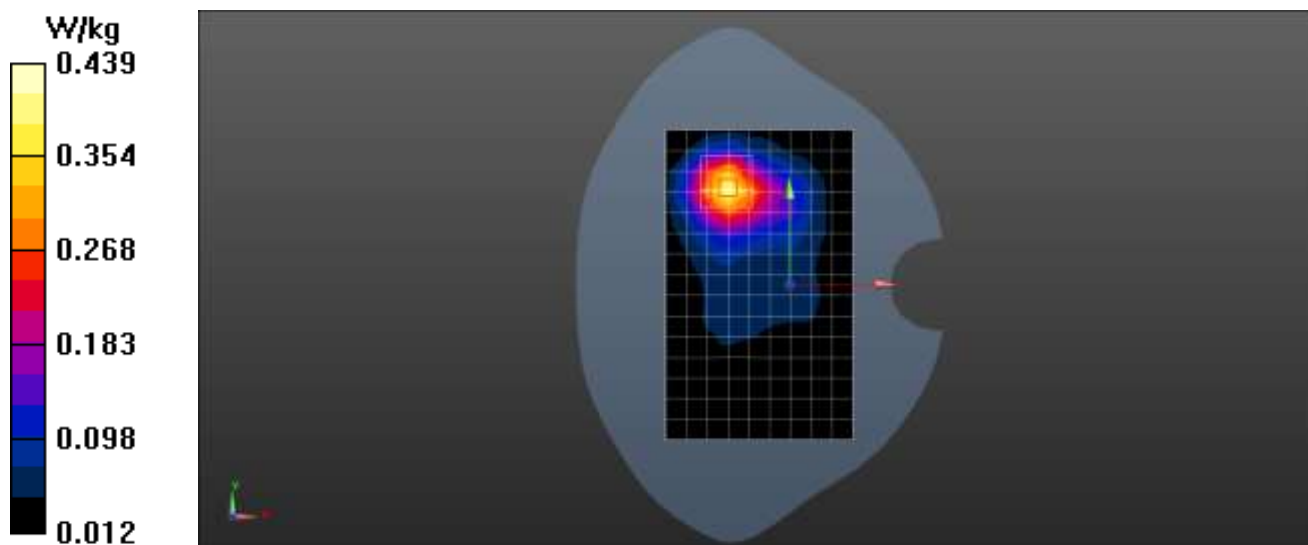

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 36CH Right Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5180 MHz; Duty Cycle: 1:1.024

Medium parameters used (interpolated): $f = 5180$ MHz; $\sigma = 4.673$ S/m; $\epsilon_r = 36.084$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.150 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.248 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.333 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

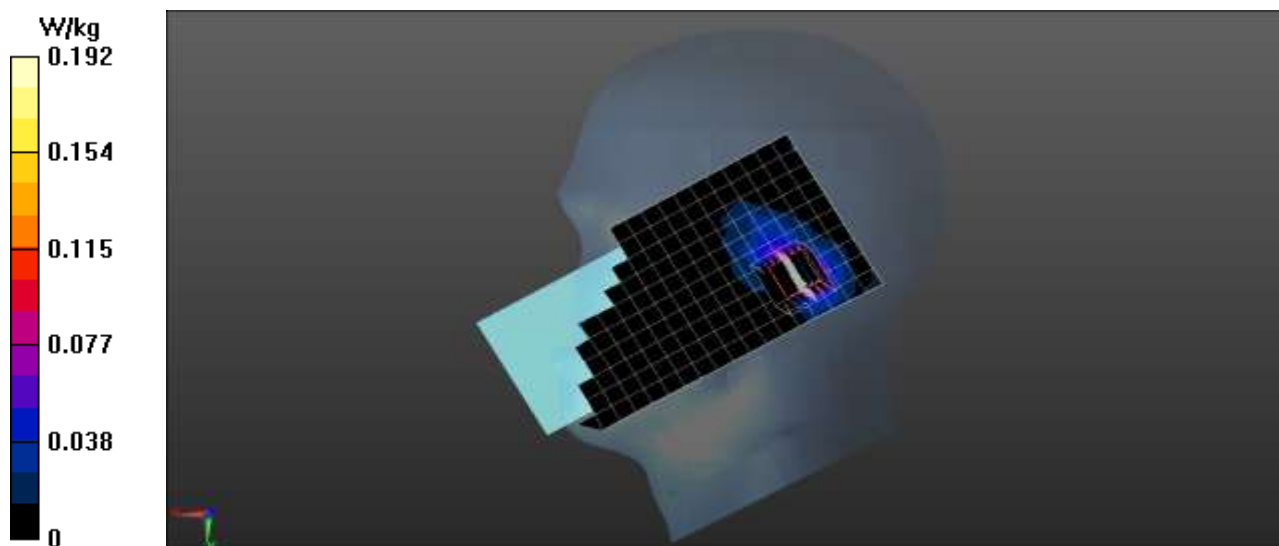

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 36CH Rear side 10mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1


Communication System: UID 0, WIFI 5GHz (0); Frequency: 5180 MHz; Duty Cycle: 1:1.025

Medium parameters used (interpolated): $f = 5180 \text{ MHz}$; $\sigma = 4.673 \text{ S/m}$; $\epsilon_r = 36.084$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

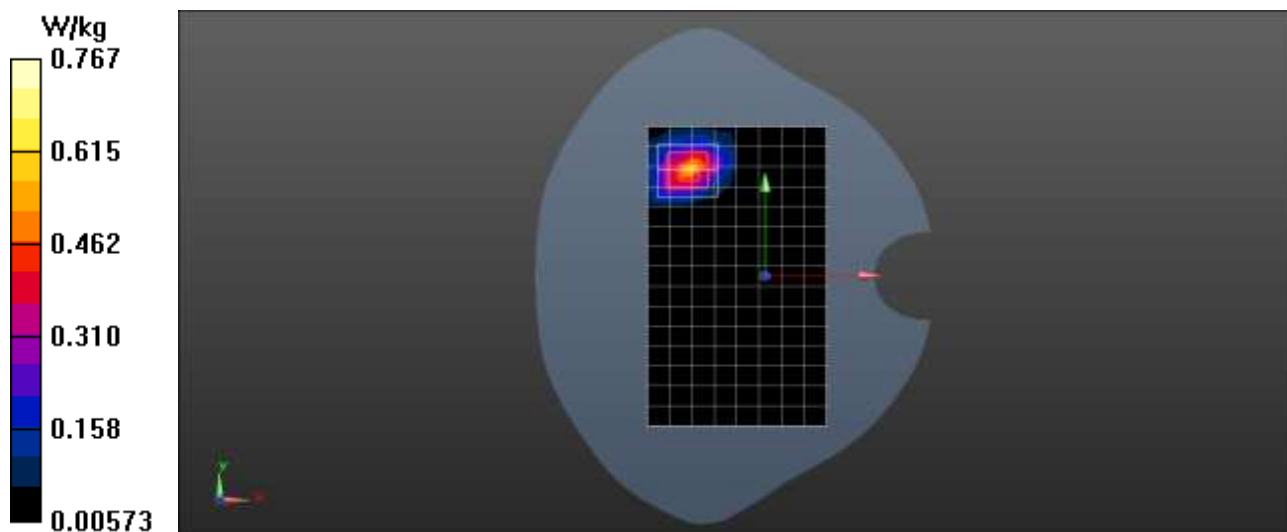Configuration/Right side 5mm/Area Scan (6x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.786 W/kg **Configuration/Right side 5mm/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 0 V/m ; Power Drift = -0.13 dB Peak SAR (extrapolated) = 1.06 W/kg **SAR(1 g) = 0.52 W/kg ; SAR(10 g) = 0.264 W/kg** Maximum value of SAR (measured) = 0.767 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 36CH Rear side 5mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5180 MHz; Duty Cycle: 1:1.025

Medium parameters used (interpolated): $f = 5180$ MHz; $\sigma = 4.673$ S/m; $\epsilon_r = 36.084$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Right side 5mm/Area Scan (6x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.972 W/kg


Configuration/Right side 5mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.55 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

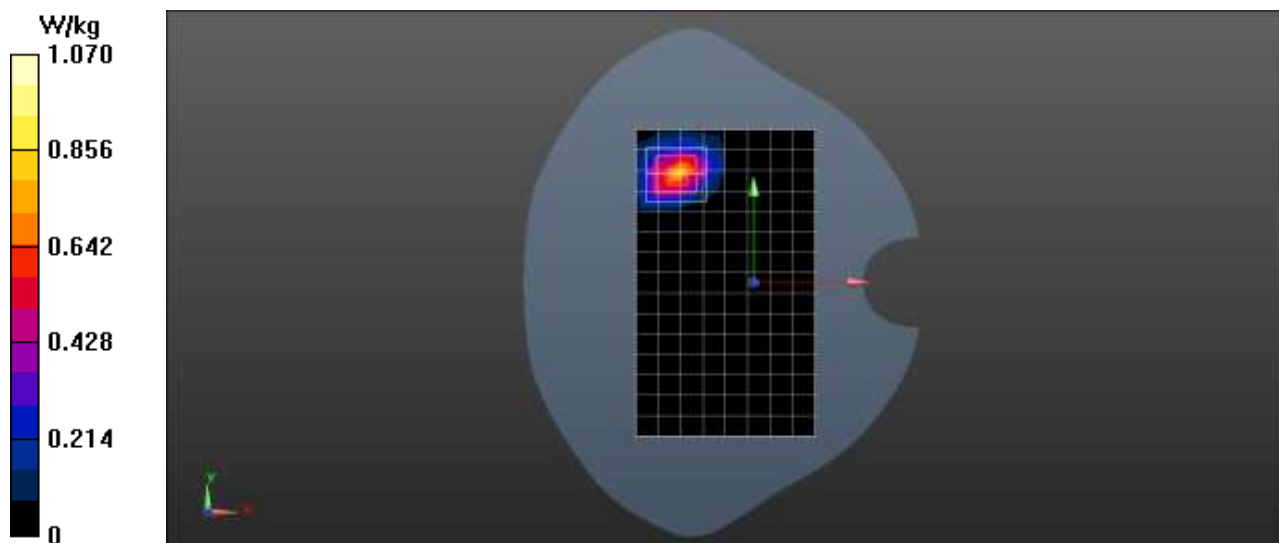

Date: 2025/4/17

Test Laboratory: LCS-SAR Lab



WIFI 5.3G 802.11a 60CH Right Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1


Communication System: UID 0, WIFI 5GHz (0); Frequency: 5300 MHz; Duty Cycle: 1:1.025
Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.803 \text{ S/m}$; $\epsilon_r = 36.293$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.336 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 3.399 V/m ; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.671 W/kg
SAR(1 g) = 0.218 W/kg ; SAR(10 g) = 0.078 W/kg
Maximum value of SAR (measured) = 0.427 W/kg

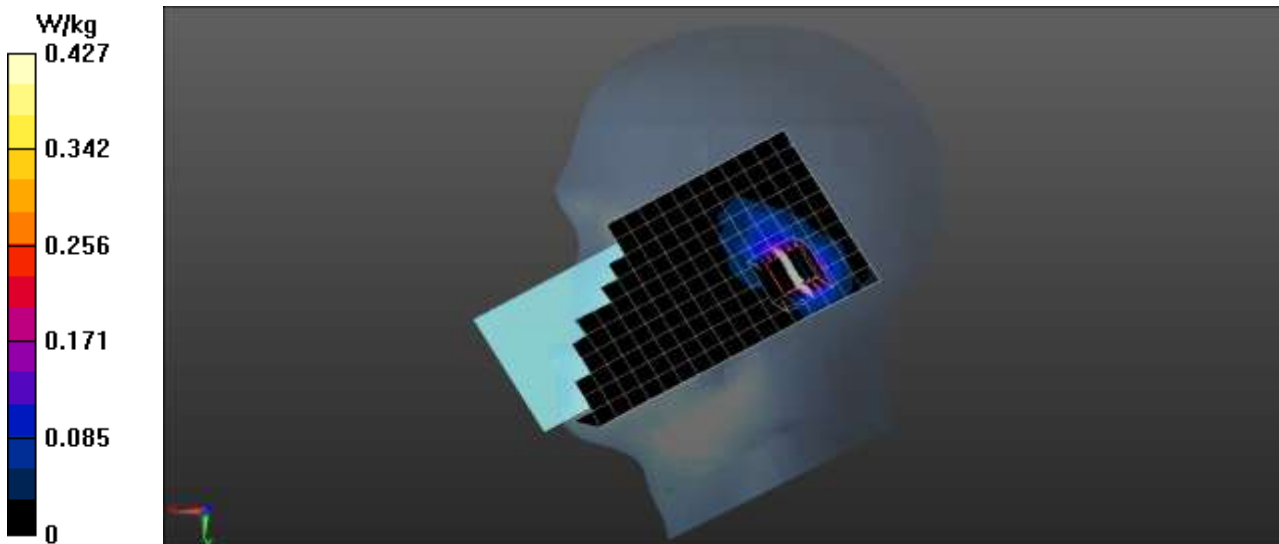

Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11a 60CH Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**


Communication System: UID 0, WIFI 5GHz (0); Frequency: 5300 MHz; Duty Cycle: 1:1.025

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.803 \text{ S/m}$; $\epsilon_r = 36.293$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

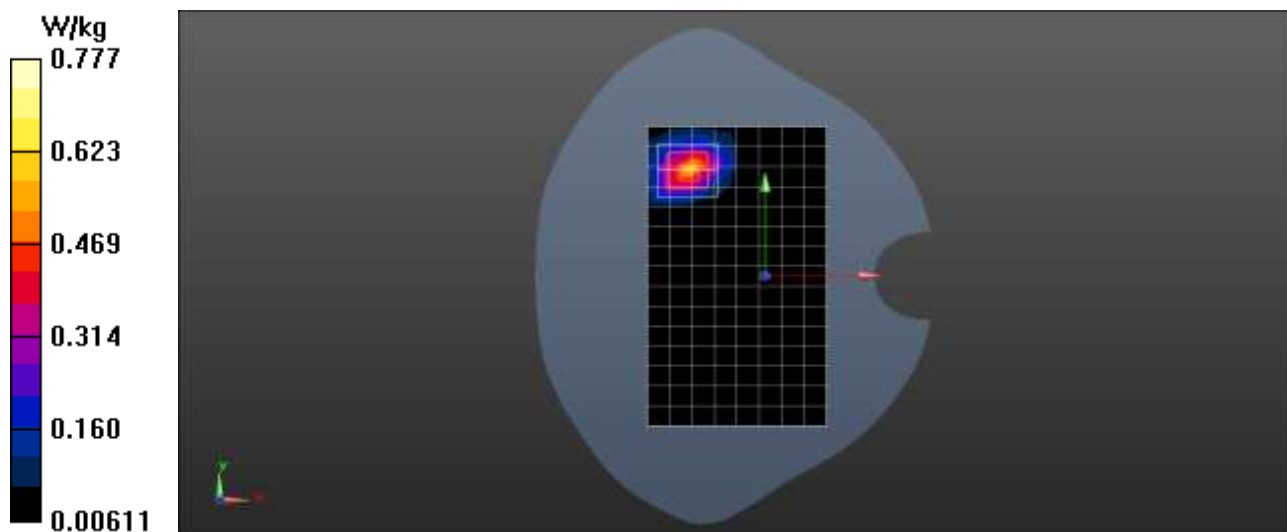Configuration/Right side 5mm/Area Scan (6x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.796 W/kg **Configuration/Right side 5mm/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 2.483 V/m ; Power Drift = -0.19 dB Peak SAR (extrapolated) = 1.14 W/kg **SAR(1 g) = 0.548 W/kg ; SAR(10 g) = 0.283 W/kg** Maximum value of SAR (measured) = 0.777 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/17

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11a 60CH Rear side 5mm

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1


Communication System: UID 0, WIFI 5GHz (0); Frequency: 5300 MHz; Duty Cycle: 1:1.025

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.803 \text{ S/m}$; $\epsilon_r = 36.293$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

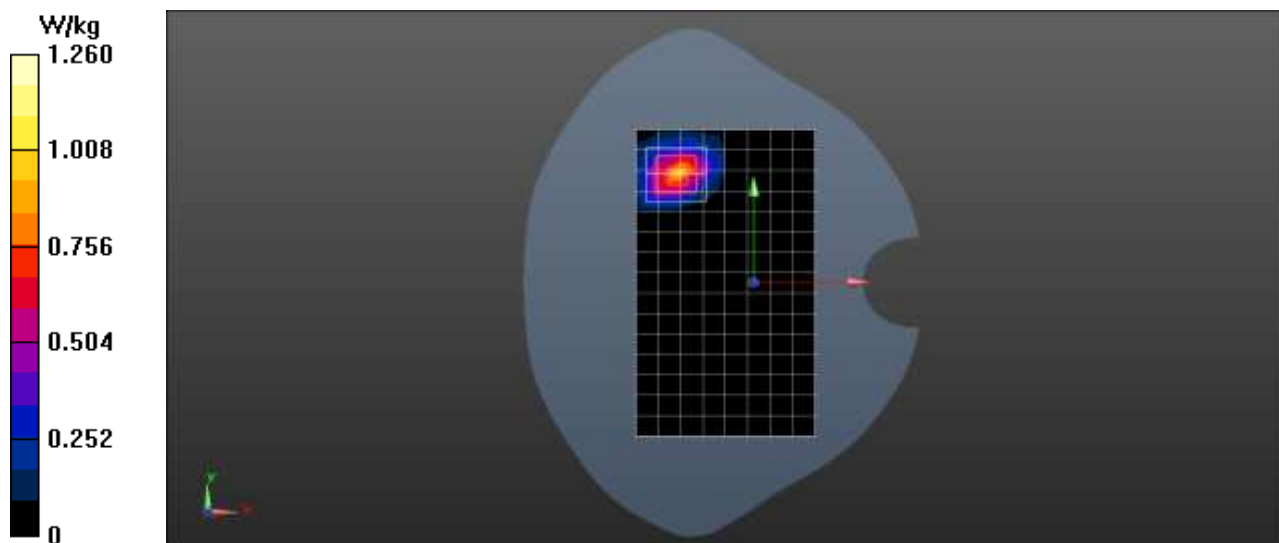Configuration/Right side 5mm/Area Scan (6x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.771 W/kg **Configuration/Right side 5mm/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 0.4090 V/m ; Power Drift = -0.08 dB Peak SAR (extrapolated) = 1.86 W/kg **SAR(1 g) = 0.580 W/kg ; SAR(10 g) = 0.213 W/kg** Maximum value of SAR (measured) = 1.26 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/18

Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11a 140CH Right Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5700 MHz; Duty Cycle: 1:1.026

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.141$ S/m; $\epsilon_r = 35.549$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.74, 4.74, 4.74); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.305 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2657 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.309 W/kg

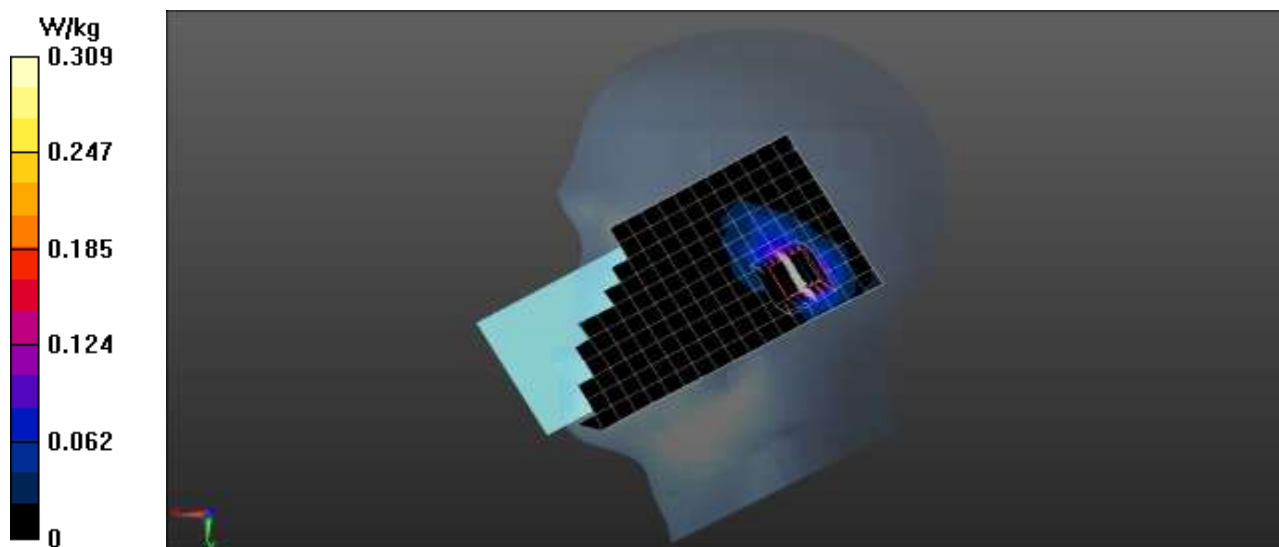

Date: 2025/4/18

Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11a 140CH Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5700 MHz; Duty Cycle: 1:1.026

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.141$ S/m; $\epsilon_r = 35.549$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.74, 4.74, 4.74); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Right side 5mm/Area Scan (6x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.386W/kg


Configuration/Right side 5mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.485 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.405 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.277 W/kg

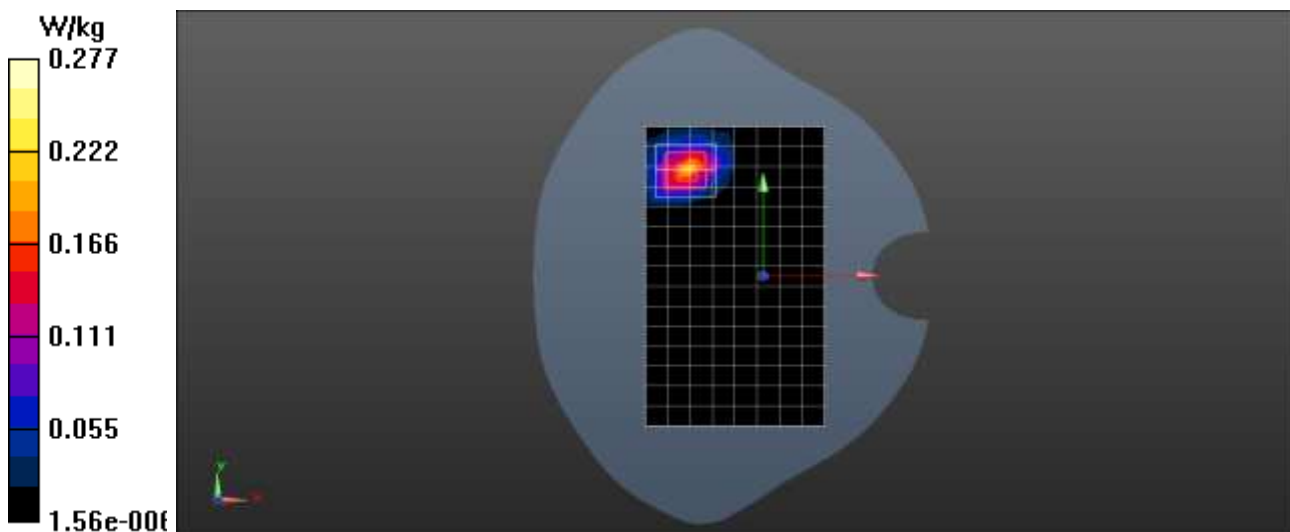

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/18

Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11a 140CH Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5700 MHz; Duty Cycle: 1:1.026

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.141$ S/m; $\epsilon_r = 35.549$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.74, 4.74, 4.74); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Right side 5mm/Area Scan (6x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.386W/kg


Configuration/Right side 5mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.601 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.377 W/kg

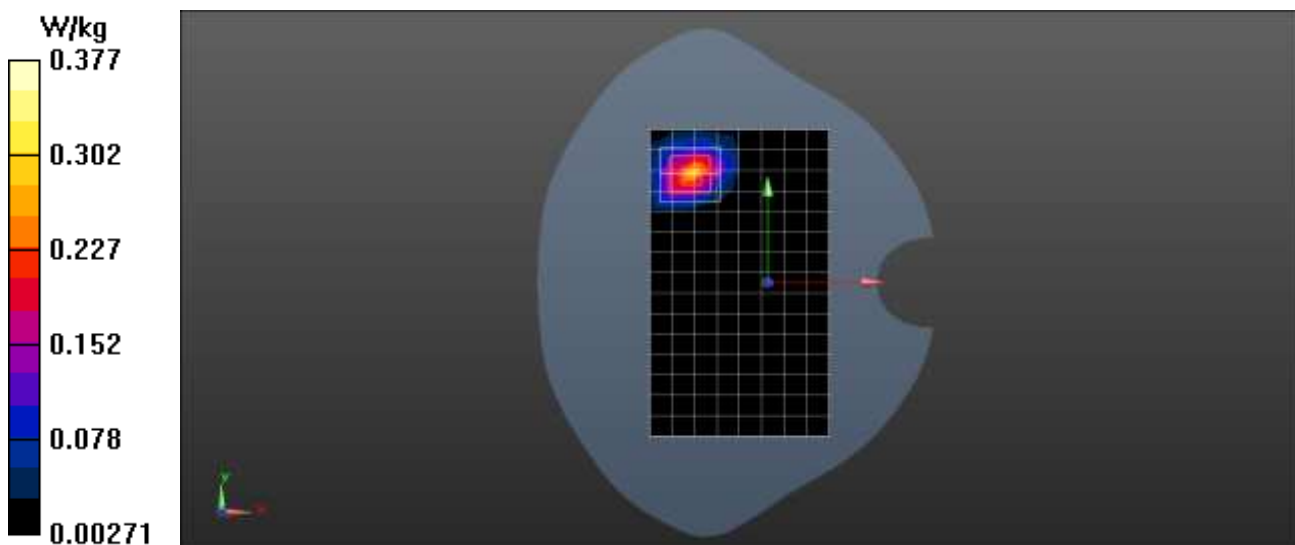

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/18

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 157CH Right Cheek

DUT: Smart Phone; Type: BraX3; Serial: A250303080-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 1:1.025

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.263$ S/m; $\epsilon_r = 34.992$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.86, 4.86, 4.86); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.204 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.413 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.219 W/kg

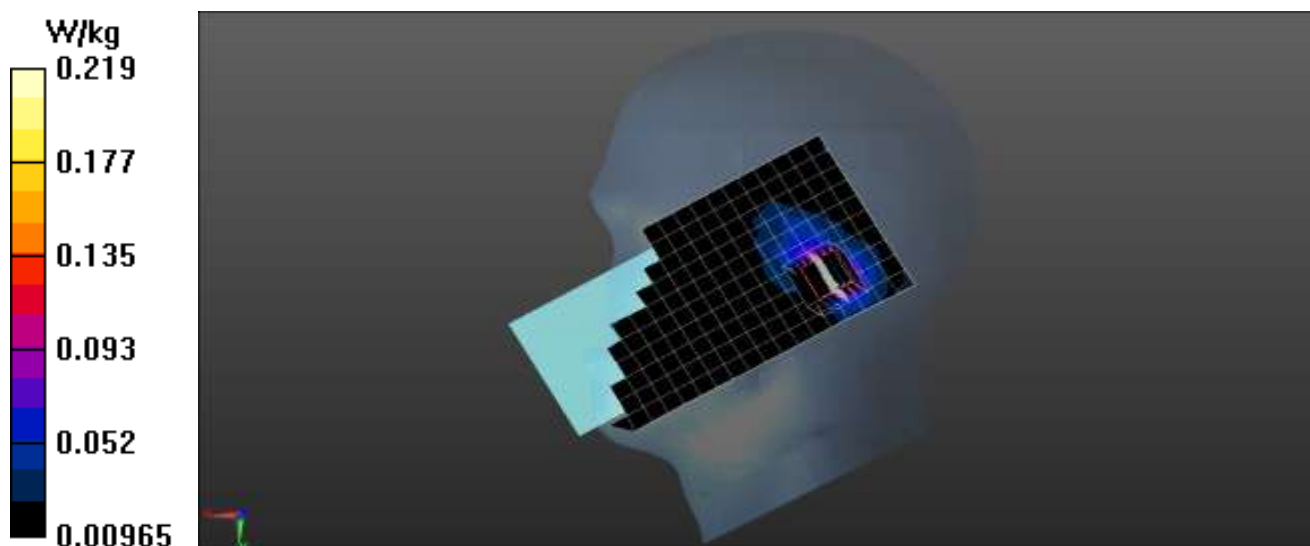

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/4/18

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 157CH Rear side 10mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 1:1.025
Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.263$ S/m; $\epsilon_r = 34.992$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.86, 4.86, 4.86); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Right side 5mm/Area Scan (6x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.394 W/kg


Configuration/Right side 5mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.849 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

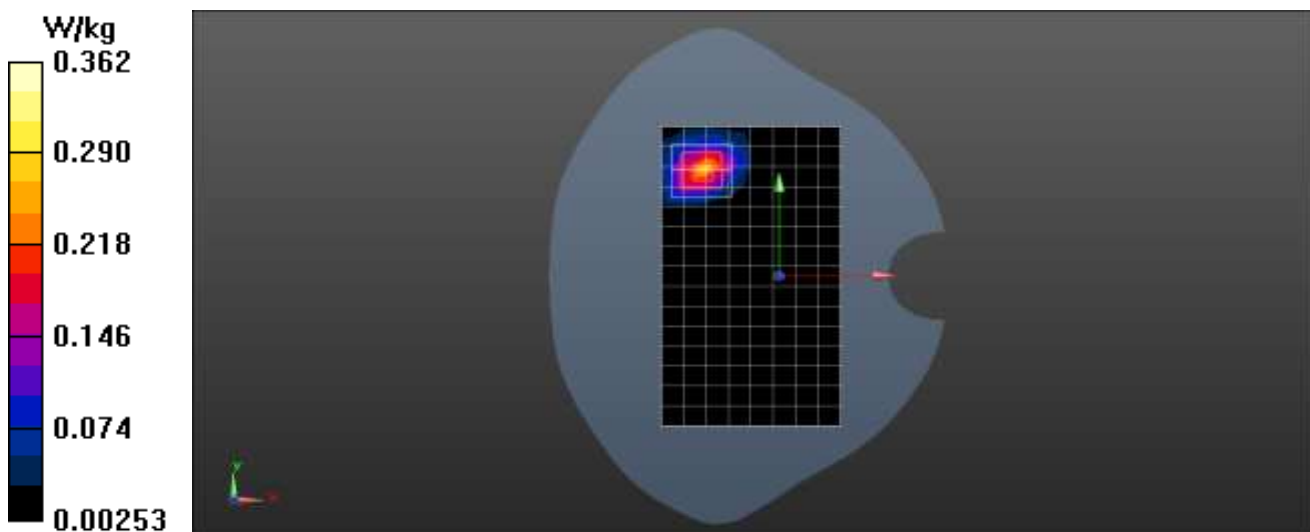

Date: 2025/4/18

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 157CH Rear side 5mm**DUT: Smart Phone; Type: BraX3; Serial: A250303080-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 1:1.025
Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.263$ S/m; $\epsilon_r = 34.992$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.86, 4.86, 4.86); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Right side 5mm/Area Scan (6x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.413 W/kg

Configuration/Right side 5mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.587 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.568 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.427 W/kg

