Shenzhen Be-Comfortable Technology Co. Ltd

规格承认书

SPECIFICATION FOR APPROVAL

客 户	睿联
Customer	<u> </u>
项目名称	D11
Project Name	
客户料号	54.07.001.0117A
Customer NO.	0.1107.100.1101.7.11
规 格	双频WIFI天线
specification	/
供方料号	N0Z-1878-R0A
Supplier NO.	1\0Z-1070-KUA
规格书编号	
Specification NO.	
编写人	张斌
Write by	*
版本	Ver.1
REV.	7 61.1
日 期	2023/12/27
Date	2023/12/2/
备 注	10
Note	*

客户研	角认 CUSTOMER APPROV	ED BY						
批准 Approved by 审核 Checked by 制表 Prepared b								
		÷						
供方	确认 SUPPLIER APPROVE	D BY						
批准 Approved by	审核 Checked by	制表 Prepared by						
78 th	De tout	Lest						



Shenzhen Be-Comfortable Technology Co. Ltd

版本变更记录								
变更日期	变更内容	版本	变更人	批准人				



Shenzhen Be-Comfortable Technology Co. Ltd

1. 承认书项目表 (Index)

序号	内容	页码
_	承认书封面	1
_	版本变更记录	2
1	承认书项目表	3
2	试验设备和条件	4
3	样机结构说明件	5
4	S11	7
5	增益/效率/3D图	8
6	包装图	9



Shenzhen Be-Comfortable Technology Co. Ltd

- 2. 试验设备和条件(Test Equipment & Conditions)
- **2.1. Network Analyzers :** KEYSIGHT P5002A
- 2.2. Communications Test Set: R&S CMW 500
- 2.3. 3D Chamber Test System: 64探头测试系统






Shenzhen Be-Comfortable Technology Co. Ltd

3. 样机结构说明件(Mechanical instruction)




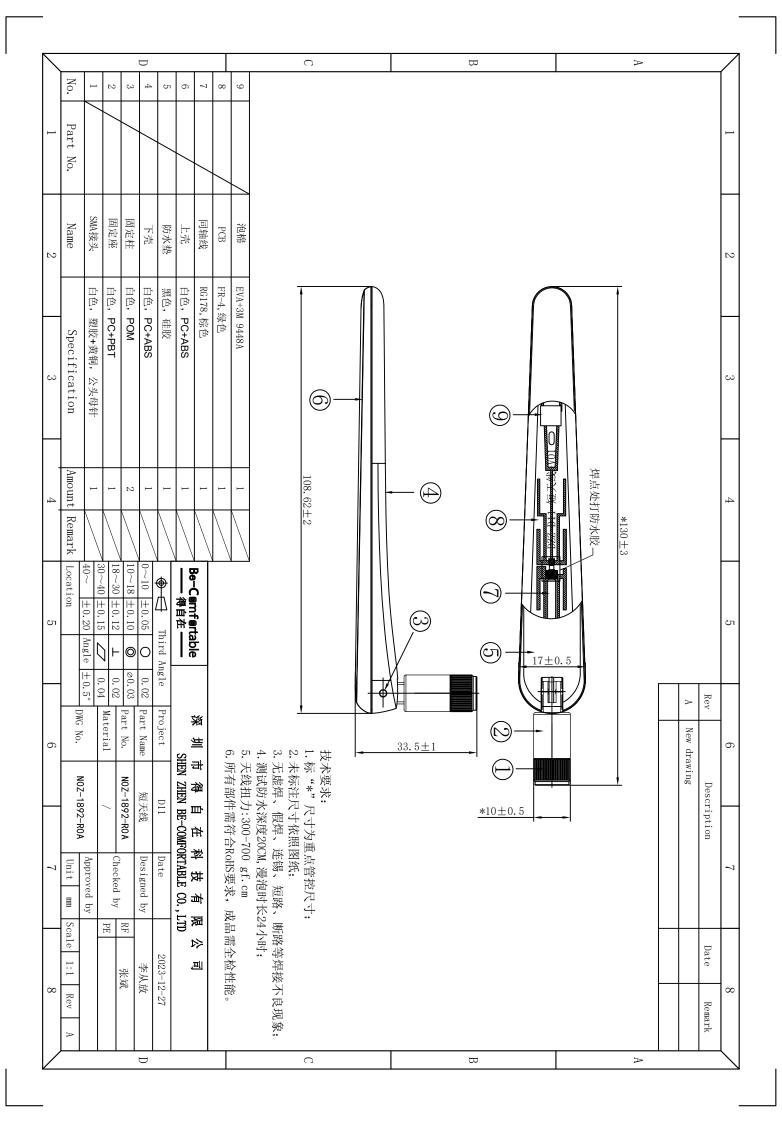



Shenzhen Be-Comfortable Technology Co. Ltd

4. S11驻波比2.5以下

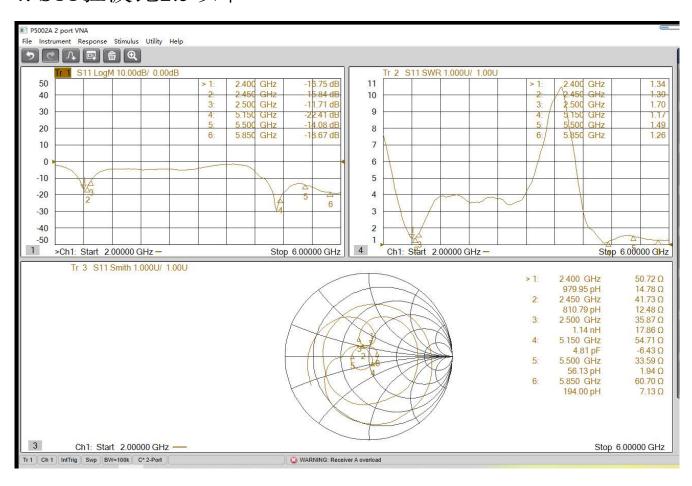


5. 增益/效率/3D图(Gain & Efficiency & 3D Pattern)

Frequen	ıcy ID		1	2	3	4	5	6		7	8	9	10	11
Frequen	icy (MH	z)	2400	2410	2420	2430	244	0 24	50 2	460	2470	2480	2490	2500
Gain (dB	3i)		2.60	2.35	2.55	3.0	1 2.	74 2	2.12	2.06	2.36	2.31	2.27	2.02
Efficienc	cy (%)		62.15	63.19	65.53	66.8	1 66.3	39 66	.99 (57.77	68.35	68.15	68.22	69.23
12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650	5700	5750	5800	5850
3.01	3.10	3.68	2.46	3.67	3.70	3.66	3.48	4.13	3.5	1 2.8	31 4.3	8 4.35	3.77	3.18
56.66	60.16	62.16	64.22	67.09	70.04	70.97	69.61	69.97	68.77	7 67.9	68.9	2 68.85	67.47	68.21



Shenzhen Be-Comfortable Technology Co. Ltd

3D Pattern @2400-2500/5150-5850MHZ

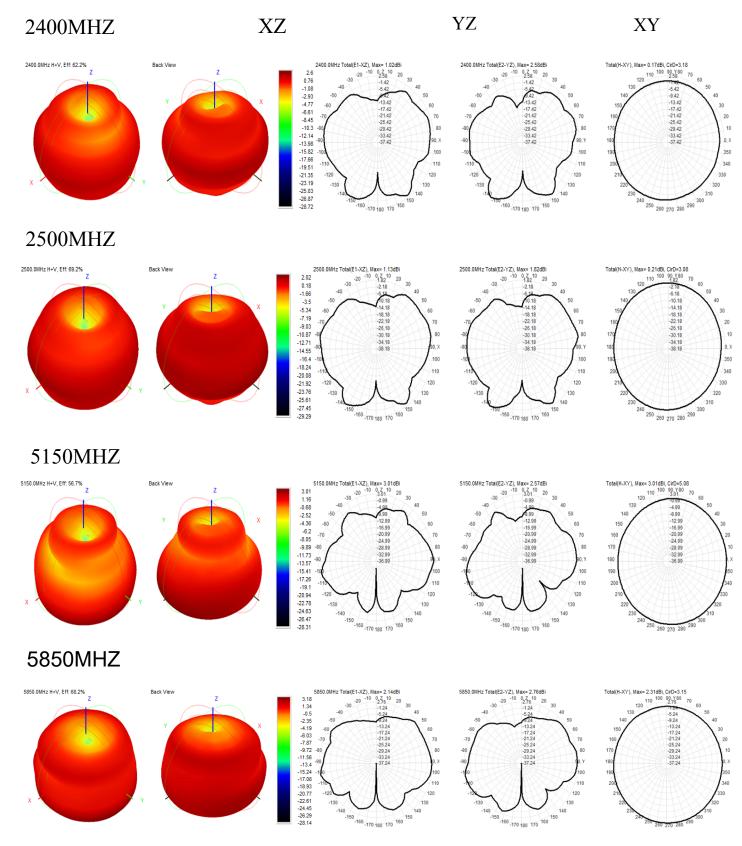



Shenzhen Be-Comfortable Technology Co. Ltd

有源数据

11b/11M	1	6	11	11a/54M	36	64	165
	18. 55	18. 85	18. 86		18. 1	18. 09	19. 11
	-82. 57	-80. 31	-80. 74		-72. 68	-74. 84	-76. 9
11g/54M	1	6	11	11n/MCS7	36	64	165
	19. 21	19. 31	19. 21		18. 12	18. 52	18. 14
	-68. 12	-69. 2	-67. 47		-65. 21	-64. 51	-63. 14
11n/MCS7	1	6	11				
	19. 12	19. 14	19. 07				
	-66. 65	-65. 64	-64. 98				

Be-Cemfertable —— 得自在 ——

产品包裝规范

日期: 2023-11-25

page: 1 of 1


 成品名称: 短天线
 版本: A


 客户: 睿联


一:成品天线




二: 装袋,每PE袋装50PCS产品(以实际包装为准)。







三: 装箱,每箱装12袋;一箱共600PCS产品; (以实际包装为准)



四:封箱,外箱贴我司生产标签和ROHS标签。

批准: _____

确认: _____

拟制: __李从放