




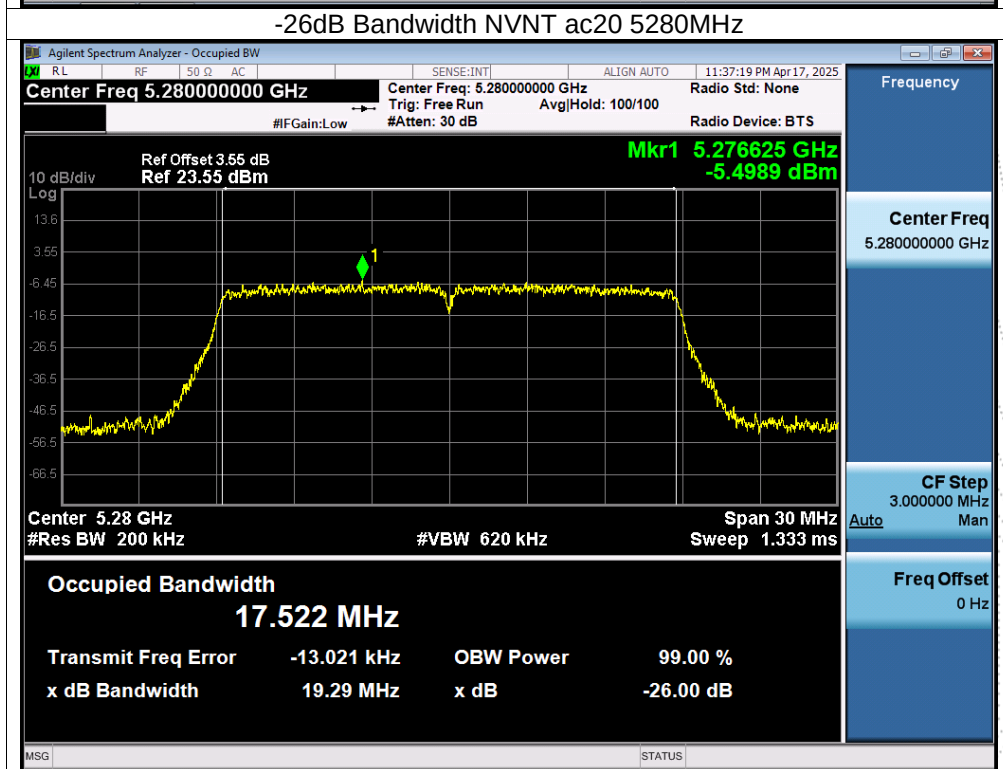
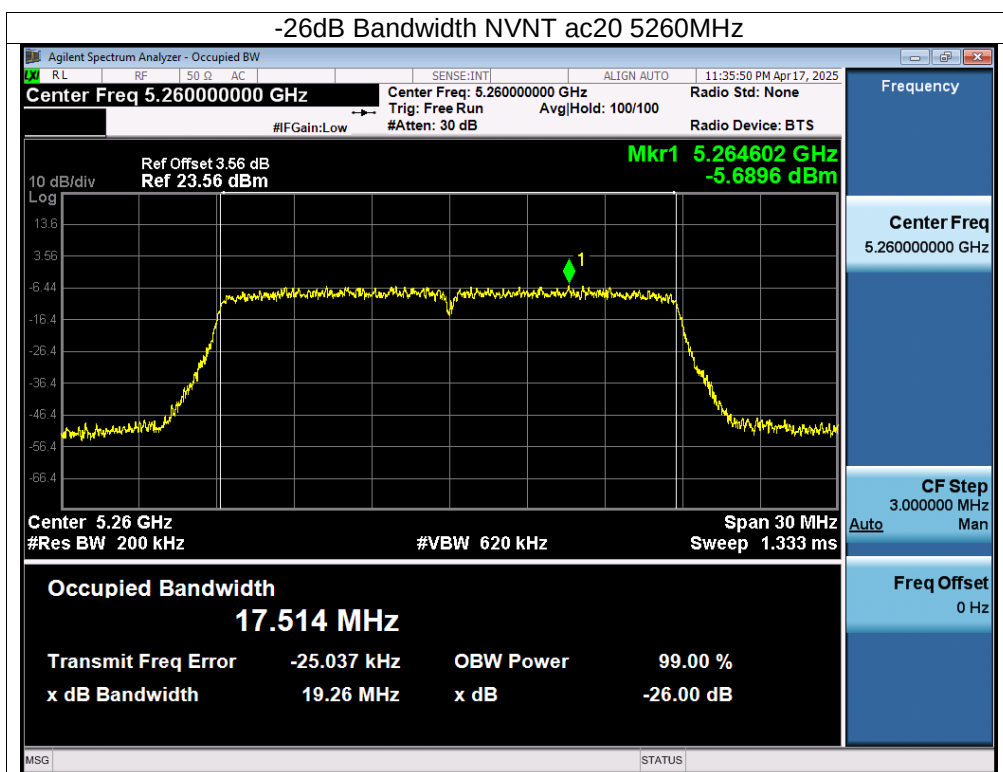
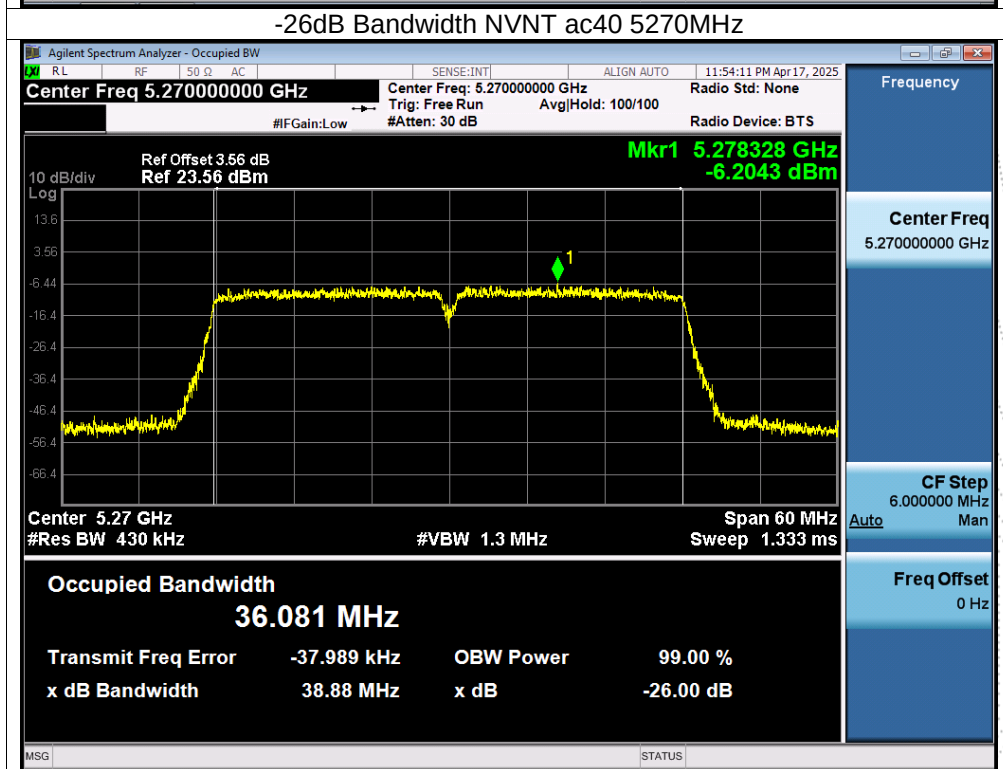
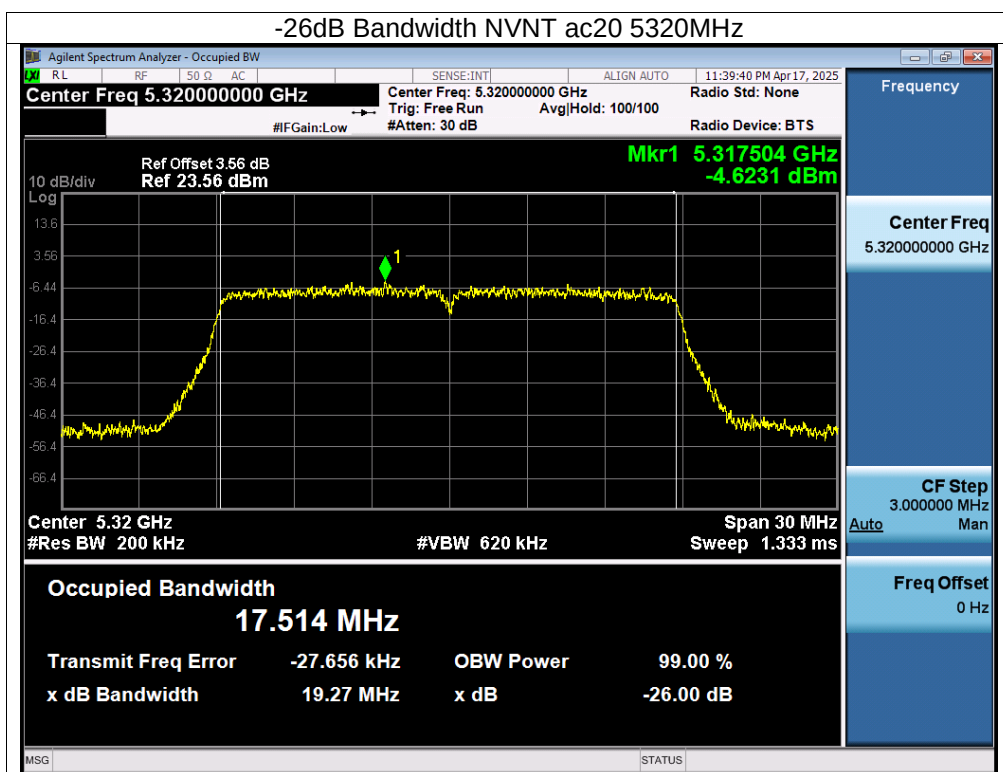
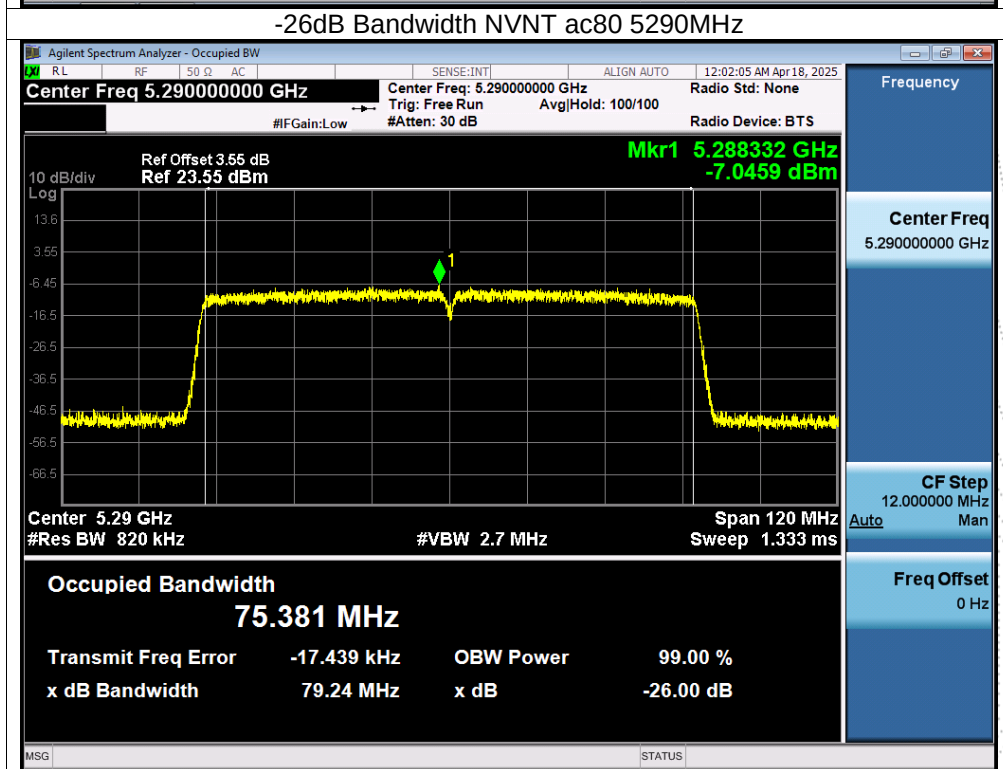



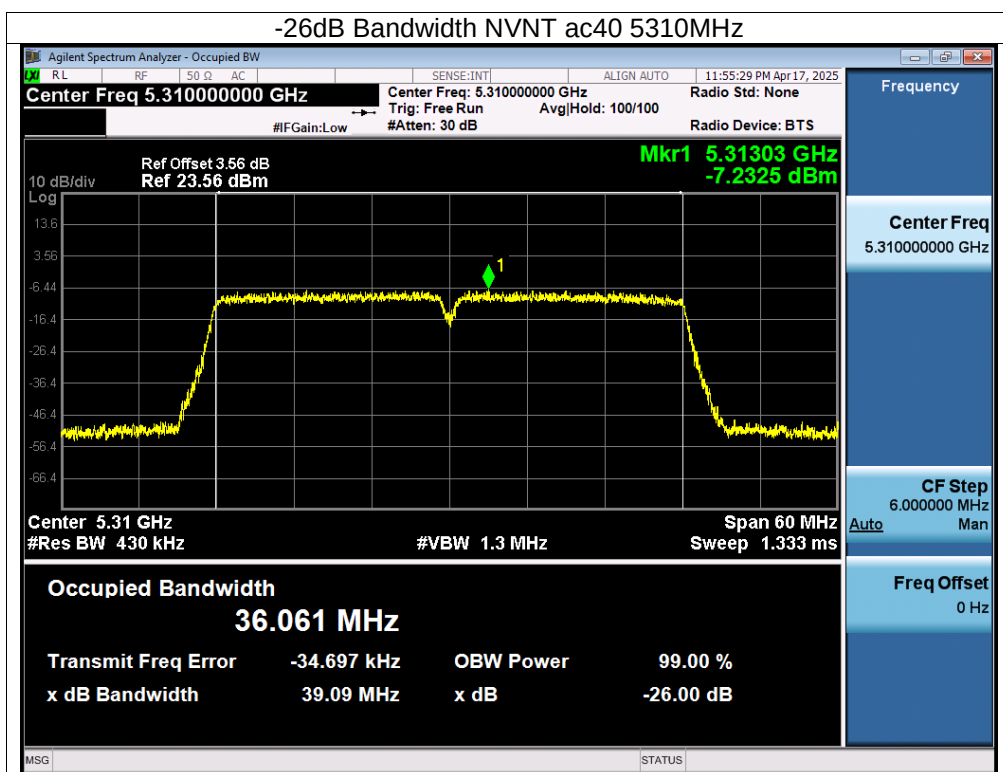


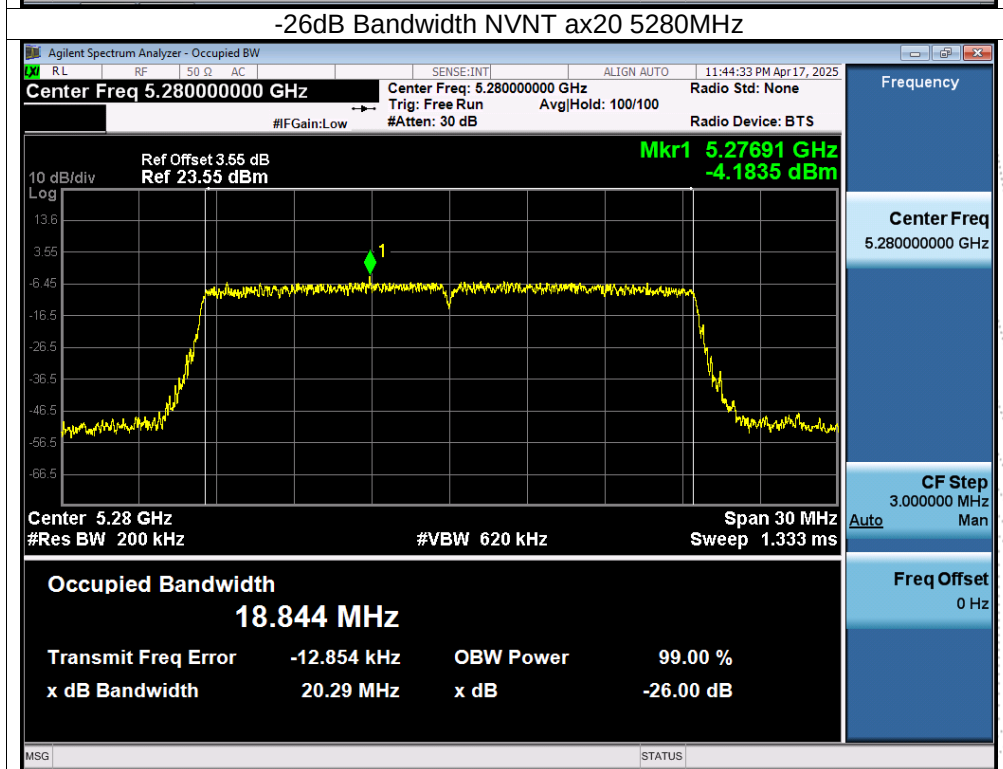



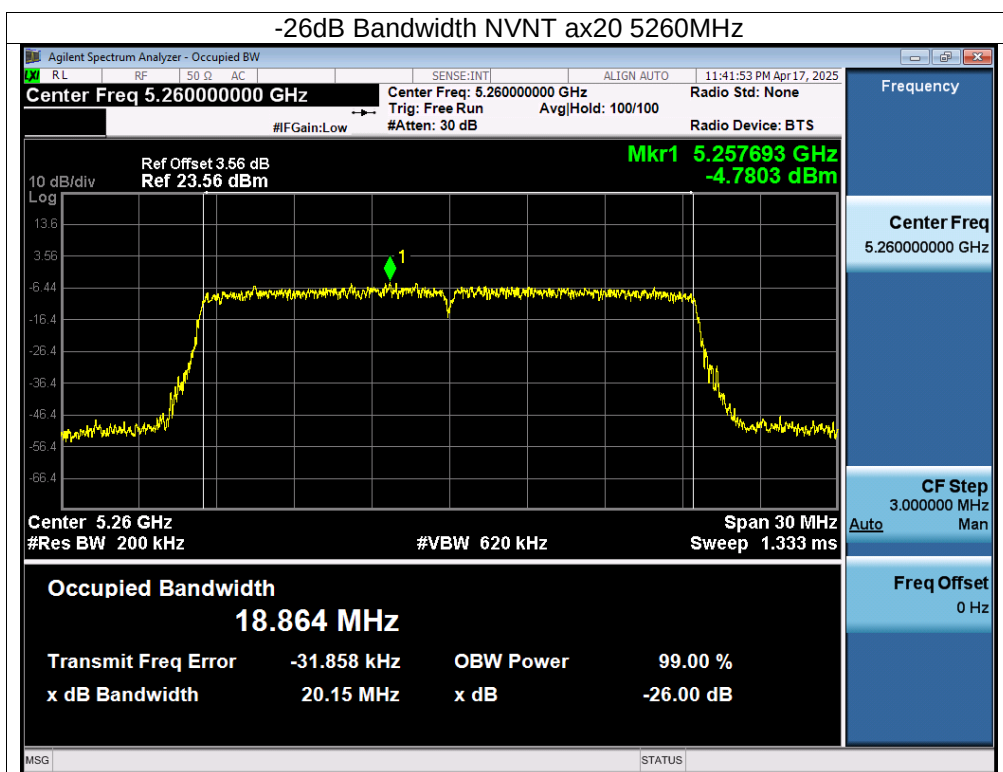



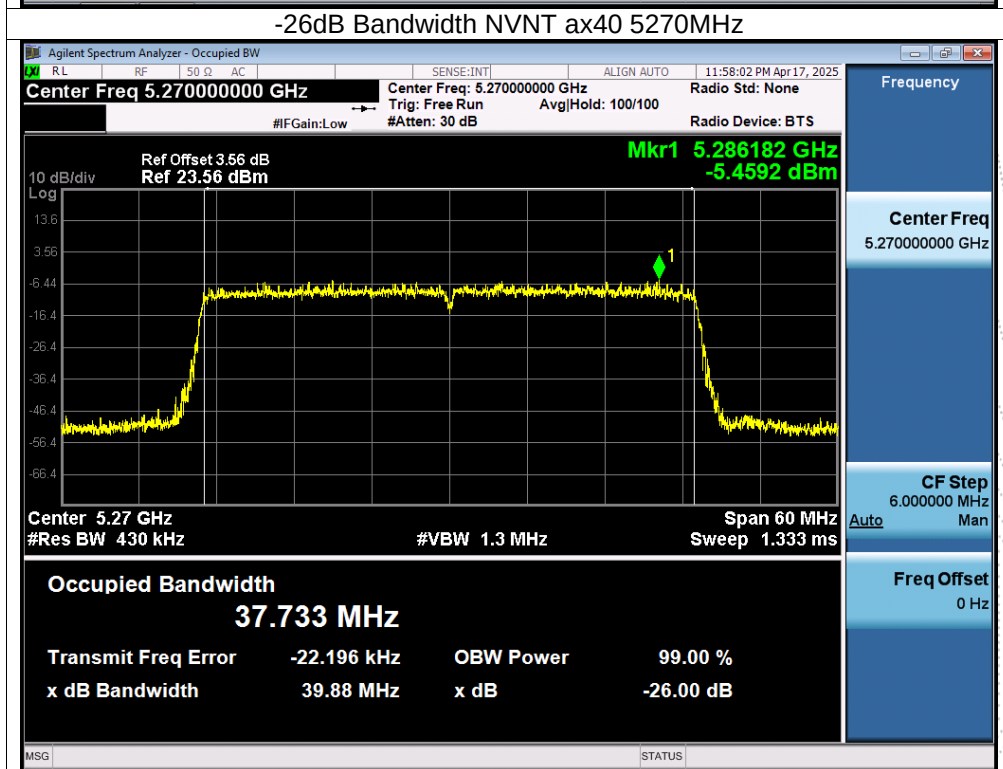



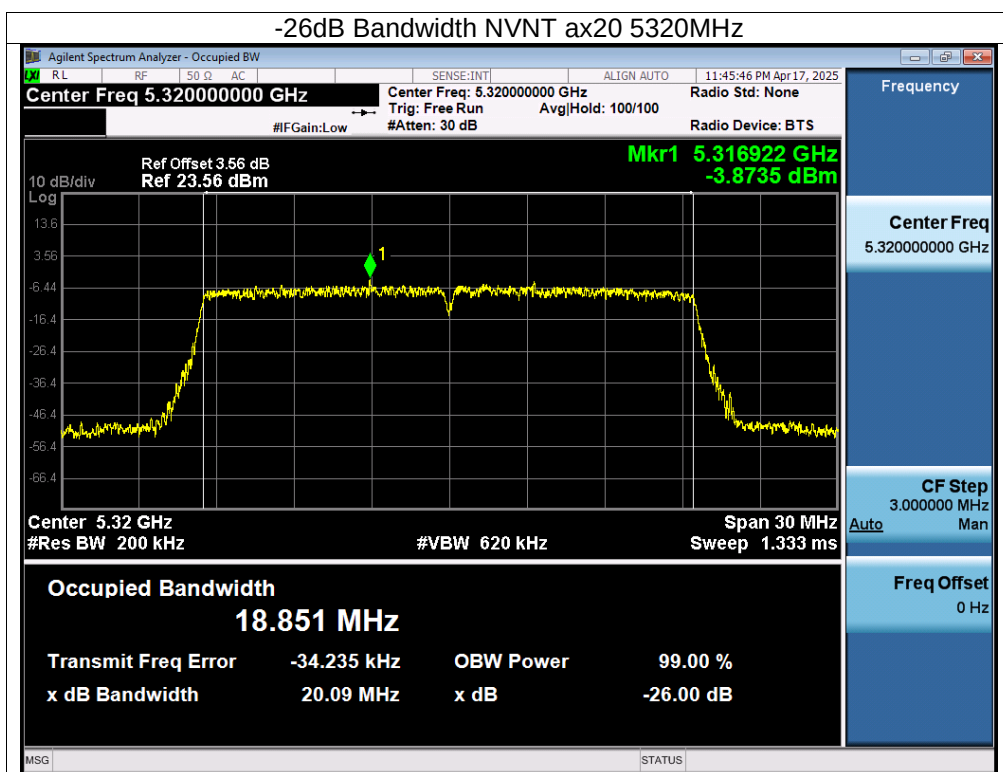


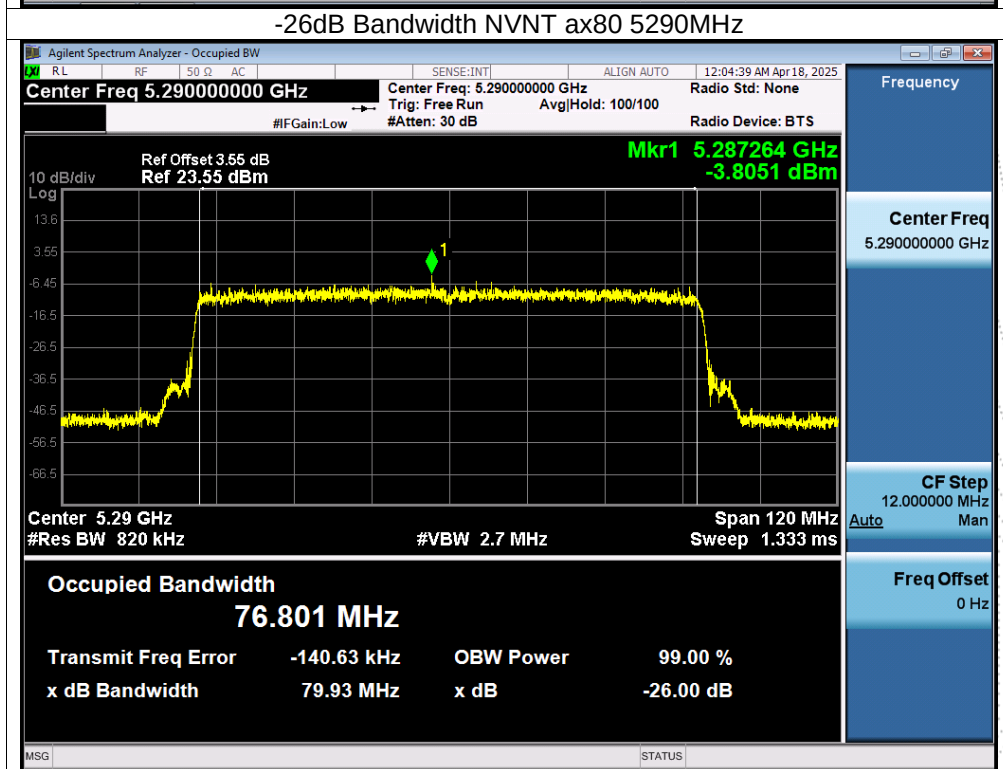
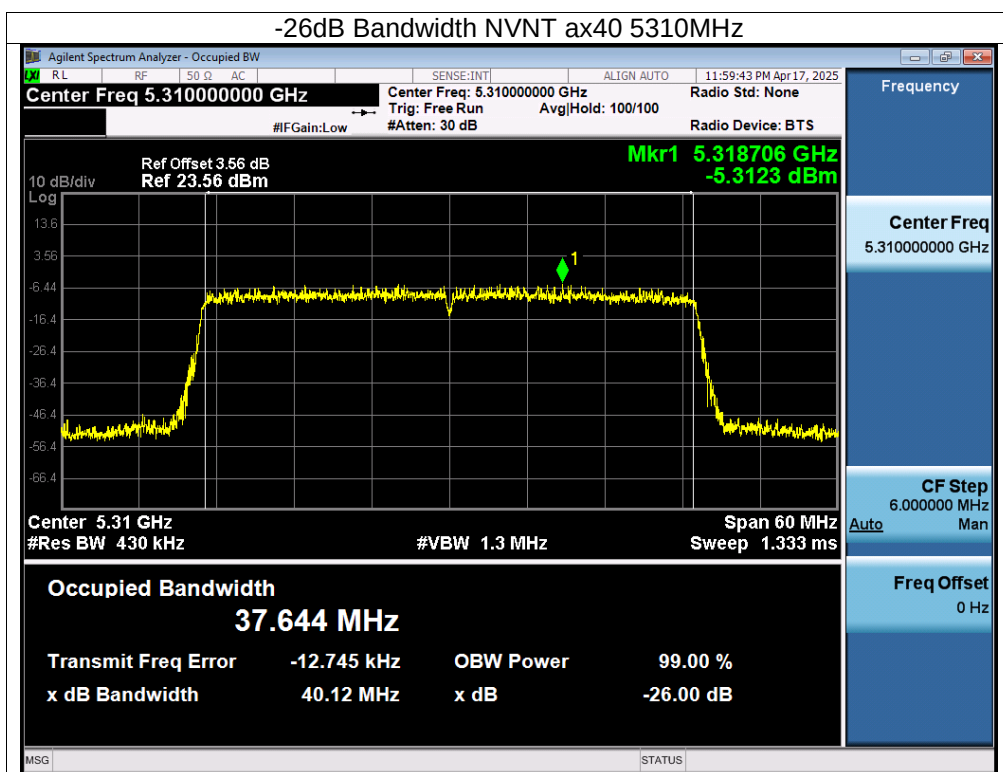



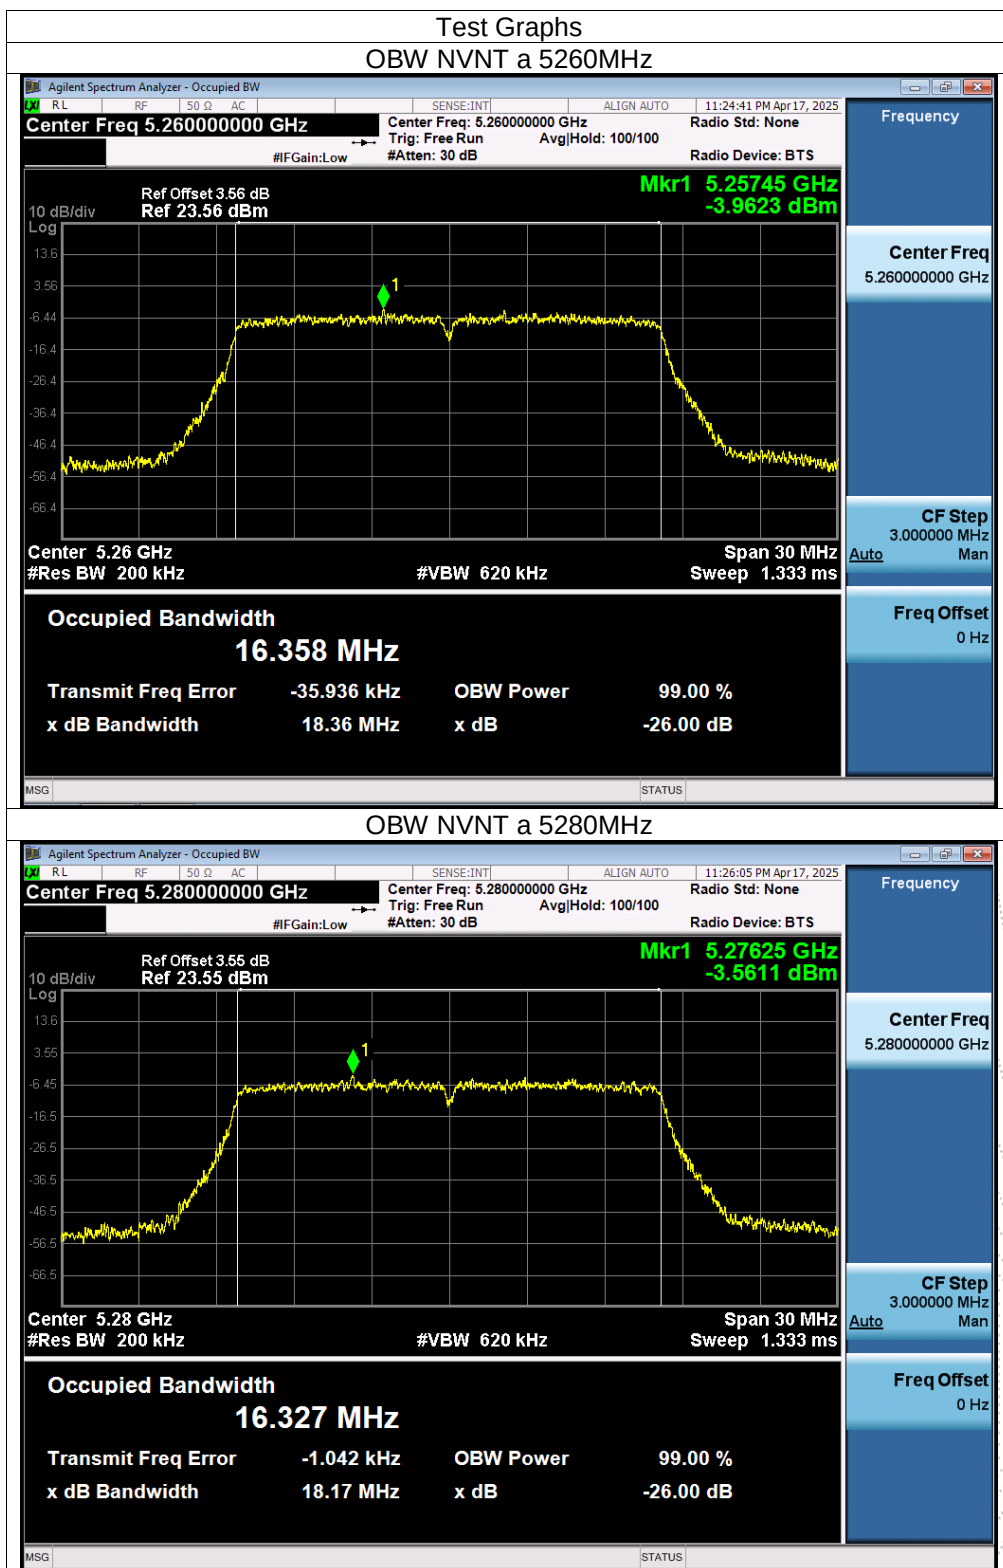


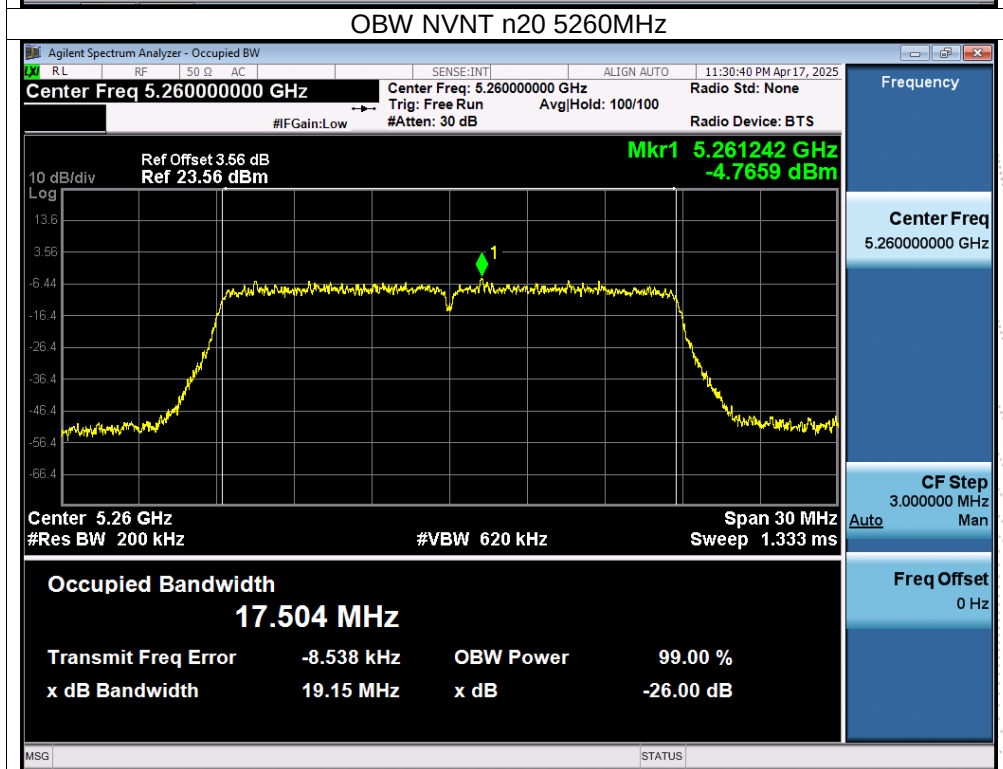
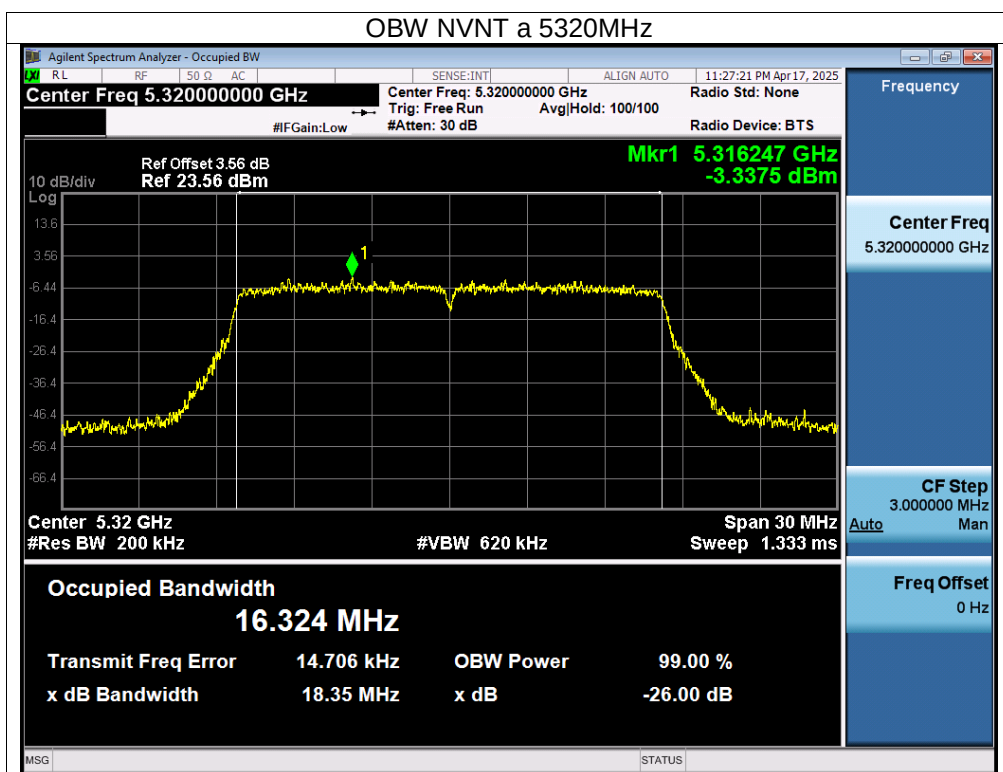


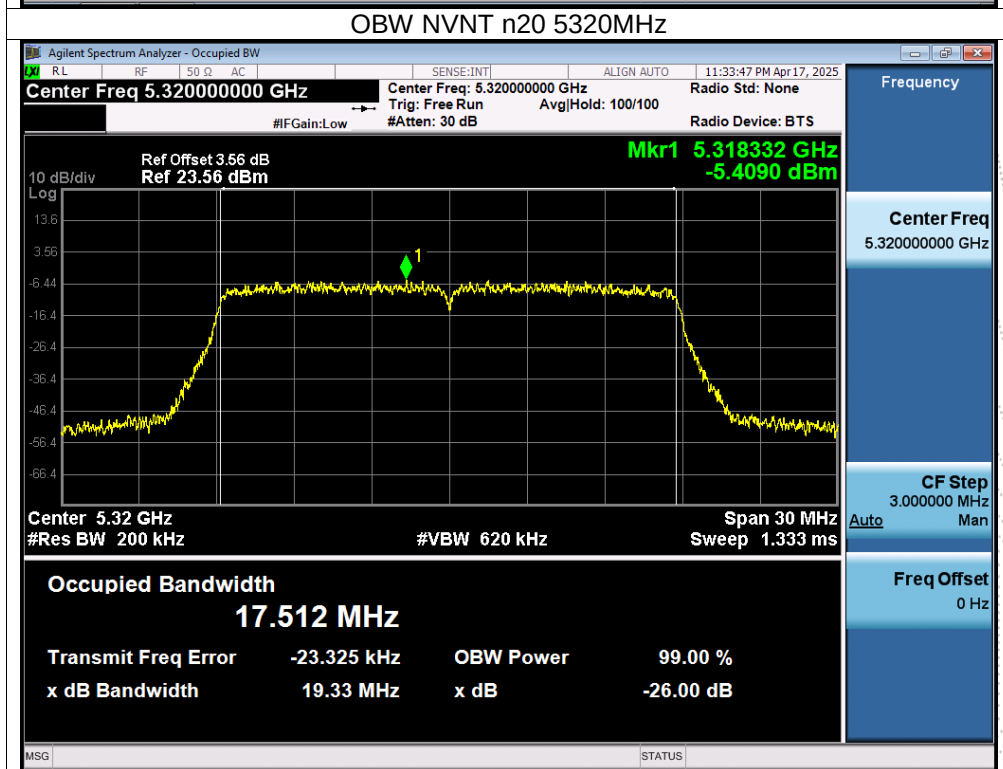
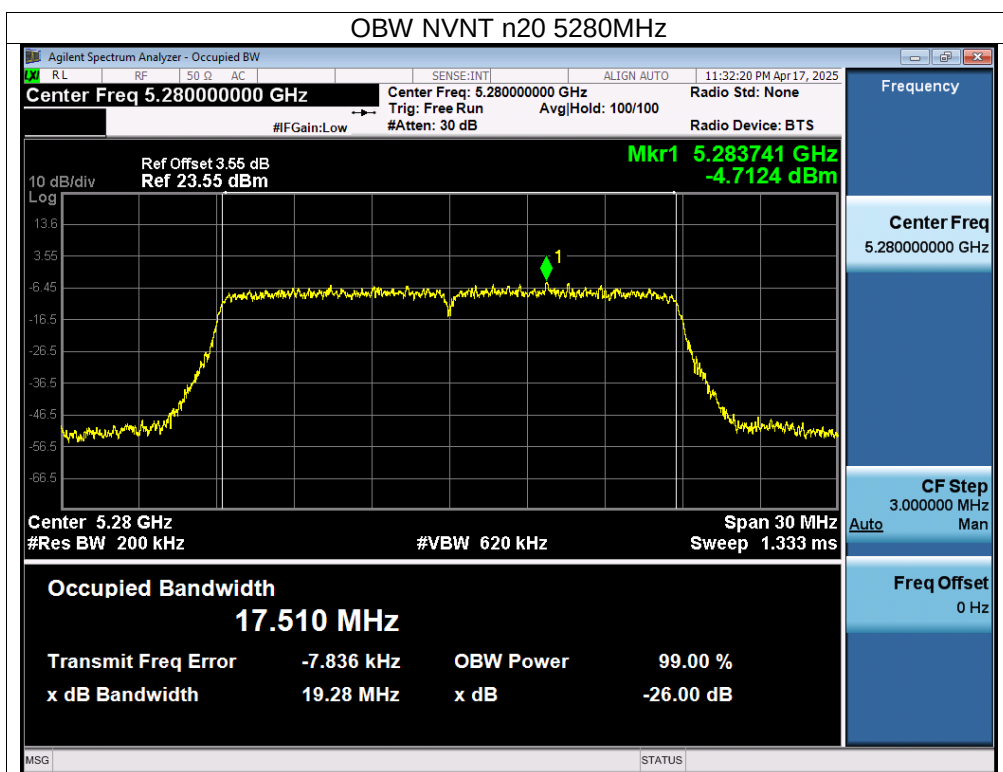


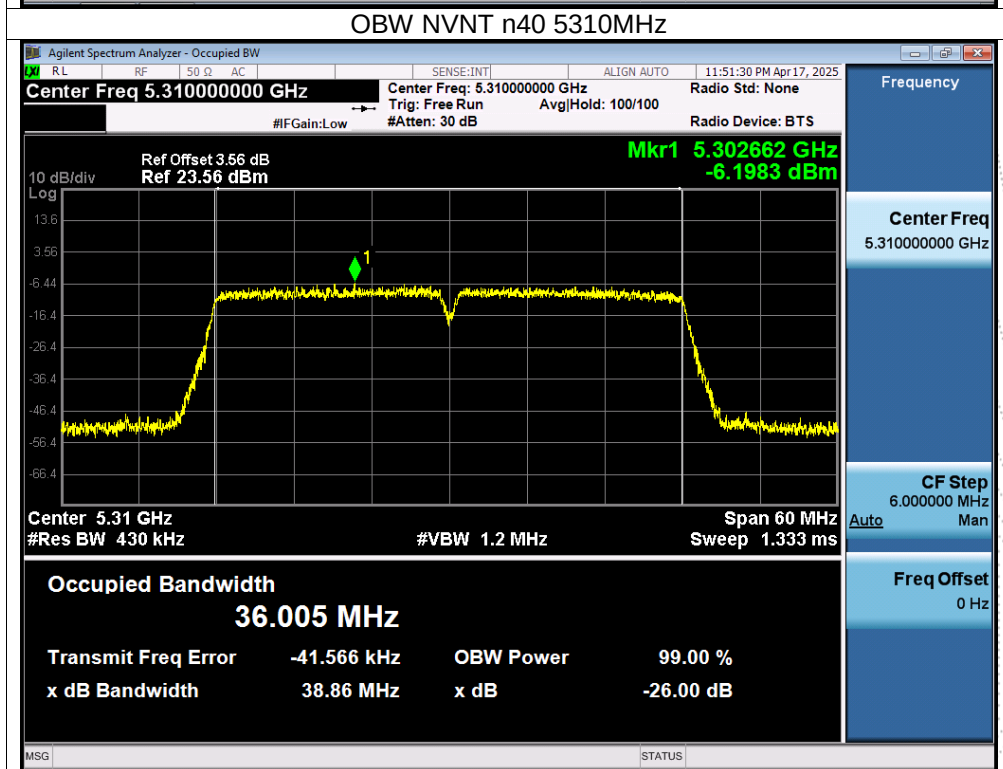
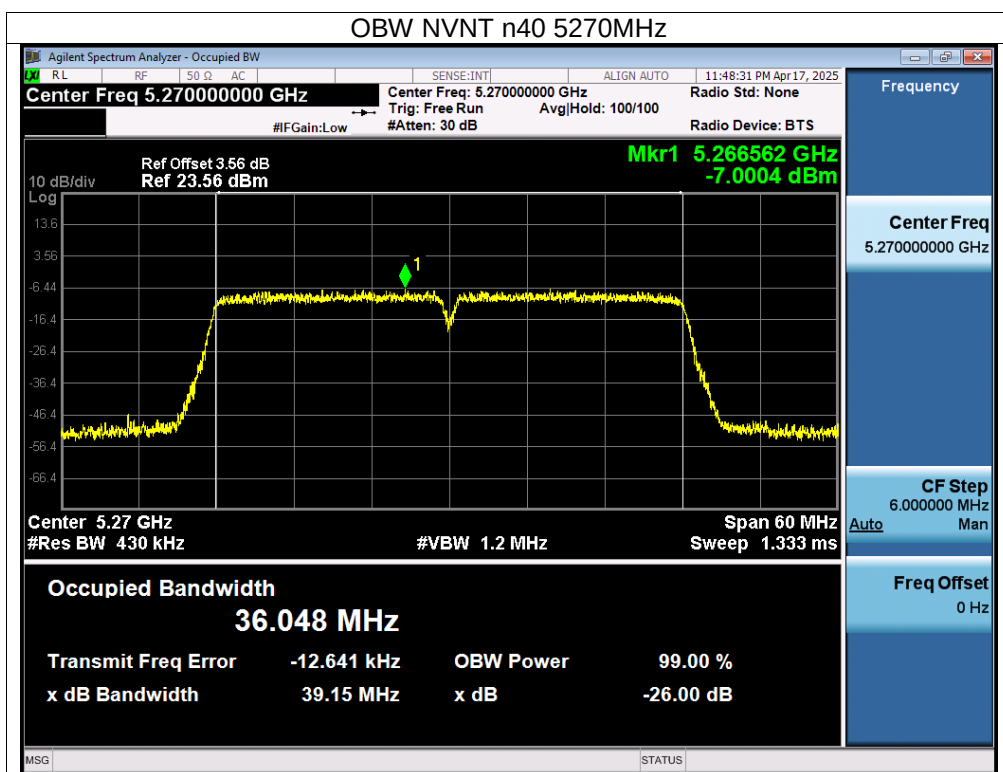


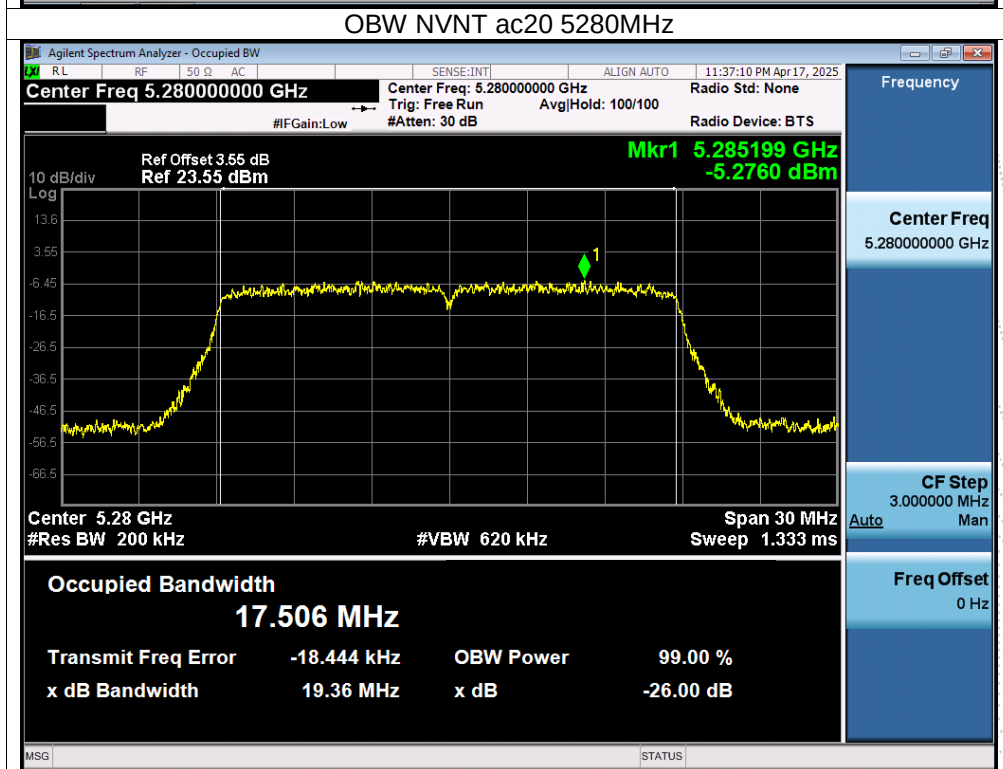
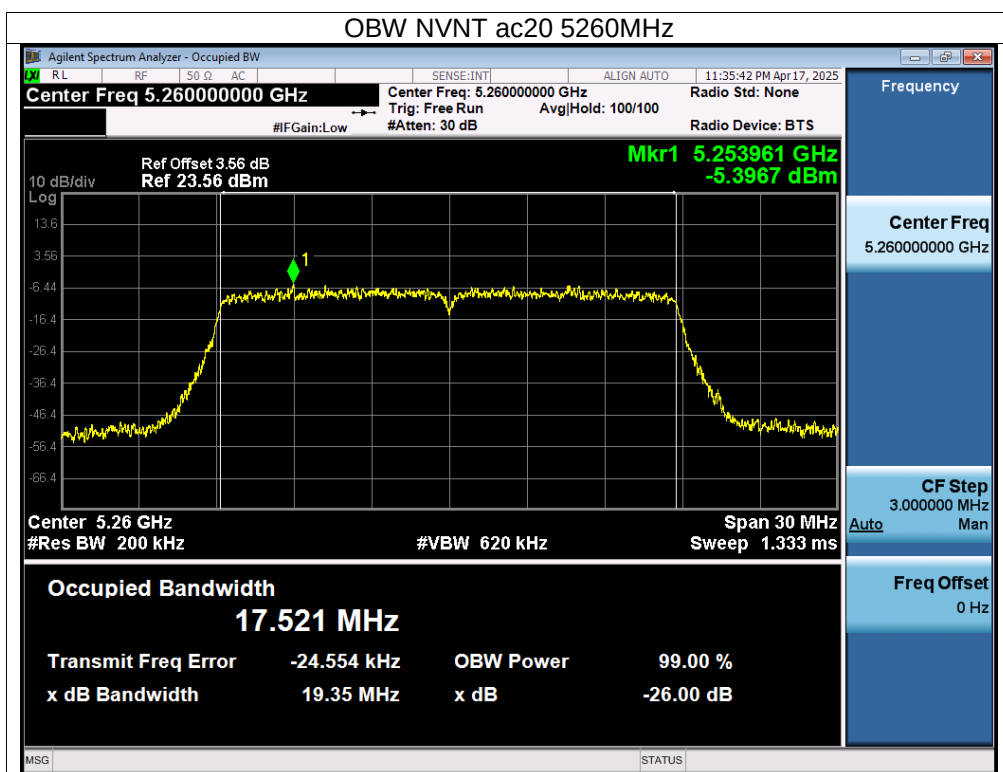


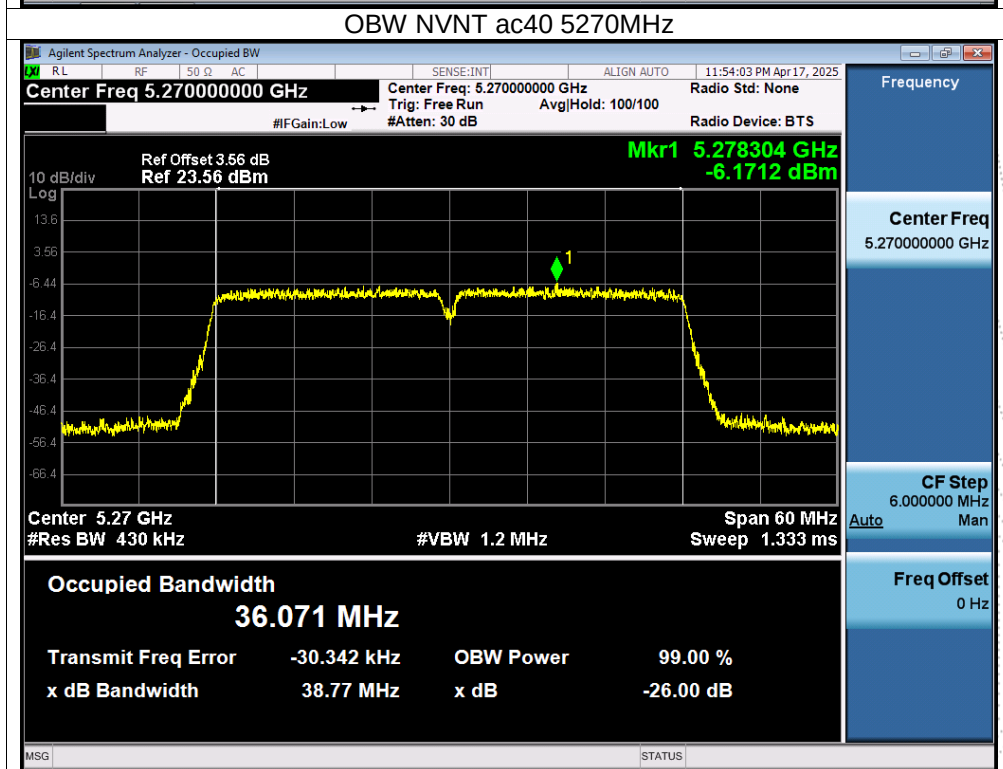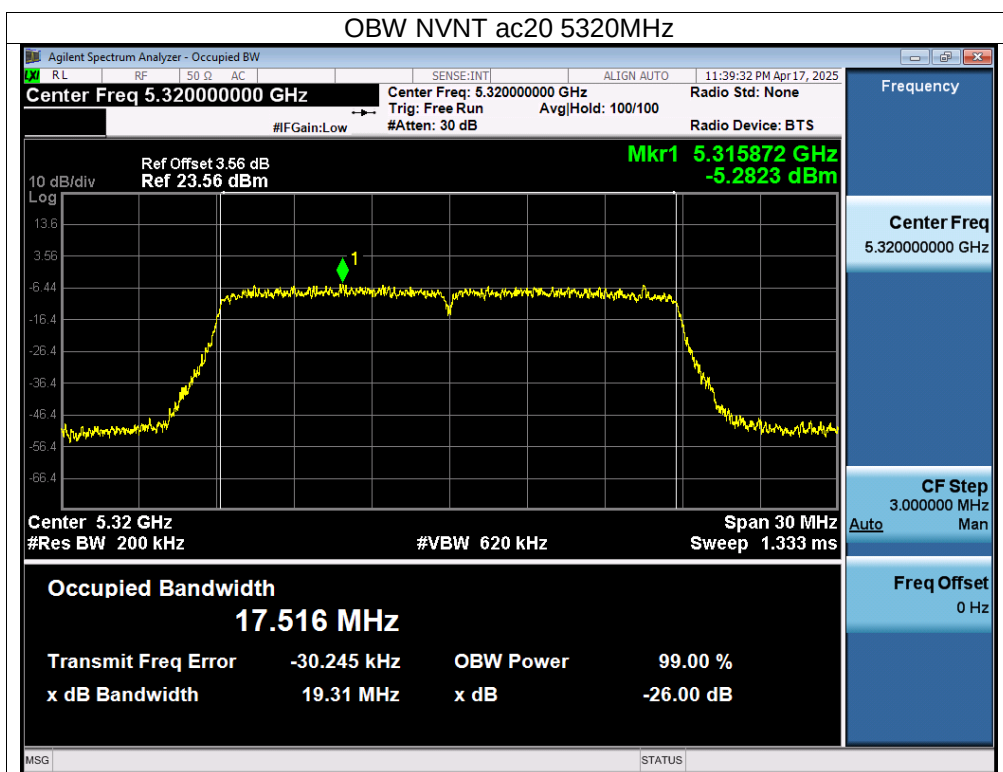

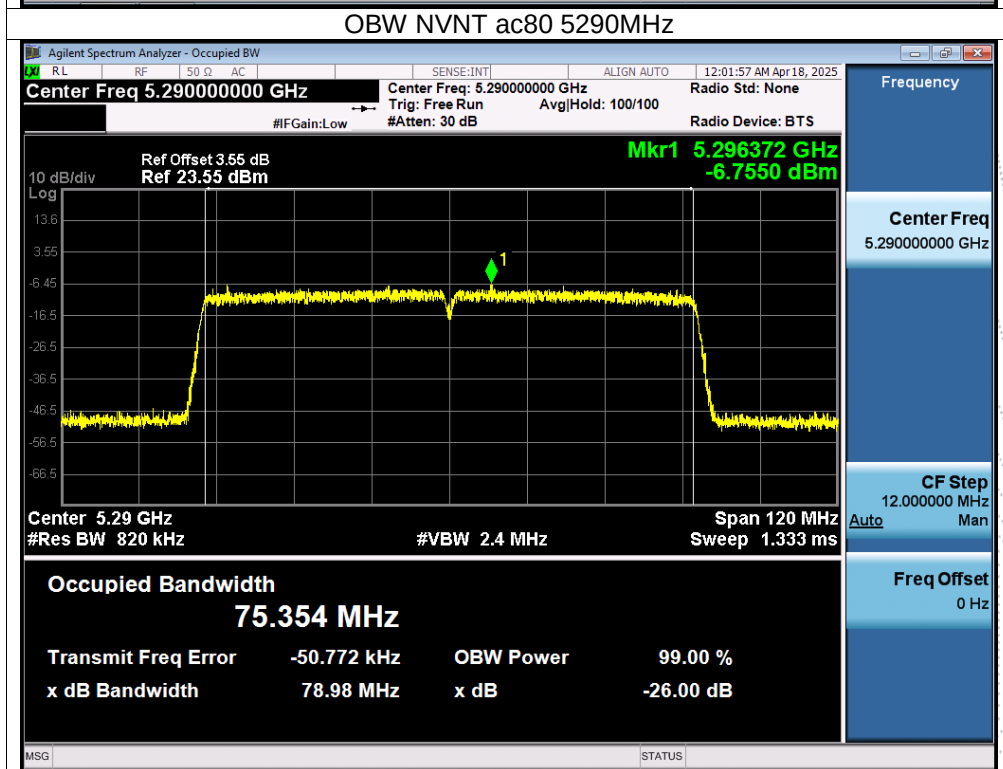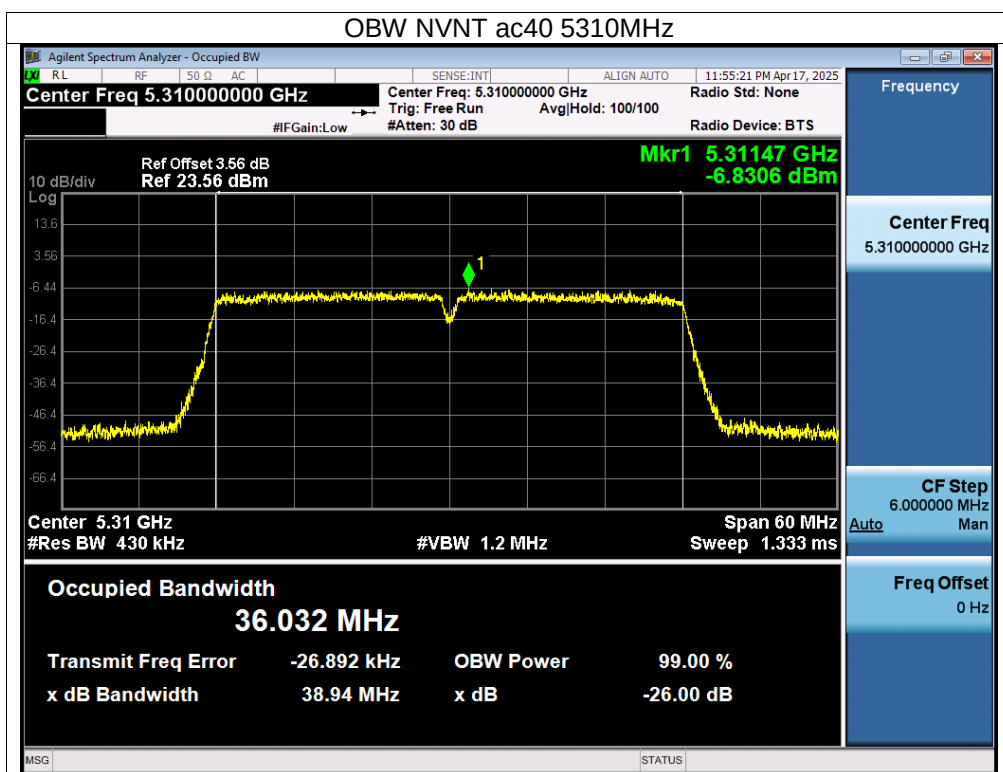

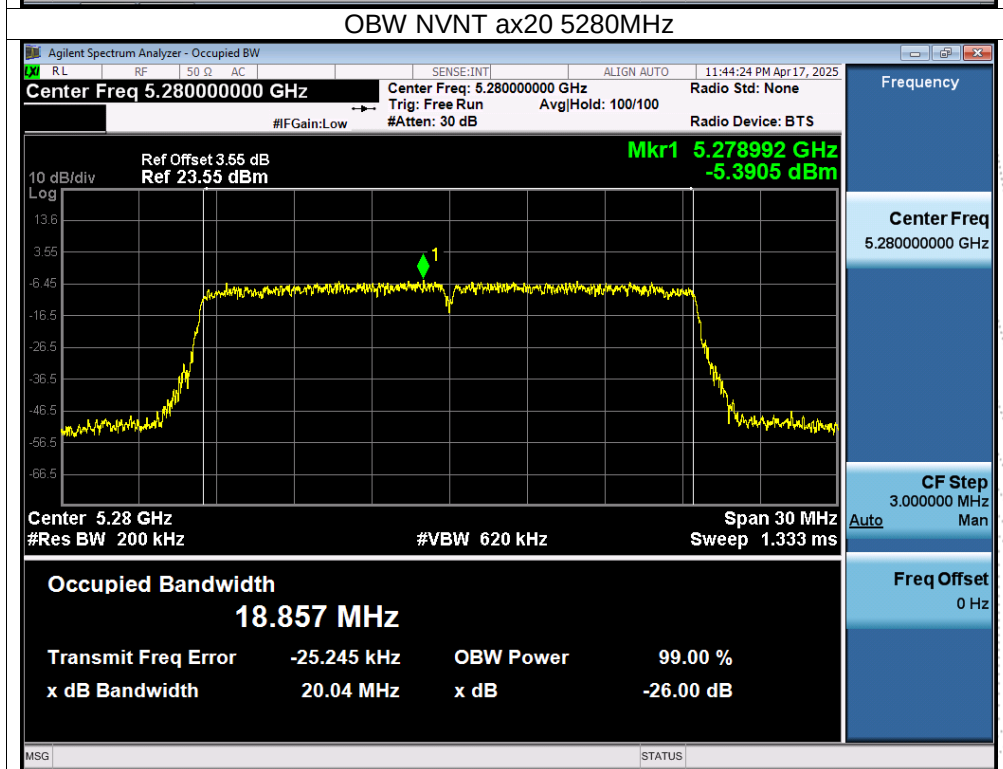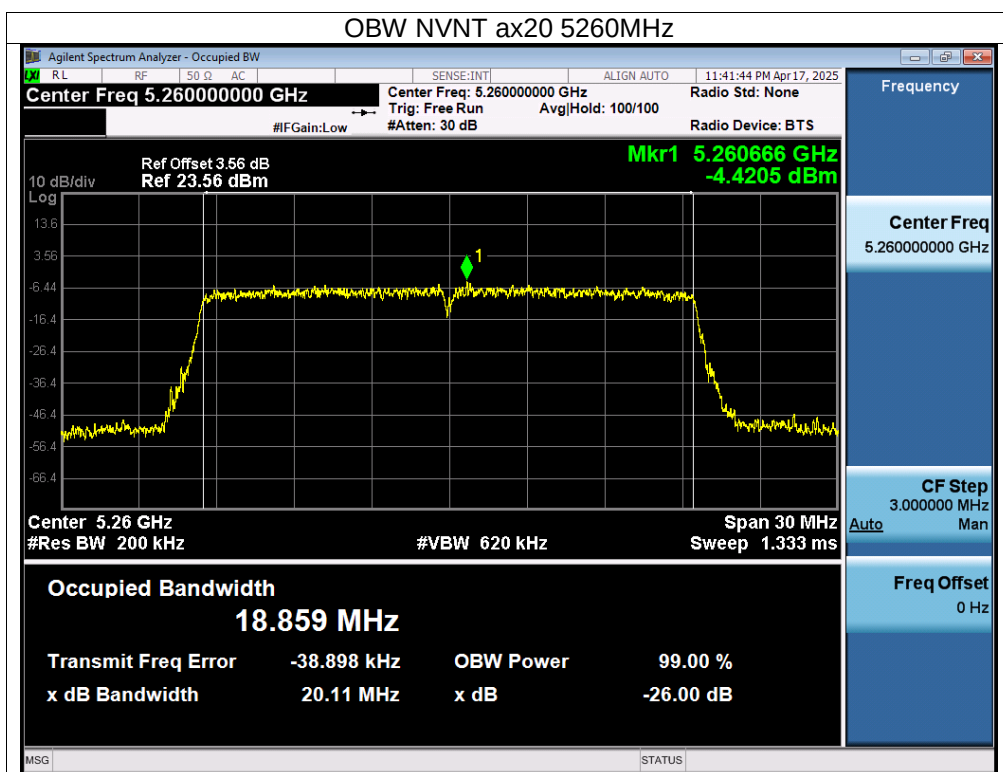

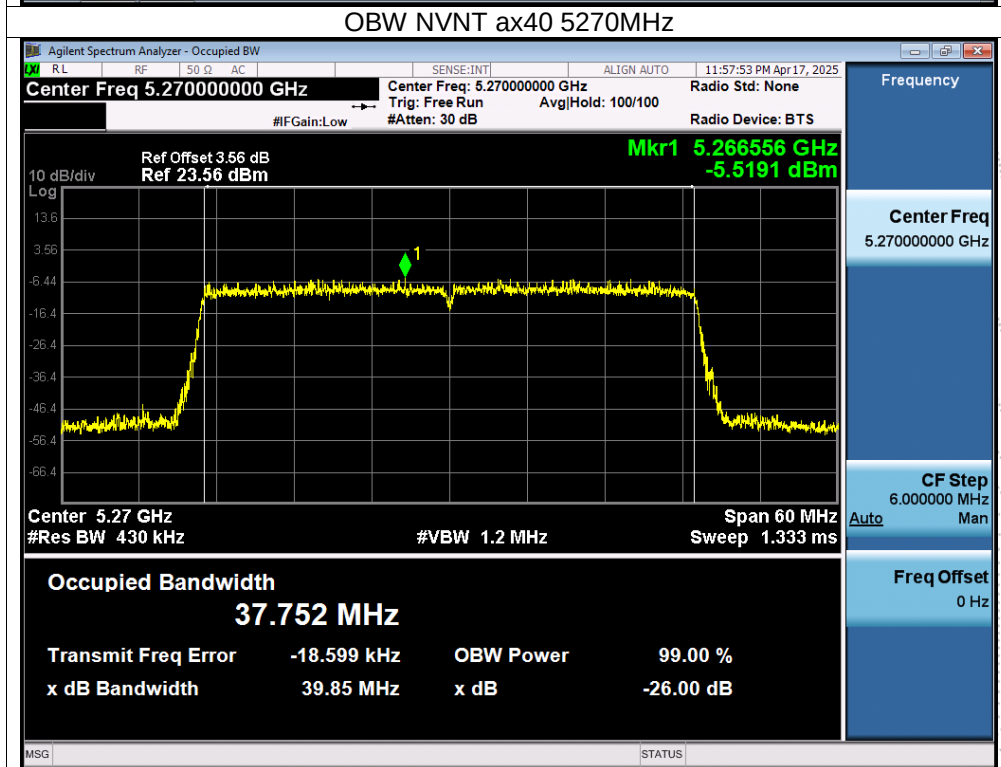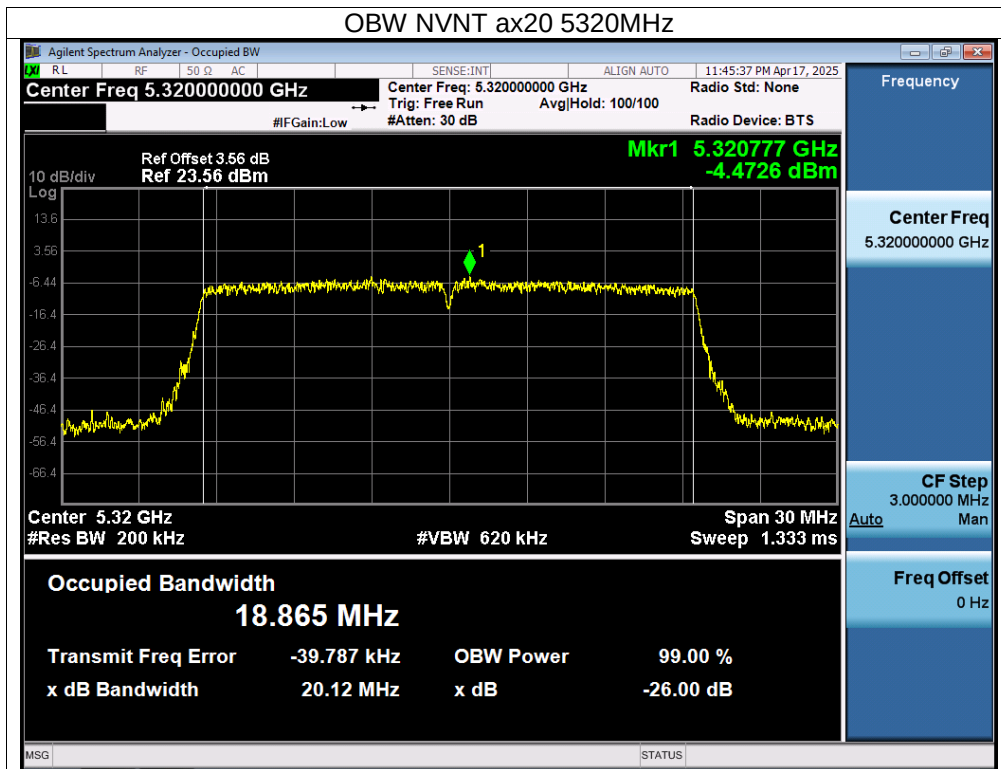

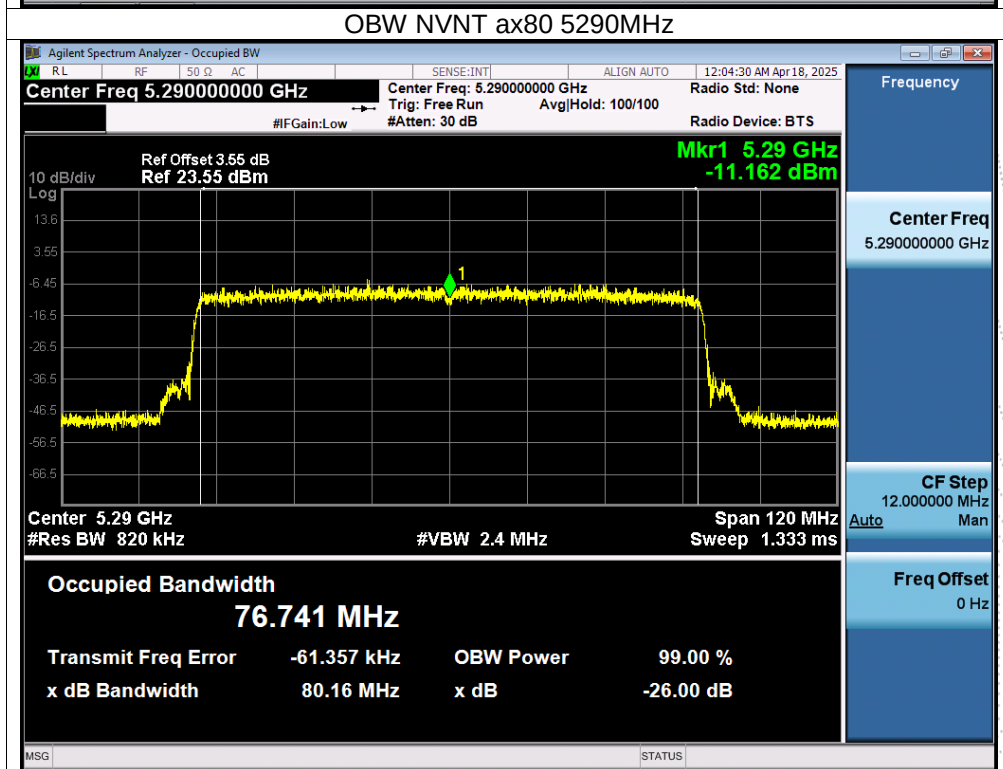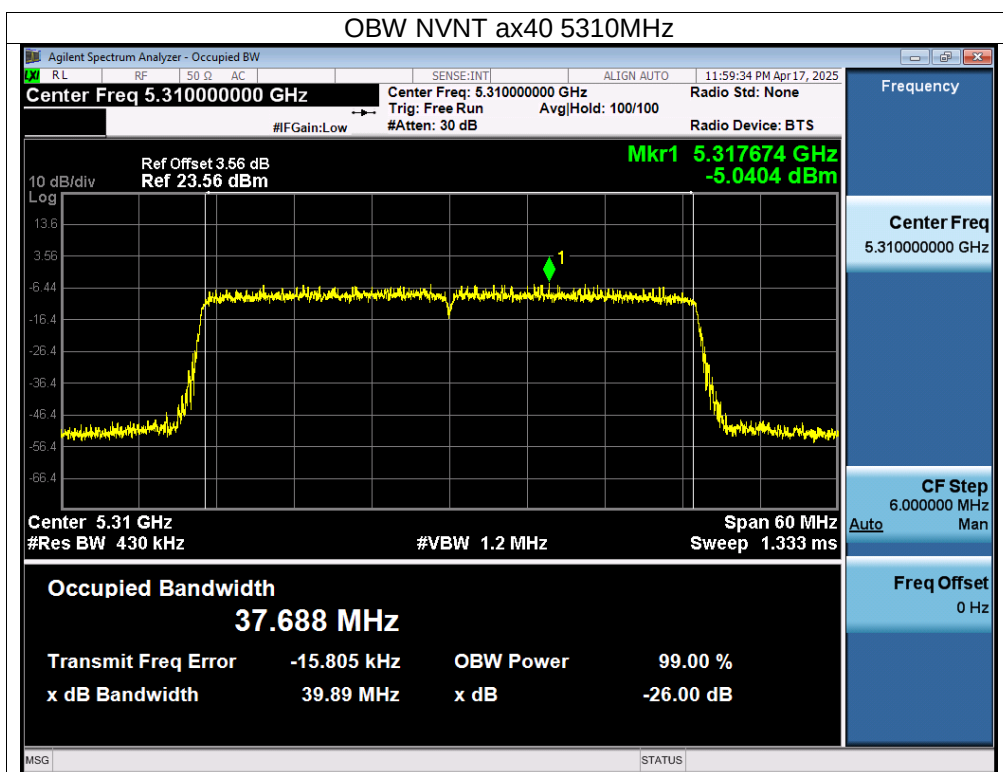

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 3.3V
Test Mode:	(U-NII-2C) 5500MHz-5700MHz		

Condition	Mode	Frequency (MHz)	99% Bandwidth (MHz)	-26dB Bandwidth (MHz)	Result
NVNT	a	5500	16.361	18.272	Pass
NVNT	a	5580	16.357	18.341	Pass
NVNT	a	5700	16.374	18.39	Pass
NVNT	n20	5500	17.506	19.26	Pass
NVNT	n20	5580	17.519	19.305	Pass
NVNT	n20	5700	17.535	19.189	Pass
NVNT	n40	5510	36.035	38.846	Pass
NVNT	n40	5550	36.015	38.783	Pass
NVNT	n40	5670	36.052	39.112	Pass
NVNT	ac20	5500	17.521	19.223	Pass
NVNT	ac20	5580	17.518	19.227	Pass
NVNT	ac20	5700	17.539	19.266	Pass
NVNT	ac40	5510	36.043	38.758	Pass
NVNT	ac40	5550	36.028	38.891	Pass
NVNT	ac40	5670	36.098	38.974	Pass
NVNT	ac80	5530	75.378	78.722	Pass
NVNT	ax20	5500	18.865	20.241	Pass
NVNT	ax20	5580	18.882	20.132	Pass
NVNT	ax20	5700	18.893	20.093	Pass
NVNT	ax40	5510	37.703	39.827	Pass
NVNT	ax40	5550	37.681	39.514	Pass
NVNT	ax40	5670	37.682	39.975	Pass
NVNT	ax80	5530	76.987	80.472	Pass

