

TEST REPORT

Report No.: BCTC2507208863-2E

Applicant: REOLINK TECHNOLOGY PTE. LTD.

Product Name: WiFi module

Test Model: CDW-B1800D4-L3

Tested Date: 2025-07-28 to 2025-09-03

Issued Date: 2025-09-05

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2BN5S-2504A

Product Name: WiFi module

Trademark: **Reolink**

Model/Type reference: CDW-B1800D4-L3

Prepared For: REOLINK TECHNOLOGY PTE. LTD.

Address: 31 KAKI BUKIT ROAD 3, #06-02, TECHLINK, SINGAPORE 417818

Manufacturer: REOLINK TECHNOLOGY PTE. LTD.

Address: 31 KAKI BUKIT ROAD 3, #06-02, TECHLINK, SINGAPORE 417818

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2025-07-28

Sample tested Date: 2025-07-28 to 2025-09-03

Issue Date: 2025-09-05


Report No.: BCTC2507208863-2E

Test Standards: FCC Part15.247
ANSI C63.10-2013

Test Results: PASS

Remark: This is WIFI-2.4GHz band radio test report.

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.


Table Of Content

Test Report Declaration	Page
1. Version	4
2. Test Summary	5
3. Measurement Uncertainty	6
4. Product Information And Test Setup	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Table Of Parameters Of Text Software Setting	8
5. Test Facility And Test Instrument Used	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. Conducted Emissions	10
6.1 Block Diagram Of Test Setup	10
6.2 Limit	10
6.3 Test Procedure	10
6.4 EUT Operating Conditions	10
6.5 Test Result	11
7. Radiated Emissions	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	16
7.3 Test Procedure	17
7.4 EUT Operating Conditions	18
7.5 Test Result	18
8. Radiated Band Emission Measurement And Restricted Bands Of Operation	35
8.1 Block Diagram Of Test Setup	35
8.2 Limit	35
8.3 Test Procedure	36
8.4 EUT operating Conditions	36
8.5 Test Result	37
9. Antenna Requirement	43
9.1 Limit	43
9.2 Test Result	43
10. EUT Photographs	44
11. EUT Test Setup Photographs	45

(Note: N/A means not applicable)

1. Version

Report No.	Issue Date	Description	Approved
BCTC2507208863-2E	2025-09-05	Original	Valid

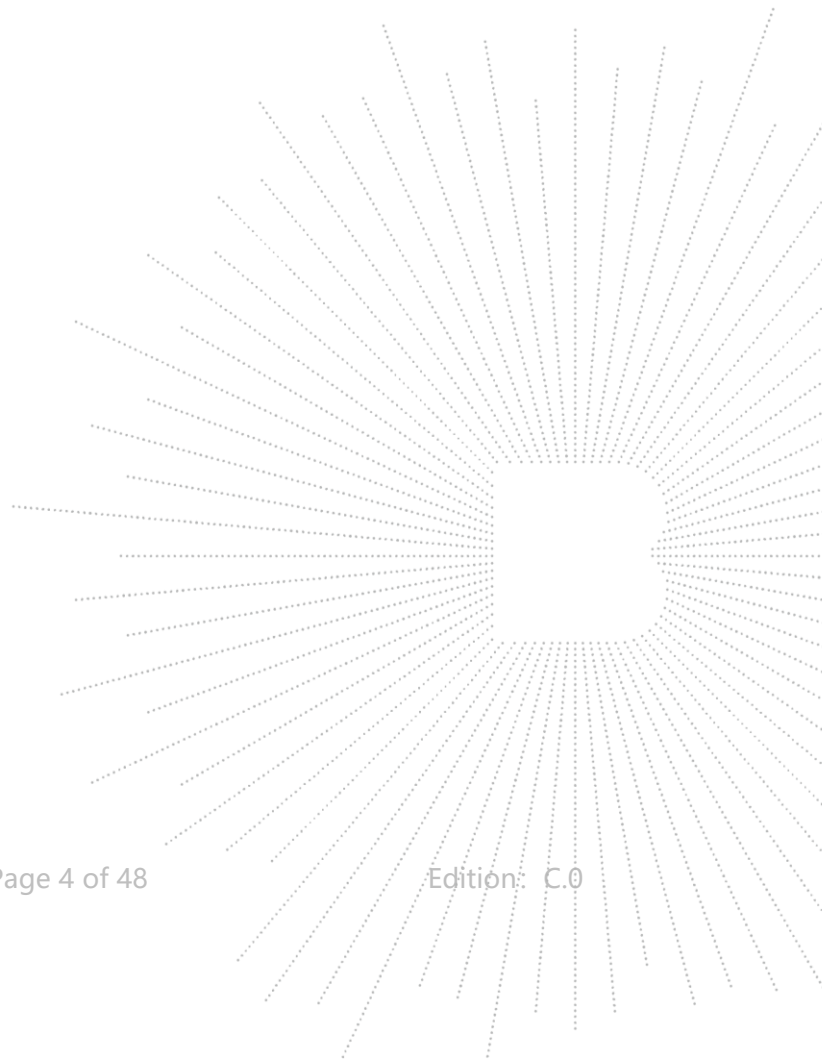

2. Test Summary

The Product has been tested according to the following specifications:


No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS
2	Radiated Spurious Emission	15.247 (d)	PASS
3	Band Edge (Out of Band Emissions)	15.247 (d)	PASS
4	Antenna Requirement	15.203	PASS

Note: According to the following changes in the product, change the antenna, Therefore, conducted emission and radiation emission, radiation stray and radiation sideband tests were only carried out in this report on the original report (ENS2504290071W00602R)

Original:



New

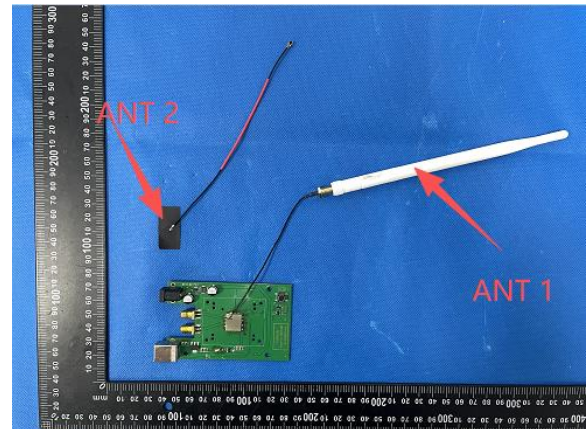

Note: According to the following changes in the original test report ENS2504290071W00602R), no changes have been made to the product. Only updated test instruments, conducted emission, radiation emission, radiation sideband, radiation spurious, EUT photos, etc.

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission(150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information And Test Setup

4.1 Product Information

Model/Type reference:	CDW-B1800D4-L3
Model differences:	N/A
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	802.11b/g/n20/ax20MHz:2412~2462 MHz 802.11n40/ax40MHz:2422~2452 MHz
Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps 802.11ax Up to 240Mbps
Type of Modulation:	OFDM/DSSS/OFDMA
Number Of Channel	802.11b/g/n20/ax20MHz:11 CH 802.11n40/ax40MHz: 7 CH
Antenna installation:	External antenna Antenna 1: 2.89 dBi, Antenna 2: 2.82 dBi
Antenna Gain:	Remark: ☒ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. ☐ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Ratings:	DC 3.3V

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	WiFi module	Reolink	CDW-B1800D4-L3	N/A	EUT
E-2	Adapter	Lenovo	ADLX65YLC3D	---	---
E-3	PC	Lenovo	ThinkPad E15 Gen2	---	---

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List for 802.11b/g/n(20)/ax(20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422
04	2427	05	2432	06	2437
07	2442	08	2447	09	2452
10	2457	11	2462		

Channel List for 802.11n (40)/ax(40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	04	2427	05	2432
06	2437	07	2442	08	2447
09	2452				

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20/ax20 CH1/ CH6/ CH11
Mode 4	802.11n40/ax40 CH3/ CH6/ CH9
Mode 5	WIFI Link+BT Link (Conducted emission & Radiated emission)

Note: This prototype does not support RU mode.

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
Frequency	2412 MHz	2437 MHz	2462 MHz
Parameters	DEF	DEF	DEF
Frequency	2422MHz	2437MHz	2452MHz
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017


5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 08, 2025	May 07, 2026
LISN	R&S	ENV216	101375	May 14, 2025	May 13, 2026
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD9561-F	01323	May 14, 2025	May 13, 2026

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR3	102075	May 08, 2025	May 07, 2026
Receiver	R&S	ESR3P	101154	May 14, 2025	May 13, 2026
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 14, 2025	May 13, 2026
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 24, 2025	May 23, 2026
Loop Antenna(9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	May 24, 2025	May 23, 2026
Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 14, 2025	May 13, 2026
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 24, 2025	May 23, 2026
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 24, 2025	May 23, 2026
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 24, 2025	May 23, 2026
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 14, 2025	May 13, 2026
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

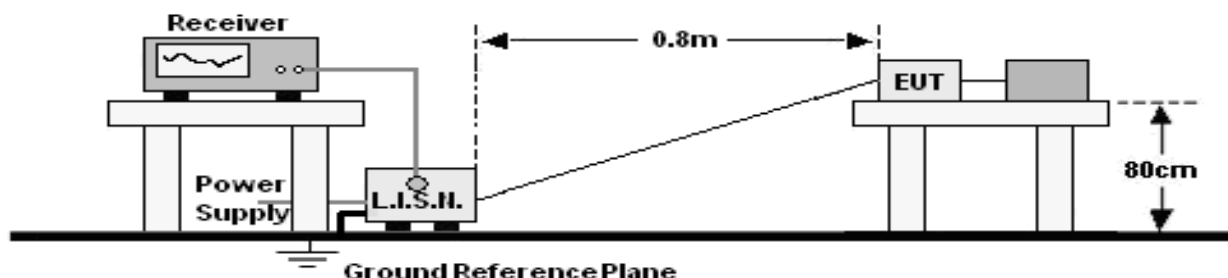

6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Antenna 1

Temperature:	24.4 °C	Relative Humidity:	56 %
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 5	Test Voltage :	DC 3.3V

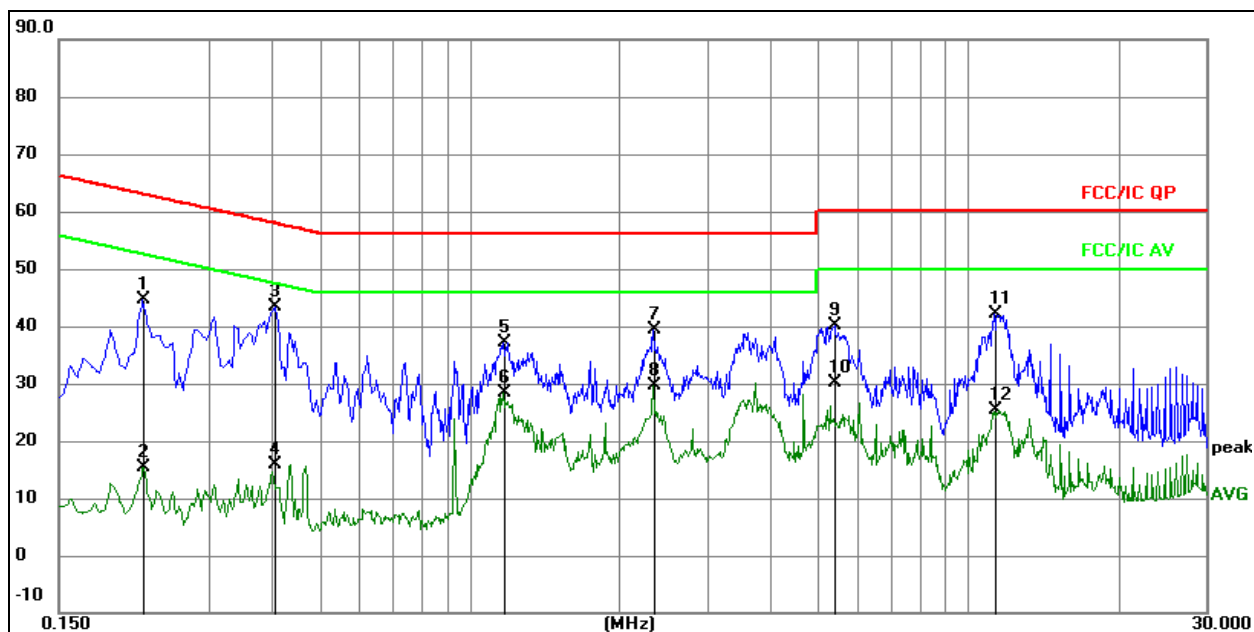


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2220	24.54	20.04	44.58	62.74	-18.16	QP
2		0.2220	-4.68	20.04	15.36	52.74	-37.38	AVG
3	*	0.4065	23.22	20.05	43.27	57.72	-14.45	QP
4		0.4065	-4.29	20.05	15.76	47.72	-31.96	AVG
5		1.1670	16.94	20.25	37.19	56.00	-18.81	QP
6		1.1670	8.20	20.25	28.45	46.00	-17.55	AVG
7		2.3370	19.15	20.25	39.40	56.00	-16.60	QP
8		2.3370	9.36	20.25	29.61	46.00	-16.39	AVG
9		5.3970	19.40	20.76	40.16	60.00	-19.84	QP
10		5.3970	9.39	20.76	30.15	50.00	-19.85	AVG
11		11.3100	20.38	21.65	42.03	60.00	-17.97	QP
12		11.3100	3.74	21.65	25.39	50.00	-24.61	AVG

Temperature:	24.4 °C	Relative Humidity:	56 %
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 5	Test Voltage :	DC 3.3V

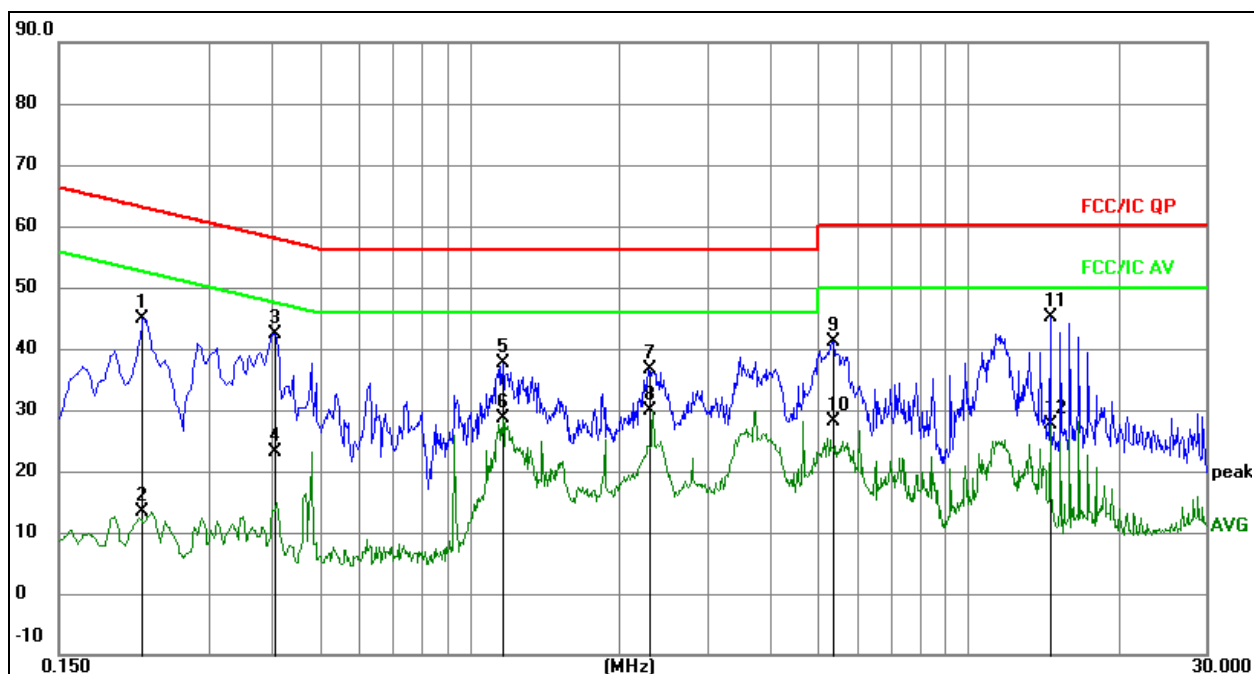


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2208	24.87	20.04	44.91	62.79	-17.88	QP
2		0.2208	-6.58	20.04	13.46	52.79	-39.33	AVG
3		0.4061	22.38	20.05	42.43	57.73	-15.30	QP
4		0.4061	3.04	20.05	23.09	47.73	-24.64	AVG
5		1.1657	17.50	20.25	37.75	56.00	-18.25	QP
6		1.1657	8.34	20.25	28.59	46.00	-17.41	AVG
7		2.2847	16.47	20.24	36.71	56.00	-19.29	QP
8		2.2847	9.58	20.24	29.82	46.00	-16.18	AVG
9		5.3615	20.45	20.76	41.21	60.00	-18.79	QP
10		5.3615	7.39	20.76	28.15	50.00	-21.85	AVG
11	*	14.5942	22.62	22.39	45.01	60.00	-14.99	QP
12		14.5942	5.32	22.39	27.71	50.00	-22.29	AVG

Antenna 2

Temperature:	26 °C	Relative Humidity:	54 %
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 5	Test Voltage :	DC 3.3V

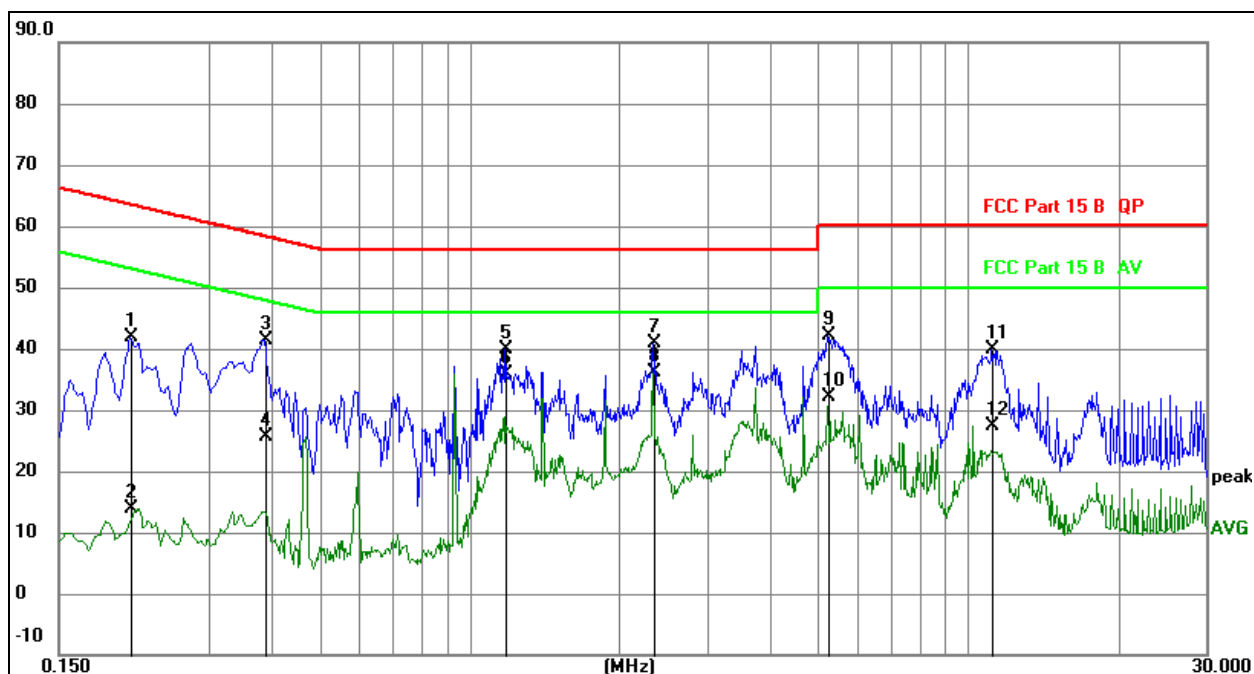


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2085	21.74	20.04	41.78	63.26	-21.48	QP
2		0.2085	-6.16	20.04	13.88	53.26	-39.38	AVG
3		0.3885	21.36	20.05	41.41	58.10	-16.69	QP
4		0.3885	5.63	20.05	25.68	48.10	-22.42	AVG
5		1.1805	19.54	20.25	39.79	56.00	-16.21	QP
6		1.1805	15.65	20.25	35.90	46.00	-10.10	AVG
7		2.3370	20.68	20.25	40.93	56.00	-15.07	QP
8	*	2.3370	15.84	20.25	36.09	46.00	-9.91	AVG
9		5.2350	21.49	20.74	42.23	60.00	-17.77	QP
10		5.2350	11.36	20.74	32.10	50.00	-17.90	AVG
11		11.1750	18.25	21.62	39.87	60.00	-20.13	QP
12		11.1750	5.66	21.62	27.28	50.00	-22.72	AVG

Temperature:	26 °C	Relative Humidity:	54 %
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 5	Test Voltage :	DC 3.3V

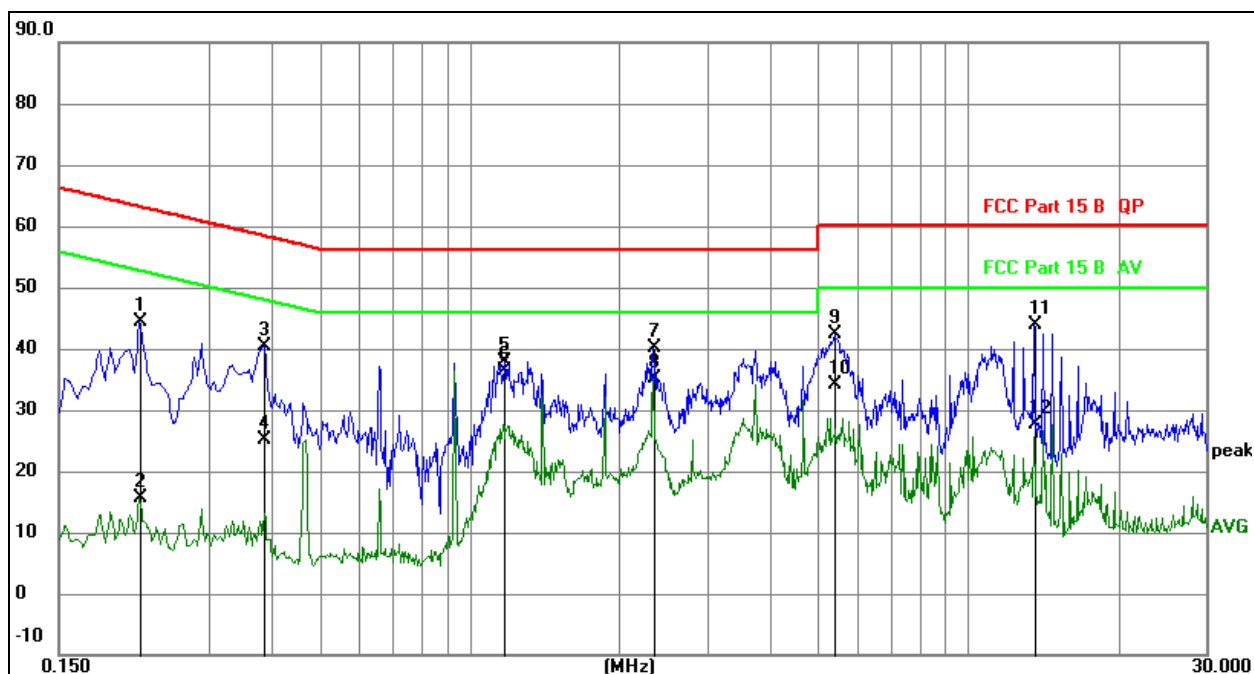

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2174	24.23	20.04	44.27	62.92	-18.65	QP
2		0.2174	-4.50	20.04	15.54	52.92	-37.38	AVG
3		0.3871	20.31	20.05	40.36	58.13	-17.77	QP
4		0.3871	5.11	20.05	25.16	48.13	-22.97	AVG
5		1.1781	17.73	20.25	37.98	56.00	-18.02	QP
6	*	1.1781	16.01	20.25	36.26	46.00	-9.74	AVG
7		2.3336	19.81	20.25	40.06	56.00	-15.94	QP
8		2.3336	14.93	20.25	35.18	46.00	-10.82	AVG
9		5.3900	21.59	20.76	42.35	60.00	-17.65	QP
10		5.3900	13.44	20.76	34.20	50.00	-15.80	AVG
11		13.5509	21.79	22.15	43.94	60.00	-16.06	QP
12		13.5509	5.57	22.15	27.72	50.00	-22.28	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

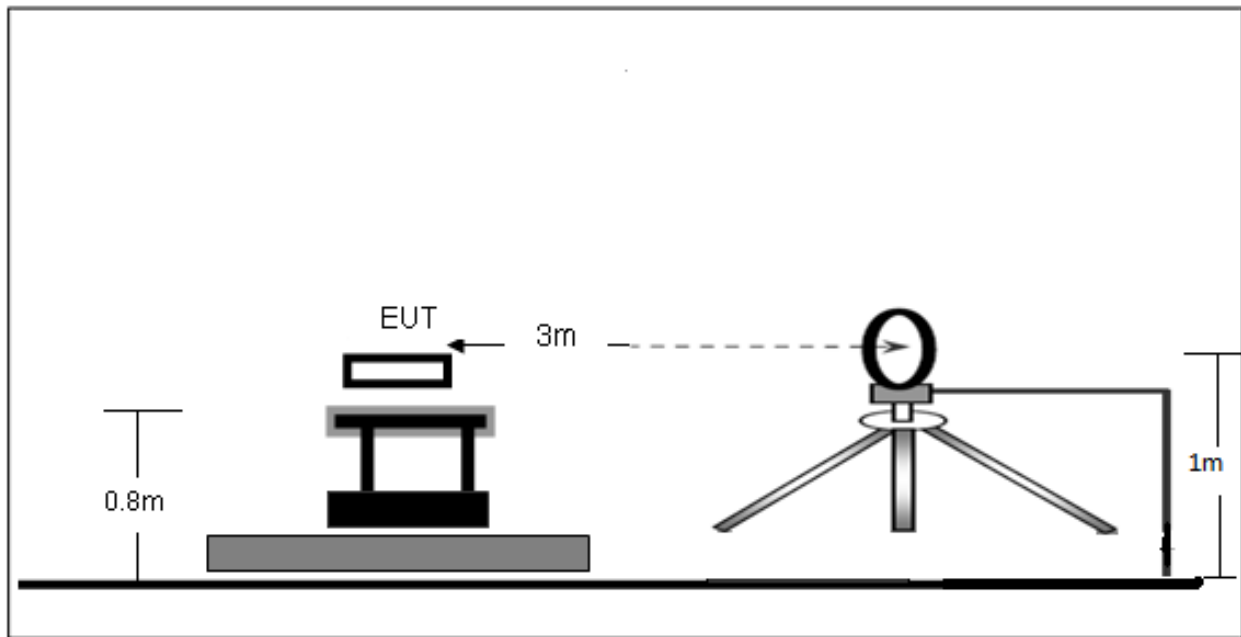

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

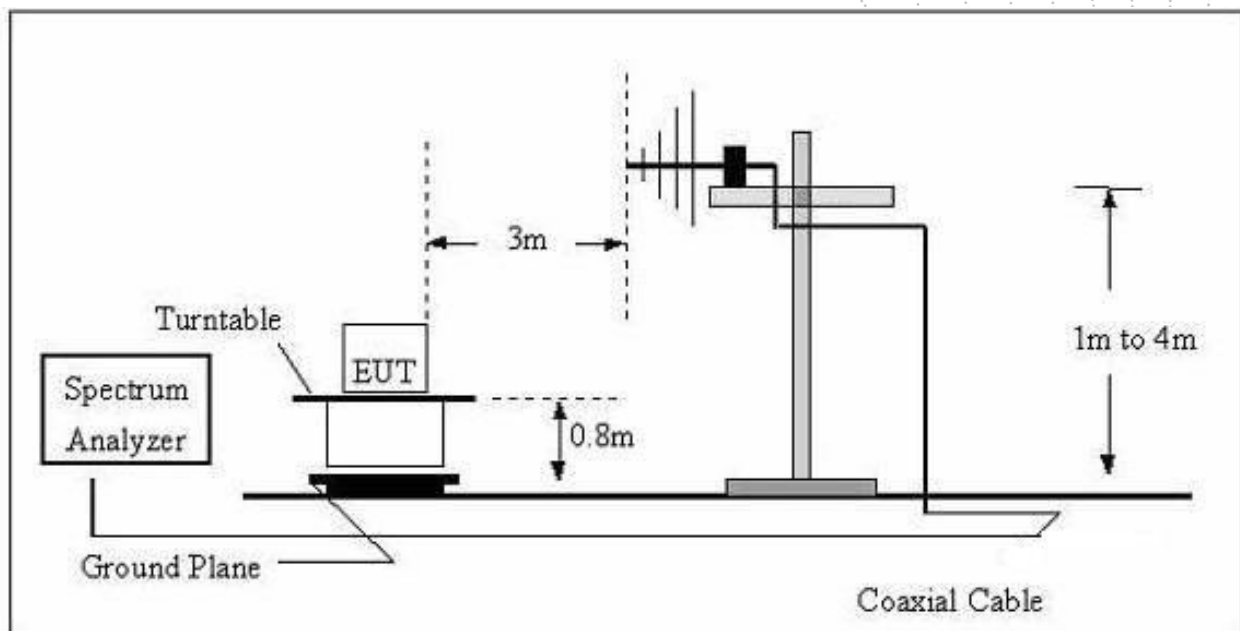

(C) Radiated Emission Test-Up Frequency Above 1GHz

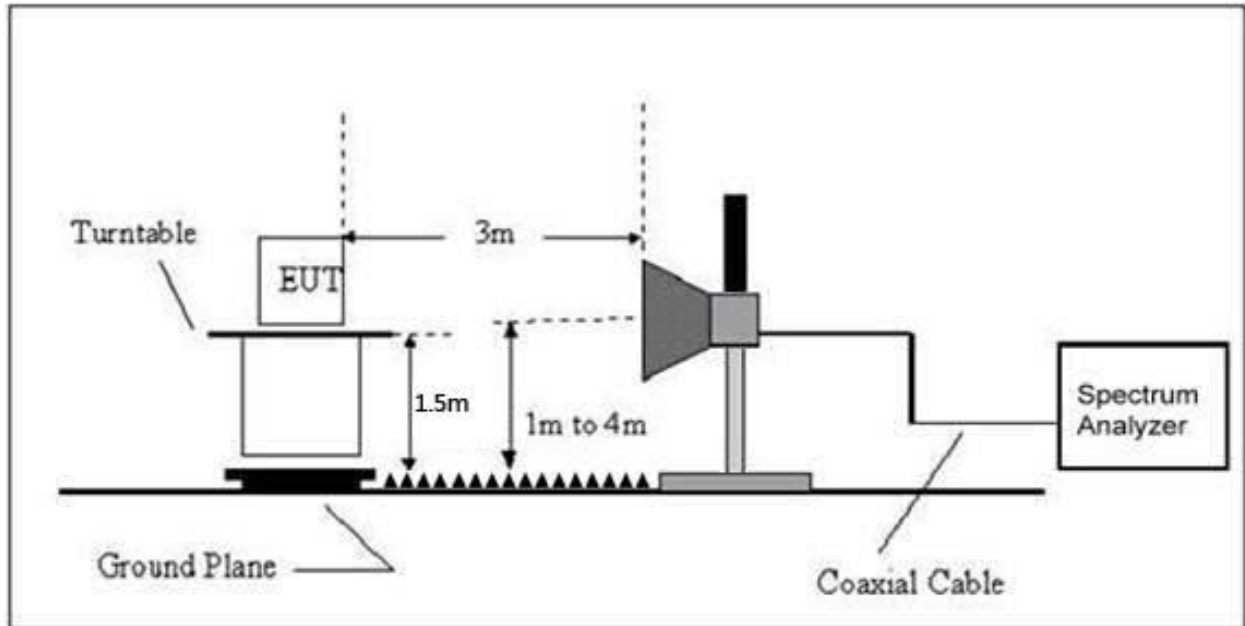

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

7.3 Test Procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26 °C	Relative Humidity:	54 %
Pressure:	101KPa	Test Voltage:	DC 3.3V
Test Mode:	Mode 5	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

Antenna 1
Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54 %
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 5	Test Voltage:	DC 3.3V

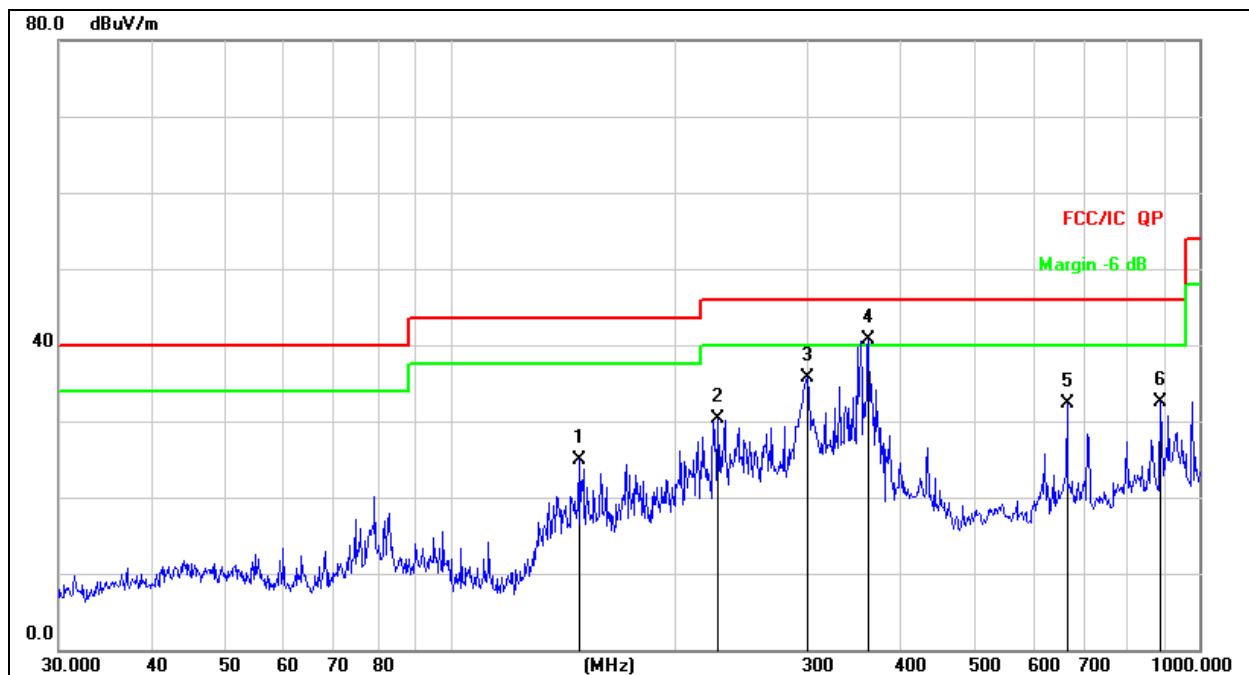


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		148.4410	42.46	-17.51	24.95	43.50	-18.55	QP
2		227.6906	44.04	-13.74	30.30	46.00	-15.70	QP
3		299.3158	47.80	-12.02	35.78	46.00	-10.22	QP
4	*	361.7139	51.10	-10.40	40.70	46.00	-5.30	QP
5		665.8035	37.41	-5.07	32.34	46.00	-13.66	QP
6		887.6099	33.97	-1.46	32.51	46.00	-13.49	QP

Temperature:	26 °C	Relative Humidity:	54 %
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 5	Test Voltage:	DC 3.3V

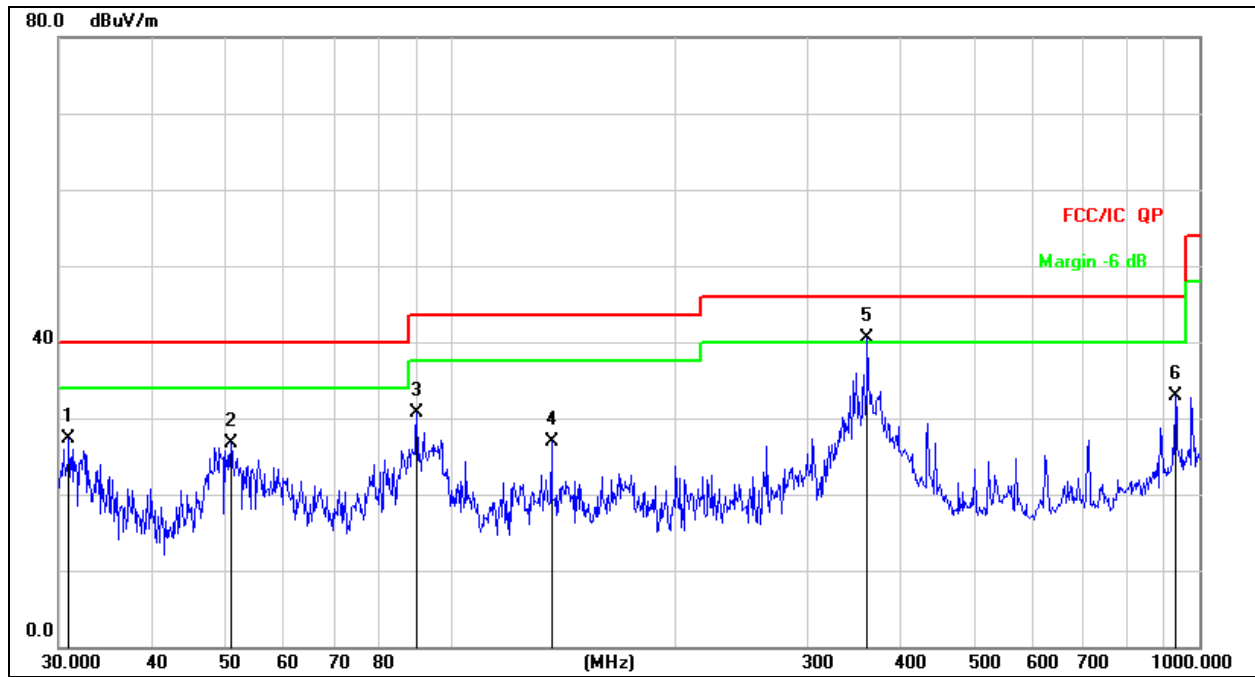


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		30.9619	42.38	-15.09	27.29	40.00	-12.71	QP
2		50.9420	39.75	-13.07	26.68	40.00	-13.32	QP
3		90.2205	45.95	-15.29	30.66	43.50	-12.84	QP
4		136.4598	43.80	-16.83	26.97	43.50	-16.53	QP
5	*	360.4476	50.99	-10.43	40.56	46.00	-5.44	QP
6		929.0082	33.96	-1.04	32.92	46.00	-13.08	QP

Antenna 2
Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54 %
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 5	Test Voltage:	DC 3.3V

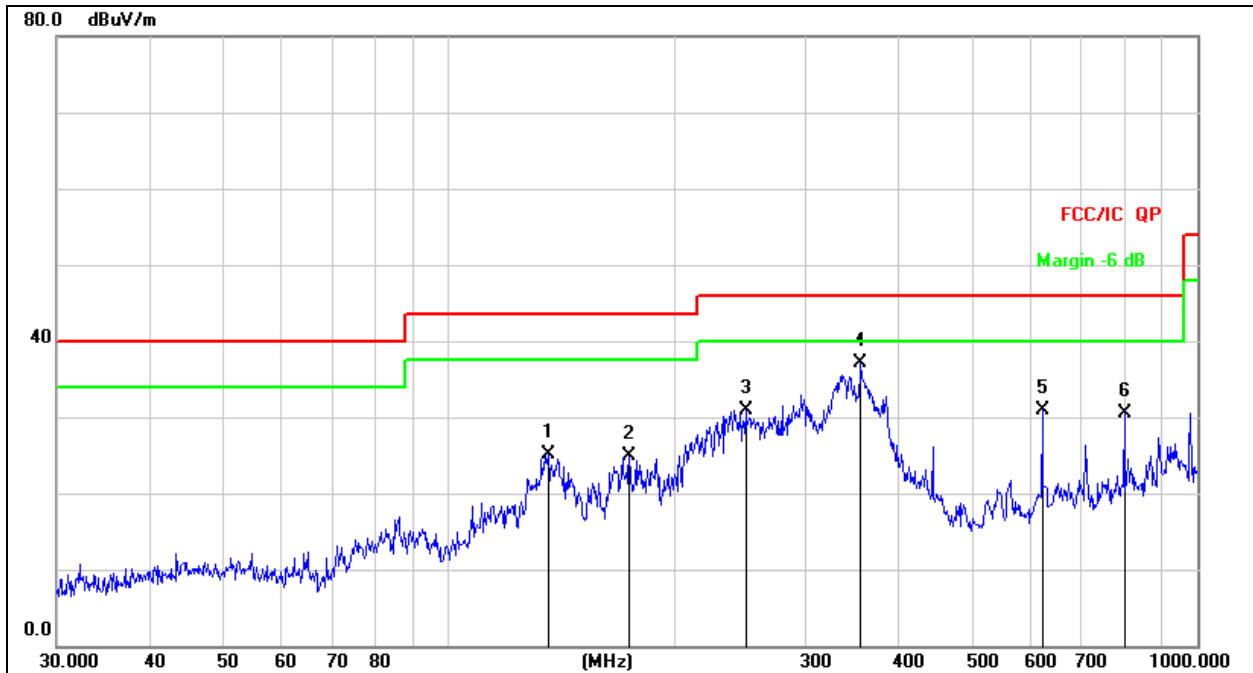


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		135.9822	41.86	-16.81	25.05	43.50	-18.45	QP
2		174.4241	40.88	-16.04	24.84	43.50	-18.66	QP
3		249.4250	44.19	-13.21	30.98	46.00	-15.02	QP
4	*	355.4273	47.60	-10.56	37.04	46.00	-8.96	QP
5		620.7096	36.26	-5.30	30.96	46.00	-15.04	QP
6		798.9797	33.22	-2.62	30.60	46.00	-15.40	QP

Temperature:	26 °C	Relative Humidity:	54 %
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 5	Test Voltage:	DC 3.3V

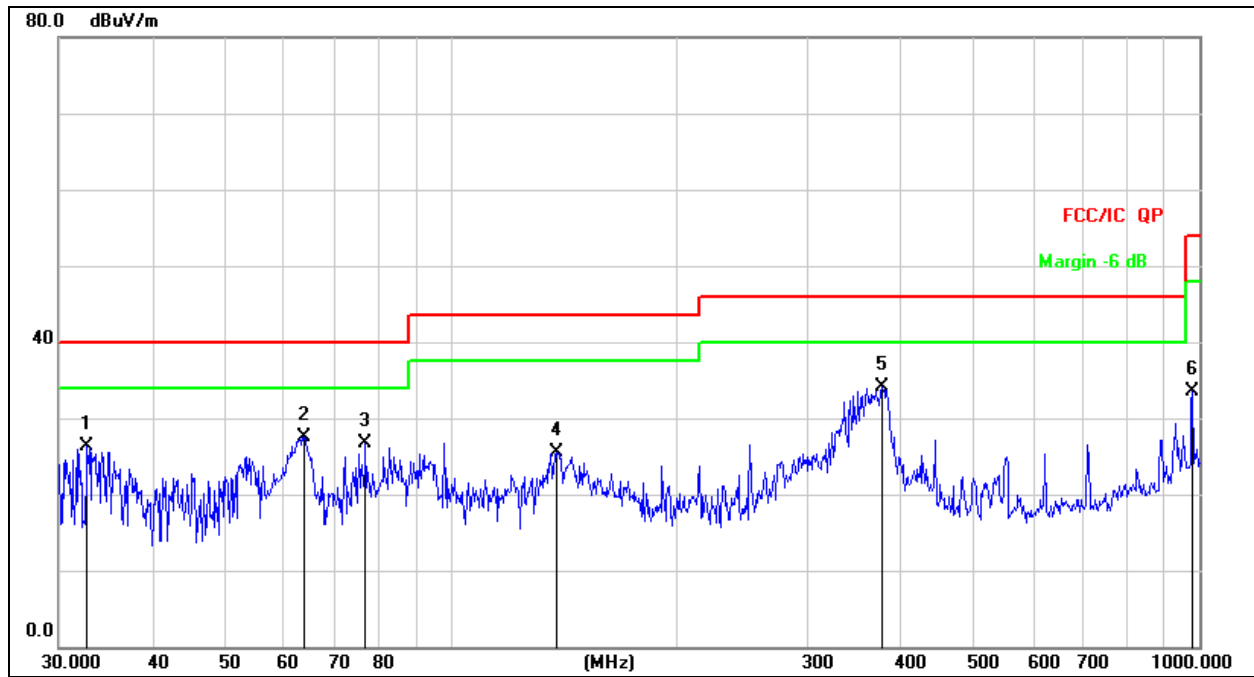

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		32.7486	41.17	-14.88	26.29	40.00	-13.71	QP
2		63.7588	42.92	-15.38	27.54	40.00	-12.46	QP
3		77.0505	42.83	-16.08	26.75	40.00	-13.25	QP
4		138.8735	42.52	-16.97	25.55	43.50	-17.95	QP
5	*	377.2591	44.05	-9.99	34.06	46.00	-11.94	QP
6		979.1804	34.06	-0.59	33.47	54.00	-20.53	QP

Antenna 1
Between 1GHz – 25GHz

802.11b

Polar (H/V)	Fre- quency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2412MHz							
V	4824.00	68.15	-19.95	48.20	74.00	-25.80	PK
V	4824.00	55.48	-19.95	35.53	54.00	-18.47	AV
V	7236.00	67.11	-14.14	52.97	74.00	-21.03	PK
V	7236.00	54.29	-14.14	40.15	54.00	-13.85	AV
H	4824.00	68.52	-19.95	48.57	74.00	-25.43	PK
H	4824.00	54.65	-19.95	34.70	54.00	-19.30	AV
H	7236.00	67.72	-14.14	53.58	74.00	-20.42	PK
H	7236.00	54.21	-14.14	40.07	54.00	-13.93	AV
Middle channel:2437MHz							
V	4874.00	68.14	-19.85	48.29	74.00	-25.71	PK
V	4874.00	54.22	-19.85	34.37	54.00	-19.63	AV
V	7311.00	68.49	-13.93	54.56	74.00	-19.44	PK
V	7311.00	58.73	-13.93	44.80	54.00	-9.20	AV
H	4874.00	65.09	-19.85	45.24	74.00	-28.76	PK
H	4874.00	55.52	-19.85	35.67	54.00	-18.33	AV
H	7311.00	65.69	-13.93	51.76	74.00	-22.24	PK
H	7311.00	59.48	-13.93	45.55	54.00	-8.45	AV
High channel:2462MHz							
V	4924.00	66.18	-19.75	46.43	74.00	-27.57	PK
V	4924.00	58.89	-19.75	39.14	54.00	-14.86	AV
V	7386.00	64.09	-13.72	50.37	74.00	-23.63	PK
V	7386.00	57.28	-13.72	43.56	54.00	-10.44	AV
H	4924.00	64.10	-19.75	44.35	74.00	-29.65	PK
H	4924.00	54.25	-19.75	34.50	54.00	-19.50	AV
H	7386.00	69.08	-13.72	55.36	74.00	-18.64	PK
H	7386.00	57.31	-13.72	43.59	54.00	-10.41	AV

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency (MHz)	Reading Level (dBUV/m)	Correct Factor (dB)	Measurement (dBUV/m)	Limits (dBUV/m)	Over (dB)	Detector Type
Low channel:2412MHz							
V	4824.00	65.05	-19.95	45.10	74.00	-28.90	PK
V	4824.00	56.07	-19.95	36.12	54.00	-17.88	AV
V	7236.00	67.99	-14.14	53.85	74.00	-20.15	PK
V	7236.00	57.66	-14.14	43.52	54.00	-10.48	AV
H	4824.00	64.34	-19.95	44.39	74.00	-29.61	PK
H	4824.00	56.57	-19.95	36.62	54.00	-17.38	AV
H	7236.00	69.81	-14.14	55.67	74.00	-18.33	PK
H	7236.00	56.52	-14.14	42.38	54.00	-11.62	AV
Middle channel:2437MHz							
V	4874.00	67.79	-19.85	47.94	74.00	-26.06	PK
V	4874.00	55.96	-19.85	36.11	54.00	-17.89	AV
V	7311.00	66.99	-13.93	53.06	74.00	-20.94	PK
V	7311.00	55.66	-13.93	41.73	54.00	-12.27	AV
H	4874.00	64.19	-19.85	44.34	74.00	-29.66	PK
H	4874.00	57.21	-19.85	37.36	54.00	-16.64	AV
H	7311.00	65.93	-13.93	52.00	74.00	-22.00	PK
H	7311.00	58.72	-13.93	44.79	54.00	-9.21	AV
High channel:2462MHz							
V	4924.00	67.44	-19.75	47.69	74.00	-26.31	PK
V	4924.00	54.10	-19.75	34.35	54.00	-19.65	AV
V	7386.00	64.54	-13.72	50.82	74.00	-23.18	PK
V	7386.00	56.62	-13.72	42.90	54.00	-11.10	AV
H	4924.00	64.14	-19.75	44.39	74.00	-29.61	PK
H	4924.00	55.23	-19.75	35.48	54.00	-18.52	AV
H	7386.00	68.93	-13.72	55.21	74.00	-18.79	PK
H	7386.00	58.76	-13.72	45.04	54.00	-8.96	AV

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n20

Polar (H/V)	Frequency (MHz)	Reading Level (dBUV/m)	Correct Factor (dB)	Measurement (dBUV/m)	Limits (dBUV/m)	Over (dB)	Detector Type
Low channel:2412MHz							
V	4824.00	67.83	-19.95	47.88	74.00	-26.12	PK
V	4824.00	55.69	-19.95	35.74	54.00	-18.26	AV
V	7236.00	64.37	-14.14	50.23	74.00	-23.77	PK
V	7236.00	59.40	-14.14	45.26	54.00	-8.74	AV
H	4824.00	67.10	-19.95	47.15	74.00	-26.85	PK
H	4824.00	54.06	-19.95	34.11	54.00	-19.89	AV
H	7236.00	66.85	-14.14	52.71	74.00	-21.29	PK
H	7236.00	54.36	-14.14	40.22	54.00	-13.78	AV
Middle channel:2437MHz							
V	4874.00	66.81	-19.85	46.96	74.00	-27.04	PK
V	4874.00	55.94	-19.85	36.09	54.00	-17.91	AV
V	7311.00	69.09	-13.93	55.16	74.00	-18.84	PK
V	7311.00	57.30	-13.93	43.37	54.00	-10.63	AV
H	4874.00	66.57	-19.85	46.72	74.00	-27.28	PK
H	4874.00	59.69	-19.85	39.84	54.00	-14.16	AV
H	7311.00	66.57	-13.93	52.64	74.00	-21.36	PK
H	7311.00	54.57	-13.93	40.64	54.00	-13.36	AV
High channel:2462MHz							
V	4924.00	69.64	-19.75	49.89	74.00	-24.11	PK
V	4924.00	59.64	-19.75	39.89	54.00	-14.11	AV
V	7386.00	69.28	-13.72	55.56	74.00	-18.44	PK
V	7386.00	57.22	-13.72	43.50	54.00	-10.50	AV
H	4924.00	67.49	-19.75	47.74	74.00	-26.26	PK
H	4924.00	59.15	-19.75	39.40	54.00	-14.60	AV
H	7386.00	69.29	-13.72	55.57	74.00	-18.43	PK
H	7386.00	54.19	-13.72	40.47	54.00	-13.53	AV

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n40

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low channel:2422MHz							
V	4844.00	66.61	-19.91	46.70	74.00	-27.30	PK
V	4844.00	54.87	-19.91	34.96	54.00	-19.04	AV
V	7266.00	67.91	-14.06	53.85	74.00	-20.15	PK
V	7266.00	59.70	-14.06	45.64	54.00	-8.36	AV
H	4844.00	64.26	-19.91	44.35	74.00	-29.65	PK
H	4844.00	58.55	-19.91	38.64	54.00	-15.36	AV
H	7266.00	69.05	-14.06	54.99	74.00	-19.01	PK
H	7266.00	59.30	-14.06	45.24	54.00	-8.76	AV
Middle channel:2437MHz							
V	4874.00	65.87	-19.85	46.02	74.00	-27.98	PK
V	4874.00	57.52	-19.85	37.67	54.00	-16.33	AV
V	7311.00	68.25	-13.93	54.32	74.00	-19.68	PK
V	7311.00	57.29	-13.93	43.36	54.00	-10.64	AV
H	4874.00	69.82	-19.85	49.97	74.00	-24.03	PK
H	4874.00	54.56	-19.85	34.71	54.00	-19.29	AV
H	7311.00	68.56	-13.93	54.63	74.00	-19.37	PK
H	7311.00	54.84	-13.93	40.91	54.00	-13.09	AV
High channel:2452MHz							
V	4904.00	67.83	-19.79	48.04	74.00	-25.96	PK
V	4904.00	59.26	-19.79	39.47	54.00	-14.53	AV
V	7356.00	65.91	-13.80	52.11	74.00	-21.89	PK
V	7356.00	56.34	-13.80	42.54	54.00	-11.46	AV
H	4904.00	68.74	-19.79	48.95	74.00	-25.05	PK
H	4904.00	55.12	-19.79	35.33	54.00	-18.67	AV
H	7356.00	66.75	-13.80	52.95	74.00	-21.05	PK
H	7356.00	57.57	-13.80	43.77	54.00	-10.23	AV

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ax20

Polar (H/V)	Frequency (MHz)	Reading Level (dBUV/m)	Correct Factor (dB)	Measurement (dBUV/m)	Limits (dBUV/m)	Over (dB)	Detector Type
Low channel:2412MHz							
V	4824.00	64.37	-19.95	44.42	74.00	-29.58	PK
V	4824.00	55.50	-19.95	35.55	54.00	-18.45	AV
V	7236.00	69.77	-14.14	55.63	74.00	-18.37	PK
V	7236.00	57.40	-14.14	43.26	54.00	-10.74	AV
H	4824.00	68.40	-19.95	48.45	74.00	-25.55	PK
H	4824.00	59.07	-19.95	39.12	54.00	-14.88	AV
H	7236.00	67.18	-14.14	53.04	74.00	-20.96	PK
H	7236.00	56.94	-14.14	42.80	54.00	-11.20	AV
Middle channel:2437MHz							
V	4874.00	68.85	-19.85	49.00	74.00	-25.00	PK
V	4874.00	57.71	-19.85	37.86	54.00	-16.14	AV
V	7311.00	65.18	-13.93	51.25	74.00	-22.75	PK
V	7311.00	59.46	-13.93	45.53	54.00	-8.47	AV
H	4874.00	69.72	-19.85	49.87	74.00	-24.13	PK
H	4874.00	56.48	-19.85	36.63	54.00	-17.37	AV
H	7311.00	67.24	-13.93	53.31	74.00	-20.69	PK
H	7311.00	57.94	-13.93	44.01	54.00	-9.99	AV
High channel:2462MHz							
V	4924.00	65.07	-19.75	45.32	74.00	-28.68	PK
V	4924.00	59.81	-19.75	40.06	54.00	-13.94	AV
V	7386.00	66.68	-13.72	52.96	74.00	-21.04	PK
V	7386.00	55.57	-13.72	41.85	54.00	-12.15	AV
H	4924.00	66.67	-19.75	46.92	74.00	-27.08	PK
H	4924.00	59.42	-19.75	39.67	54.00	-14.33	AV
H	7386.00	68.49	-13.72	54.77	74.00	-19.23	PK
H	7386.00	59.16	-13.72	45.44	54.00	-8.56	AV

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ax40

Polar (H/V)	Frequency (MHz)	Reading Level (dBUV/m)	Correct Factor (dB)	Measurement (dBUV/m)	Limits (dBUV/m)	Over (dB)	Detector Type
Low channel:2422MHz							
V	4844.00	67.29	-19.91	47.38	74.00	-26.62	PK
V	4844.00	54.68	-19.91	34.77	54.00	-19.23	AV
V	7266.00	65.60	-14.06	51.54	74.00	-22.46	PK
V	7266.00	57.17	-14.06	43.11	54.00	-10.89	AV
H	4844.00	69.79	-19.91	49.88	74.00	-24.12	PK
H	4844.00	57.25	-19.91	37.34	54.00	-16.66	AV
H	7266.00	69.74	-14.06	55.68	74.00	-18.32	PK
H	7266.00	59.26	-14.06	45.20	54.00	-8.80	AV
Middle channel:2437MHz							
V	4874.00	68.65	-19.85	48.80	74.00	-25.20	PK
V	4874.00	54.26	-19.85	34.41	54.00	-19.59	AV
V	7311.00	67.75	-13.93	53.82	74.00	-20.18	PK
V	7311.00	56.28	-13.93	42.35	54.00	-11.65	AV
H	4874.00	67.10	-19.85	47.25	74.00	-26.75	PK
H	4874.00	55.02	-19.85	35.17	54.00	-18.83	AV
H	7311.00	67.40	-13.93	53.47	74.00	-20.53	PK
H	7311.00	58.57	-13.93	44.64	54.00	-9.36	AV
High channel:2452MHz							
V	4904.00	68.84	-19.79	49.05	74.00	-24.95	PK
V	4904.00	57.87	-19.79	38.08	54.00	-15.92	AV
V	7356.00	66.69	-13.80	52.89	74.00	-21.11	PK
V	7356.00	56.23	-13.80	42.43	54.00	-11.57	AV
H	4904.00	64.42	-19.79	44.63	74.00	-29.37	PK
H	4904.00	59.35	-19.79	39.56	54.00	-14.44	AV
H	7356.00	69.08	-13.80	55.28	74.00	-18.72	PK
H	7356.00	59.93	-13.80	46.13	54.00	-7.87	AV

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Antenna 2
Between 1GHz – 25GHz

802.11b

Polar (H/V)	Fre- quency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2412MHz							
V	4824.00	67.99	-19.95	48.04	74.00	-25.96	PK
V	4824.00	57.62	-19.95	37.67	54.00	-16.33	AV
V	7236.00	65.72	-14.14	51.58	74.00	-22.42	PK
V	7236.00	54.91	-14.14	40.77	54.00	-13.23	AV
H	4824.00	64.73	-19.95	44.78	74.00	-29.22	PK
H	4824.00	56.15	-19.95	36.20	54.00	-17.80	AV
H	7236.00	67.53	-14.14	53.39	74.00	-20.61	PK
H	7236.00	54.34	-14.14	40.20	54.00	-13.80	AV
Middle channel:2437MHz							
V	4874.00	64.49	-19.85	44.64	74.00	-29.36	PK
V	4874.00	56.00	-19.85	36.15	54.00	-17.85	AV
V	7311.00	67.24	-13.93	53.31	74.00	-20.69	PK
V	7311.00	59.95	-13.93	46.02	54.00	-7.98	AV
H	4874.00	69.85	-19.85	50.00	74.00	-24.00	PK
H	4874.00	54.38	-19.85	34.53	54.00	-19.47	AV
H	7311.00	64.45	-13.93	50.52	74.00	-23.48	PK
H	7311.00	54.81	-13.93	40.88	54.00	-13.12	AV
High channel:2462MHz							
V	4924.00	68.38	-19.75	48.63	74.00	-25.37	PK
V	4924.00	59.33	-19.75	39.58	54.00	-14.42	AV
V	7386.00	64.93	-13.72	51.21	74.00	-22.79	PK
V	7386.00	57.70	-13.72	43.98	54.00	-10.02	AV
H	4924.00	67.34	-19.75	47.59	74.00	-26.41	PK
H	4924.00	55.19	-19.75	35.44	54.00	-18.56	AV
H	7386.00	68.18	-13.72	54.46	74.00	-19.54	PK
H	7386.00	56.83	-13.72	43.11	54.00	-10.89	AV

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Fre- quency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2412MHz							
V	4824.00	68.76	-19.95	48.81	74.00	-25.19	PK
V	4824.00	57.12	-19.95	37.17	54.00	-16.83	AV
V	7236.00	69.74	-14.14	55.60	74.00	-18.40	PK
V	7236.00	58.34	-14.14	44.20	54.00	-9.80	AV
H	4824.00	69.36	-19.95	49.41	74.00	-24.59	PK
H	4824.00	58.47	-19.95	38.52	54.00	-15.48	AV
H	7236.00	66.68	-14.14	52.54	74.00	-21.46	PK
H	7236.00	59.68	-14.14	45.54	54.00	-8.46	AV
Middle channel:2437MHz							
V	4874.00	68.21	-19.85	48.36	74.00	-25.64	PK
V	4874.00	57.11	-19.85	37.26	54.00	-16.74	AV
V	7311.00	64.41	-13.93	50.48	74.00	-23.52	PK
V	7311.00	56.22	-13.93	42.29	54.00	-11.71	AV
H	4874.00	65.71	-19.85	45.86	74.00	-28.14	PK
H	4874.00	54.37	-19.85	34.52	54.00	-19.48	AV
H	7311.00	65.09	-13.93	51.16	74.00	-22.84	PK
H	7311.00	57.44	-13.93	43.51	54.00	-10.49	AV
High channel:2462MHz							
V	4924.00	67.20	-19.75	47.45	74.00	-26.55	PK
V	4924.00	59.56	-19.75	39.81	54.00	-14.19	AV
V	7386.00	64.52	-13.72	50.80	74.00	-23.20	PK
V	7386.00	54.03	-13.72	40.31	54.00	-13.69	AV
H	4924.00	68.58	-19.75	48.83	74.00	-25.17	PK
H	4924.00	55.47	-19.75	35.72	54.00	-18.28	AV
H	7386.00	67.75	-13.72	54.03	74.00	-19.97	PK
H	7386.00	57.47	-13.72	43.75	54.00	-10.25	AV

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n20

Polar (H/V)	Fre- quency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2412MHz							
V	4824.00	69.39	-19.95	49.44	74.00	-24.56	PK
V	4824.00	55.01	-19.95	35.06	54.00	-18.94	AV
V	7236.00	64.04	-14.14	49.90	74.00	-24.10	PK
V	7236.00	56.91	-14.14	42.77	54.00	-11.23	AV
H	4824.00	66.25	-19.95	46.30	74.00	-27.70	PK
H	4824.00	54.80	-19.95	34.85	54.00	-19.15	AV
H	7236.00	67.32	-14.14	53.18	74.00	-20.82	PK
H	7236.00	58.28	-14.14	44.14	54.00	-9.86	AV
Middle channel:2437MHz							
V	4874.00	68.65	-19.85	48.80	74.00	-25.20	PK
V	4874.00	59.02	-19.85	39.17	54.00	-14.83	AV
V	7311.00	68.10	-13.93	54.17	74.00	-19.83	PK
V	7311.00	54.13	-13.93	40.20	54.00	-13.80	AV
H	4874.00	65.76	-19.85	45.91	74.00	-28.09	PK
H	4874.00	56.20	-19.85	36.35	54.00	-17.65	AV
H	7311.00	68.79	-13.93	54.86	74.00	-19.14	PK
H	7311.00	54.44	-13.93	40.51	54.00	-13.49	AV
High channel:2462MHz							
V	4924.00	66.37	-19.75	46.62	74.00	-27.38	PK
V	4924.00	54.66	-19.75	34.91	54.00	-19.09	AV
V	7386.00	68.36	-13.72	54.64	74.00	-19.36	PK
V	7386.00	54.18	-13.72	40.46	54.00	-13.54	AV
H	4924.00	69.40	-19.75	49.65	74.00	-24.35	PK
H	4924.00	57.22	-19.75	37.47	54.00	-16.53	AV
H	7386.00	66.85	-13.72	53.13	74.00	-20.87	PK
H	7386.00	55.90	-13.72	42.18	54.00	-11.82	AV

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n40

Polar (H/V)	Fre- quency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2422MHz							
V	4844.00	69.70	-19.91	49.79	74.00	-24.21	PK
V	4844.00	56.18	-19.91	36.27	54.00	-17.73	AV
V	7266.00	65.74	-14.06	51.68	74.00	-22.32	PK
V	7266.00	59.45	-14.06	45.39	54.00	-8.61	AV
H	4844.00	68.30	-19.91	48.39	74.00	-25.61	PK
H	4844.00	59.17	-19.91	39.26	54.00	-14.74	AV
H	7266.00	69.64	-14.06	55.58	74.00	-18.42	PK
H	7266.00	57.65	-14.06	43.59	54.00	-10.41	AV
Middle channel:2437MHz							
V	4874.00	68.04	-19.85	48.19	74.00	-25.81	PK
V	4874.00	54.43	-19.85	34.58	54.00	-19.42	AV
V	7311.00	68.62	-13.93	54.69	74.00	-19.31	PK
V	7311.00	56.93	-13.93	43.00	54.00	-11.00	AV
H	4874.00	64.85	-19.85	45.00	74.00	-29.00	PK
H	4874.00	56.59	-19.85	36.74	54.00	-17.26	AV
H	7311.00	68.14	-13.93	54.21	74.00	-19.79	PK
H	7311.00	59.57	-13.93	45.64	54.00	-8.36	AV
High channel:2452MHz							
V	4904.00	69.90	-19.79	50.11	74.00	-23.89	PK
V	4904.00	57.52	-19.79	37.73	54.00	-16.27	AV
V	7356.00	65.55	-13.80	51.75	74.00	-22.25	PK
V	7356.00	58.90	-13.80	45.10	54.00	-8.90	AV
H	4904.00	68.14	-19.79	48.35	74.00	-25.65	PK
H	4904.00	59.37	-19.79	39.58	54.00	-14.42	AV
H	7356.00	68.11	-13.80	54.31	74.00	-19.69	PK
H	7356.00	54.59	-13.80	40.79	54.00	-13.21	AV

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ax20

Polar (H/V)	Fre- quency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2412MHz							
V	4824.00	69.26	-19.95	49.31	74.00	-24.69	PK
V	4824.00	54.23	-19.95	34.28	54.00	-19.72	AV
V	7236.00	69.47	-14.14	55.33	74.00	-18.67	PK
V	7236.00	55.33	-14.14	41.19	54.00	-12.81	AV
H	4824.00	64.43	-19.95	44.48	74.00	-29.52	PK
H	4824.00	57.08	-19.95	37.13	54.00	-16.87	AV
H	7236.00	65.47	-14.14	51.33	74.00	-22.67	PK
H	7236.00	54.55	-14.14	40.41	54.00	-13.59	AV
Middle channel:2437MHz							
V	4874.00	64.86	-19.85	45.01	74.00	-28.99	PK
V	4874.00	57.67	-19.85	37.82	54.00	-16.18	AV
V	7311.00	68.50	-13.93	54.57	74.00	-19.43	PK
V	7311.00	57.48	-13.93	43.55	54.00	-10.45	AV
H	4874.00	67.19	-19.85	47.34	74.00	-26.66	PK
H	4874.00	57.05	-19.85	37.20	54.00	-16.80	AV
H	7311.00	67.05	-13.93	53.12	74.00	-20.88	PK
H	7311.00	54.89	-13.93	40.96	54.00	-13.04	AV
High channel:2462MHz							
V	4924.00	68.08	-19.75	48.33	74.00	-25.67	PK
V	4924.00	55.77	-19.75	36.02	54.00	-17.98	AV
V	7386.00	67.63	-13.72	53.91	74.00	-20.09	PK
V	7386.00	57.23	-13.72	43.51	54.00	-10.49	AV
H	4924.00	65.17	-19.75	45.42	74.00	-28.58	PK
H	4924.00	55.89	-19.75	36.14	54.00	-17.86	AV
H	7386.00	66.70	-13.72	52.98	74.00	-21.02	PK
H	7386.00	54.92	-13.72	41.20	54.00	-12.80	AV

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ax40

Polar (H/V)	Fre- quency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2422MHz							
V	4844.00	65.41	-19.91	45.50	74.00	-28.50	PK
V	4844.00	58.00	-19.91	38.09	54.00	-15.91	AV
V	7266.00	69.91	-14.06	55.85	74.00	-18.15	PK
V	7266.00	58.76	-14.06	44.70	54.00	-9.30	AV
H	4844.00	67.75	-19.91	47.84	74.00	-26.16	PK
H	4844.00	58.74	-19.91	38.83	54.00	-15.17	AV
H	7266.00	67.55	-14.06	53.49	74.00	-20.51	PK
H	7266.00	57.52	-14.06	43.46	54.00	-10.54	AV
Middle channel:2437MHz							
V	4874.00	65.40	-19.85	45.55	74.00	-28.45	PK
V	4874.00	55.37	-19.85	35.52	54.00	-18.48	AV
V	7311.00	68.22	-13.93	54.29	74.00	-19.71	PK
V	7311.00	54.68	-13.93	40.75	54.00	-13.25	AV
H	4874.00	68.36	-19.85	48.51	74.00	-25.49	PK
H	4874.00	59.88	-19.85	40.03	54.00	-13.97	AV
H	7311.00	69.20	-13.93	55.27	74.00	-18.73	PK
H	7311.00	56.54	-13.93	42.61	54.00	-11.39	AV
High channel:2452MHz							
V	4904.00	68.63	-19.79	48.84	74.00	-25.16	PK
V	4904.00	57.95	-19.79	38.16	54.00	-15.84	AV
V	7356.00	65.48	-13.80	51.68	74.00	-22.32	PK
V	7356.00	56.57	-13.80	42.77	54.00	-11.23	AV
H	4904.00	68.95	-19.79	49.16	74.00	-24.84	PK
H	4904.00	55.57	-19.79	35.78	54.00	-18.22	AV
H	7356.00	66.40	-13.80	52.60	74.00	-21.40	PK
H	7356.00	56.74	-13.80	42.94	54.00	-11.06	AV


Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8. Radiated Band Emission Measurement And Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

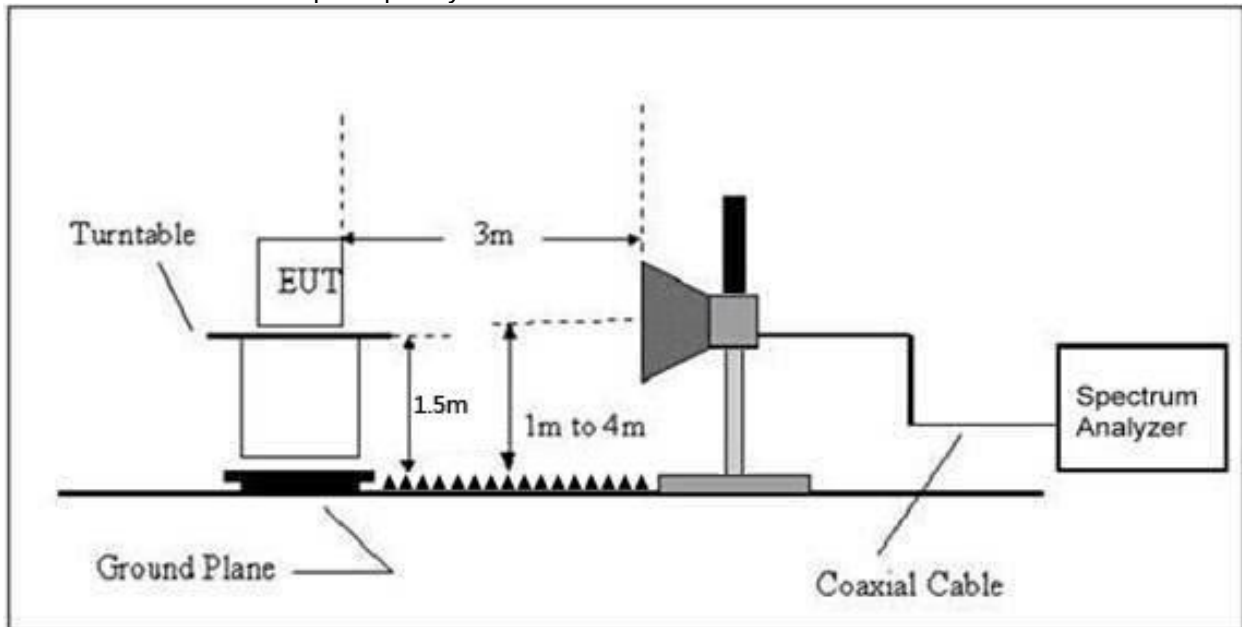

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test Procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

Antenna 1

	Polar (H/V)	Fre- quency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Measure- ment (dBuV/m)		Over	Result
					PK	PK	AV	PK	
802.11b	Low Channel 2412MHz								
	H	2390.00	70.55	-25.43	45.12	74.00	54.00	-28.88	PASS
	H	2400.00	72.17	-25.40	46.77	74.00	54.00	-27.23	PASS
	V	2390.00	72.33	-25.43	46.90	74.00	54.00	-27.10	PASS
	V	2400.00	72.17	-25.40	46.77	74.00	54.00	-27.23	PASS
	High Channel 2462MHz								
	H	2483.50	72.44	-25.15	47.29	74.00	54.00	-26.71	PASS
	H	2500.00	76.06	-25.10	50.96	74.00	54.00	-23.04	PASS
	V	2483.50	72.24	-25.15	47.09	74.00	54.00	-26.91	PASS
	V	2500.00	72.49	-25.10	47.39	74.00	54.00	-26.61	PASS
802.11g	Low Channel 2412MHz								
	H	2390.00	70.48	-25.43	45.05	74.00	54.00	-28.95	PASS
	H	2400.00	73.87	-25.40	48.47	74.00	54.00	-25.53	PASS
	V	2390.00	72.57	-25.43	47.14	74.00	54.00	-26.86	PASS
	V	2400.00	74.19	-25.40	48.79	74.00	54.00	-25.21	PASS
	High Channel 2462MHz								
	H	2483.50	76.19	-25.15	51.04	74.00	54.00	-22.96	PASS
	H	2500.00	71.36	-25.10	46.26	74.00	54.00	-27.74	PASS
	V	2483.50	70.89	-25.15	45.74	74.00	54.00	-28.26	PASS
	V	2500.00	70.79	-25.10	45.69	74.00	54.00	-28.31	PASS
Remark: 1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier, Over= Measurement – Limit 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									

	Polar (H/V)	Fre- quency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Measure- ment (dBuV/m)		Over	Result
					PK	PK	AV	PK	
802.11 n20	Low Channel 2412MHz								
	H	2390.00	71.19	-25.43	45.76	74.00	54.00	-28.24	PASS
	H	2400.00	72.97	-25.40	47.57	74.00	54.00	-26.43	PASS
	V	2390.00	74.54	-25.43	49.11	74.00	54.00	-24.89	PASS
	V	2400.00	72.39	-25.40	46.99	74.00	54.00	-27.01	PASS
	High Channel 2462MHz								
	H	2483.50	77.30	-25.15	52.15	74.00	54.00	-21.85	PASS
	H	2500.00	74.89	-25.10	49.79	74.00	54.00	-24.21	PASS
	V	2483.50	71.25	-25.15	46.10	74.00	54.00	-27.90	PASS
	V	2500.00	73.57	-25.10	48.47	74.00	54.00	-25.53	PASS
802.11 n40	Low Channel 2422MHz								
	H	2390.00	69.22	-25.43	43.79	74.00	54.00	-30.21	PASS
	H	2400.00	70.90	-25.40	45.50	74.00	54.00	-28.50	PASS
	V	2390.00	76.63	-25.43	51.20	74.00	54.00	-22.80	PASS
	V	2400.00	76.35	-25.40	50.95	74.00	54.00	-23.05	PASS
	High Channel 2452MHz								
	H	2483.50	73.71	-25.15	48.56	74.00	54.00	-25.44	PASS
	H	2500.00	73.90	-25.10	48.80	74.00	54.00	-25.20	PASS
	V	2483.50	73.42	-25.15	48.27	74.00	54.00	-25.73	PASS
	V	2500.00	70.66	-25.10	45.56	74.00	54.00	-28.44	PASS
Remark: 1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier, Over= Measurement – Limit 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									

	Polar (H/V)	Fre- quency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Measure- ment (dBuV/m)		Over	Result
					PK	PK	AV	PK	
802.11 ax20	Low Channel 2412MHz								
	H	2390.00	74.35	-25.43	48.92	74.00	54.00	-25.08	PASS
	H	2400.00	75.53	-25.40	50.13	74.00	54.00	-23.87	PASS
	V	2390.00	72.60	-25.43	47.17	74.00	54.00	-26.83	PASS
	V	2400.00	77.69	-25.40	52.29	74.00	54.00	-21.71	PASS
	High Channel 2462MHz								
	H	2483.50	77.37	-25.15	52.22	74.00	54.00	-21.78	PASS
	H	2500.00	73.64	-25.10	48.54	74.00	54.00	-25.46	PASS
	V	2483.50	70.36	-25.15	45.21	74.00	54.00	-28.79	PASS
	V	2500.00	69.27	-25.10	44.17	74.00	54.00	-29.83	PASS
802.11 ax40	Low Channel 2422MHz								
	H	2390.00	71.88	-25.43	46.45	74.00	54.00	-27.55	PASS
	H	2400.00	74.03	-25.40	48.63	74.00	54.00	-25.37	PASS
	V	2390.00	72.88	-25.43	47.45	74.00	54.00	-26.55	PASS
	V	2400.00	76.98	-25.40	51.58	74.00	54.00	-22.42	PASS
	High Channel 2452MHz								
	H	2483.50	72.34	-25.15	47.19	74.00	54.00	-26.81	PASS
	H	2500.00	74.13	-25.10	49.03	74.00	54.00	-24.97	PASS
	V	2483.50	70.71	-25.15	45.56	74.00	54.00	-28.44	PASS
	V	2500.00	73.51	-25.10	48.41	74.00	54.00	-25.59	PASS
Remark: 1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier, Over= Measurement – Limit 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									

Antenna 2

	Polar (H/V)	Fre- quency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Measure- ment (dBuV/m)		Over	Result
					PK	PK	AV	PK	
802.11b	Low Channel 2412MHz								
	H	2390.00	73.08	-25.43	47.65	74.00	54.00	-26.35	PASS
	H	2400.00	73.00	-25.40	47.60	74.00	54.00	-26.40	PASS
	V	2390.00	75.97	-25.43	50.54	74.00	54.00	-23.46	PASS
	V	2400.00	74.61	-25.40	49.21	74.00	54.00	-24.79	PASS
	High Channel 2462MHz								
	H	2483.50	72.24	-25.15	47.09	74.00	54.00	-26.91	PASS
	H	2500.00	73.40	-25.10	48.30	74.00	54.00	-25.70	PASS
	V	2483.50	70.40	-25.15	45.25	74.00	54.00	-28.75	PASS
	V	2500.00	69.28	-25.10	44.18	74.00	54.00	-29.82	PASS
802.11g	Low Channel 2412MHz								
	H	2390.00	70.75	-25.43	45.32	74.00	54.00	-28.68	PASS
	H	2400.00	75.92	-25.40	50.52	74.00	54.00	-23.48	PASS
	V	2390.00	71.41	-25.43	45.98	74.00	54.00	-28.02	PASS
	V	2400.00	76.25	-25.40	50.85	74.00	54.00	-23.15	PASS
	High Channel 2462MHz								
	H	2483.50	73.41	-25.15	48.26	74.00	54.00	-25.74	PASS
	H	2500.00	74.17	-25.10	49.07	74.00	54.00	-24.93	PASS
	V	2483.50	72.63	-25.15	47.48	74.00	54.00	-26.52	PASS
	V	2500.00	72.42	-25.10	47.32	74.00	54.00	-26.68	PASS

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
- 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

	Polar (H/V)	Fre- quency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Measure- ment (dBuV/m)		Over	Result
					PK	PK	AV	PK	
802.11 n20	Low Channel 2412MHz								
	H	2390.00	71.68	-25.43	46.25	74.00	54.00	-27.75	PASS
	H	2400.00	70.48	-25.40	45.08	74.00	54.00	-28.92	PASS
	V	2390.00	72.14	-25.43	46.71	74.00	54.00	-27.29	PASS
	V	2400.00	73.75	-25.40	48.35	74.00	54.00	-25.65	PASS
	High Channel 2462MHz								
	H	2483.50	73.79	-25.15	48.64	74.00	54.00	-25.36	PASS
	H	2500.00	72.29	-25.10	47.19	74.00	54.00	-26.81	PASS
	V	2483.50	74.77	-25.15	49.62	74.00	54.00	-24.38	PASS
	V	2500.00	74.80	-25.10	49.70	74.00	54.00	-24.30	PASS
802.11 n40	Low Channel 2422MHz								
	H	2390.00	71.80	-25.43	46.37	74.00	54.00	-27.63	PASS
	H	2400.00	75.61	-25.40	50.21	74.00	54.00	-23.79	PASS
	V	2390.00	76.93	-25.43	51.50	74.00	54.00	-22.50	PASS
	V	2400.00	76.46	-25.40	51.06	74.00	54.00	-22.94	PASS
	High Channel 2452MHz								
	H	2483.50	76.00	-25.15	50.85	74.00	54.00	-23.15	PASS
	H	2500.00	73.20	-25.10	48.10	74.00	54.00	-25.90	PASS
	V	2483.50	73.20	-25.15	48.05	74.00	54.00	-25.95	PASS
	V	2500.00	72.79	-25.10	47.69	74.00	54.00	-26.31	PASS
Remark: 1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier, Over= Measurement – Limit 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									

	Polar (H/V)	Fre- quency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Measure- ment (dBuV/m)		Over	Result
					PK	PK	AV	PK	
802.11 ax20	Low Channel 2412MHz								
	H	2390.00	69.51	-25.43	44.08	74.00	54.00	-29.92	PASS
	H	2400.00	74.62	-25.40	49.22	74.00	54.00	-24.78	PASS
	V	2390.00	75.98	-25.43	50.55	74.00	54.00	-23.45	PASS
	V	2400.00	73.55	-25.40	48.15	74.00	54.00	-25.85	PASS
	High Channel 2462MHz								
	H	2483.50	74.76	-25.15	49.61	74.00	54.00	-24.39	PASS
	H	2500.00	72.13	-25.10	47.03	74.00	54.00	-26.97	PASS
	V	2483.50	71.00	-25.15	45.85	74.00	54.00	-28.15	PASS
	V	2500.00	70.07	-25.10	44.97	74.00	54.00	-29.03	PASS
802.11 ax40	Low Channel 2422MHz								
	H	2390.00	74.72	-25.43	49.29	74.00	54.00	-24.71	PASS
	H	2400.00	70.51	-25.40	45.11	74.00	54.00	-28.89	PASS
	V	2390.00	72.41	-25.43	46.98	74.00	54.00	-27.02	PASS
	V	2400.00	72.71	-25.40	47.31	74.00	54.00	-26.69	PASS
	High Channel 2452MHz								
	H	2483.50	74.43	-25.15	49.28	74.00	54.00	-24.72	PASS
	H	2500.00	72.65	-25.10	47.55	74.00	54.00	-26.45	PASS
	V	2483.50	73.80	-25.15	48.65	74.00	54.00	-25.35	PASS
	V	2500.00	71.28	-25.10	46.18	74.00	54.00	-27.82	PASS
Remark: 1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier, Over= Measurement – Limit 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									


9. Antenna Requirement

9.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


9.2 Test Result

The EUT antenna is External antenna, Adopt the IPEX interface, fulfill the requirement of this section.

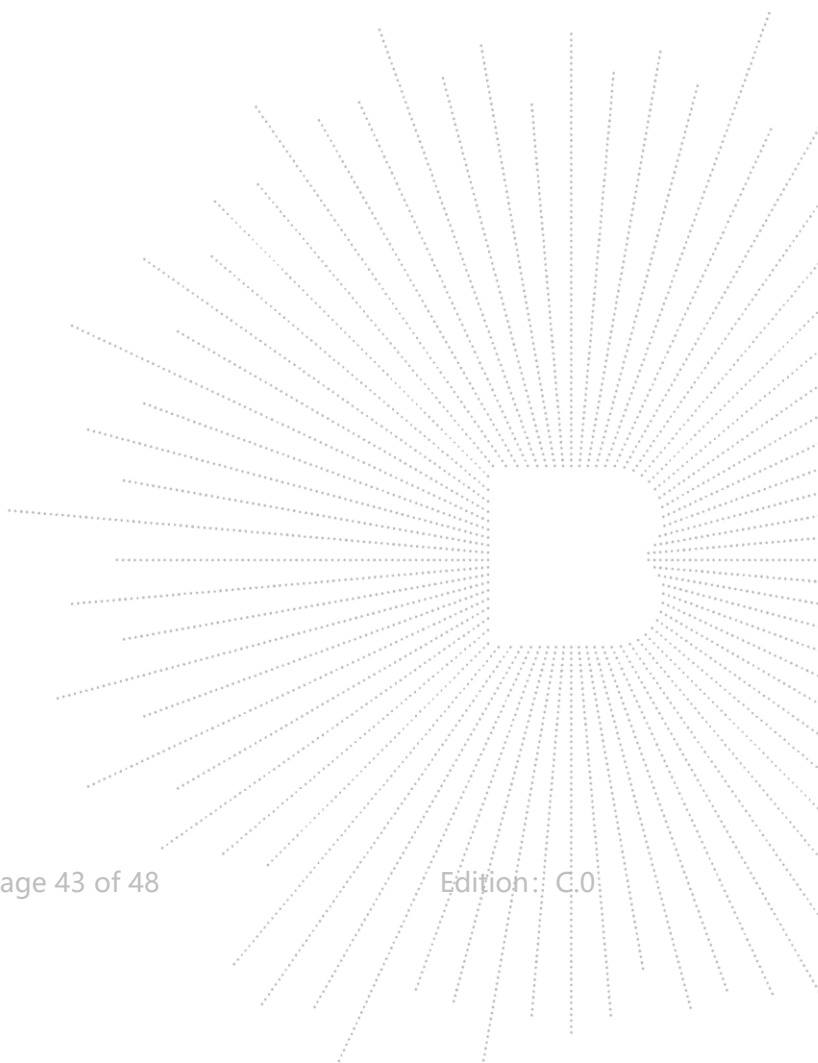


10. EUT Photographs

EUT Photo 1

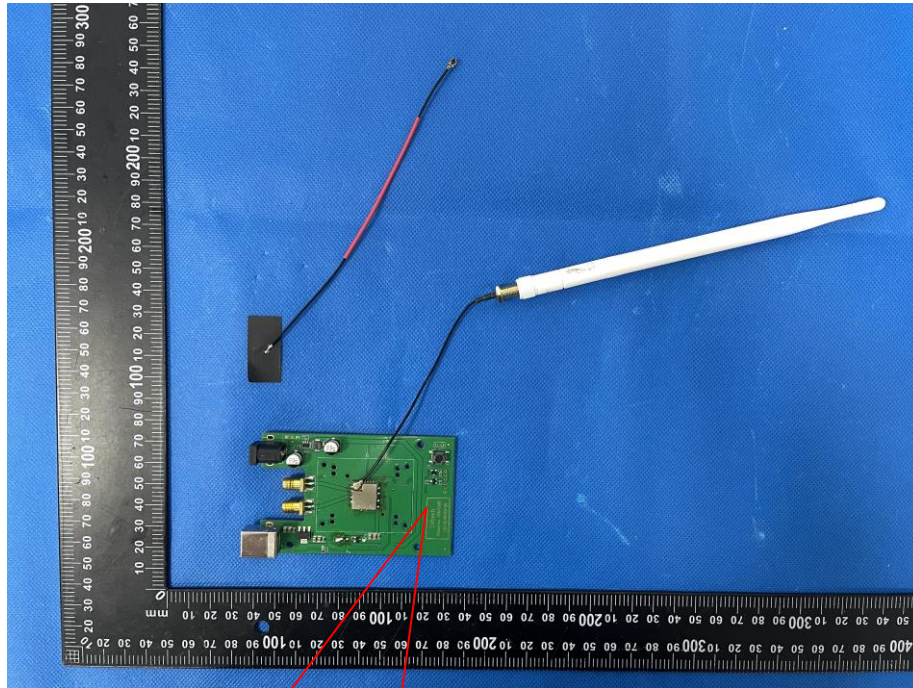

Note: Auxiliary base plate


EUT Photo 2

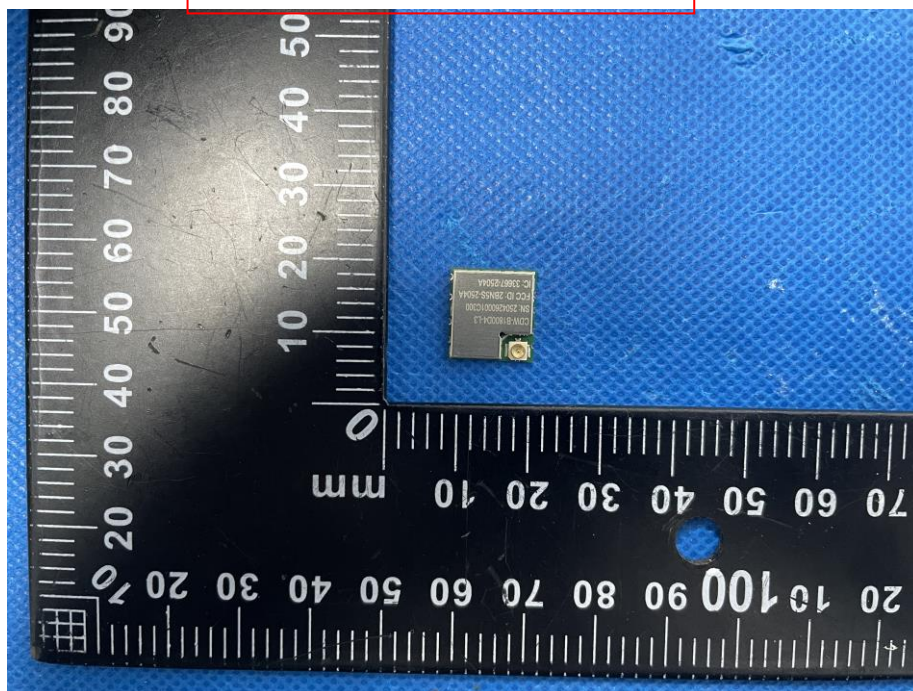


NOTE: Appendix-Photographs Of EUT Constructional Details.

11. EUT Test Setup Photographs

Conducted Emissions Photo

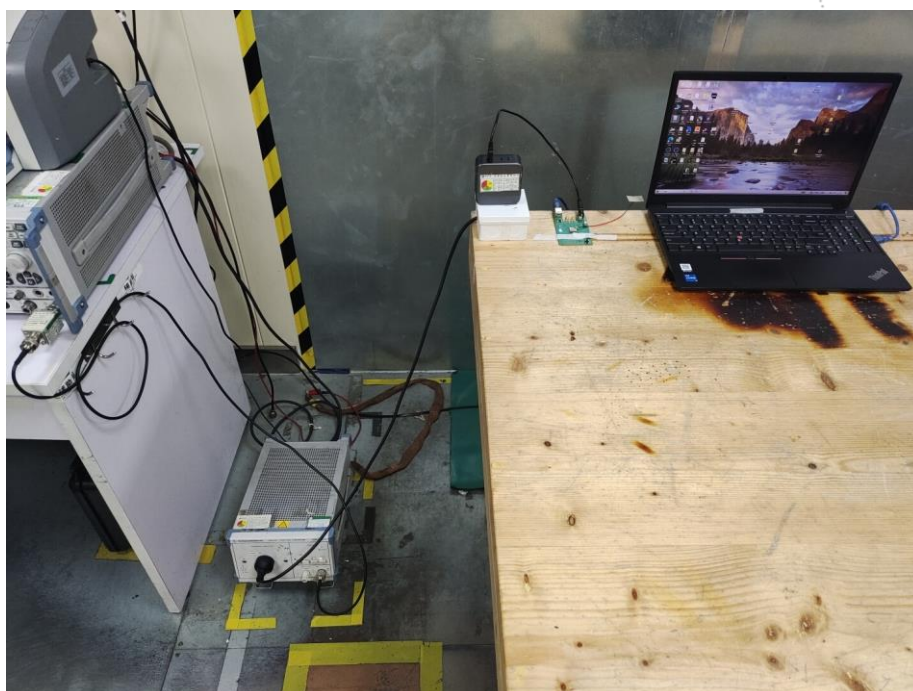

Radiated Measurement Photos

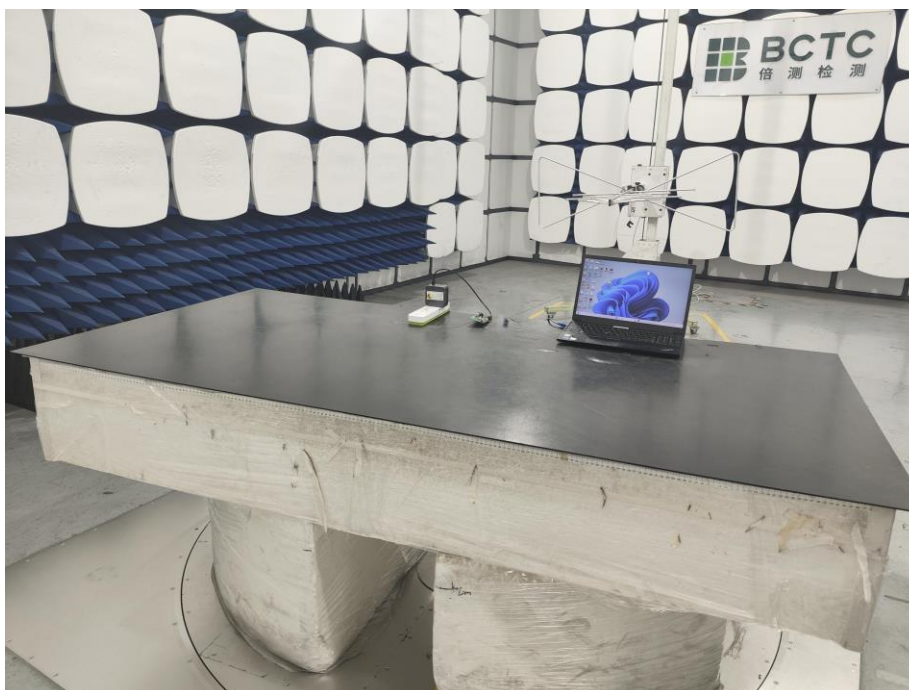



STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****