

Letter of acceptance

SHENZHEN XINPIN INNOVATION

ELECTRONIC TECHNOLOGY CO., LTD

Customer Name: _____

Customer No. : _____

Number: RC- G25-7.7~8.0UH-3300GS-7MM

Data: 2022-07-06

Supplier: Dongguan Jireisi technology Co., LTD

绘制draw	审核Check	批准Approval
Lin Lu	GuiXiang Deng	Shengru Liu



东莞市捷瑞思科技有限公司

Dongguan Jireisi technology Co., LTD

Tel: 86+13632701380


Fax:N/A

地址: 东莞市大岭山镇太公岭村莞长路段 152 号

No. 152, Guan Chang Road, Taigongling Village, Dalingshan Town,
Dongguan City

customer name	P/N	ModelNumber	Ver	Data
XINPIN		RC- G25-7.7~8.0UH-3300GS-7MM	A0	2022.7.6

一、Plane structure diagram: Unit:MM

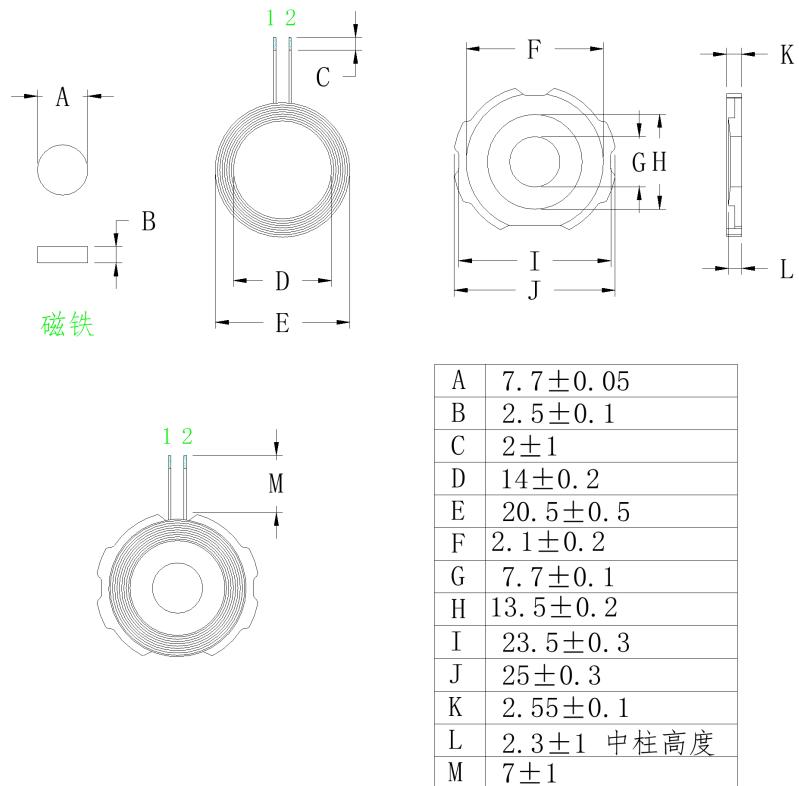

二、Product parameters:

Foot position	Wire diameter	Number of turns	Remark
1 - 2	0.08*24	14	Hot air stranding wire

三、technical requirements:

1. Secure the cable end to prevent loose cables
2. According to customer requirements, cut the too long thread, plated with tin, and the plating depth is 2 ± 1 MM
3. Point the appropriate white glue on the soft magnetic sheet, paste the coil, and ensure that the surface of the product is clean and tidy in the process
4. The soft magnetic sheet used is with round holes, without damage
5. Additional process (according to customer requirements): Install 7.7x2.5mm magnet in the middle round hole of the finished product and attach a circular double-sided tape with a diameter of 14mm on the back of the finished product, after packaging

四、electrical parameter:

1.inductance, Q 值:

PIN 1 — 2 = 7.7~8.0UH

The above inductance values are based on Quanhua 1062A instrument, 10KHZ/0.3Vrms as the standard or equivalent instrument.

五、bill of materials:

No.	Name	Material	Supplier	Reamrk
1	Hot air stranding wire	0.08X24	Weihan	
2	Magnetic sheet	G25 soft substrate material	TianTong	
3	Tin	HTEP	QianDao	
4	White glue	BY882	BaoYue	
5	strong magnet	7.7*2.5 (3300~3400GS)	LianSheng	
6	Double-sided adhesive	D 14mm	HongHui	