



TEST REPORT

FCC ID:2BN7BW-041

Applicant: SHENZHEN XINPIN INNOVATION ELECTRONIC TECHNOLOGY CO.,LTD
Address: 301,The tenth factory building,second industrial zone, Shanmen Community,Yanluo Street,Baoan District,Shenzhen,Guangdong Province, China
Manufacturer: SHENZHEN XINPIN INNOVATION ELECTRONIC TECHNOLOGY CO.,LTD
Address: 301,The tenth factory building,second industrial zone, Shanmen Community,Yanluo Street,Baoan District,Shenzhen,Guangdong Province, China
EUT: Watch Wireless Charge
Trade Mark: N/A
Model Number: W-041, W-041A, W-041B, W-041C, W-041D, W-041E, W-041F
Date of Receipt: Mar.06, 2025
Test Date: May 12, 2025 - May 20, 2025
Date of Report: May 20, 2025
Prepared By: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China
Applicable Standards: FCC PART 15 Subpart C
ANSI C63.10:2020
Test Result: Pass
Report Number: DLE-250519009R

Prepared (Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	3
3. GENERAL INFORMATION	4
4. TEST INSTRUMENT USED	6
5. CONDUCTED EMISSION TEST	7
6. RADIATION EMISSION TEST	11
7. BANDWIDTH TEST	17
8. ANTENNA REQUIREMENT	18
9. SETUP PHOTOGRAPHS	18
10. EUT PHOTOGRAPHS	18

**1. VERSION**

Version No.	Date	Description
00	May 20, 2025	Original

2. TEST SUMMARY

EMC Emission			
Test Item	Section in CFR 47	Result	Remark
AC Power Line Conducted Emission	15.207	PASS	
Spurious Emission	15.209(a)(f)	PASS	
20dB Bandwidth	15.215	PASS	
Antenna requirement	15.203	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

Test Lab: Shenzhen DL Testing Technology Co., Ltd.

101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1

Address: Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118



3. GENERAL INFORMATION


3.1 Description of Device (EUT)

Product Name: Watch Wireless Charge
Trade Mark: N/A
Model No.: W-041
Serial No.: W-041A, W-041B, W-041C, W-041D, W-041E, W-041F
Model Difference: The input terminals are the same, the output terminals add a micro port Line.
Hardware version: H1.0
Software version: S1.0
Operation Frequency: 324KHz
Modulation type: MSK
Antenna Type: Inductive loop coil Antenna
Antenna gain: 0 dBi
Input: 5V/3A
Power supply: Max output: 15 W; Wireless charge output: 2.5W(Max);
USB-A Output: 5W; USB-C Output: 10W; Lightning Output: 12W

3.2 Tested System Details

None.

3.3 Block Diagram of Test Set-up



3.4 Test Mode Description

Mode1. Wireless Output Mode(Max 2.5W) Mode 2 Wireless Output + Line Output (Max 12.5W)
Mode 3 Line Output (Max 15W)

Note: 1. We have evaluated 1%, 50% and 99% battery charging mode, and the worst mode (99%) is showed in this report.

2. All modes have been tested, and the report only shows the results of the worst mode 1.

3.5 Test Auxiliary Equipment

Watch(Provide by test lab):
Manufacturer: HUAWEI
Model: Watch 4

Adapter (Provide by test lab):
Manufacturer: SHENZHEN TIANTIN
ELECTRONICS CO., LTD
Model: TPA-46B050100UU
I/P: AC 100-240V 50/60Hz 0.2A
O/P: DC 5V/1A



3.6 Test Uncertainty

Conducted Emission Uncertainty(150KHz-30MHz)	:	$\pm 2.56\text{dB}$
20dB Bandwidth	:	$\pm 0.5\text{kHz}$
Radiated Emission Uncertainty(9KHz-1GHz)	:	$\pm 3.24\text{dB}$



4. TEST INSTRUMENT USED

For Conducted Emission Test (843 Shielded Room)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
Clamp	COM-POWER	CLA-050	431071	Nov. 02, 2024	Nov. 01, 2025
3-Loop Antenna	DAZE	ZN30401	13021	Nov. 02, 2024	Nov. 01, 2025
ISN T8	Schwarzbeck	NTFM 8158	101135	Nov. 01, 2024	Oct. 31, 2025
ISN T5	Schwarzbeck	NTFM 8158	101136	Nov. 01, 2024	Oct. 31, 2025
843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025
843 Cable 1#	ChengYu	CE Cable	002	Nov. 01, 2024	Oct. 31, 2025

For Radiated Emission Test (966 chamber)


Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
966 Chamber	YIHENG	966 Room	966	Nov. 06, 2023	Nov. 05, 2026
Spectrum Analyzer	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
EMI Receiver	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
Amplifier	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
Amplifier	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
Broadband Trilog Antenna	Schwarzbeck	VULB9162	00306	Nov. 02, 2024	Nov. 01, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	02139	Nov. 02, 2024	Nov. 01, 2025
Loop Antenna	ZHINAN	ZN30900A	/	Nov. 01, 2024	Oct. 31, 2025
966 Cable 1#	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
966 Cable 2#	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025



5. CONDUCTED EMISSION TEST

5.1 Block Diagram of Test Setup

For Mains Terminals Test

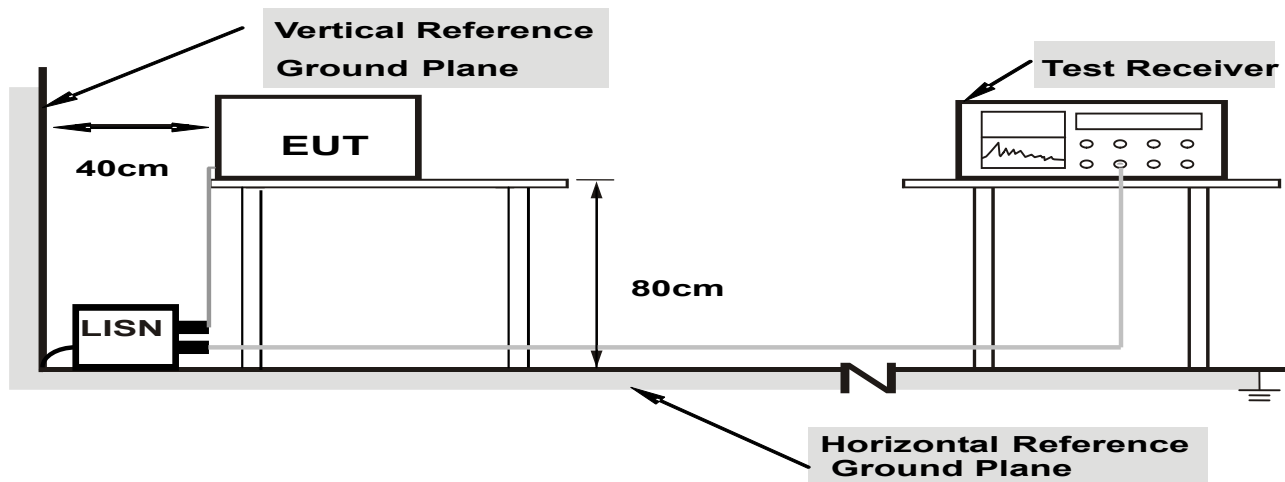

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.2 Test Standard and Limit

FCC Part 15 Subpart C

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15~0.50	66 ~ 56*	55 ~ 46*
0.50~5.00	56	46
5.00~30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

5.3 EUT Configuration on Test

The following equipment's are installed on conducted emission test to meet FCC Part 15 Subpart C requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

5.4 Operating Condition of EUT

5.4.1 Setup the EUT and simulators as shown in Section 5.1.

5.4.2 Turn on the power of all equipments.

5.4.3 Let the EUT work in test modes and test it.



5.5 Test Procedure

The EUT is put on the table and connected to the AC mains through a Artificial Mains Network (AMN) or ISN. This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the **ANSI C63.10** regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 10KHz.

The frequency range from 150 KHz to 30 MHz is investigated.

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor


5.6 Test Result

PASS

W-041 and W-041A models are tested and evaluationed, we recorded the worst model (W-041) and the worst mode (Mode 1) data in the report. Please refer to the following page.

**Conducted Emission Test Data**

Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Line
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

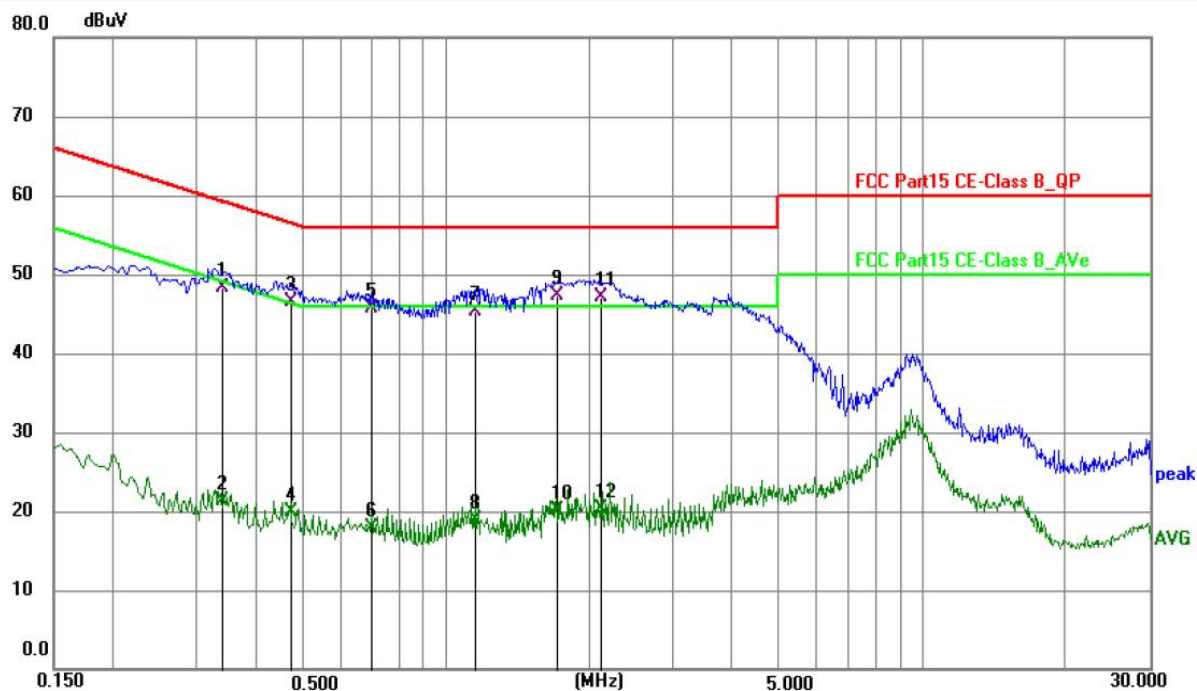


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.3390	28.77	19.48	48.25	59.23	-10.98	QP	P
2	0.3390	1.87	19.48	21.35	49.23	-27.88	AVG	P
3	0.4740	27.03	19.49	46.52	56.44	-9.92	QP	P
4	0.4740	0.39	19.49	19.88	46.44	-26.56	AVG	P
5	0.6990	26.13	19.50	45.63	56.00	-10.37	QP	P
6	0.6990	-1.51	19.50	17.99	46.00	-28.01	AVG	P
7	1.1490	25.74	19.51	45.25	56.00	-10.75	QP	P
8	1.1490	-0.53	19.51	18.98	46.00	-27.02	AVG	P
9 *	1.7160	27.79	19.54	47.33	56.00	-8.67	QP	P
10	1.7160	0.50	19.54	20.04	46.00	-25.96	AVG	P
11	2.1210	27.47	19.55	47.02	56.00	-8.98	QP	P
12	2.1210	0.78	19.55	20.33	46.00	-25.67	AVG	P



Conducted Emission Test Data

Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Neutral
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

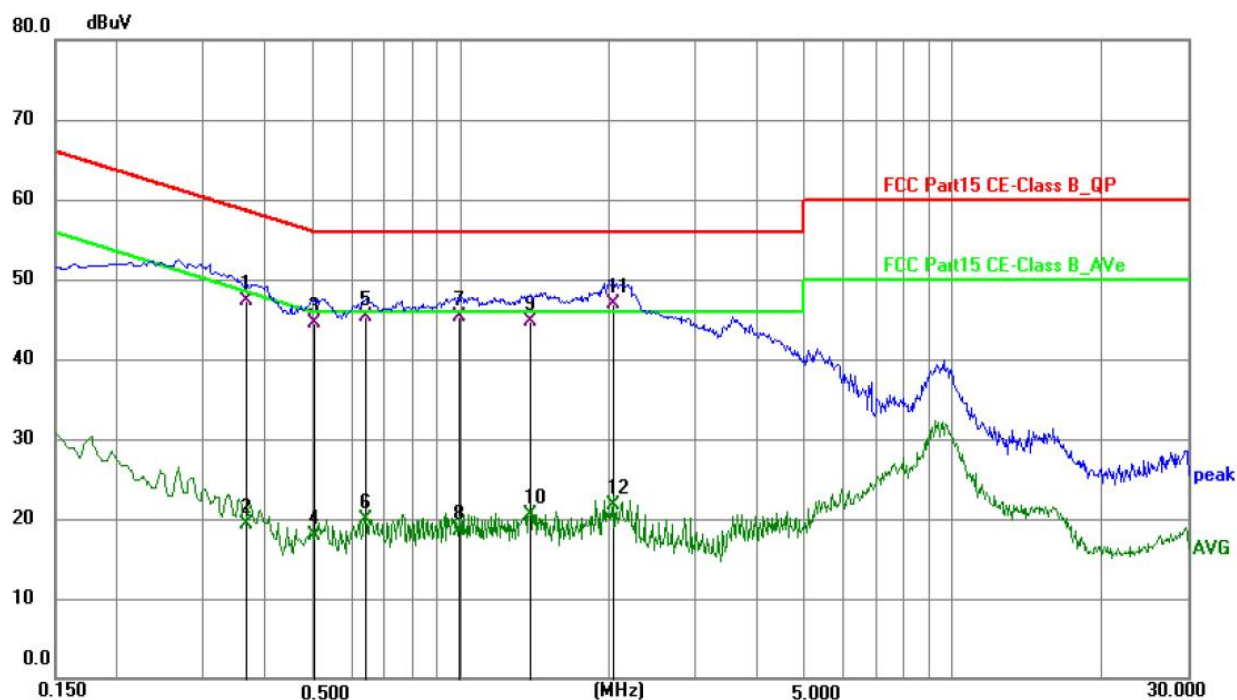


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.3660	27.77	19.48	47.25	58.59	-11.34	QP	P
2	0.3660	-0.23	19.48	19.25	48.59	-29.34	AVG	P
3	0.5052	25.07	19.49	44.56	56.00	-11.44	QP	P
4	0.5052	-1.64	19.49	17.85	46.00	-28.15	AVG	P
5	0.6402	25.75	19.50	45.25	56.00	-10.75	QP	P
6	0.6402	0.50	19.50	20.00	46.00	-26.00	AVG	P
7	0.9915	25.85	19.51	45.36	56.00	-10.64	QP	P
8	0.9915	-0.95	19.51	18.56	46.00	-27.44	AVG	P
9	1.3872	25.16	19.52	44.68	56.00	-11.32	QP	P
10	1.3872	0.93	19.52	20.45	46.00	-25.55	AVG	P
11 *	2.0490	27.34	19.55	46.89	56.00	-9.11	QP	P
12	2.0490	2.22	19.55	21.77	46.00	-24.23	AVG	P


6. RADIATION EMISSION TEST

6.1 Block Diagram of Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

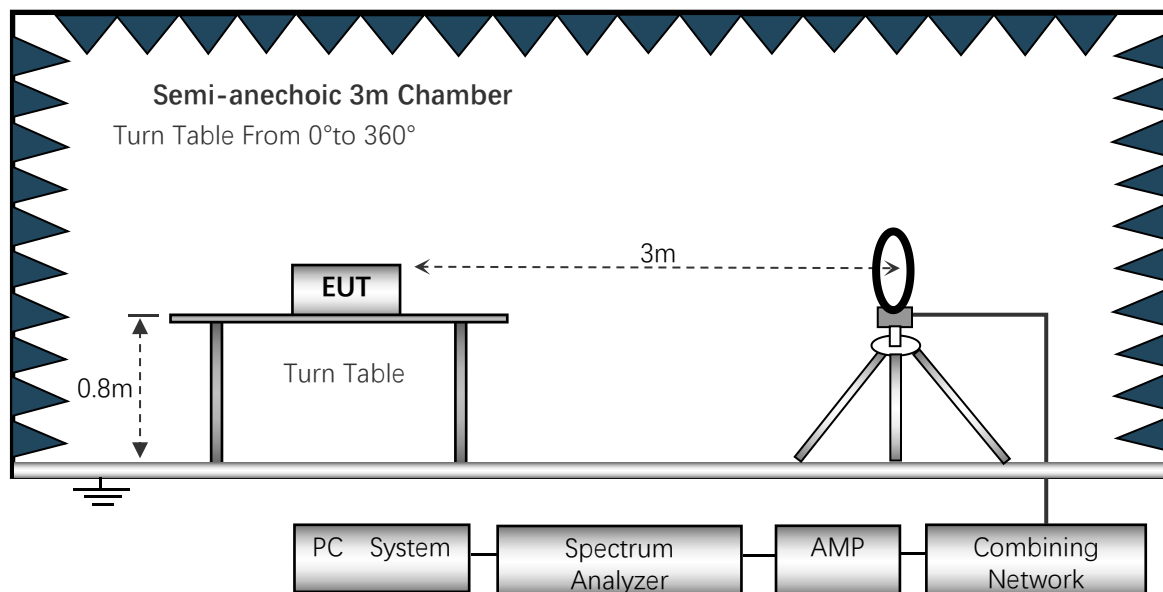

Below 1GHz

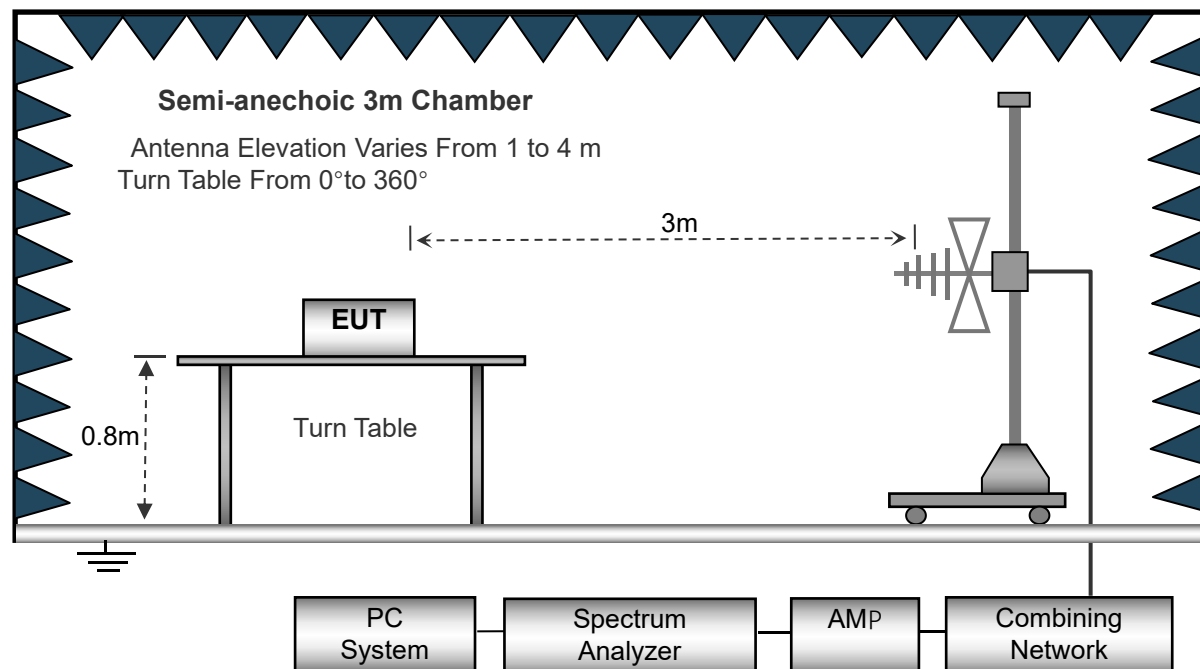

6.2 Test Standard and Limit

FCC Part 15 Subpart C



Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.090	2400/F(kHz)	300	AVERAGE
0.090-0.110	2400/F(kHz)	300	Quasi-peak Value
0.110-0.490	2400/F(kHz)	300	AVERAGE
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Above 30MHz

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dBμV/m)	Remark
30 ~ 88	3	40.0	Quasi-peak Value
88 ~ 216	3	43.5	Quasi-peak Value
216 ~ 960	3	46.0	Quasi-peak Value
960 ~ 1000	3	54.0	Quasi-peak Value
Above 1000	3	74.0	PEAK
		54.0	AVERAGE

Remark:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

6.3 EUT Configuration on Test

The FCC Part 15 Subpart C regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 5.3.

6.4 Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.4 except the test set up replaced as Section 6.2.

6.5 Test Procedure

1) The radiated emissions test was conducted in a semi-anechoic chamber.

2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.

3) Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.

4) The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

5) The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120KHz.


6) The frequency range from 9KHz to 1000MHz is checked.

6.6 Test Result


PASS

**Radiation Emission Test Data 0.009MHz~30 MHz**

Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	/
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

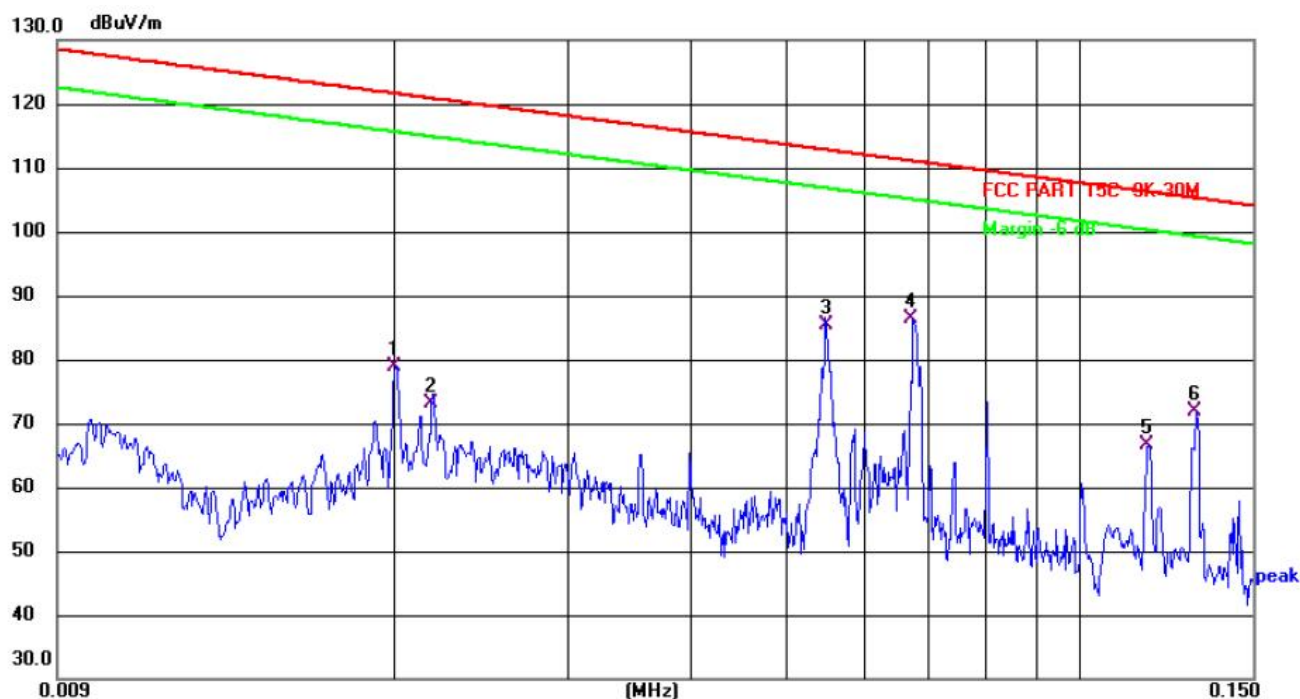

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0200	50.58	28.27	78.85	121.57	-42.72	QP
2	0.0217	44.84	28.24	73.08	120.86	-47.78	QP
3	0.0550	57.54	27.84	85.38	112.79	-27.41	QP
4	0.0670	58.63	27.71	86.34	111.07	-24.73	QP
5	0.1170	39.40	27.22	66.62	106.23	-39.61	QP
6	0.1310	44.62	27.14	71.76	105.25	-33.49	QP

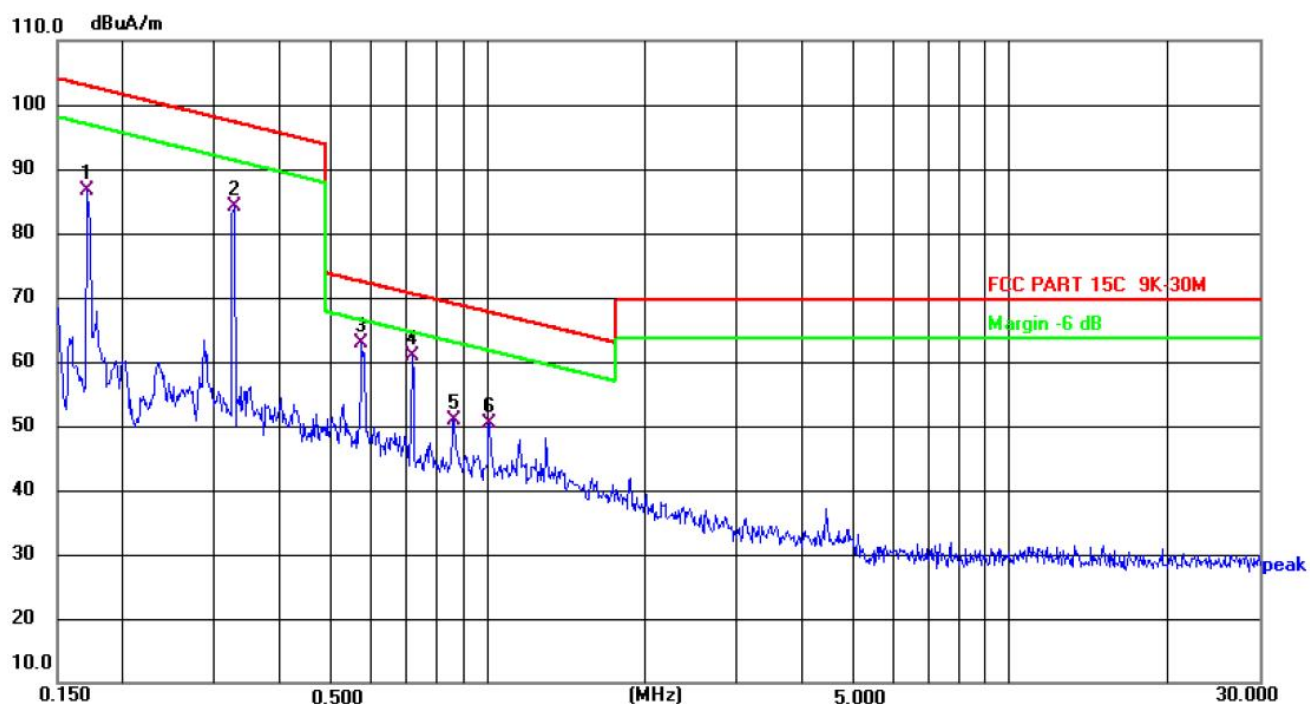

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuA/m)	Limit (dBuA/m)	Margin (dB)	Detector
1	0.1703	59.63	26.98	86.61	102.97	-16.36	QP
2	0.3271	57.65	26.49	84.14	97.31	-13.17	QP
3	0.5738	37.18	25.73	62.91	72.46	-9.55	QP
4	0.7170	35.50	25.28	60.78	70.57	-9.79	QP
5	0.8633	26.01	24.83	50.84	68.99	-18.15	QP
6	1.0070	25.87	24.39	50.26	67.69	-17.43	QP

Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level(Meter Reading+ Factor) - Limit.



Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31.0701	52.32	-16.38	35.94	40.00	-4.06	QP
2	62.6507	47.94	-15.84	32.10	40.00	-7.90	QP
3	106.3850	51.55	-15.75	35.80	43.50	-7.70	QP
4	135.5062	52.32	-19.22	33.10	43.50	-10.40	QP
5	185.1379	48.25	-17.15	31.10	43.50	-12.40	QP
6	223.7333	52.38	-15.52	36.86	46.00	-9.14	QP



Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	34.7602	52.99	-16.31	36.68	40.00	-3.32	QP
2	37.4164	52.12	-15.69	36.43	40.00	-3.57	QP
3	95.4270	51.15	-16.97	34.18	43.50	-9.32	QP
4	134.0880	53.85	-19.15	34.70	43.50	-8.80	QP
5	151.5972	54.78	-19.21	35.57	43.50	-7.93	QP
6	158.1123	53.55	-18.73	34.82	43.50	-8.68	QP

Remarks:

1. Final Level = Receiver Read level + Correct factor (Antenna Factor + Cable Loss – Preamplifier Factor)
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. W-041 and W-041A models are tested and evaluationed, we recorded the worst model (W-041) and the worst mode (Mode 1) data in the report.



8. ANTENNA REQUIREMENT

a) STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

b) EUT ANTENNA

The EUT antenna is Inductive loop coil Antenna. It comply with the standard requirement.

9. SETUP PHOTOGRAPHS

Reference to the setup photo for details.

10. EUT PHOTOGRAPHS

Reference to the external and internal photo for details.

***** END OF REPORT *****