



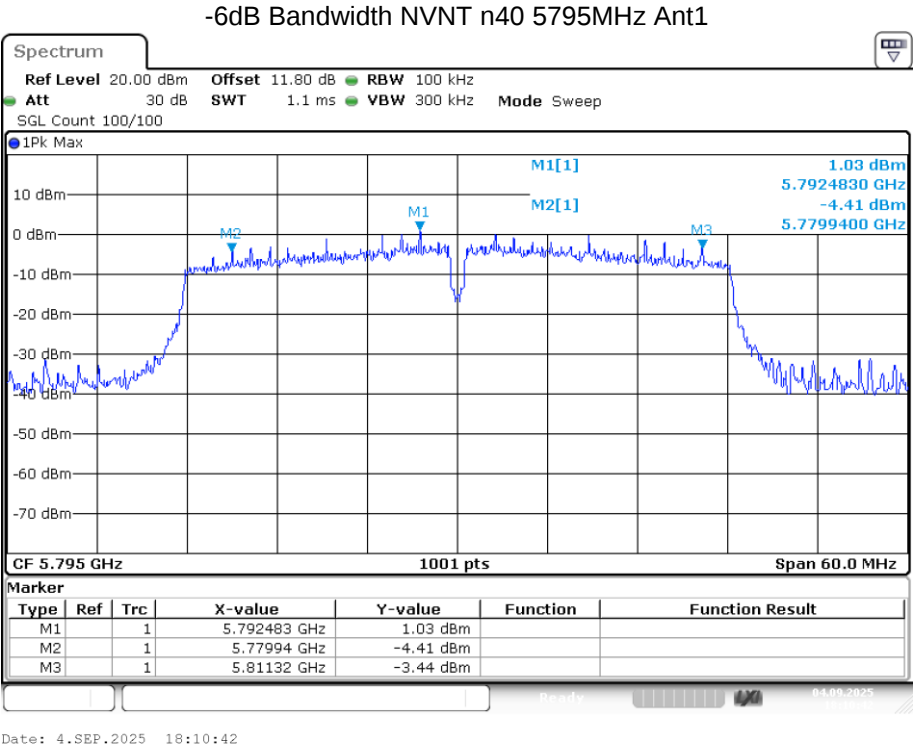

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.364
NVNT	a	5785	Ant1	16.394
NVNT	a	5825	Ant1	16.394
NVNT	ac20	5745	Ant1	17.562
NVNT	ac20	5785	Ant1	17.562
NVNT	ac20	5825	Ant1	17.562
NVNT	ac40	5755	Ant1	36.084
NVNT	ac40	5795	Ant1	35.964
NVNT	ax20	5745	Ant1	17.562
NVNT	ax20	5785	Ant1	17.532
NVNT	ax20	5825	Ant1	17.532
NVNT	ax40	5755	Ant1	36.084
NVNT	ax40	5795	Ant1	35.964
NVNT	n20	5745	Ant1	17.562
NVNT	n20	5785	Ant1	17.532
NVNT	n20	5825	Ant1	17.562
NVNT	n40	5755	Ant1	36.144
NVNT	n40	5795	Ant1	36.024

OBW NVNT a 5745MHz Ant1

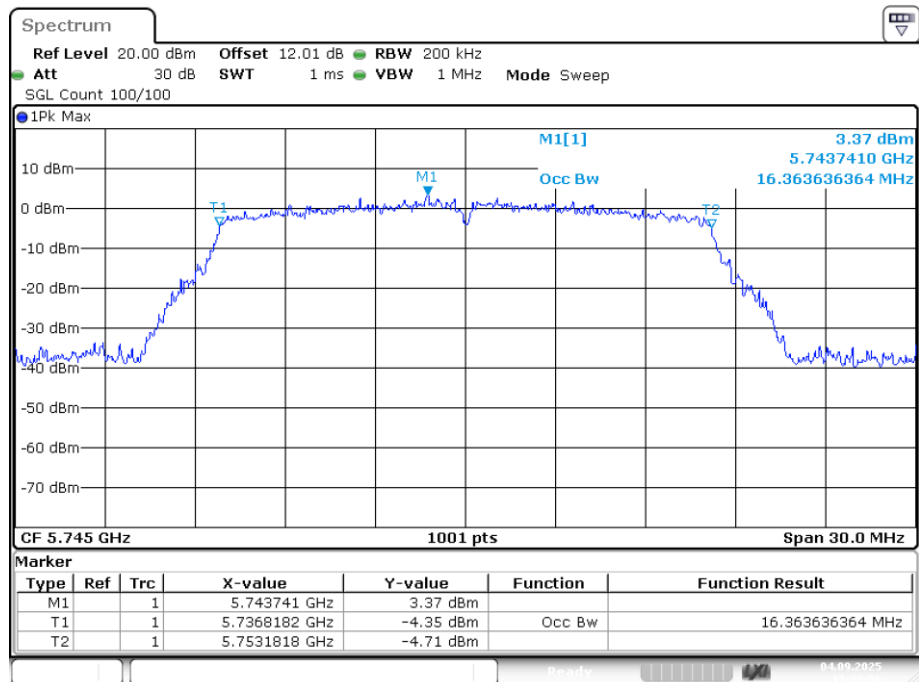


Date: 4.SEP.2025 17:33:56

OBW NVNT a 5785MHz Ant1

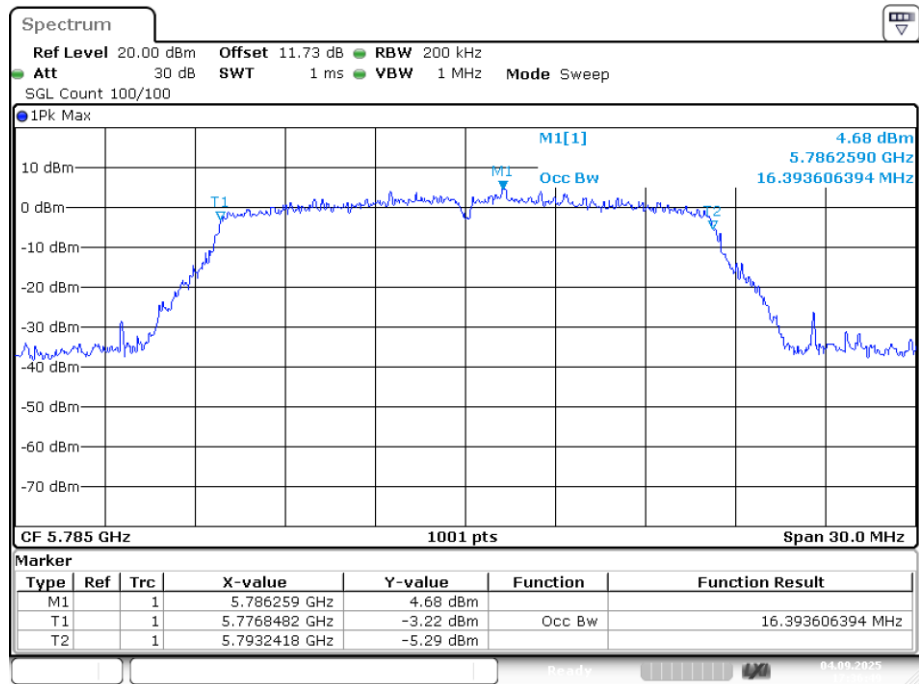


Date: 4.SEP.2025 17:36:49

OBW NVNT a 5825MHz Ant1

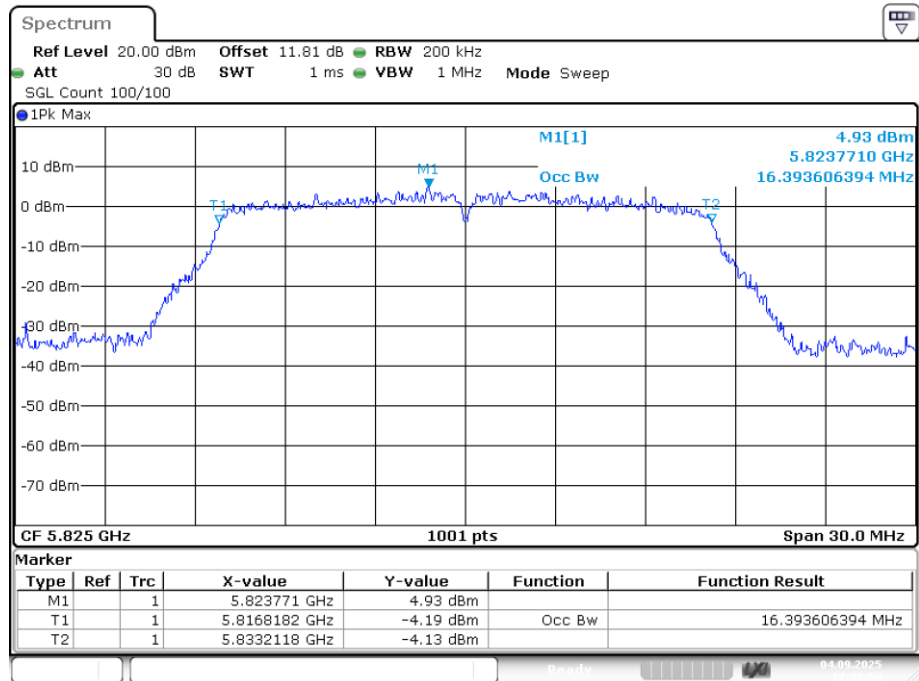


Date: 4.SEP.2025 17:38:50

OBW NVNT ac20 5745MHz Ant1

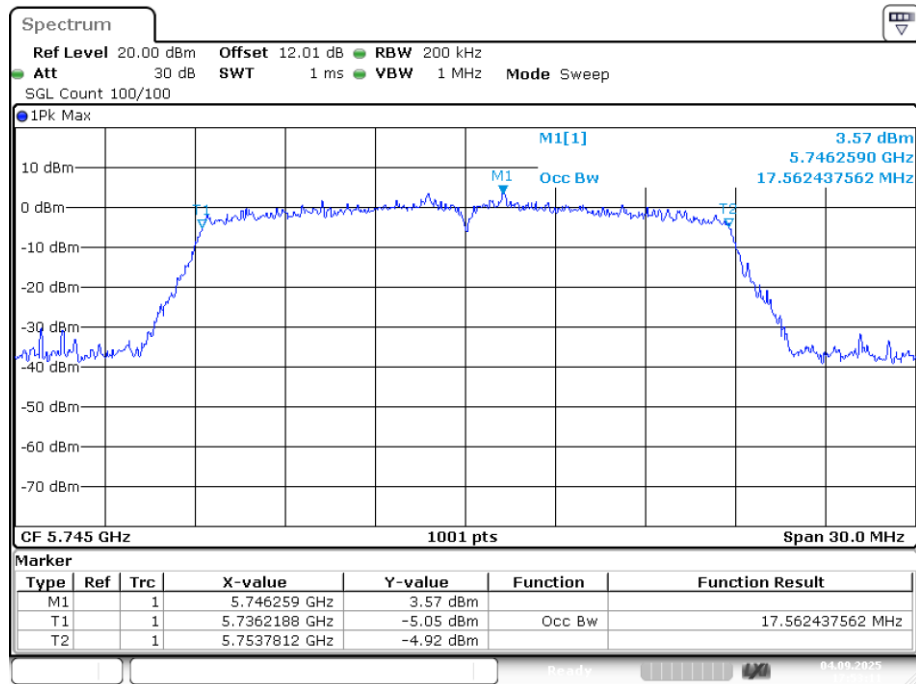


Date: 4.SEP.2025 17:53:11

OBW NVNT ac20 5785MHz Ant1

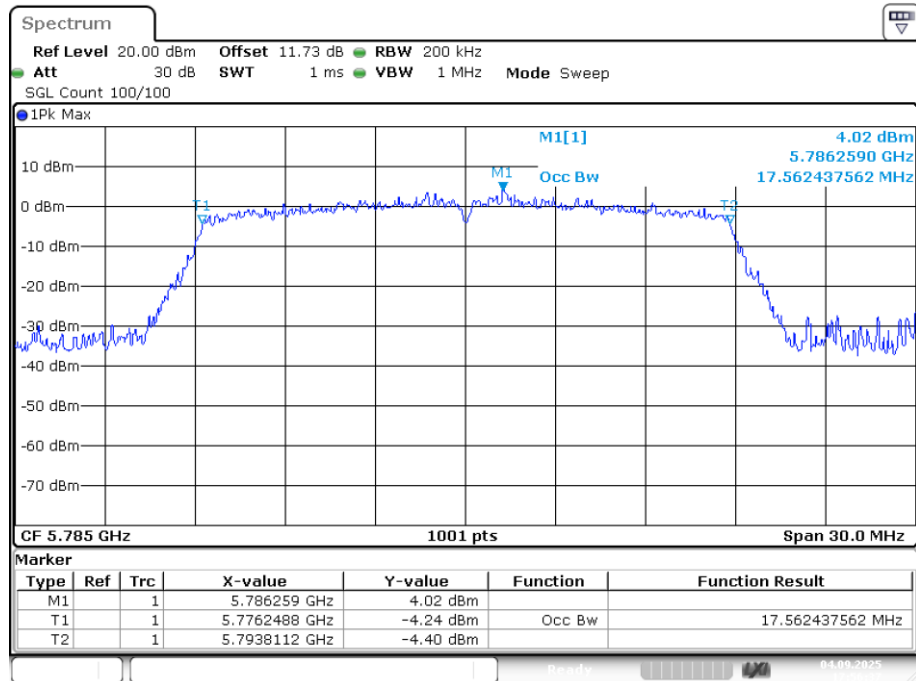


Date: 4.SEP.2025 17:56:37

OBW NVNT ac20 5825MHz Ant1

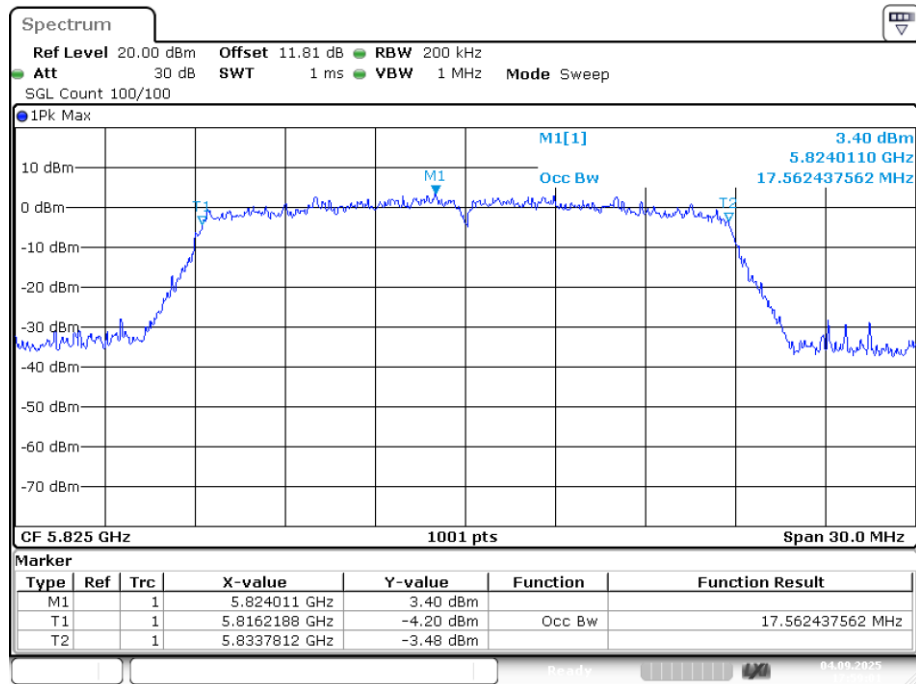


Date: 4.SEP.2025 17:59:01

OBW NVNT ac40 5755MHz Ant1

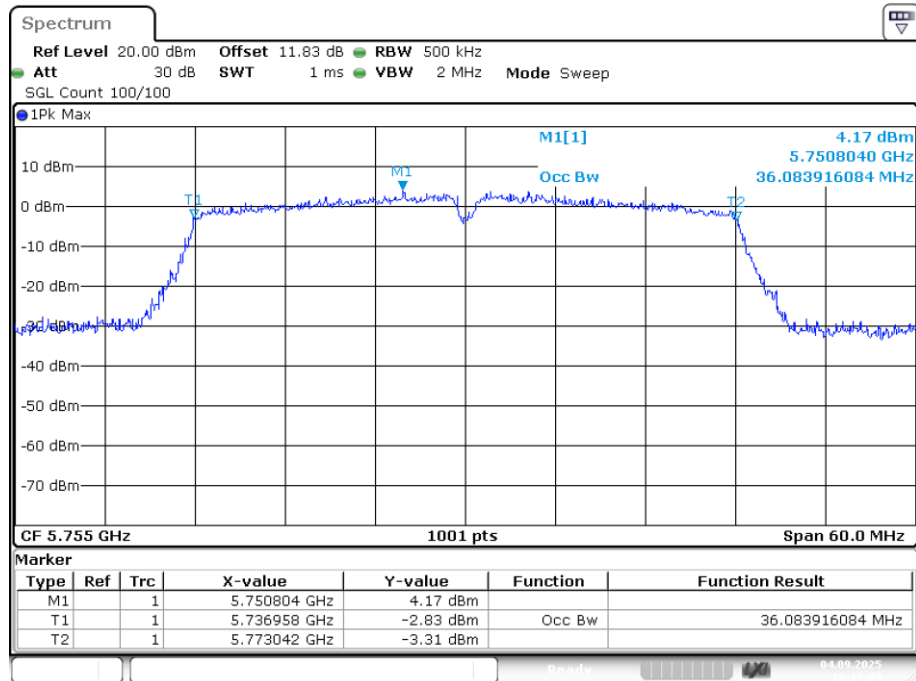


Date: 4.SEP.2025 18:13:10

OBW NVNT ac40 5795MHz Ant1

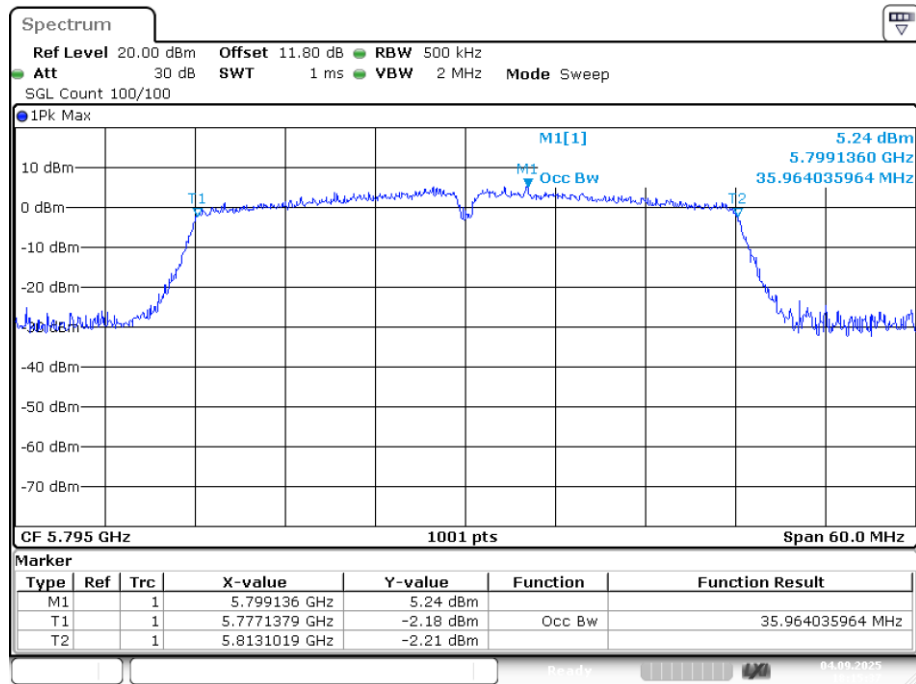


Date: 4.SEP.2025 18:15:37

OBW NVNT ax20 5745MHz Ant1

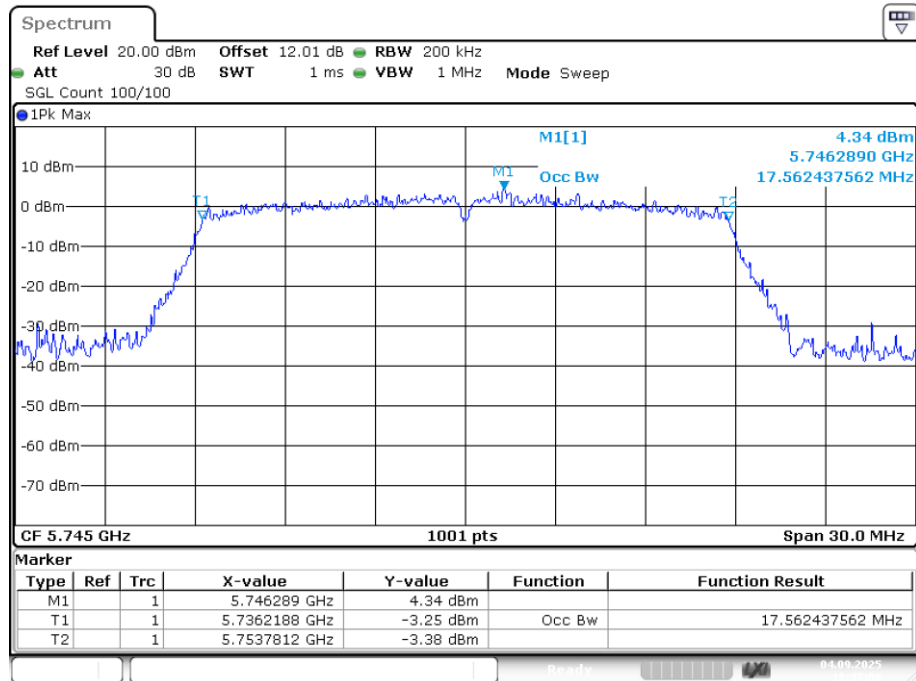


Date: 4.SEP.2025 18:47:06

OBW NVNT ax20 5785MHz Ant1

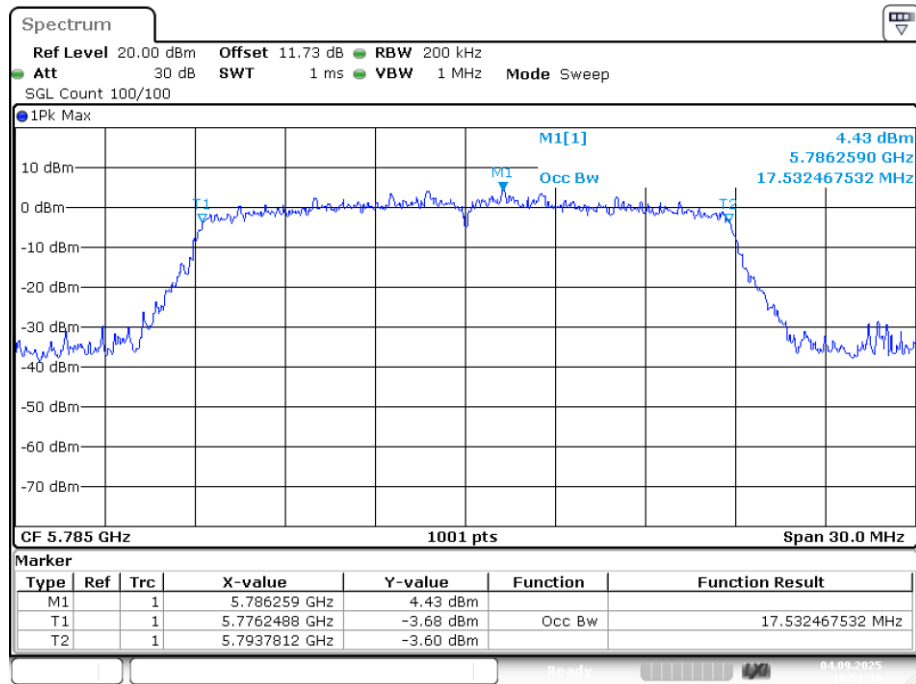


Date: 4.SEP.2025 18:51:49

OBW NVNT ax20 5825MHz Ant1

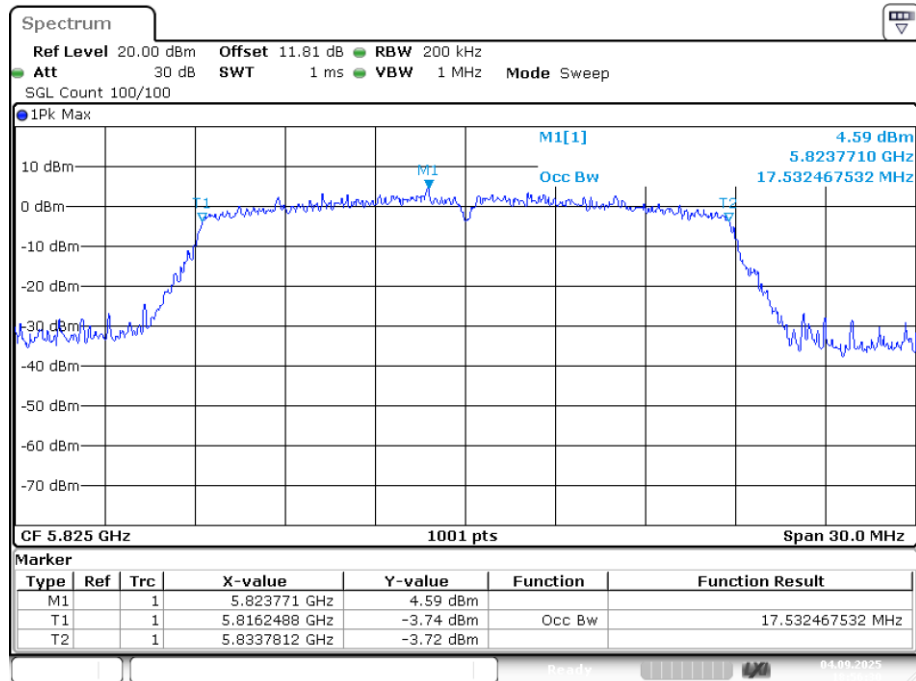


Date: 4.SEP.2025 18:56:29

OBW NVNT ax40 5755MHz Ant1

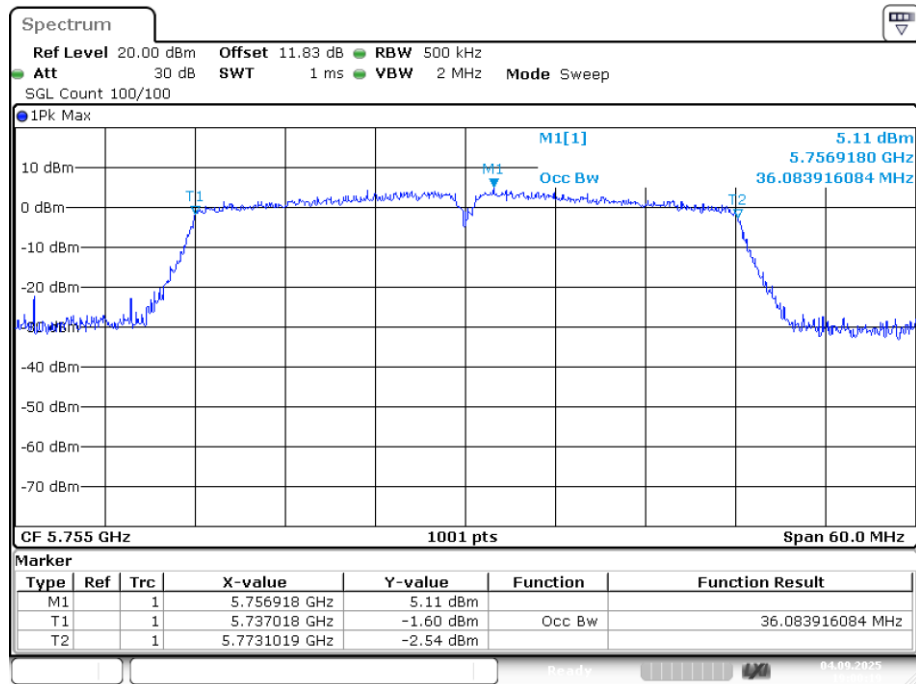


Date: 4.SEP.2025 19:00:19

OBW NVNT ax40 5795MHz Ant1

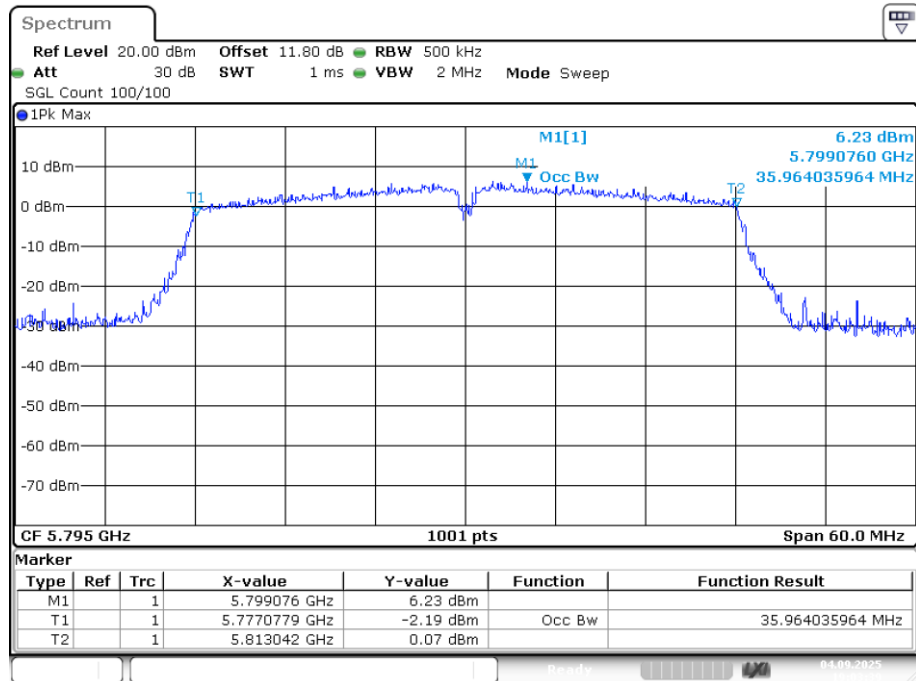


Date: 4.SEP.2025 19:03:39

OBW NVNT n20 5745MHz Ant1

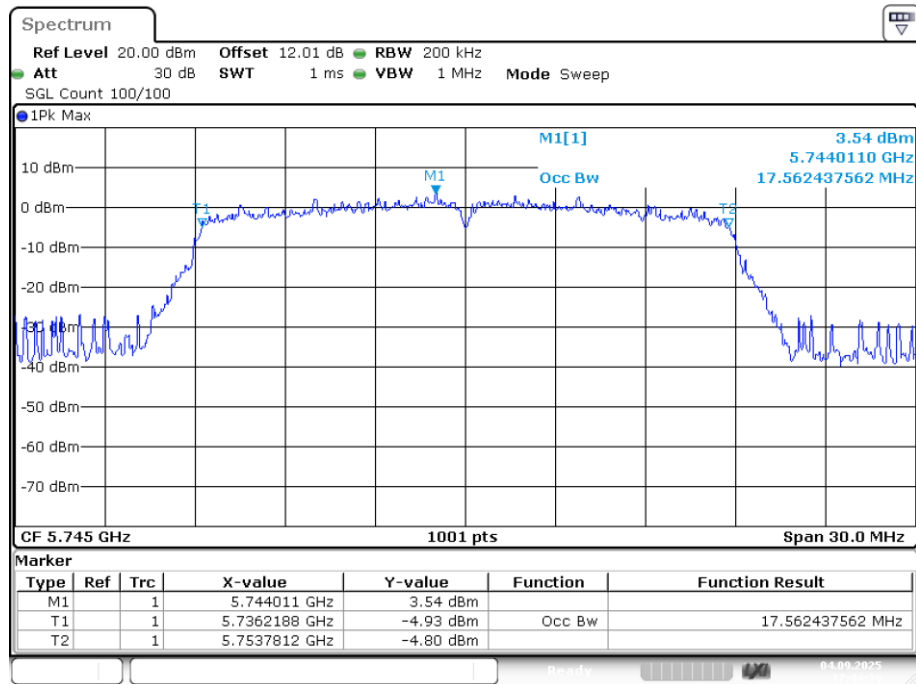


Date: 4.SEP.2025 17:44:39

OBW NVNT n20 5785MHz Ant1

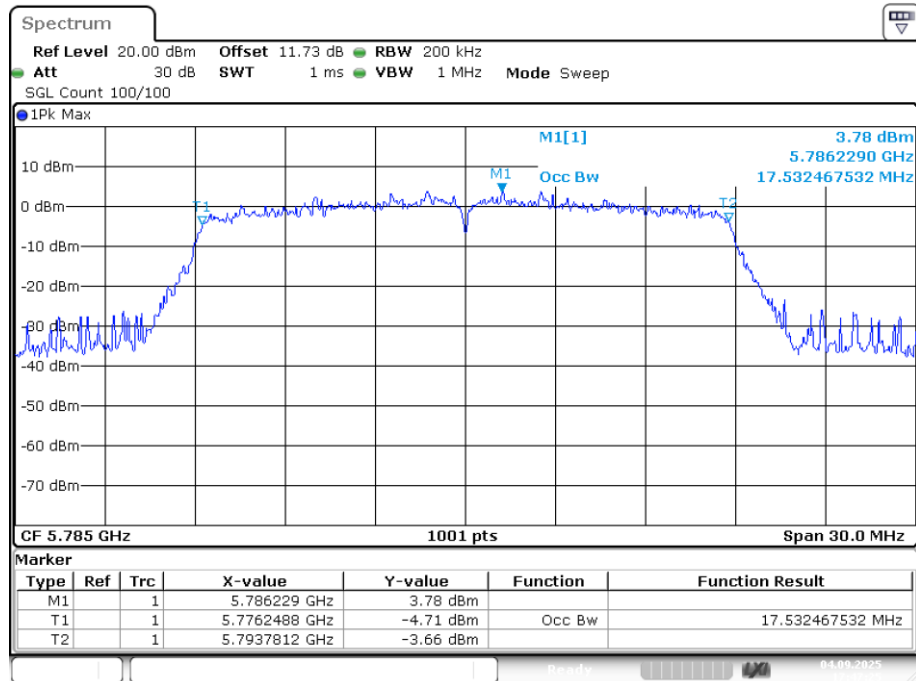


Date: 4.SEP.2025 17:47:25

OBW NVNT n20 5825MHz Ant1

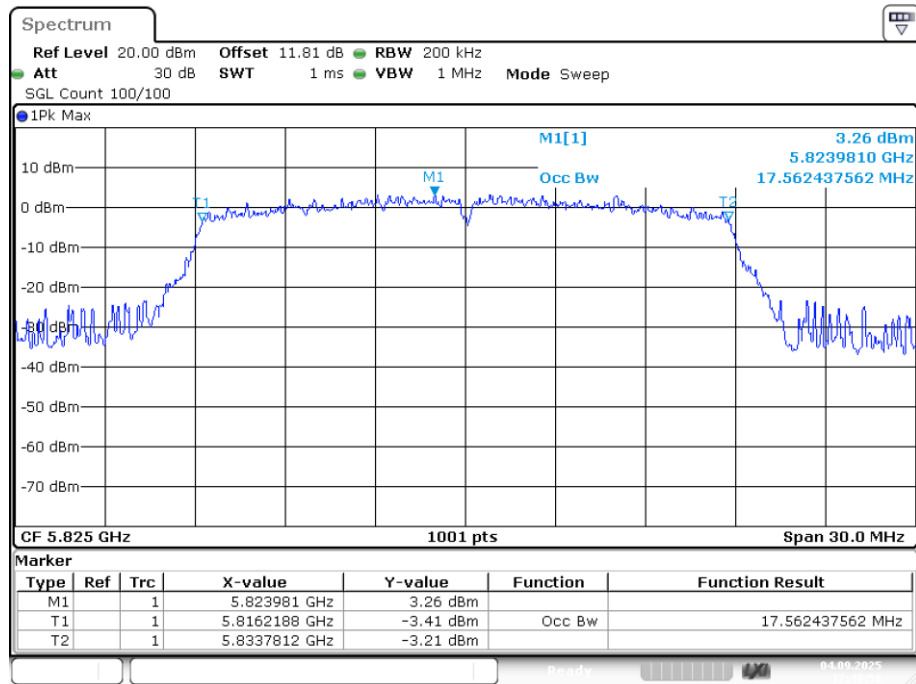


Date: 4.SEP.2025 17:49:56

OBW NVNT n40 5755MHz Ant1

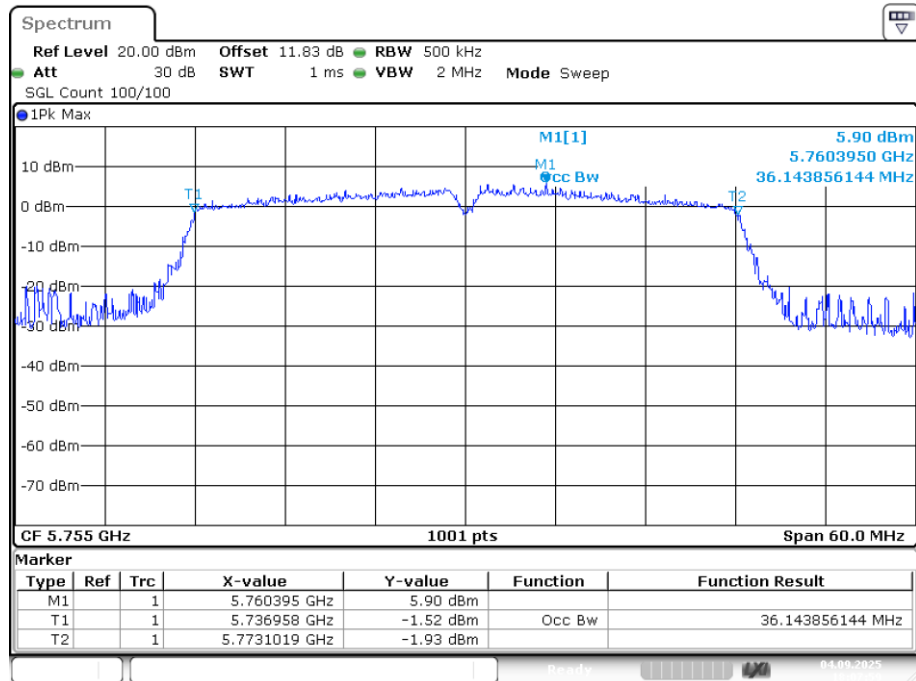


Date: 4.SEP.2025 18:07:59

OBW NVNT n40 5795MHz Ant1

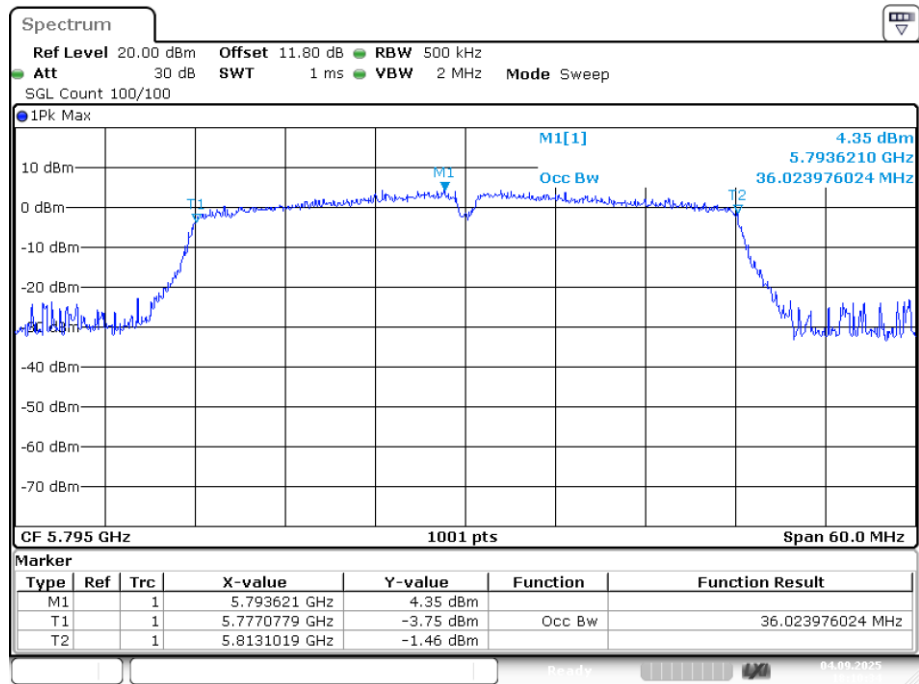

Date: 4.SEP.2025 18:10:35

4.4 Duty Cycle

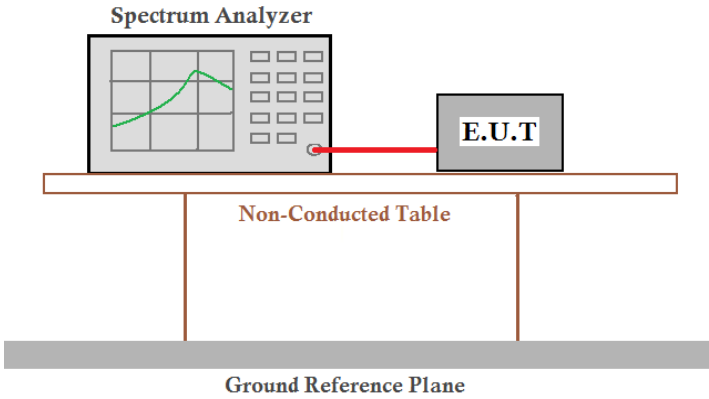Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	/
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test procedure:	a) A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on and off times of the transmitted signal. 789033 D02 General UNII Test Procedures New Rules v02r01 Page 3 b) Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak
Test results:	Pass


U-NII 1

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5180	Ant1	98.18	0.08
NVNT	a	5200	Ant1	98.18	0.08
NVNT	a	5240	Ant1	98.13	0.08
NVNT	ac20	5180	Ant1	98.07	0.08
NVNT	ac20	5200	Ant1	98.08	0.08
NVNT	ac20	5240	Ant1	98.04	0.09
NVNT	ac40	5190	Ant1	96.34	0.16
NVNT	ac40	5230	Ant1	96.36	0.16
NVNT	ax20	5180	Ant1	98.09	0.08
NVNT	ax20	5200	Ant1	98.04	0.09
NVNT	ax20	5240	Ant1	98.06	0.09
NVNT	ax40	5190	Ant1	96.36	0.16
NVNT	ax40	5230	Ant1	96.31	0.16
NVNT	n20	5180	Ant1	98.07	0.08
NVNT	n20	5200	Ant1	98.04	0.09
NVNT	n20	5240	Ant1	98.05	0.09
NVNT	n40	5190	Ant1	96.24	0.17
NVNT	n40	5230	Ant1	96.32	0.16

U-NII 3

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5745	Ant1	98.18	0.08
NVNT	a	5785	Ant1	98.2	0.08
NVNT	a	5825	Ant1	98.16	0.08
NVNT	ac20	5745	Ant1	98.05	0.09
NVNT	ac20	5785	Ant1	98.06	0.09
NVNT	ac20	5825	Ant1	98.08	0.08
NVNT	ac40	5755	Ant1	96.29	0.16
NVNT	ac40	5795	Ant1	96.33	0.16
NVNT	ax20	5745	Ant1	98.04	0.09
NVNT	ax20	5785	Ant1	98.08	0.08
NVNT	ax20	5825	Ant1	98.06	0.09
NVNT	ax40	5755	Ant1	96.37	0.16
NVNT	ax40	5795	Ant1	96.34	0.16
NVNT	n20	5745	Ant1	98.04	0.09
NVNT	n20	5785	Ant1	98.04	0.09
NVNT	n20	5825	Ant1	98.05	0.09
NVNT	n40	5755	Ant1	96.3	0.16
NVNT	n40	5795	Ant1	96.27	0.17

4.5 Maximum Conducted Output Power

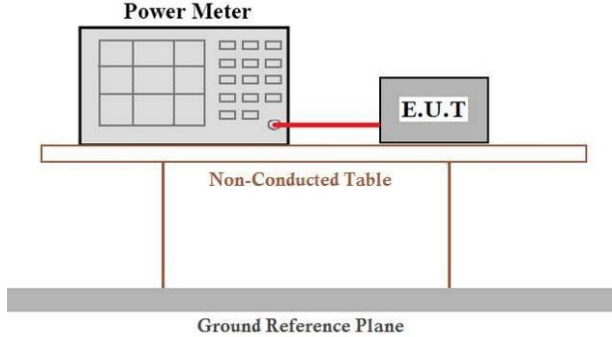Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	For the band 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 250mW. For the band 5.725-5.85GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 1W.
Test setup:	 The diagram illustrates the test setup. A 'Power Meter' is connected to an 'E.U.T.' (Equipment Under Test) by a red cable. Both components are positioned on a 'Non-Conducted Table'. This table is supported by two vertical legs. Below the table, a 'Ground Reference Plane' is indicated.
Test procedure:	Measurement using an RF average power meter (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).
Test results:	Pass

Measurement Data**Band 1 (5150-5250 MHz)**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Cycle Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	13.167	0.08	13.247	24	Pass
NVNT	a	5200	Ant1	13.36	0.08	13.44	24	Pass
NVNT	a	5240	Ant1	13.65	0.08	13.73	24	Pass
NVNT	ac20	5180	Ant1	13.418	0.08	13.498	24	Pass
NVNT	ac20	5200	Ant1	14.091	0.08	14.171	24	Pass
NVNT	ac20	5240	Ant1	13.57	0.09	13.66	24	Pass
NVNT	ac40	5190	Ant1	13.275	0.16	13.435	24	Pass
NVNT	ac40	5230	Ant1	13.132	0.16	13.292	24	Pass
NVNT	ax20	5180	Ant1	13.248	0.08	13.328	24	Pass
NVNT	ax20	5200	Ant1	13.818	0.09	13.908	24	Pass
NVNT	ax20	5240	Ant1	14.189	0.09	14.279	24	Pass
NVNT	ax40	5190	Ant1	14.613	0.16	14.773	24	Pass
NVNT	ax40	5230	Ant1	13.618	0.16	13.778	24	Pass
NVNT	n20	5180	Ant1	13.748	0.08	13.828	24	Pass
NVNT	n20	5200	Ant1	13.519	0.09	13.609	24	Pass
NVNT	n20	5240	Ant1	13.51	0.09	13.6	24	Pass
NVNT	n40	5190	Ant1	13.218	0.17	13.388	24	Pass
NVNT	n40	5230	Ant1	12.768	0.16	12.928	24	Pass

Note: Total Power= Conducted Power+ Duty Cycle Factor**Band 4 (5725 – 5850 MHz)**

Condition	Mode	Frequency (MHz)	Antenna	Conducte d Power (dBm)	Duty Cycle Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	12.822	0.08	12.902	30	Pass
NVNT	a	5785	Ant1	13.926	0.08	14.006	30	Pass
NVNT	a	5825	Ant1	14.12	0.08	14.2	30	Pass
NVNT	ac20	5745	Ant1	12.453	0.09	12.543	30	Pass
NVNT	ac20	5785	Ant1	13.04	0.09	13.13	30	Pass
NVNT	ac20	5825	Ant1	13.238	0.08	13.318	30	Pass
NVNT	ac40	5755	Ant1	12.488	0.16	12.648	30	Pass
NVNT	ac40	5795	Ant1	13.364	0.16	13.524	30	Pass
NVNT	ax20	5745	Ant1	13.53	0.09	13.62	30	Pass
NVNT	ax20	5785	Ant1	13.093	0.08	13.173	30	Pass
NVNT	ax20	5825	Ant1	13.309	0.09	13.399	30	Pass
NVNT	ax40	5755	Ant1	13.013	0.16	13.173	30	Pass
NVNT	ax40	5795	Ant1	14.363	0.16	14.523	30	Pass
NVNT	n20	5745	Ant1	12.7	0.09	12.79	30	Pass
NVNT	n20	5785	Ant1	13.22	0.09	13.31	30	Pass
NVNT	n20	5825	Ant1	13.527	0.09	13.617	30	Pass
NVNT	n40	5755	Ant1	13.351	0.16	13.511	30	Pass
NVNT	n40	5795	Ant1	12.822	0.17	12.992	30	Pass

Note: Total Power= Conducted Power+ Duty Cycle Factor

4.6 Power Spectral Density

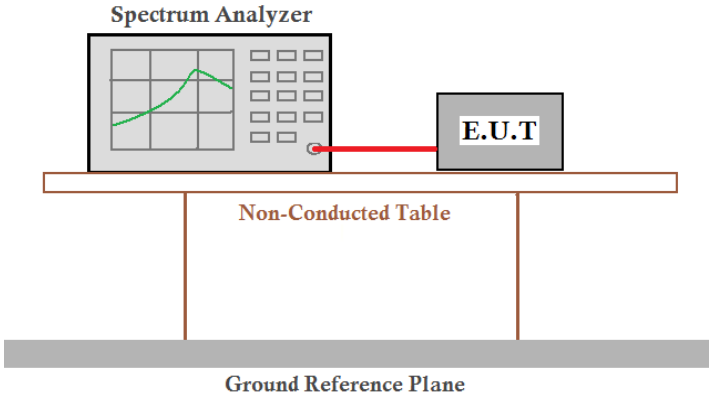
Test Requirement:	47-CFR-Part-15.407
Test Method:	ANSI C63.10-2020, section 12.6
Limit:	$\leq 11.00\text{dBm/MHz}$ for 5150MHz-5250MHz, 5250-5350MHz and 5470-5725 MHz $\leq 30.00\text{dBm/500KHz}$ for 5725MHz-5850MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green curve on its screen, is connected to an E.U.T. (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a table labeled 'Non-Conducted Table'. This table is supported by two vertical legs. Below the table, a horizontal grey bar represents the 'Ground Reference Plane'.
Test procedure:	Refer to ANSI-C63.10-2020, section.12.6-
Test results:	Pass

Measurement Data**Band 1 (5150 - 5250 MHz)**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD(dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	3.299	0.08	3.379	11	Pass
NVNT	a	5200	Ant1	3.295	0.08	3.375	11	Pass
NVNT	a	5240	Ant1	3.678	0.08	3.758	11	Pass
NVNT	ac20	5180	Ant1	3.363	0.08	3.443	11	Pass
NVNT	ac20	5200	Ant1	3.361	0.08	3.441	11	Pass
NVNT	ac20	5240	Ant1	3.158	0.09	3.248	11	Pass
NVNT	ac40	5190	Ant1	0.525	0.16	0.685	11	Pass
NVNT	ac40	5230	Ant1	-0.021	0.16	0.139	11	Pass
NVNT	ax20	5180	Ant1	2.964	0.08	3.044	11	Pass
NVNT	ax20	5200	Ant1	3.657	0.09	3.747	11	Pass
NVNT	ax20	5240	Ant1	3.896	0.09	3.986	11	Pass
NVNT	ax40	5190	Ant1	1.368	0.16	1.528	11	Pass
NVNT	ax40	5230	Ant1	0.737	0.16	0.897	11	Pass
NVNT	n20	5180	Ant1	3.587	0.08	3.667	11	Pass
NVNT	n20	5200	Ant1	3.353	0.09	3.443	11	Pass
NVNT	n20	5240	Ant1	3.315	0.09	3.405	11	Pass
NVNT	n40	5190	Ant1	0.295	0.17	0.465	11	Pass
NVNT	n40	5230	Ant1	-0.034	0.16	0.126	11	Pass


Note: 1. Total PSD= Conducted PSD+ Duty Cycle Factor,
2. Offset = Cable loss

PSD NVNT a 5180MHz Ant1

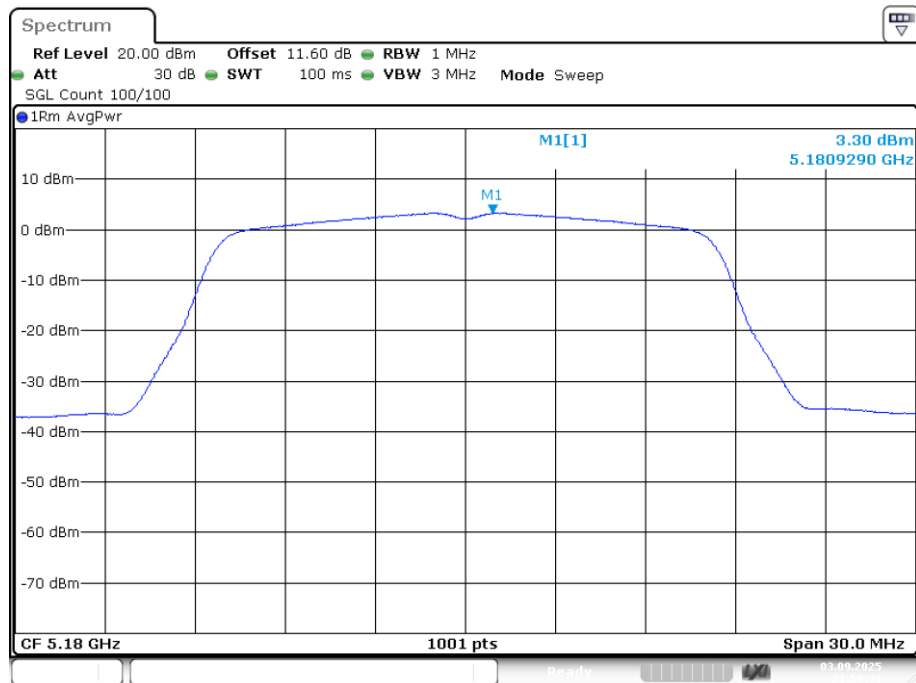


Date: 3.SEP.2025 21:56:38

PSD NVNT a 5200MHz Ant1

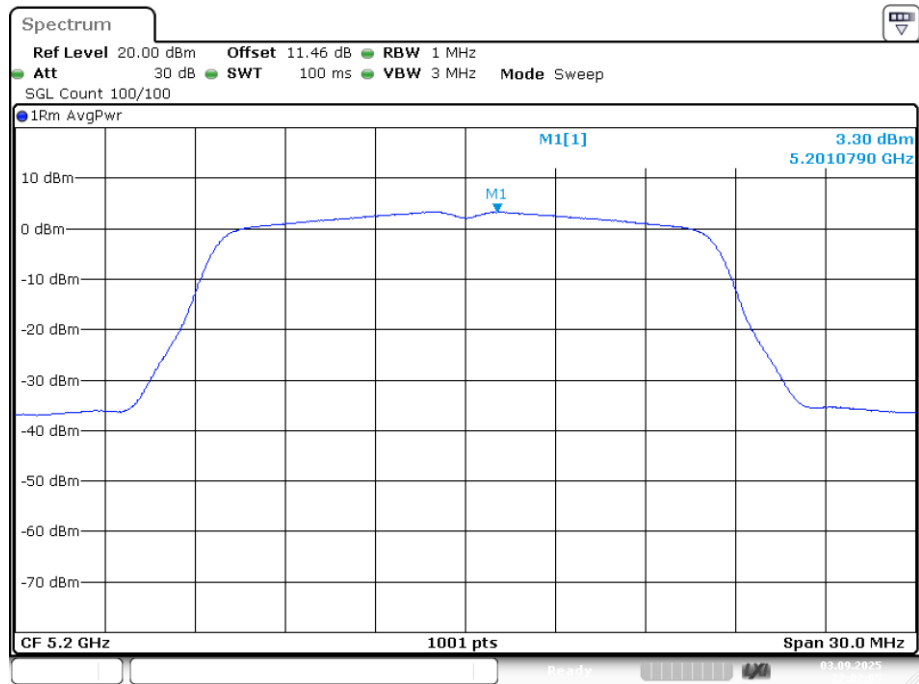


Date: 3.SEP.2025 22:02:04

PSD NVNT a 5240MHz Ant1

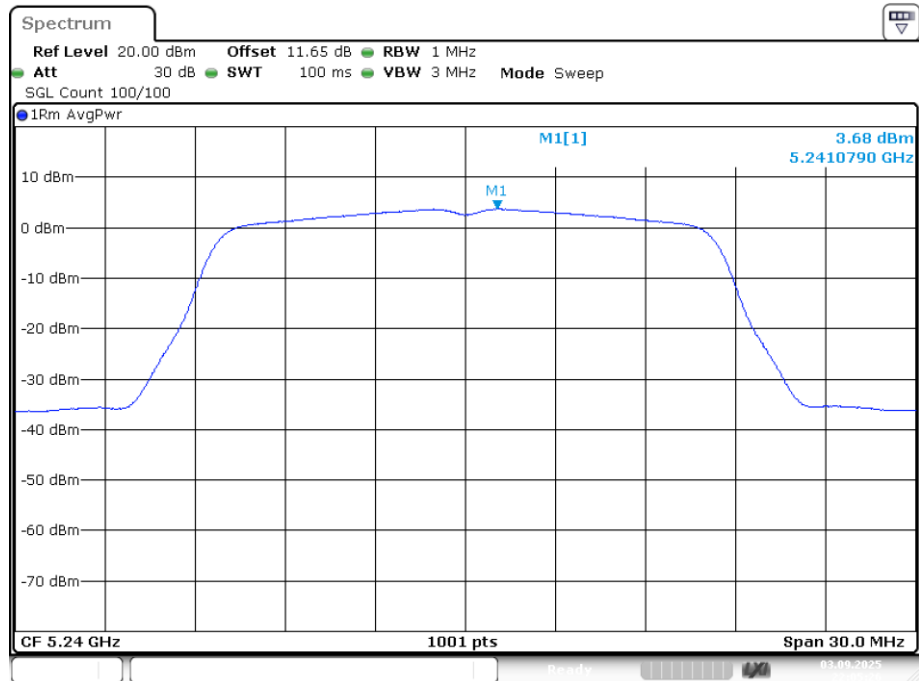


Date: 3.SEP.2025 22:05:25

PSD NVNT ac20 5180MHz Ant1

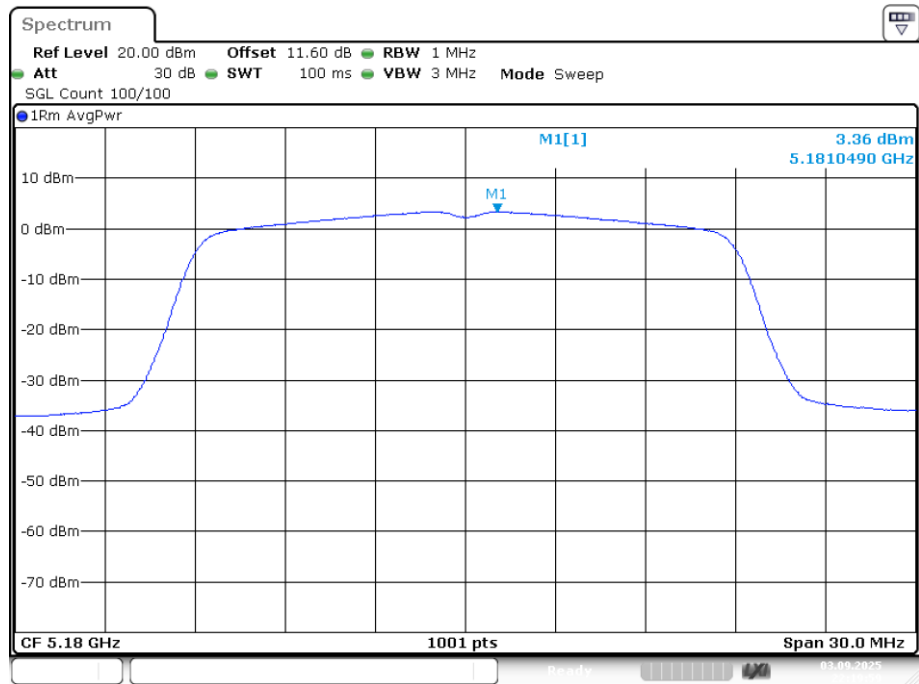


Date: 3.SEP.2025 22:19:59

PSD NVNT ac20 5200MHz Ant1

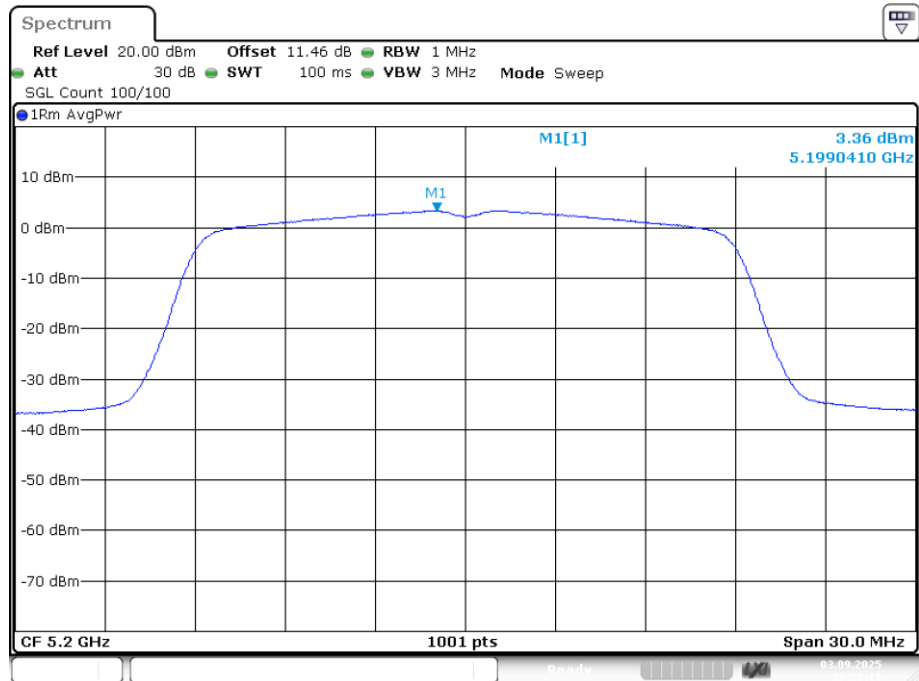


Date: 3.SEP.2025 22:23:18

PSD NVNT ac20 5240MHz Ant1

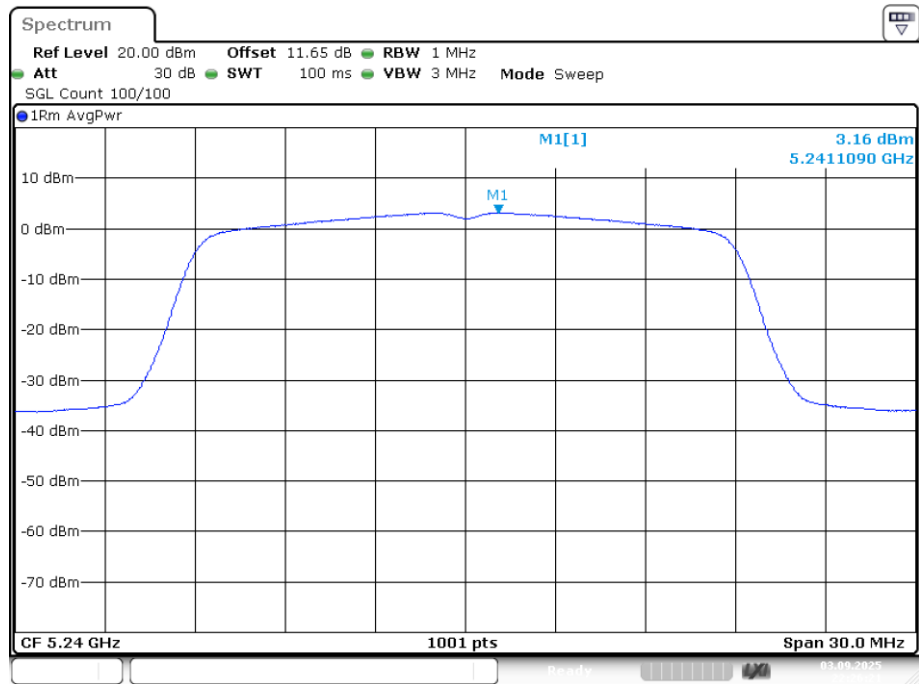


Date: 3.SEP.2025 22:26:21

PSD NVNT ac40 5190MHz Ant1

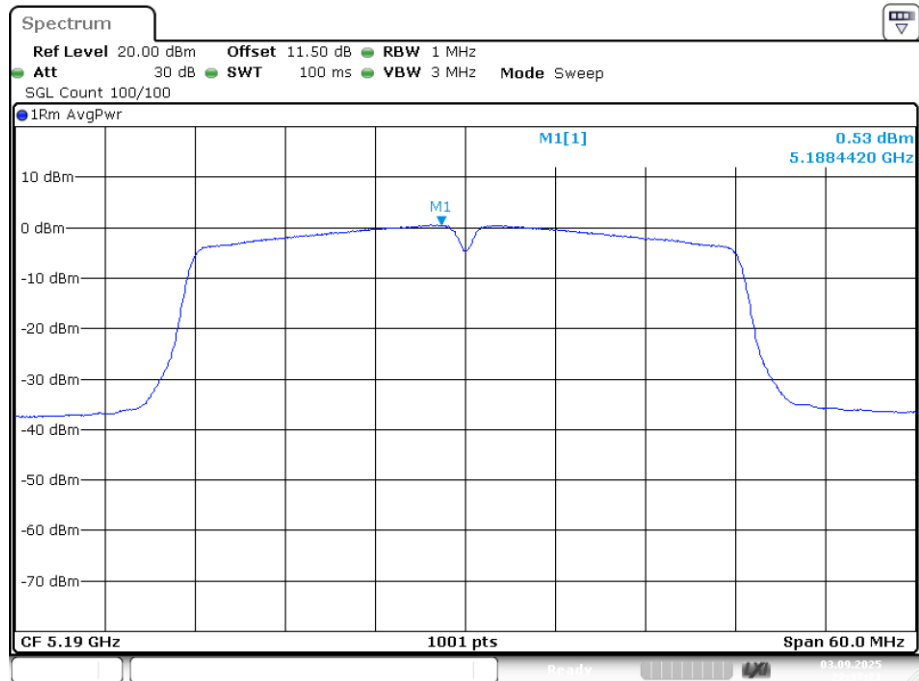


Date: 3.SEP.2025 22:37:21

PSD NVNT ac40 5230MHz Ant1

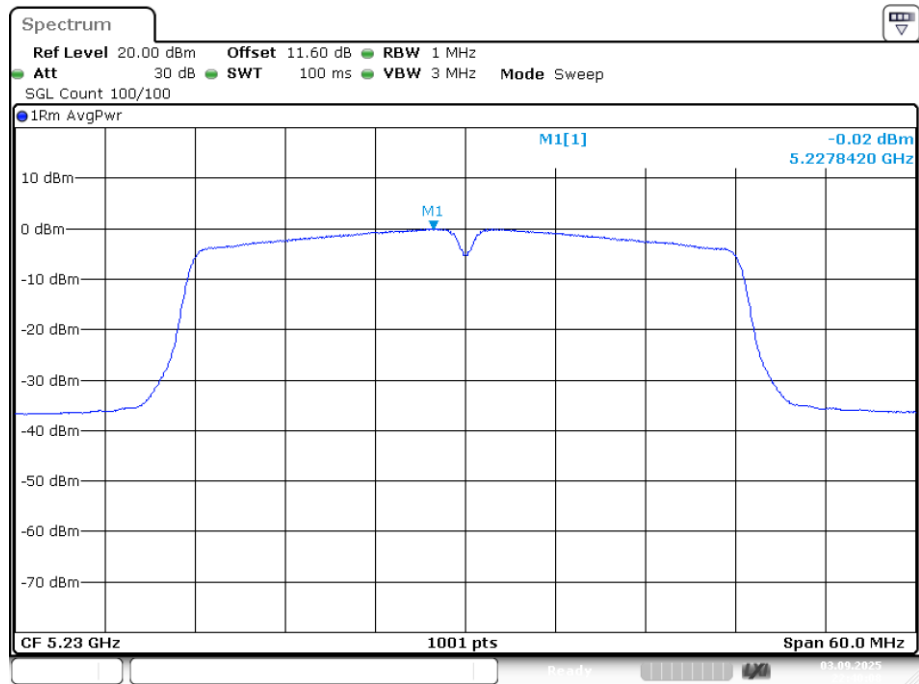


Date: 3.SEP.2025 22:40:08

PSD NVNT ax20 5180MHz Ant1

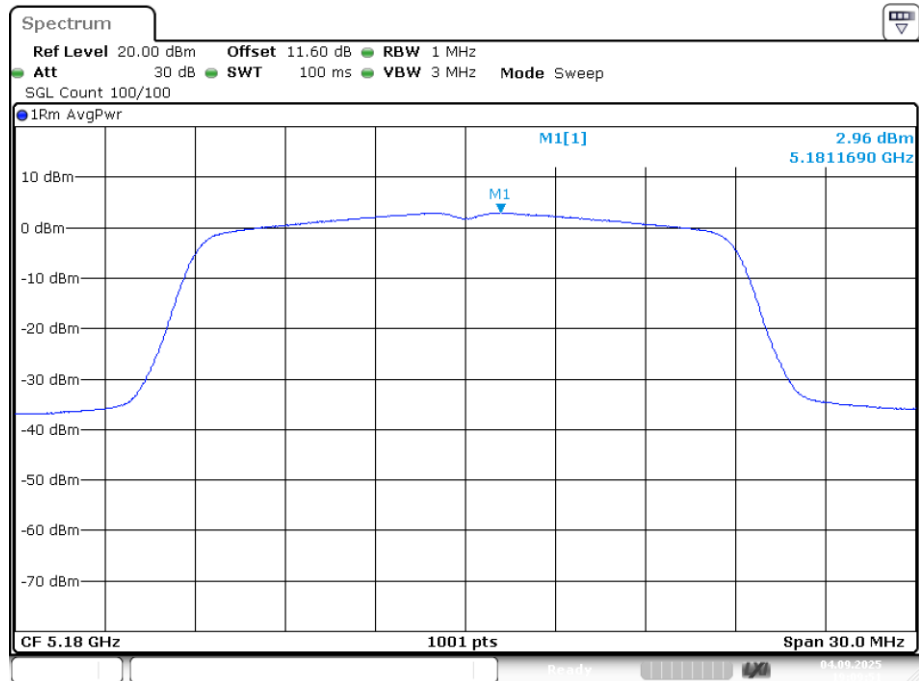


Date: 4.SEP.2025 19:09:51

PSD NVNT ax20 5200MHz Ant1

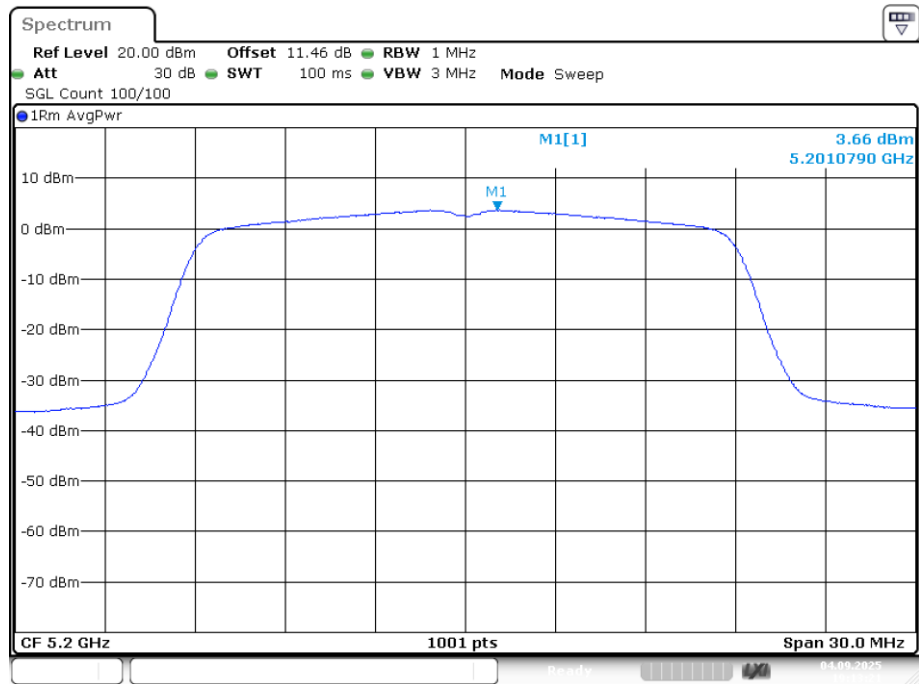


Date: 4.SEP.2025 19:13:22

PSD NVNT ax20 5240MHz Ant1

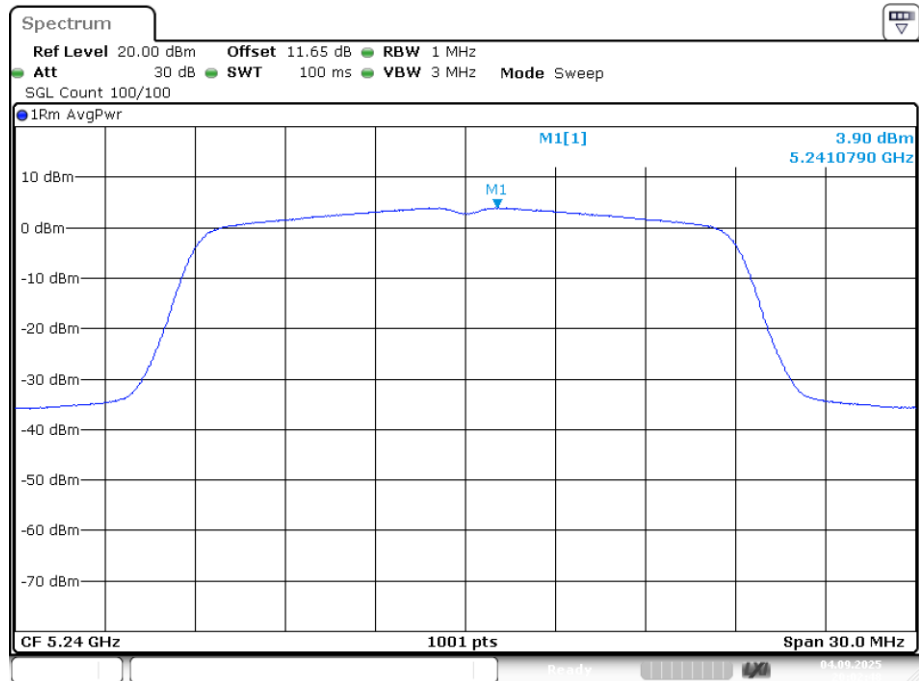


Date: 4.SEP.2025 20:02:48

PSD NVNT ax40 5190MHz Ant1

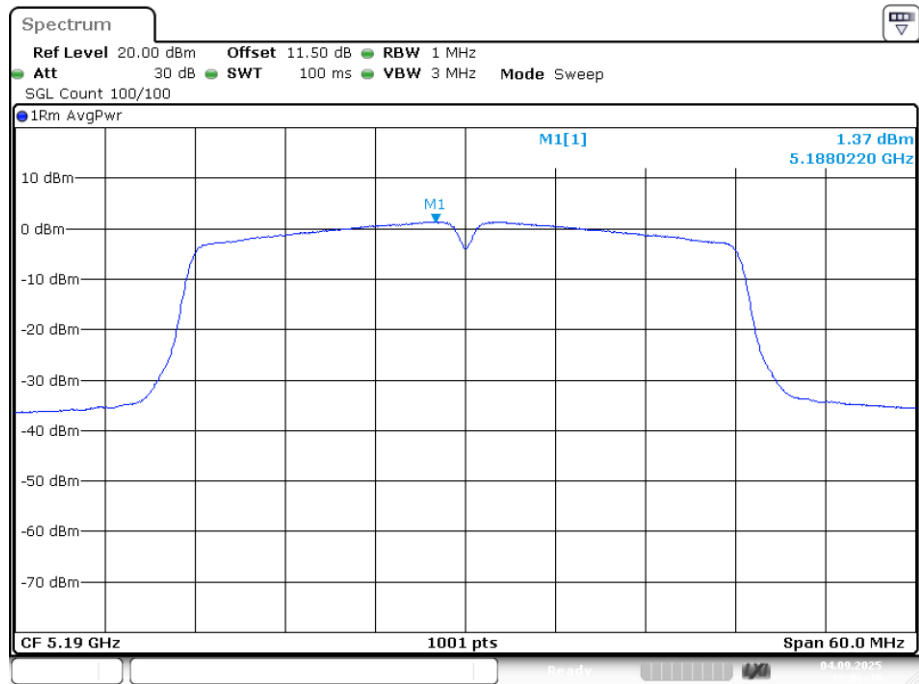


Date: 4.SEP.2025 20:06:30

PSD NVNT ax40 5230MHz Ant1

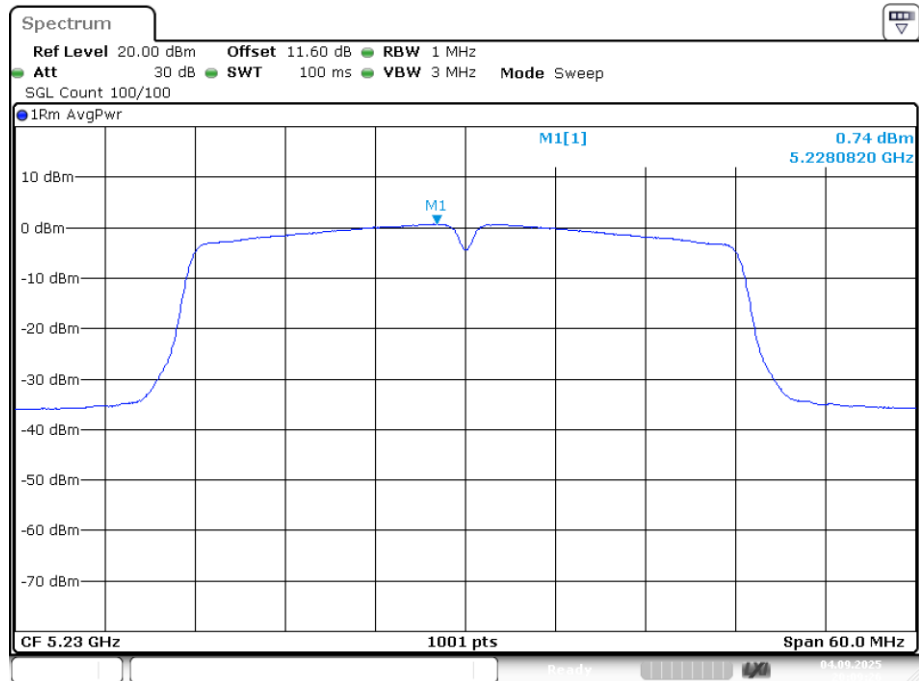


Date: 4.SEP.2025 20:09:26

PSD NVNT n20 5180MHz Ant1

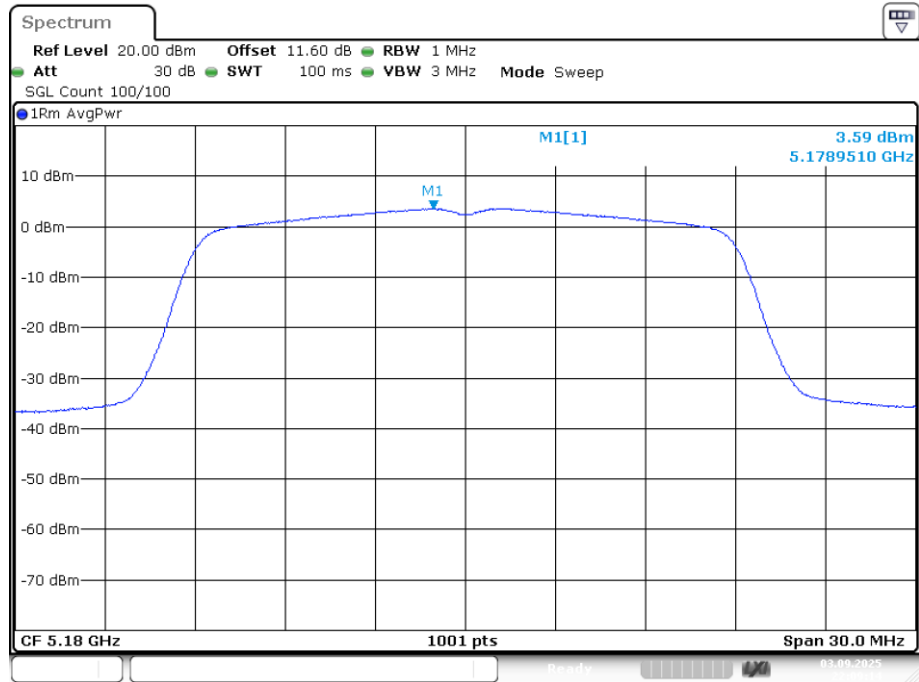


Date: 3.SEP.2025 22:09:13

PSD NVNT n20 5200MHz Ant1

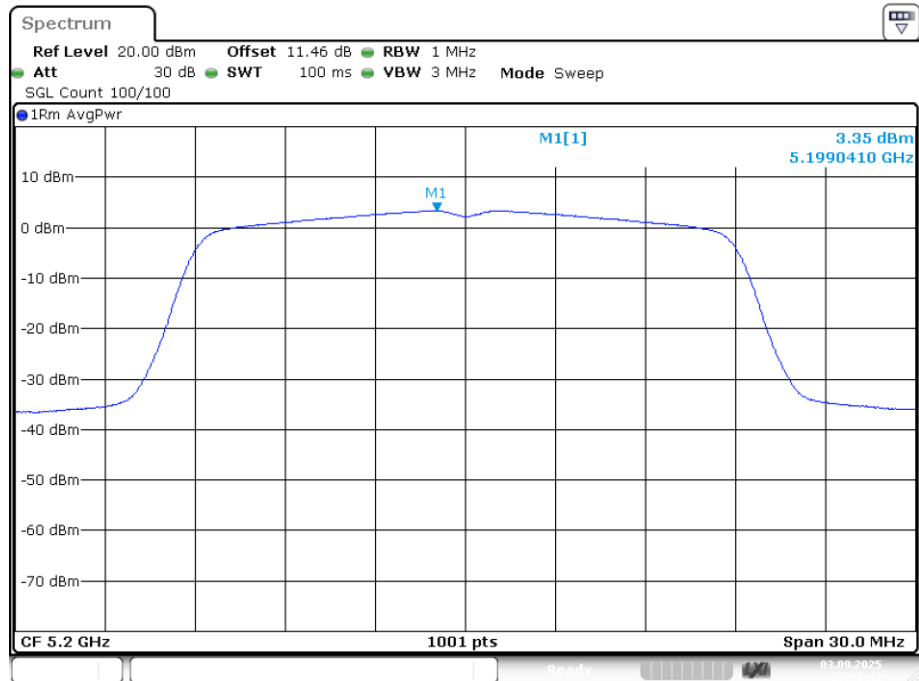


Date: 3.SEP.2025 22:12:41

PSD NVNT n20 5240MHz Ant1

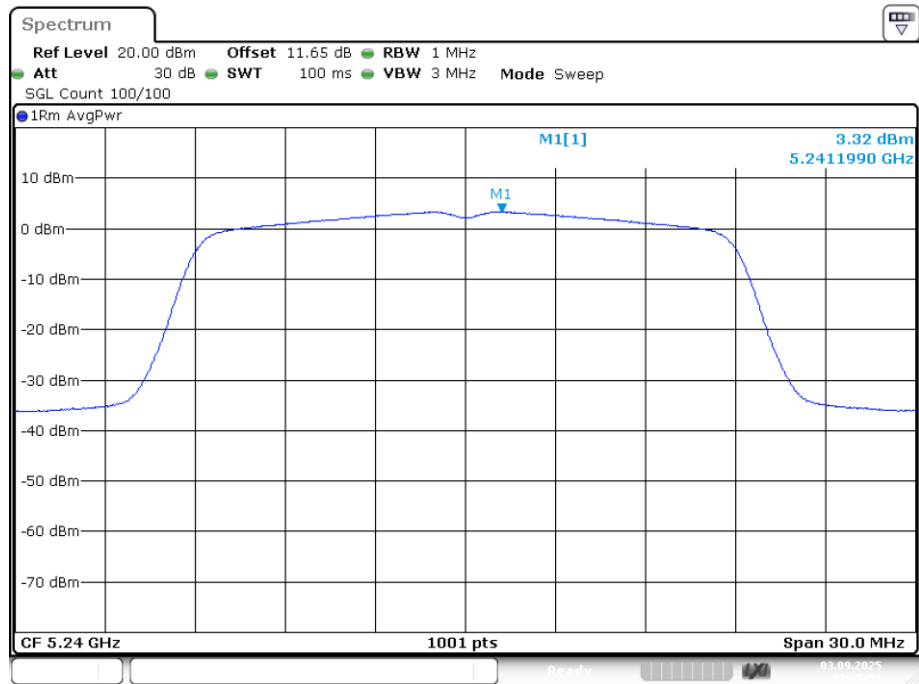


Date: 3.SEP.2025 22:15:52

PSD NVNT n40 5190MHz Ant1

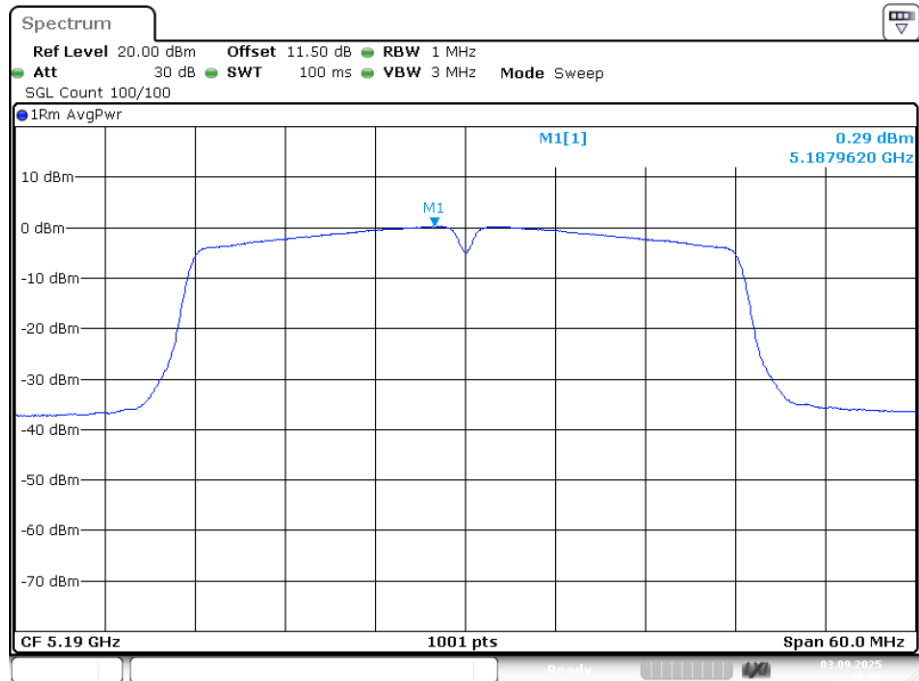

Date: 3.SEP.2025 22:30:00

PSD NVNT n40 5230MHz Ant1

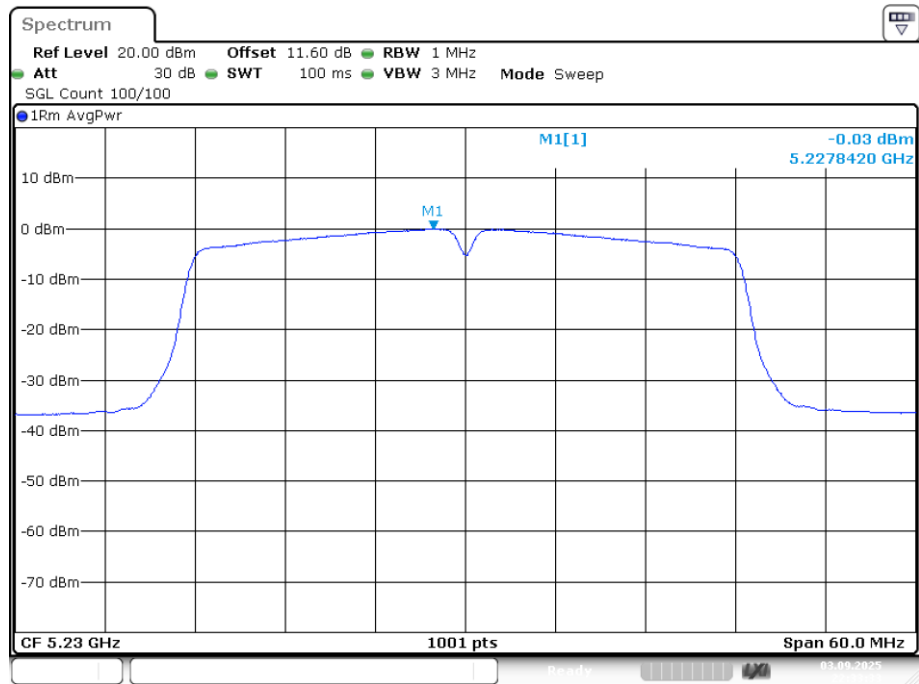


Date: 3.SEP.2025 22:33:33

Band 4 (5725 - 5850 MHz)

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD(dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-0.382	0.08	-0.302	30	Pass
NVNT	a	5785	Ant1	0.651	0.08	0.731	30	Pass
NVNT	a	5825	Ant1	0.817	0.08	0.897	30	Pass
NVNT	ac20	5745	Ant1	-0.632	0.09	-0.542	30	Pass
NVNT	ac20	5785	Ant1	-0.047	0.09	0.043	30	Pass
NVNT	ac20	5825	Ant1	0.014	0.08	0.094	30	Pass
NVNT	ac40	5755	Ant1	-3.735	0.16	-3.575	30	Pass
NVNT	ac40	5795	Ant1	-2.217	0.16	-2.057	30	Pass
NVNT	ax20	5745	Ant1	0.633	0.09	0.723	30	Pass
NVNT	ax20	5785	Ant1	0.292	0.08	0.372	30	Pass
NVNT	ax20	5825	Ant1	0.383	0.09	0.473	30	Pass
NVNT	ax40	5755	Ant1	-2.675	0.16	-2.515	30	Pass
NVNT	ax40	5795	Ant1	-2.225	0.16	-2.065	30	Pass
NVNT	n20	5745	Ant1	-0.844	0.09	-0.754	30	Pass
NVNT	n20	5785	Ant1	-0.052	0.09	0.038	30	Pass
NVNT	n20	5825	Ant1	0.465	0.09	0.555	30	Pass
NVNT	n40	5755	Ant1	-2.116	0.16	-1.956	30	Pass
NVNT	n40	5795	Ant1	-2.505	0.17	-2.335	30	Pass


**Note: 1. Total PSD= Conducted PSD+ Duty Cycle Factor,
2. Offset = Cable loss**

PSD NVNT a 5745MHz Ant1

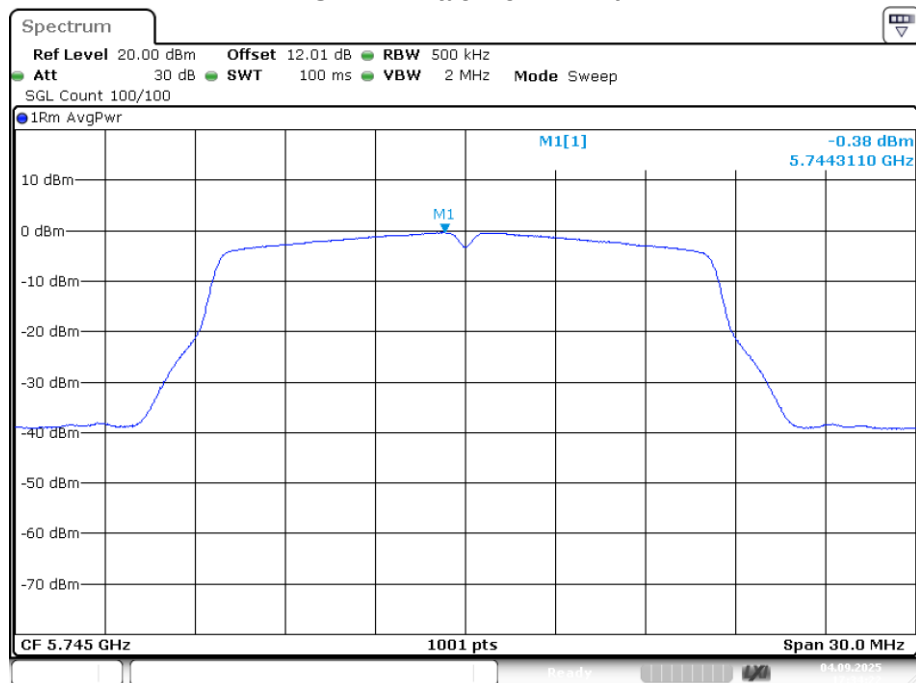


Date: 4.SEP.2025 17:34:22

PSD NVNT a 5785MHz Ant1

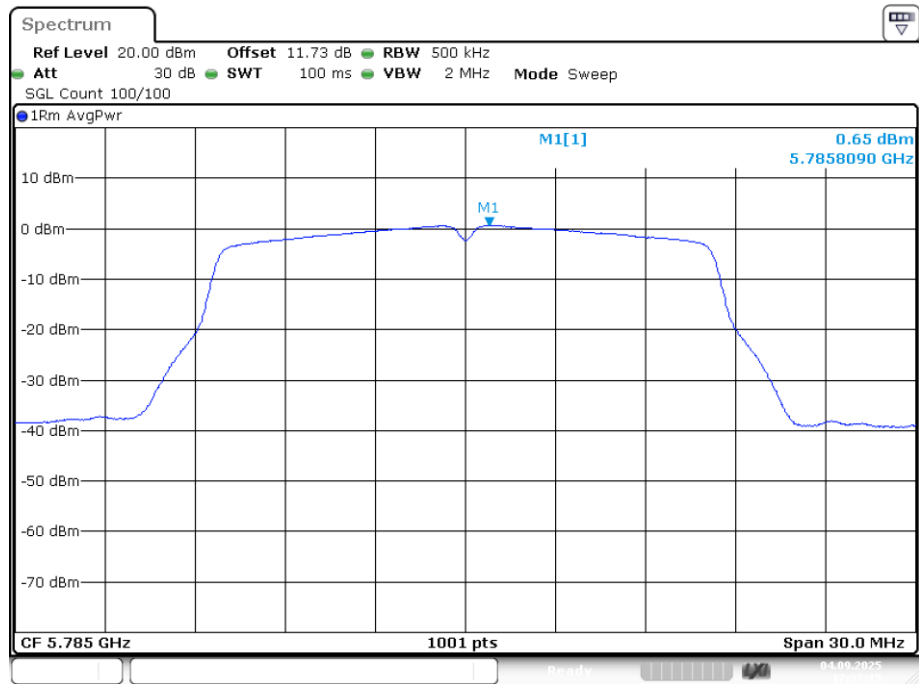


Date: 4.SEP.2025 17:37:15

PSD NVNT a 5825MHz Ant1

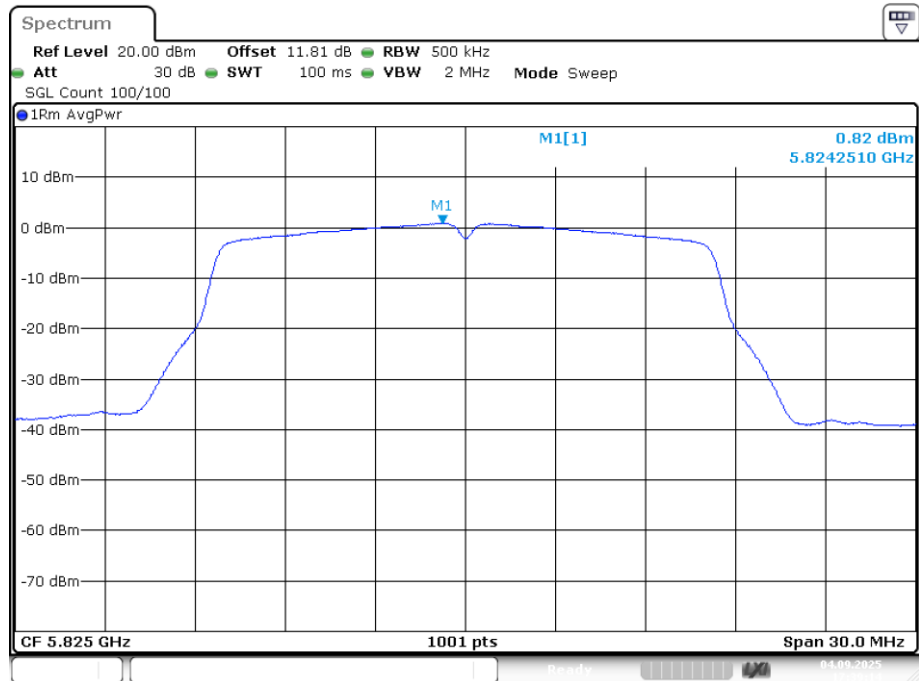


Date: 4.SEP.2025 17:39:14

PSD NVNT ac20 5745MHz Ant1

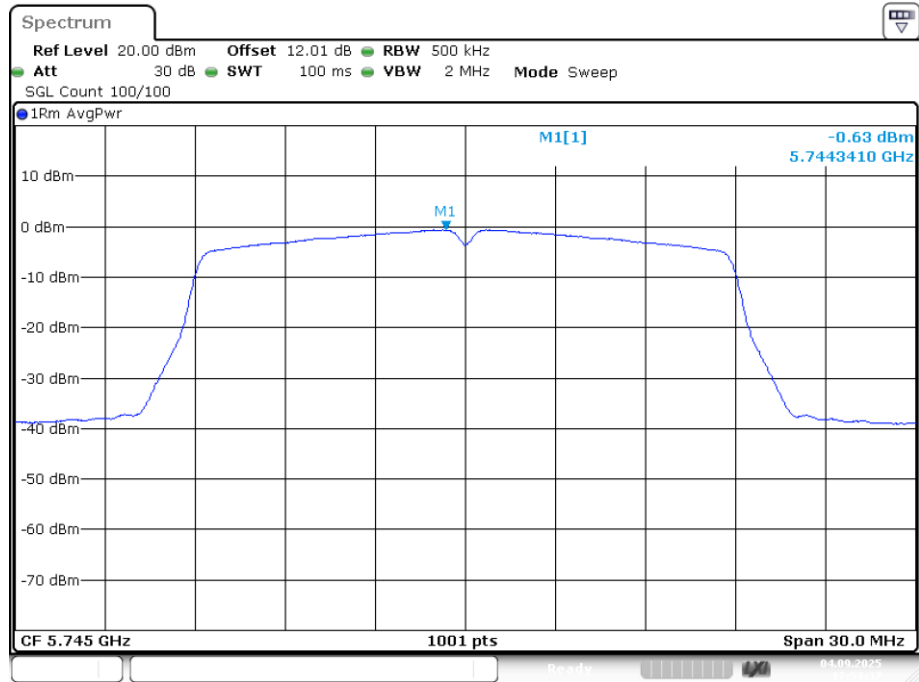


Date: 4.SEP.2025 17:53:37

PSD NVNT ac20 5785MHz Ant1

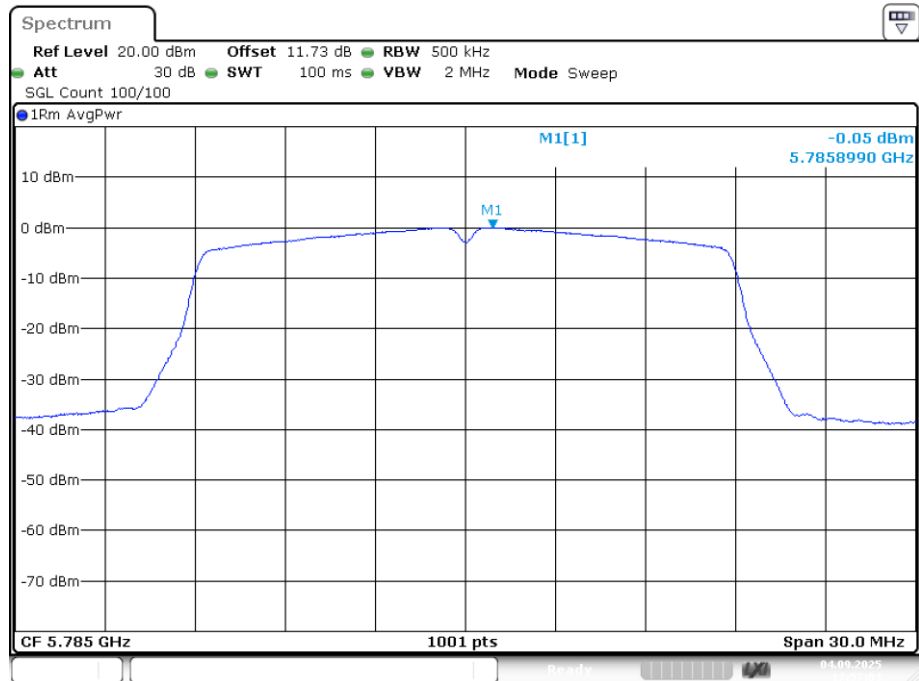


Date: 4.SEP.2025 17:57:04

PSD NVNT ac20 5825MHz Ant1

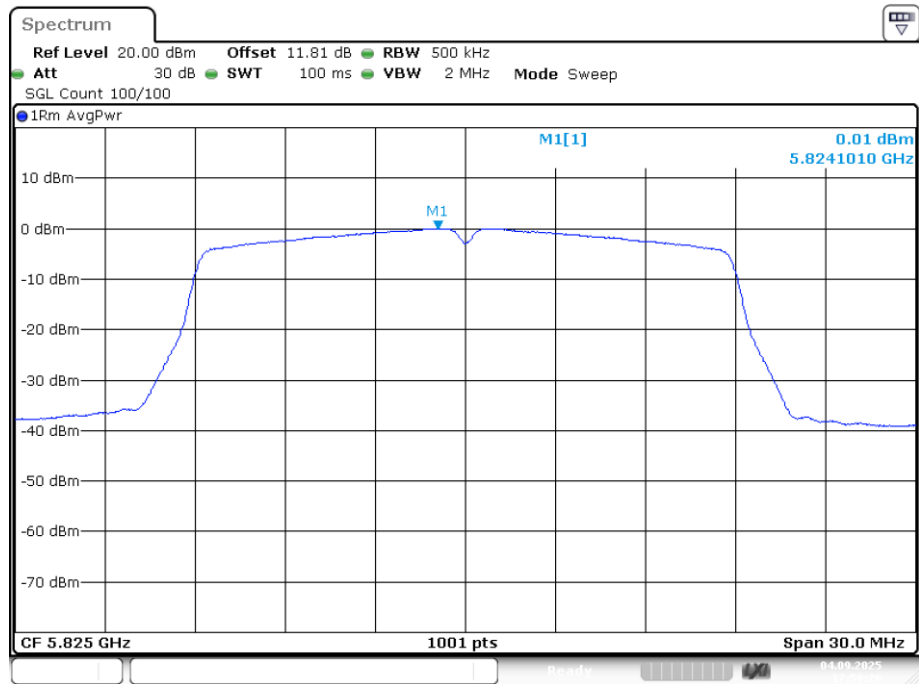


Date: 4.SEP.2025 17:59:26

PSD NVNT ac40 5755MHz Ant1

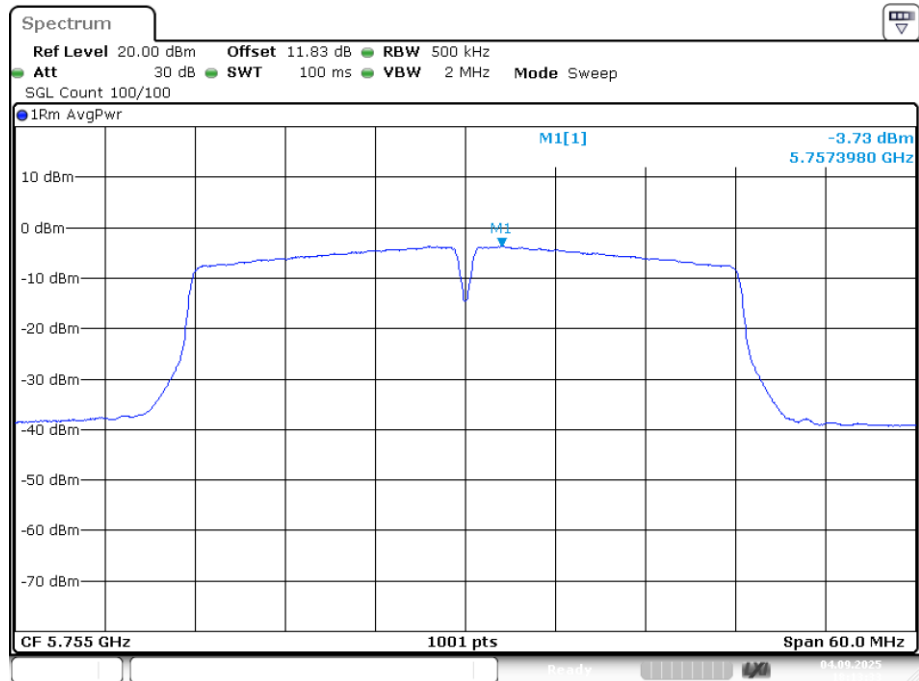


Date: 4.SEP.2025 18:13:34

PSD NVNT ac40 5795MHz Ant1

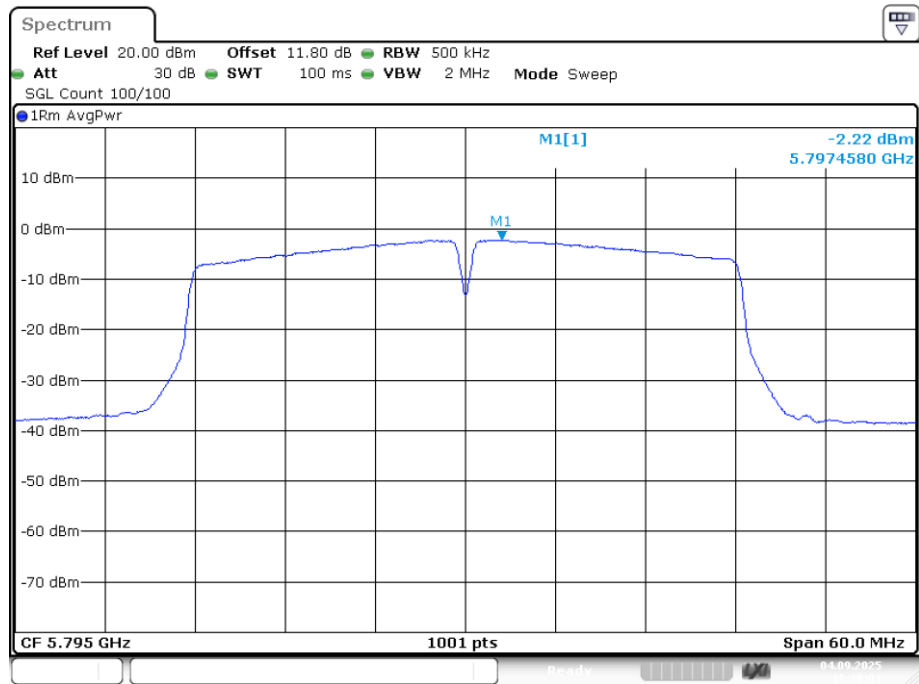


Date: 4.SEP.2025 18:16:01

PSD NVNT ax20 5745MHz Ant1

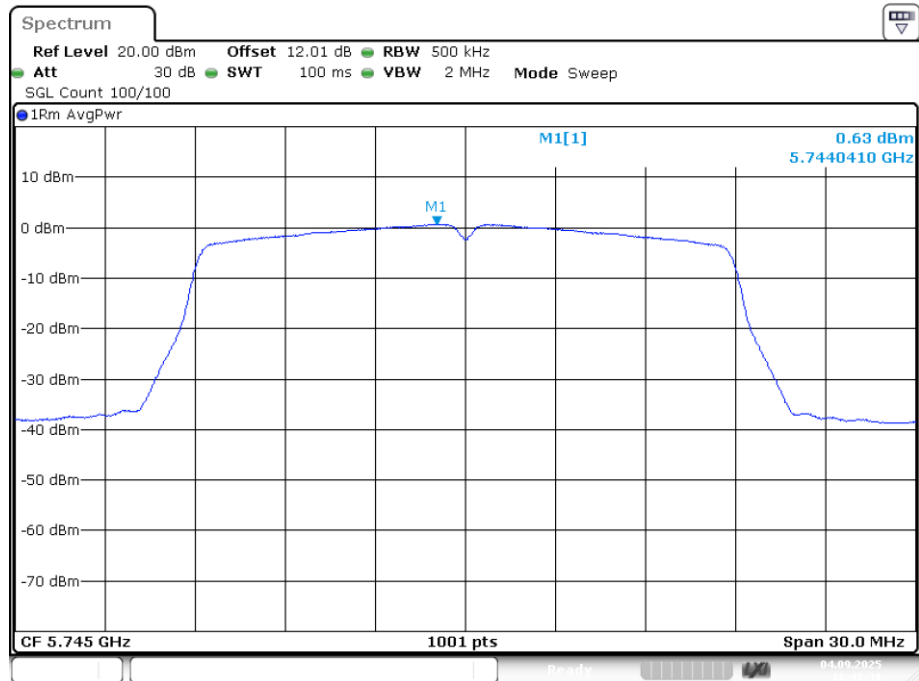


Date: 4.SEP.2025 18:47:32

PSD NVNT ax20 5785MHz Ant1

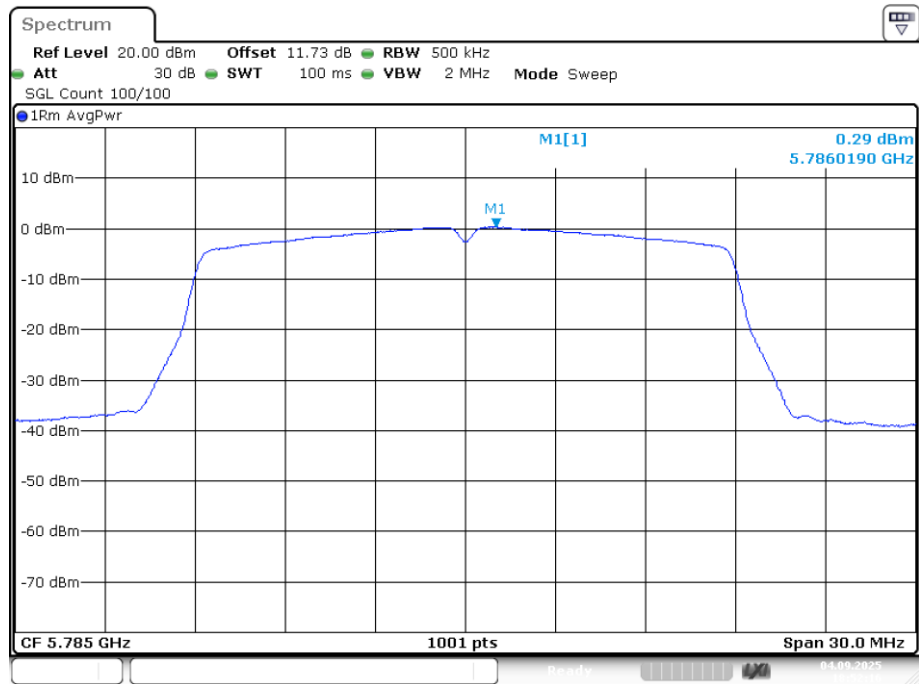


Date: 4.SEP.2025 18:52:16

PSD NVNT ax20 5825MHz Ant1

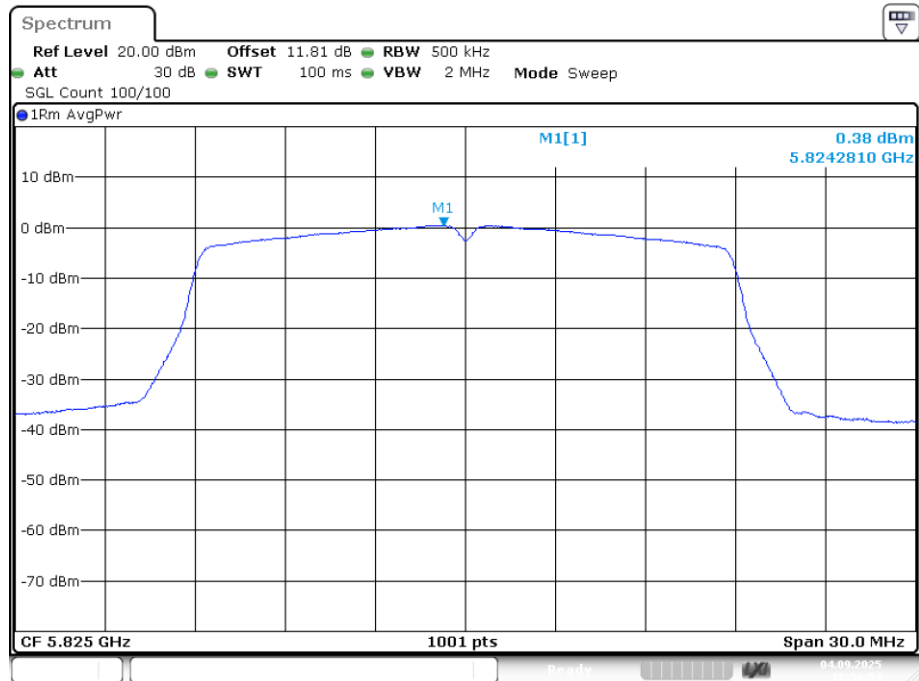


Date: 4.SEP.2025 18:56:54

PSD NVNT ax40 5755MHz Ant1

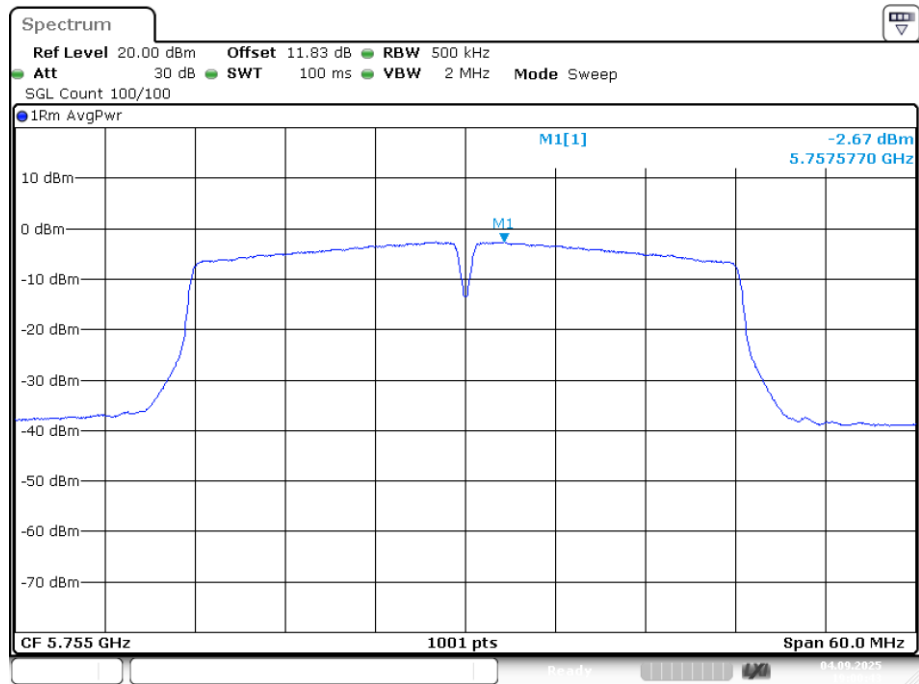


Date: 4.SEP.2025 19:00:43

PSD NVNT ax40 5795MHz Ant1

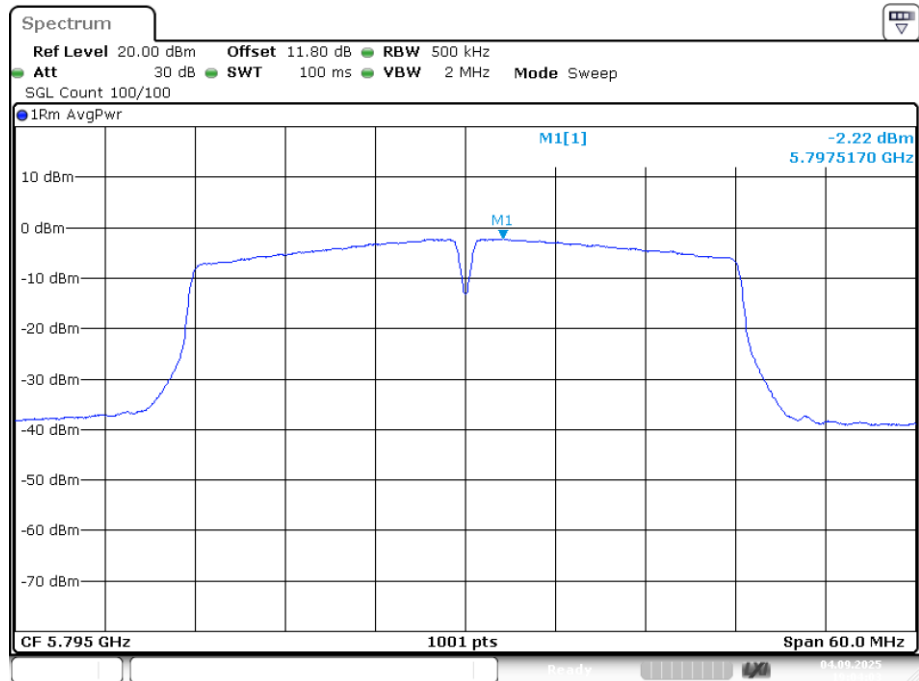


Date: 4.SEP.2025 19:04:03

PSD NVNT n20 5745MHz Ant1

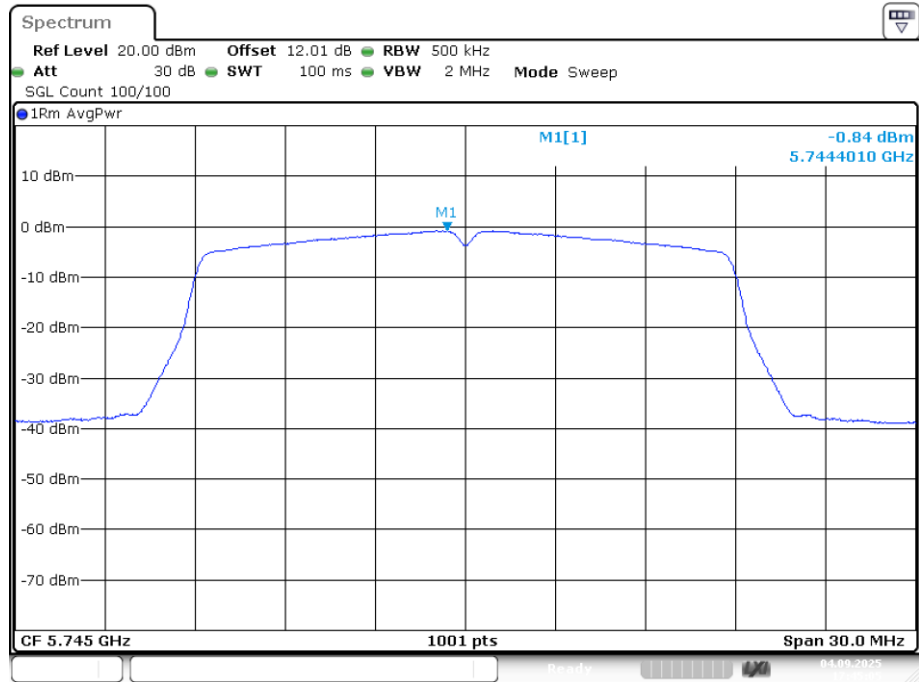


Date: 4.SEP.2025 17:45:05

PSD NVNT n20 5785MHz Ant1

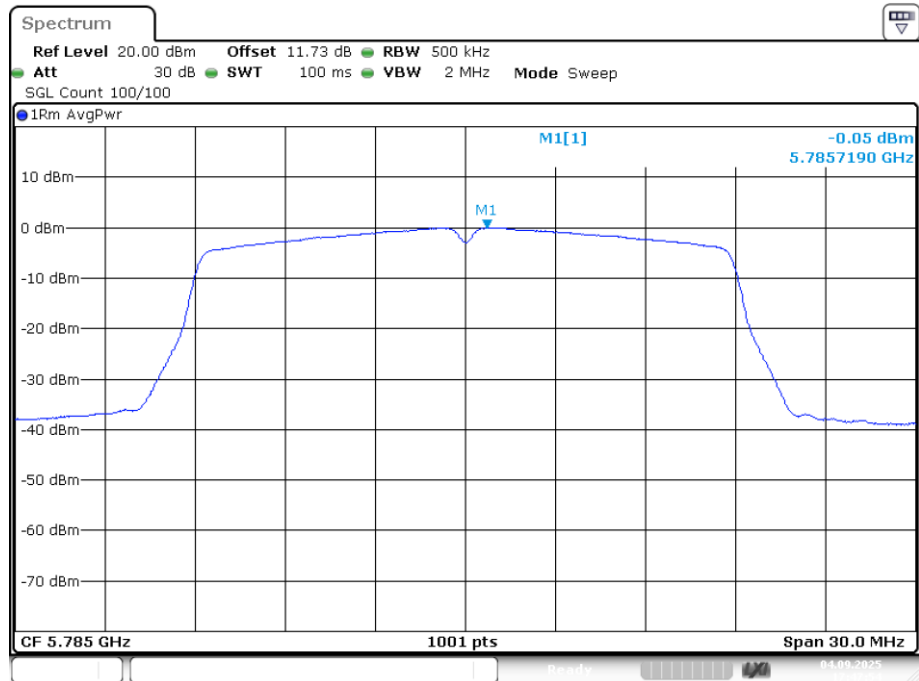


Date: 4.SEP.2025 17:47:54

PSD NVNT n20 5825MHz Ant1

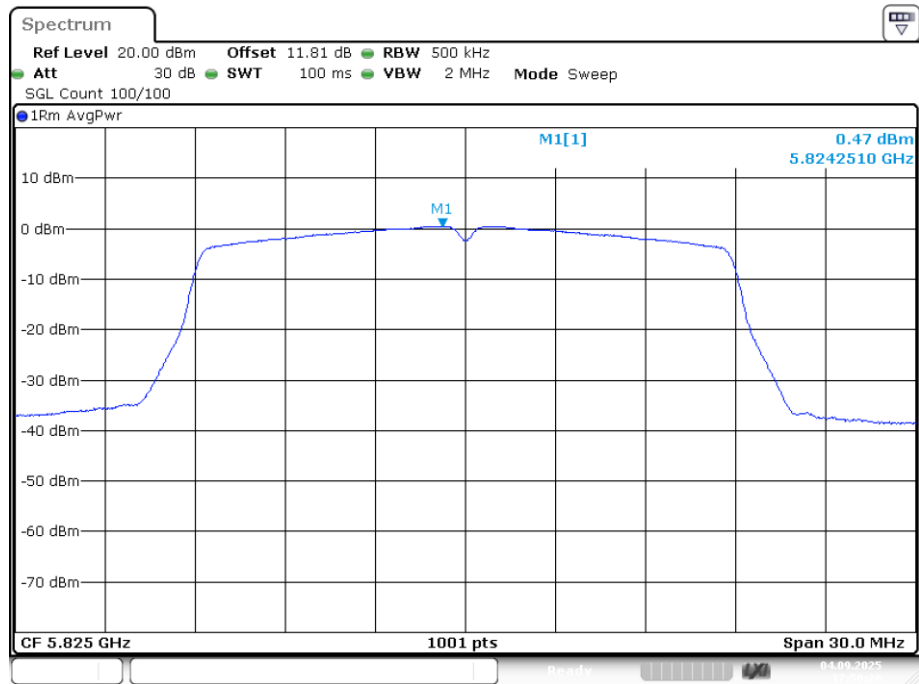


Date: 4.SEP.2025 17:50:20

PSD NVNT n40 5755MHz Ant1

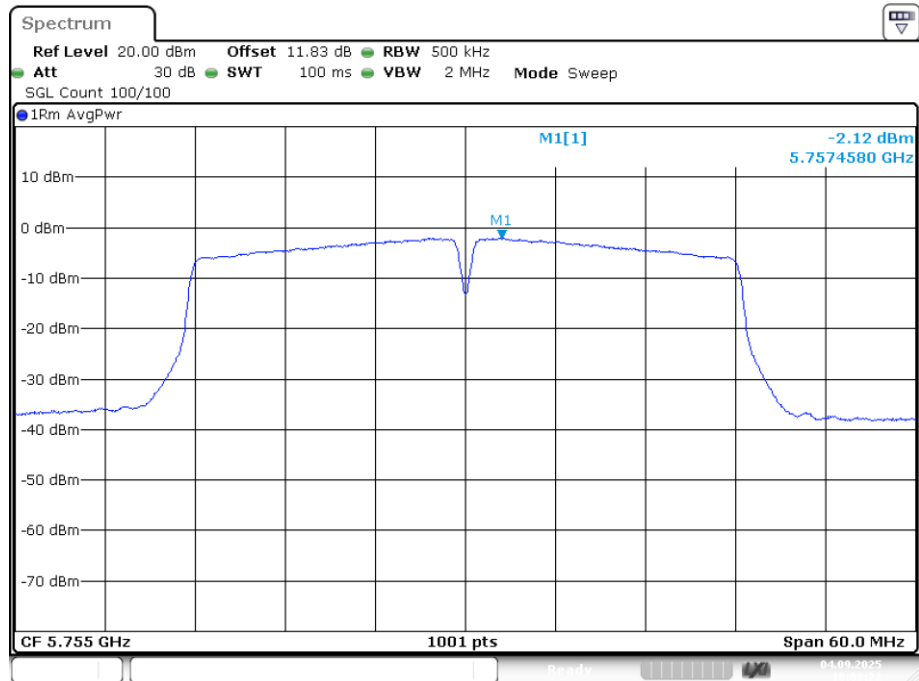

Date: 4.SEP.2025 18:08:23


PSD NVNT n40 5795MHz Ant1

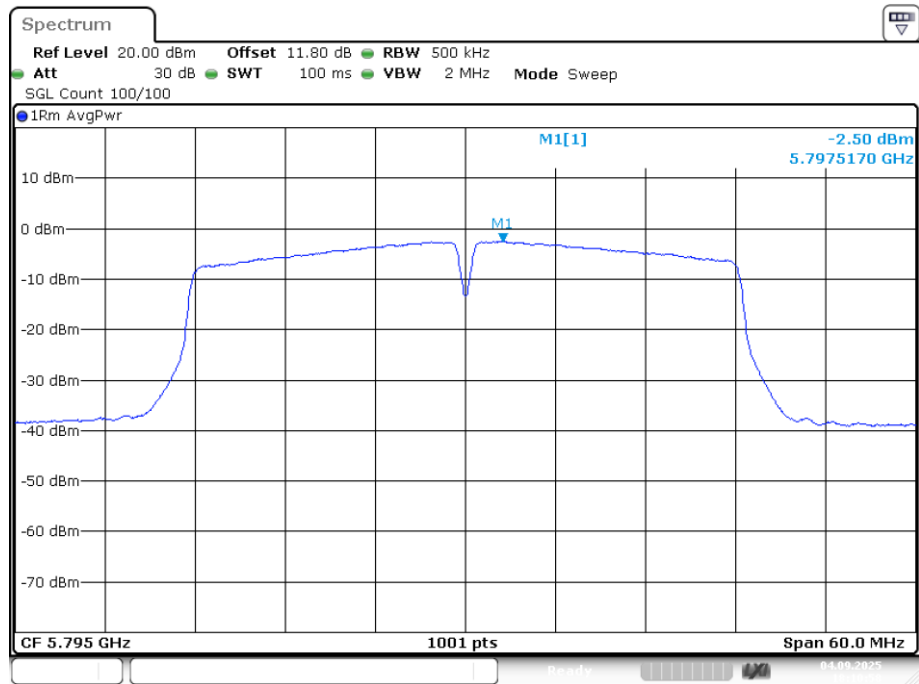

Date: 4.SEP.2025 18:10:59

4.7 Radiated Band Edge

Test Requirement:	15.205&15.209				
Test Method:	ANSI C63.10:2013				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		54.0		Average Value
			68.2		Peak Value
	Undesirable emission limits:				
	(1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.				
	(2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.				
	(3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.				
	Test Procedure:	a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.			
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.					
c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.					
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.					
e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.					
f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Test setup:		Above 1GHz			

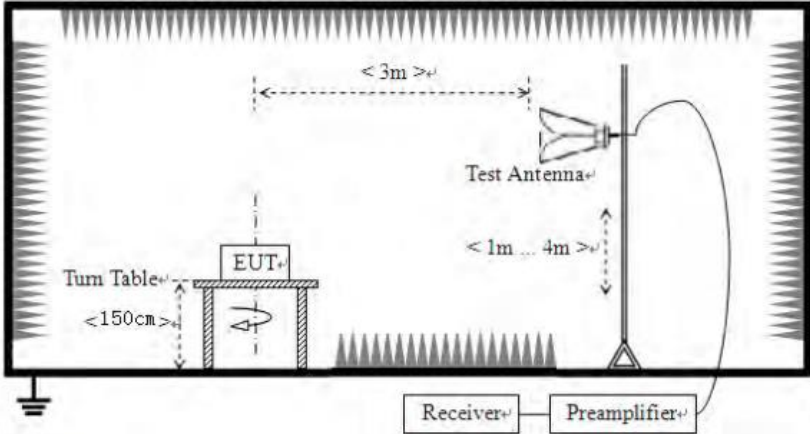	
Test results:	Pass

Remark:

According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2,$$

For example, if EIRP = -27dBm

$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$$

Measurement Data:**Band1**

Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	33.81	17.18	50.99	74.00	-23.01	PK
V	5150.00	36.31	17.18	53.49	74.00	-20.51	PK
Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	23.29	17.18	40.47	54.00	-13.53	AV
V	5150.00	26.94	17.18	44.12	54.00	-9.88	AV
Mode:		802.11a		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150	34.14	17.18	51.32	74.00	-22.68	PK
V	5150	34.09	17.18	51.27	74.00	-22.73	PK
Mode:		802.11a		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	23.24	17.18	40.42	54.00	-13.58	AV
V	5350.00	23.40	17.18	40.58	54.00	-13.42	AV

Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	30.94	17.18	48.12	74.00	-25.88	PK
V	5150.00	35.64	17.18	52.82	74.00	-21.18	PK
Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.49	17.18	41.67	54.00	-12.33	AV
V	5150.00	25.54	17.18	42.72	54.00	-11.28	AV
Mode:		802.11n(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	33.88	17.18	51.06	74.00	-22.94	PK
V	5350.00	36.28	17.18	53.46	74.00	-20.54	PK
Mode:		802.11n(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	24.03	17.18	41.21	54.00	-12.79	AV
V	5350.00	23.31	17.18	40.49	54.00	-13.51	AV

Mode:		802.11ac(VHT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	33.12	17.18	50.30	74.00	-23.70	PK
V	5150.00	32.85	17.18	50.03	74.00	-23.97	PK
Mode:		802.11ac(VHT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.66	17.18	41.84	54.00	-12.16	AV
V	5150.00	23.59	17.18	40.77	54.00	-13.23	AV
Mode:		802.11ac(VHT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.34	17.18	51.52	74.00	-22.48	PK
V	5350.00	33.51	17.18	50.69	74.00	-23.31	PK
Mode:		802.11ac(VHT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	22.67	17.18	39.85	54.00	-14.15	AV
V	5350.00	23.60	17.18	40.78	54.00	-13.22	AV

Mode:		802.11ax(HE20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	34.75	17.18	51.93	74.00	-22.07	PK
V	5150.00	35.33	17.18	52.51	74.00	-21.49	PK
Mode:		802.11ax(HE20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	22.70	17.18	39.88	54.00	-14.12	AV
V	5150.00	25.87	17.18	43.05	54.00	-10.95	AV
Mode:		802.11ax(HE20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	32.17	17.18	49.35	74.00	-24.65	PK
V	5350.00	36.37	17.18	53.55	74.00	-20.45	PK
Mode:		802.11ax(HE20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	22.90	17.18	40.08	54.00	-13.92	AV
V	5350.00	24.43	17.18	41.61	54.00	-12.39	AV

Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	30.98	17.18	48.16	74.00	-25.84	PK
V	5150.00	33.84	17.18	51.02	74.00	-22.98	PK
Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.92	17.18	42.10	54.00	-11.90	AV
V	5150.00	24.45	17.18	41.63	54.00	-12.37	AV
Mode:		802.11n(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	33.43	17.18	50.61	74.00	-23.39	PK
V	5350.00	34.53	17.18	51.71	74.00	-22.29	PK
Mode:		802.11n(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	22.03	17.18	39.21	54.00	-14.79	AV
V	5350.00	24.01	17.18	41.19	54.00	-12.81	AV

Mode:		802.11ac(VHT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	32.40	17.18	49.58	74.00	-24.42	PK
V	5150.00	33.77	17.18	50.95	74.00	-23.05	PK
Mode:		802.11ac(VHT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	23.30	17.18	40.48	54.00	-13.52	AV
V	5150.00	25.60	17.18	42.78	54.00	-11.22	AV
Mode:		802.11ac(VHT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	31.26	17.18	48.44	74.00	-25.56	PK
V	5350.00	33.22	17.18	50.40	74.00	-23.60	PK
Mode:		802.11ac(VHT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	21.82	17.18	39.00	54.00	-15.00	AV
V	5350.00	25.67	17.18	42.85	54.00	-11.15	AV

Mode:		802.11ax(HE40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	34.80	17.18	51.98	74.00	-22.02	PK
V	5150.00	33.21	17.18	50.39	74.00	-23.61	PK
Mode:		802.11ax(HE40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.87	17.18	42.05	54.00	-11.95	AV
V	5150.00	26.14	17.18	43.32	54.00	-10.68	AV
Mode:		802.11ax(HE40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	32.26	17.18	49.44	74.00	-24.56	PK
V	5350.00	33.51	17.18	50.69	74.00	-23.31	PK
Mode:		802.11ax(HE40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.11	17.18	42.29	54.00	-11.71	AV
V	5350.00	23.71	17.18	40.89	54.00	-13.11	AV

Band 4

Mode:		802.11a		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	33.69	17.18	50.87	74.00	-23.13	PK
V	5725.00	34.92	17.18	52.10	74.00	-21.90	PK
Mode:		802.11a		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	22.79	17.18	39.97	54.00	-14.03	AV
V	5725.00	24.18	17.18	41.36	54.00	-12.64	AV
Mode:		802.11a		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	33.29	17.18	50.47	74.00	-23.53	PK
V	5850.00	33.29	17.18	50.47	74.00	-23.53	PK
Mode:		802.11a		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	24.36	17.18	41.54	54.00	-12.46	AV
V	5850.00	26.25	17.18	43.43	54.00	-10.57	AV

Mode:		802.11n(HT20)		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	31.04	17.18	48.22	74.00	-25.78	PK
V	5725.00	34.20	17.18	51.38	74.00	-22.62	PK
Mode:		802.11n(HT20)		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	25.62	17.18	42.80	54.00	-11.20	AV
V	5725.00	23.58	17.18	40.76	54.00	-13.24	AV
Mode:		802.11n(HT20)		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	34.04	17.18	51.22	74.00	-22.78	PK
V	5850.00	34.02	17.18	51.20	74.00	-22.80	PK
Mode:		802.11n(HT20)		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	22.55	17.18	39.73	54.00	-14.27	AV
V	5850.00	23.32	17.18	40.50	54.00	-13.50	AV

Mode:		802.11ac(VHT20)		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	30.98	17.18	48.16	74.00	-25.84	PK
V	5725.00	33.05	17.18	50.23	74.00	-23.77	PK
Mode:		802.11ac(VHT20)		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	24.47	17.18	41.65	54.00	-12.35	AV
V	5725.00	27.29	17.18	44.47	54.00	-9.53	AV
Mode:		802.11ac(VHT20)		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	34.38	17.18	51.56	74.00	-22.44	PK
V	5850.00	32.77	17.18	49.95	74.00	-24.05	PK
Mode:		802.11ac(VHT20)		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	24.66	17.18	41.84	54.00	-12.16	AV
V	5850.00	24.65	17.18	41.83	54.00	-12.17	AV


Mode:		802.11ax(HE20)		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	33.44	17.18	50.62	74.00	-23.38	PK
V	5725.00	35.29	17.18	52.47	74.00	-21.53	PK
Mode:		802.11ax(HE20)		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	23.91	17.18	41.09	54.00	-12.91	AV
V	5725.00	27.14	17.18	44.32	54.00	-9.68	AV
Mode:		802.11ax(HE20)		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	31.30	17.18	48.48	74.00	-25.52	PK
V	5850.00	34.45	17.18	51.63	74.00	-22.37	PK
Mode:		802.11ax(HE20)		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	24.67	17.18	41.85	54.00	-12.15	AV
V	5850.00	25.53	17.18	42.71	54.00	-11.29	AV

Mode:		802.11n(HT40)		Frequency:		5755MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	31.10	17.18	48.28	74.00	-25.72	PK
V	5725.00	35.95	17.18	53.13	74.00	-20.87	PK
Mode:		802.11n(HT40)		Frequency:		5755MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	24.76	17.18	41.94	54.00	-12.06	AV
V	5725.00	24.26	17.18	41.44	54.00	-12.56	AV
Mode:		802.11n(HT40)		Frequency:		5795MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	30.93	17.18	48.11	74.00	-25.89	PK
V	5850.00	35.03	17.18	52.21	74.00	-21.79	PK
Mode:		802.11n(HT40)		Frequency:		5795MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	23.05	17.18	40.23	54.00	-13.77	AV
V	5850.00	24.44	17.18	41.62	54.00	-12.38	AV

Mode:		802.11ac(VHT40)		Frequency:		5755MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	31.87	17.18	49.05	74.00	-24.95	PK
V	5725.00	36.21	17.18	53.39	74.00	-20.61	PK
Mode:		802.11ac(VHT40)		Frequency:		5755MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	22.17	17.18	39.35	54.00	-14.65	AV
V	5725.00	25.50	17.18	42.68	54.00	-11.32	AV
Mode:		802.11ac(VHT40)		Frequency:		5795MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	31.06	17.18	48.24	74.00	-25.76	PK
V	5850.00	36.14	17.18	53.32	74.00	-20.68	PK
Mode:		802.11ac(VHT40)		Frequency:		5795MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	22.95	17.18	40.13	54.00	-13.87	AV
V	5850.00	25.76	17.18	42.94	54.00	-11.06	AV

Mode:		802.11ax(HE40)		Frequency:		5755MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	32.58	17.18	49.76	74.00	-24.24	PK
V	5725.00	33.98	17.18	51.16	74.00	-22.84	PK
Mode:		802.11ax(HE40)		Frequency:		5755MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.000	25.11	17.18	42.29	54.00	-11.71	AV
V	5725.00	26.25	17.18	43.43	54.00	-10.57	AV
Mode:		802.11ax(HE40)		Frequency:		5795MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	31.54	17.18	48.72	74.00	-25.28	PK
V	5850.00	36.09	17.18	53.27	74.00	-20.73	PK
Mode:		802.11ax(HE40)		Frequency:		5795MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	24.33	17.18	41.51	54.00	-12.49	AV
V	5850.00	23.50	17.18	40.68	54.00	-13.32	AV


4.8 Conducted Band Edge

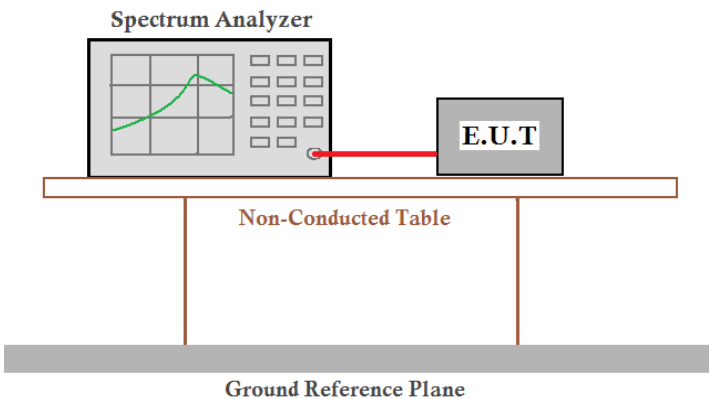Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	- For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. - For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test procedure:	The procedure for peak unwanted emissions measurements above 1000 MHz is as follows: - Peak emission levels are measured by setting the instrument as follows: - RBW = 1 MHz. - VBW $\geq [3 \times \text{RBW}]$. - Detector = peak. - Sweep time = auto. - Trace mode = max hold. - Allow sweeps to continue until the trace stabilizes.
Test results:	Pass


Band 1

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-30.78	-27	Pass
NVNT	a	5240	Ant1	-30.57	-27	Pass
NVNT	ac20	5180	Ant1	-30.44	-27	Pass
NVNT	ac20	5240	Ant1	-30.65	-27	Pass
NVNT	ac40	5190	Ant1	-30.28	-27	Pass
NVNT	ac40	5230	Ant1	-30.99	-27	Pass
NVNT	ax20	5180	Ant1	-30.88	-27	Pass
NVNT	ax20	5240	Ant1	-30.59	-27	Pass
NVNT	ax40	5190	Ant1	-30.23	-27	Pass
NVNT	ax40	5230	Ant1	-40.33	-27	Pass
NVNT	n20	5180	Ant1	-31.01	-27	Pass
NVNT	n20	5240	Ant1	-30.81	-27	Pass
NVNT	n40	5190	Ant1	-27.86	-27	Pass
NVNT	n40	5230	Ant1	-30.99	-27	Pass

Note: The margin is at least greater than the antenna gain plus the cable loss.

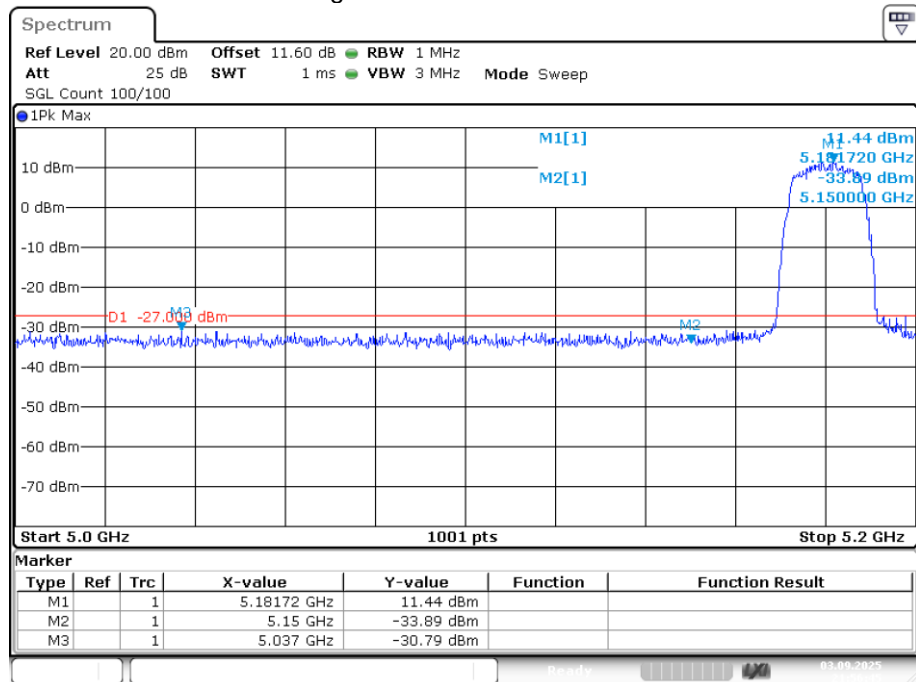
Band Edge NVNT a 5180MHz Low Ant1

Band Edge NVNT a 5240MHz High Ant1

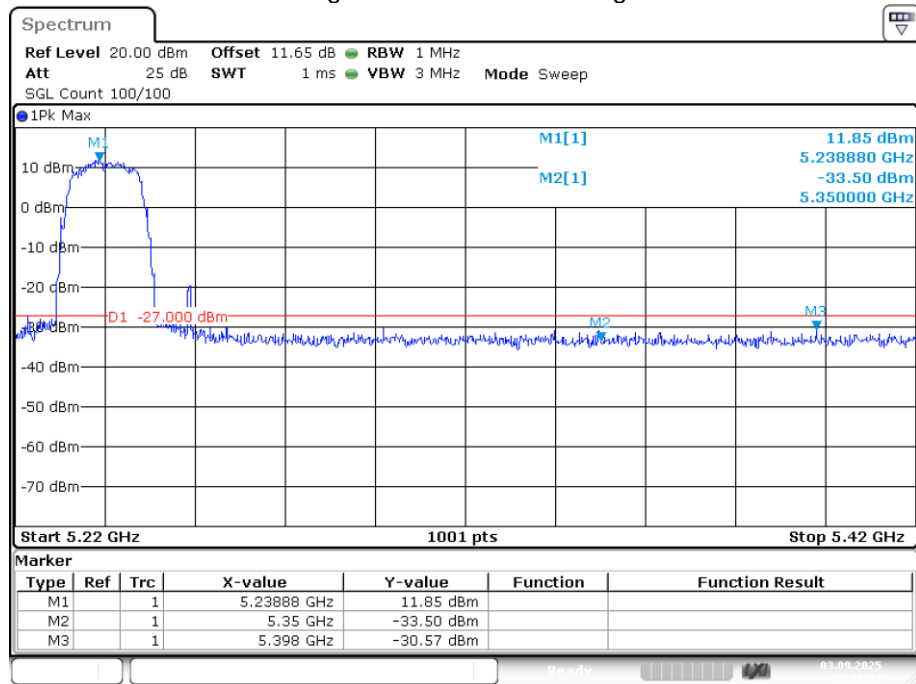

Date: 3.SEP.2025 22:05:33

Band Edge NVNT ac20 5180MHz Low Ant1

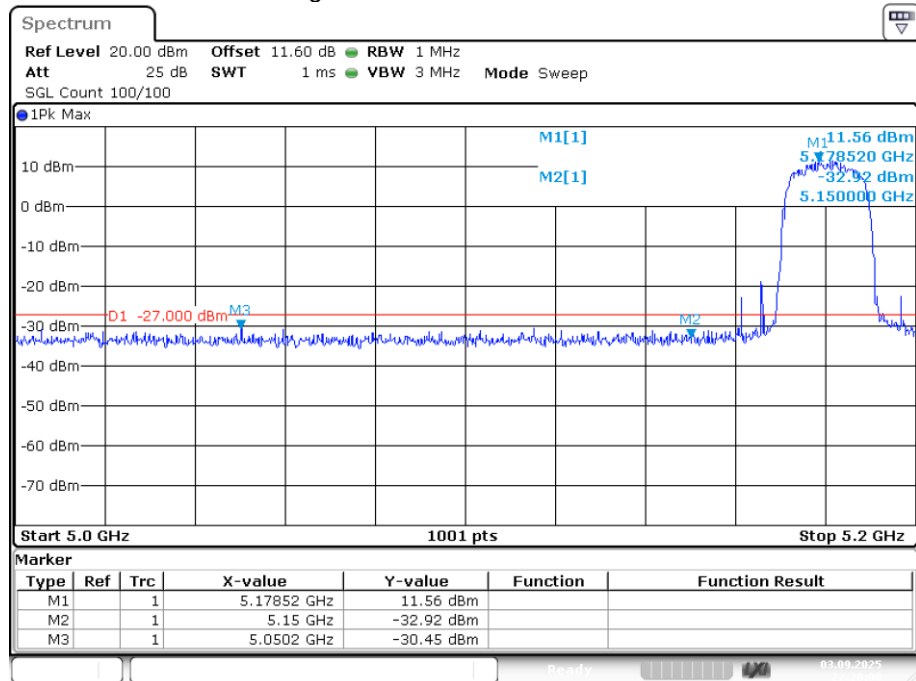

Date: 3.SEP.2025 22:20:06