



FCC TEST REPORT

FCC ID: 2BN84-AC321

On Behalf of

Shenzhen Aocai Technology Co., LTD

LED projector

Model No.: See model list

Prepared for : Shenzhen Aocai Technology Co., LTD
Address : 701, Building A9, Longwangmiao Industrial Building, East Baishisha
Community, Fuyong Street, Baoan District, Shenzhen

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2502222-C05-R03
Date of Receipt : March 13, 2025
Date of Test : March 13, 2025 - April 12, 2025
Date of Report : April 12, 2025
Version Number : V0
Test Result : Pass

TABLE OF CONTENTS

Description	Page
TABLE OF CONTENTS	2
1. Summary of Standards And Results	5
1.1. Description of Standards and Results	5
2. General Information	6
2.1. Description of Device (EUT)	6
2.2. Accessories of Device (EUT)	7
2.3. Tested Supporting System Details	7
2.4. Block Diagram of connection between EUT and simulators	7
2.5. Test Mode Description	7
2.6. Test Conditions	8
2.7. Test Facility	8
2.8. Measurement Uncertainty	8
2.9. Test Equipment List	9
3. Spurious Emission	11
3.1. Test Limits	11
3.2. Test Procedure	11
3.3. Test Setup	12
3.4. Test Results	13
4. Power Line Conducted Emission	24
4.1. Test Limits	24
4.2. Test Procedure	24
4.3. Test Setup	24
4.4. Test Results	24
5. Conducted Maximum peak Output Power	27
5.1. Test limits	27
5.2. Test Procedure	27
5.3. Test Setup	27
5.4. Test Results	27
6. Peak Power Spectral Density	28
6.1. Test limits	28
6.2. Test Procedure	28
6.3. Test Setup	28
6.4. Test Results	28
7. Bandwidth	31
7.1. Test limits	33
7.2. Test Procedure	33
7.3. Test Setup	33
7.4. Test Results	33
8. Band Edge Check	41
8.1. Test limits	41
8.2. Test Procedure	41
8.3. Test Setup	41
8.4. Test Results	41
9. Antenna Requirement	47
9.1. Standard Requirement	47
9.2. Antenna Connected Construction	47
9.3. Results	47
10. Test setup photo	48
10.1. Photo of Radiated Emission test	48
10.2. Photo of Conducted Emission test	49
11. EUT Photos	50
12. Model list	51

TEST REPORT DECLARATION

Applicant : Shenzhen Aocai Technology Co., LTD
Address : 701, Building A9, Longwangmiao Industrial Building, East Baishisha Community,
Fuyong Street, Baoan District, Shenzhen
Manufacturer : Shenzhen Aocai Technology Co., LTD
Address : 701, Building A9, Longwangmiao Industrial Building, East Baishisha Community,
Fuyong Street, Baoan District, Shenzhen
EUT Description : LED projector
(A) Model No. See model list
(B) Trademark **N/A**

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10-2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen
Project Engineer



Approved by (name + signature).....: Jack Xu
Project Manager



Date of issue.....: April 12, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	April 12, 2025	Initial released Issue	Yannis Wen

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Test Requirement	Standards Paragraph	Result
Conducted Emission	FCC PART 15	15.207	P
6dB Bandwidth	FCC PART 15	15.247 (a)(2)	P
Conducted Maximum Peak Output Power	FCC PART 15	15.247 (b)(3)	P
Radiated Spurious Emission	FCC PART 15	15.247 (c)	P
Conducted Spurious & Band Edge Emission	FCC PART 15	15.247 (d)	P
Power Spectral Density	FCC PART 15	15.247 (e)	P
Radiated Band Edge Emission	FCC PART 15	15.205	P
Antenna Requirement	FCC PART 15	15.203	P

Note: 1. P is an abbreviation for Pass.

2. F is an abbreviation for Fail.

3. N/A is an abbreviation for Not Applicable.

4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description : LED projector
Model Number : See model list
Diff : There is no difference except the name of the model. All tests are made with the AC321 model.
Power supply : AC 120V from power line.

Radio Technology : Bluetooth BLE

Operation frequency : 2402-2480MHz

Channel No. : 40 Channels

Channel spacing : 2MHz

Rate : 1Mbps, 2Mbps

Modulation type : GFSK

Antenna Type : Internal antenna, Maximum Gain is 4.73dBi
(Antenna information is provided by applicant.)

Software version : V1.0

Hardware version : V1.0

Intend use environment : Residential, commercial and light industrial environment

2.2. Accessories of Device (EUT)

Accessories : /

Manufacturer : /


Model : /

Ratings : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1	Notebook PC	Lenovo	ThinkPad L14	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK (1M/2Mbps)	Low :CH1	2402
	Middle: CH20	2440
	High: CH40	2480

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	24℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd
 Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
 Shenzhen, Guangdong, China

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2℃
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2025.03.09	4Year
4*4*3 Shielded room	CHENYU	4*4*3	/	N/A	2025.03.09	4Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2024.08.08	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2024.08.08	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2024.08.08	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2024.08.08	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2024.08.08	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2024.08.08	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2024.08.08	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2024.08.08	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2024.08.08	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2024.08.08	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2024.08.08	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	2Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2024.08.08	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2024.08.08	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2024.08.08	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2024.07.15	1 Year
Electronic Thermo-Hygrometer	S.H.Qixiang	HTC-1	/	N/A	2024.08.11	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2024.08.08	1 Year
Adjustable attenuator	MWRFTest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1
RF-CE	MTS 8310	MWRFTtest	V2.0.0.0

3. SPURIOUS EMISSION

3.1. Test Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

NOTE:

- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(uv/m)

3.2. Test Procedure

The measuring distance of 3m shall be used for measurements at frequency up to 1GH and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above1GHz testing, The table was rotated 360 degrees to determine the position of the highest radiation


The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set of make measurement.

The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Qusia Peak Detector mode premeasured


If Peak value comply with QP limit Below 1GHz.The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.

For the actual test configuration, please see the test setup photo.


3.3. Test Setup

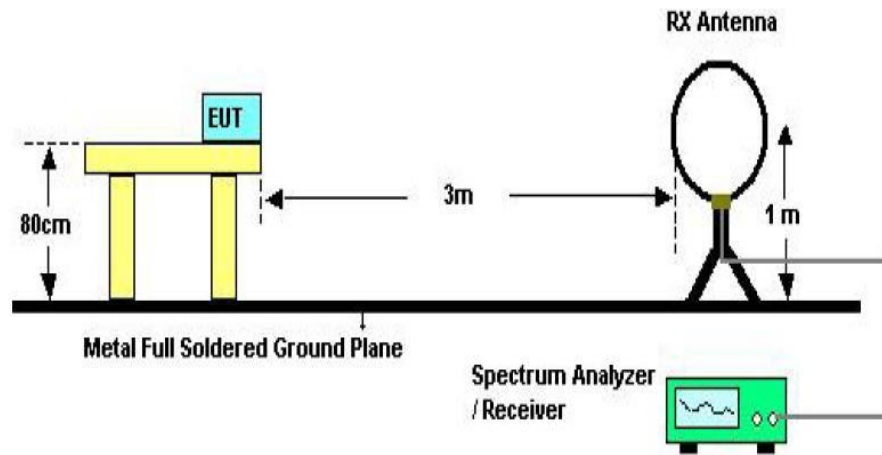

Below 30MHz Test Setup

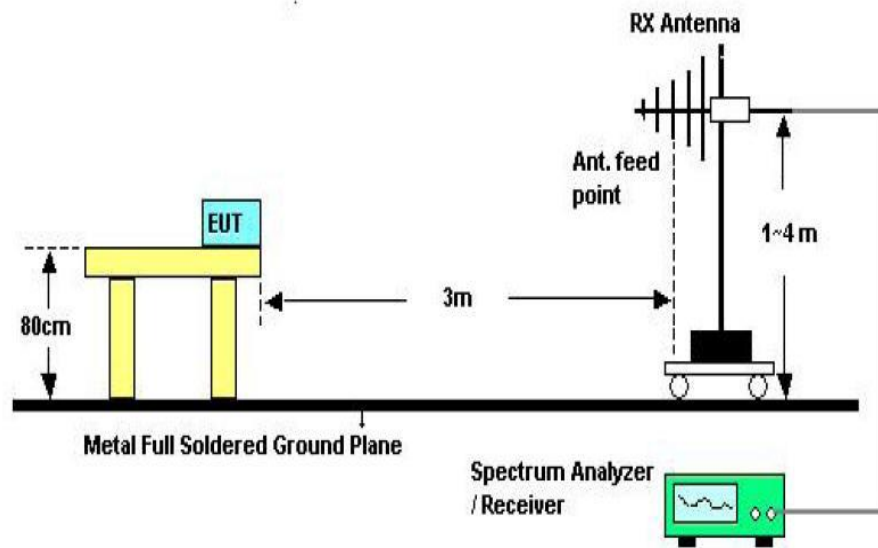

Above 30MHz Test Setup

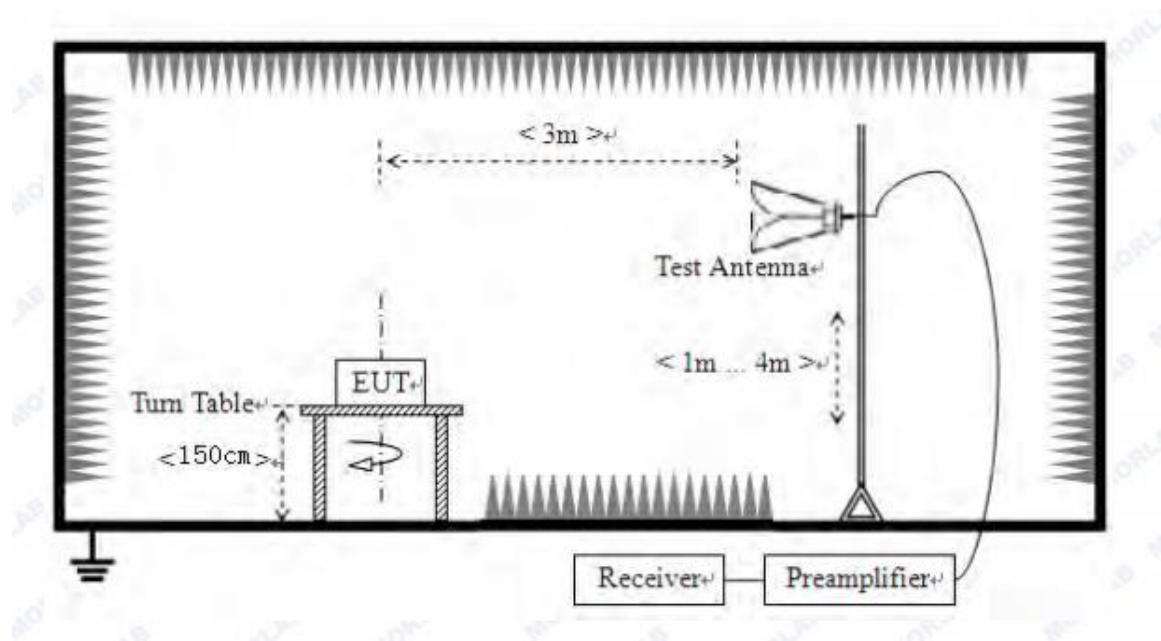

Above 1GHz Test Setup

3.4. Test Results

Test Condition

Continual Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHz~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz


We have scanned the 10th harmonic from 9 kHz to the EUT.

Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


2. Only show the test data of the worst Channel in this report.

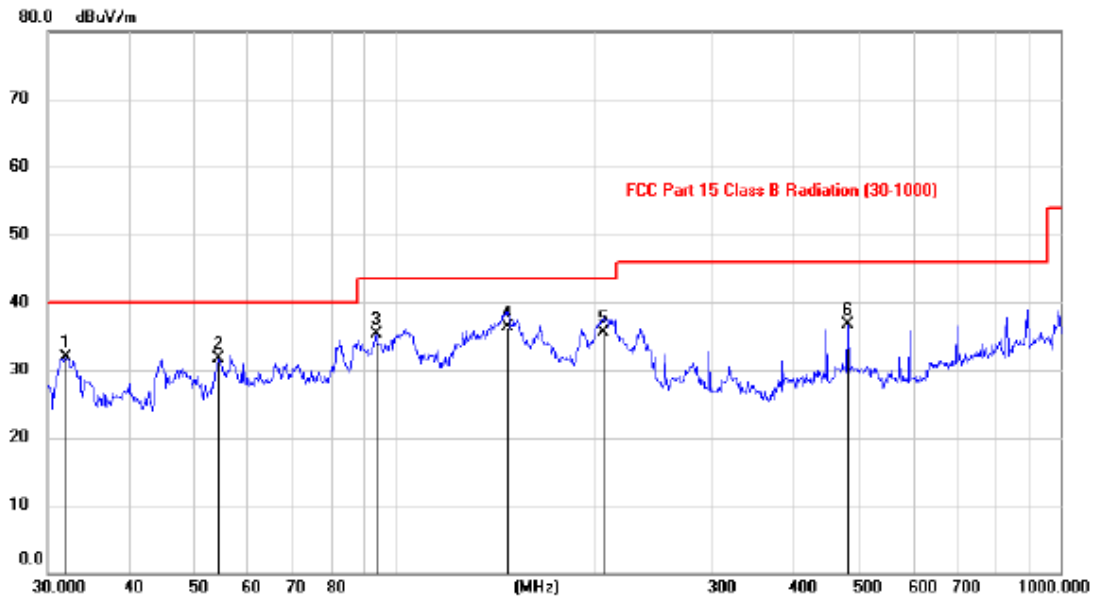Antenna polarity: Horizontal

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.9878	18.25	13.60	31.85	40.00	-8.15	peak		
2		54.3943	18.12	13.66	31.78	40.00	-8.22	peak		
3		93.6260	24.87	10.36	35.23	43.50	-8.27	peak		
4	*	147.5242	21.37	14.88	36.25	43.50	-7.25	QP		
5		205.7949	24.56	11.00	35.56	43.50	-7.94	QP		
6		480.0221	18.73	17.95	36.68	46.00	-9.32	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

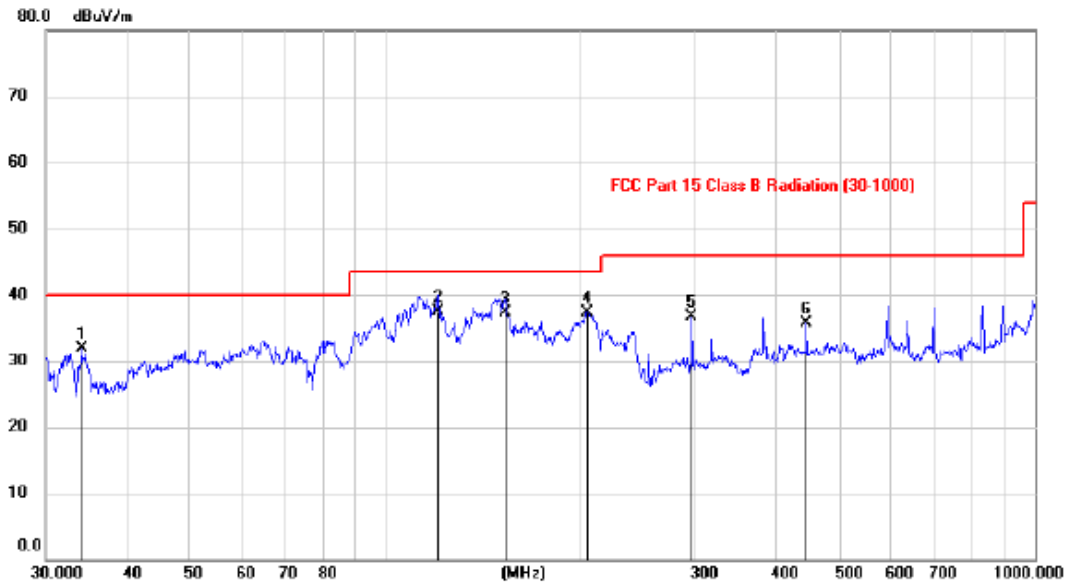Antenna polarity: Vertical

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		34.1559	18.28	13.70	31.98	40.00	-8.02	peak		
2	*	120.4876	24.49	13.07	37.56	43.50	-5.94	QP		
3		152.8248	22.20	15.05	37.25	43.50	-6.25	QP		
4		204.2615	26.38	10.97	37.35	43.50	-6.15	peak		
5		296.7033	22.65	14.03	36.68	46.00	-9.32	peak		
6		445.5800	18.25	17.46	35.71	46.00	-10.29	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Notes: Above is below 1GHz test data. This report only shall the worst case mode for GFSK 2402MHz (1Mbps).

Test Mode: TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	45.03	V	33.95	10.18	34.26	54.90	74	-19.10	PK
4804	38.35	V	33.95	10.18	34.26	48.22	54	-5.78	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	46.05	H	33.95	10.18	34.26	55.92	74	-18.08	PK
4804	36.03	H	33.95	10.18	34.26	45.90	54	-8.10	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: TX Mid									
4880	45.01	V	33.93	10.2	34.29	54.85	74	-19.15	PK
4880	34.25	V	33.93	10.2	34.29	44.09	54	-9.91	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
4880	44.02	H	33.93	10.2	34.29	53.86	74	-20.14	PK
4880	33.74	H	33.93	10.2	34.29	43.58	54	-10.42	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
Test Mode: TX High									
4960	45.54	V	33.98	10.22	34.25	55.49	74	-18.51	PK
4960	33.47	V	33.98	10.22	34.25	43.42	54	-10.58	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	44.75	H	33.98	10.22	34.25	54.70	74	-19.30	PK
4960	35.00	H	33.98	10.22	34.25	44.95	54	-9.05	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Test Mode: TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	43.04	V	33.95	10.18	34.26	52.91	74	-21.09	PK
4804	37.65	V	33.95	10.18	34.26	47.52	54	-6.48	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	46.39	H	33.95	10.18	34.26	56.26	74	-17.74	PK
4804	35.89	H	33.95	10.18	34.26	45.76	54	-8.24	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: TX Mid									
4880	43.34	V	33.93	10.2	34.29	53.18	74	-20.82	PK
4880	33.54	V	33.93	10.2	34.29	43.38	54	-10.62	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
4880	45.27	H	33.93	10.2	34.29	55.11	74	-18.89	PK
4880	36.00	H	33.93	10.2	34.29	45.84	54	-8.16	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
Test Mode: TX High									
4960	45.71	V	33.98	10.22	34.25	55.66	74	-18.34	PK
4960	34.16	V	33.98	10.22	34.25	44.11	54	-9.89	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	42.42	H	33.98	10.22	34.25	52.37	74	-21.63	PK
4960	32.82	H	33.98	10.22	34.25	42.77	54	-11.23	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/


Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.


Conducted RF Spurious Emission

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

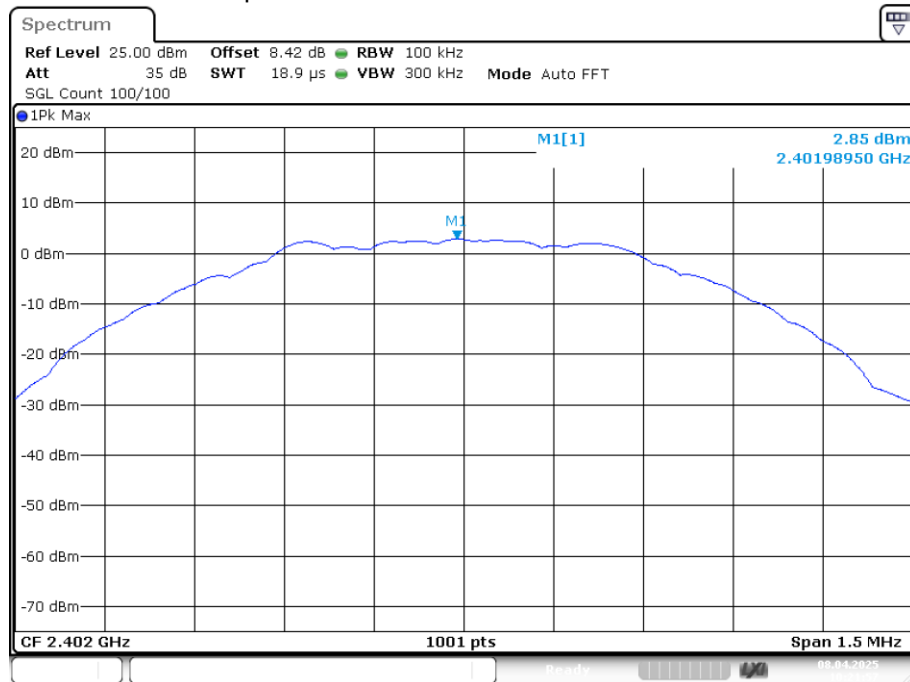


Date: 8.APR.2025 10:21:57

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

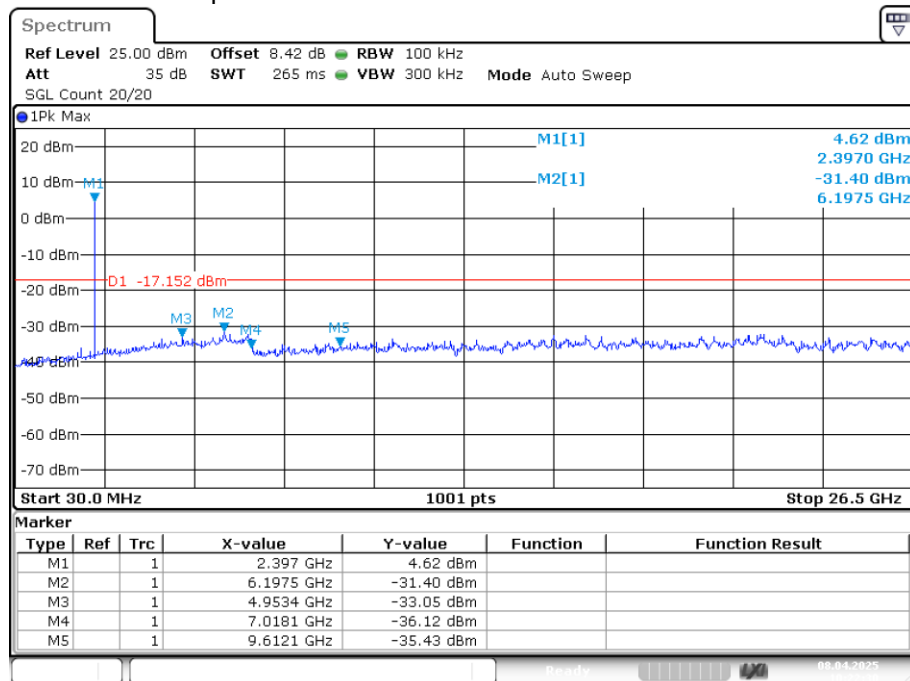


Date: 8.APR.2025 10:22:30

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

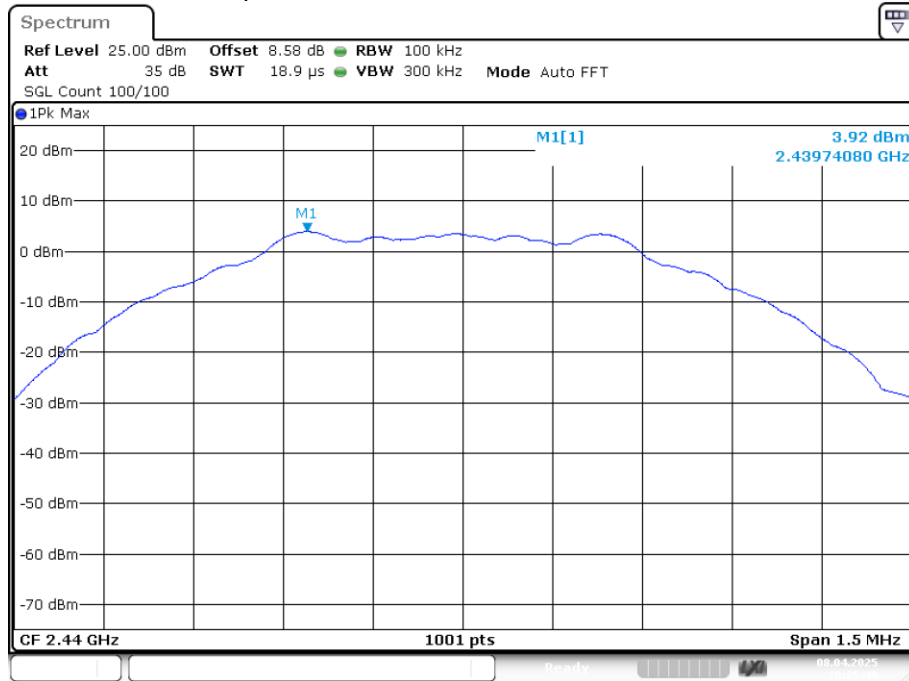


Date: 8.APR.2025 10:25:49

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

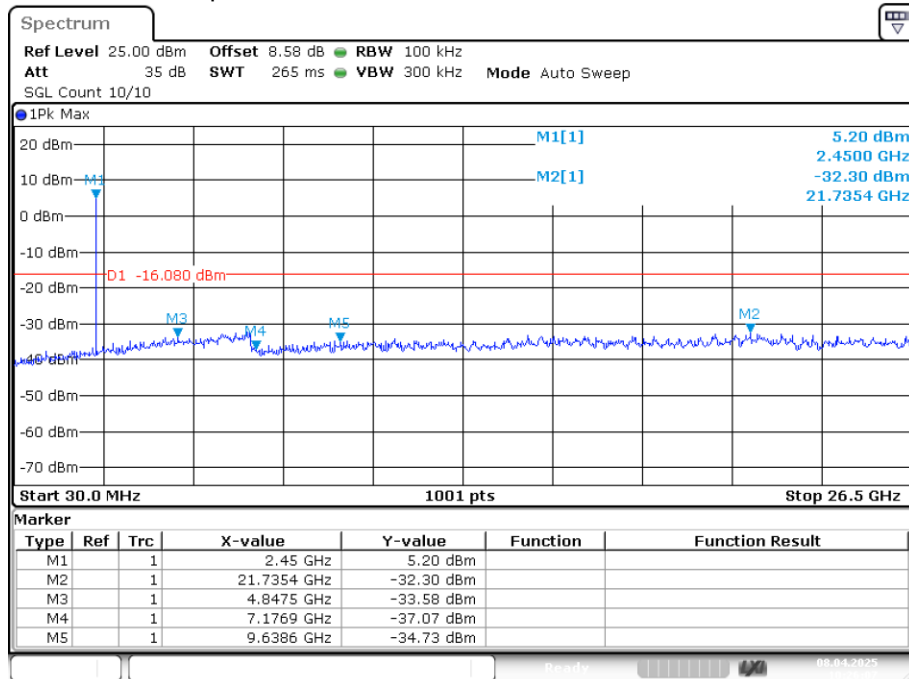


Date: 8.APR.2025 10:26:07

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

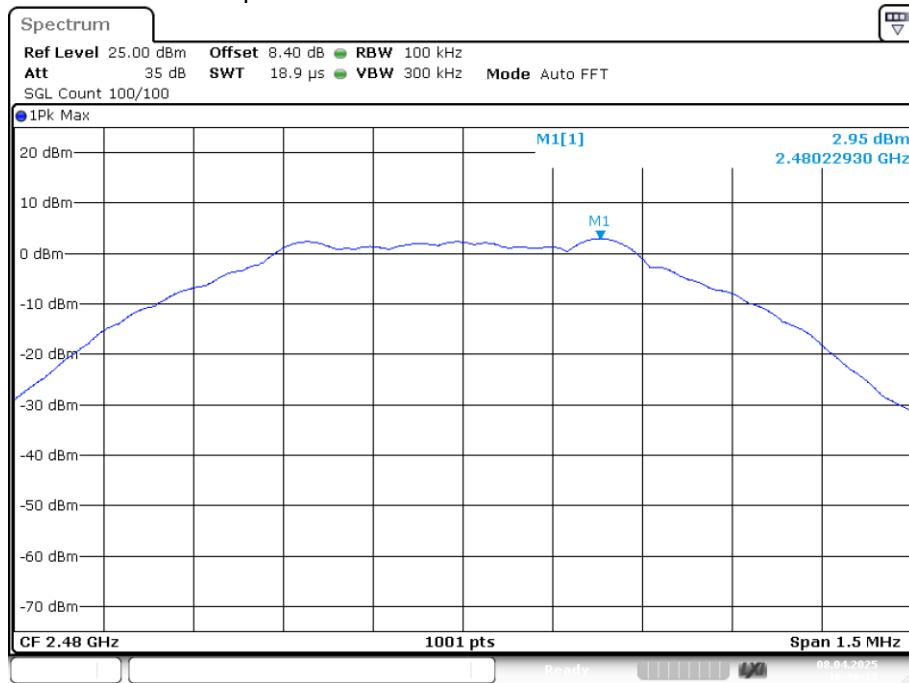


Date: 8.APR.2025 10:30:14

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

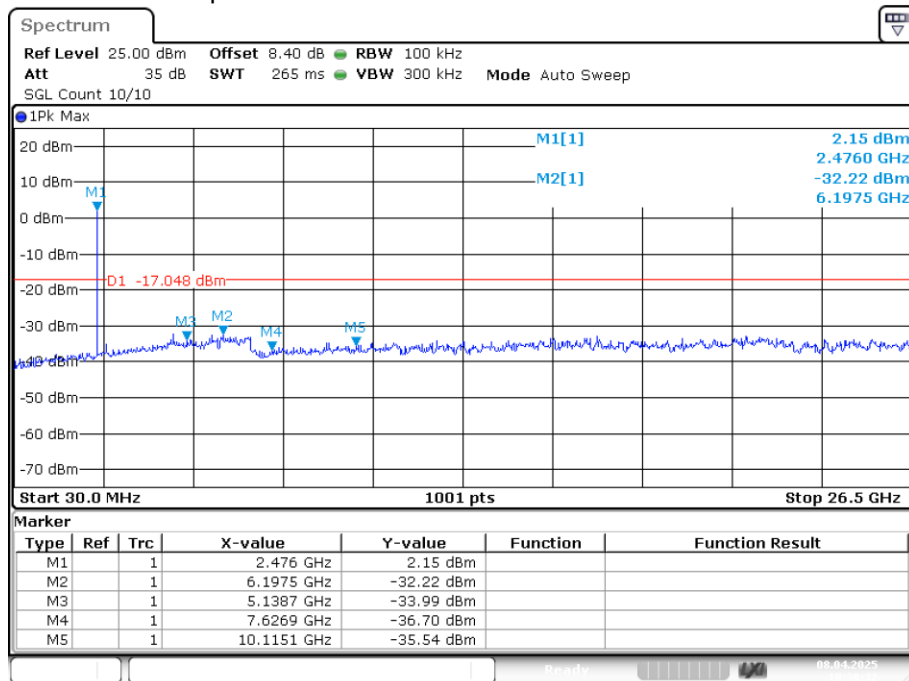


Date: 8.APR.2025 10:30:31

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref

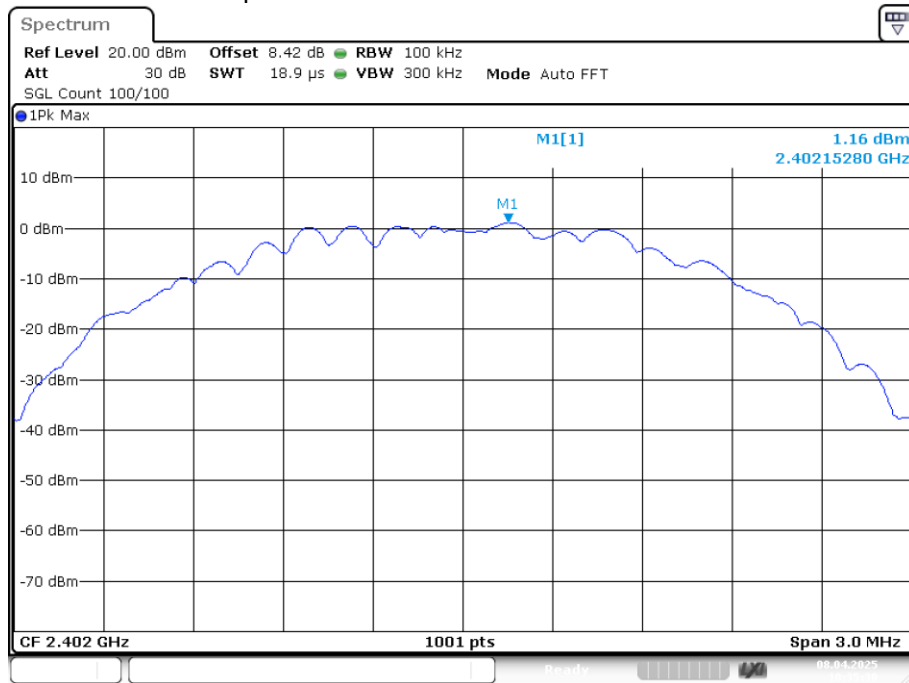


Date: 8.APR.2025 10:35:30

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

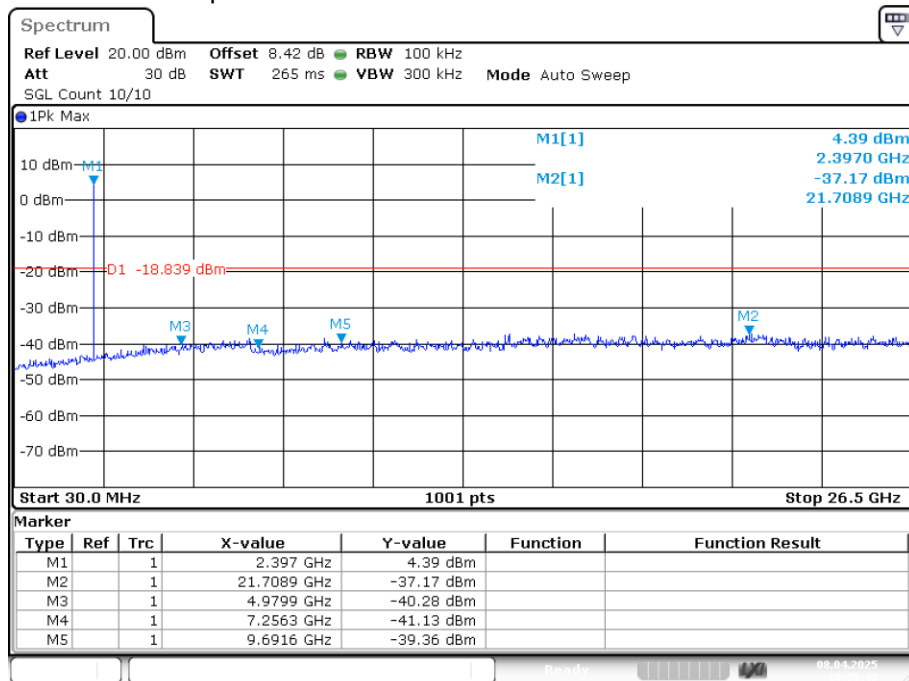


Date: 8.APR.2025 10:35:47

Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref

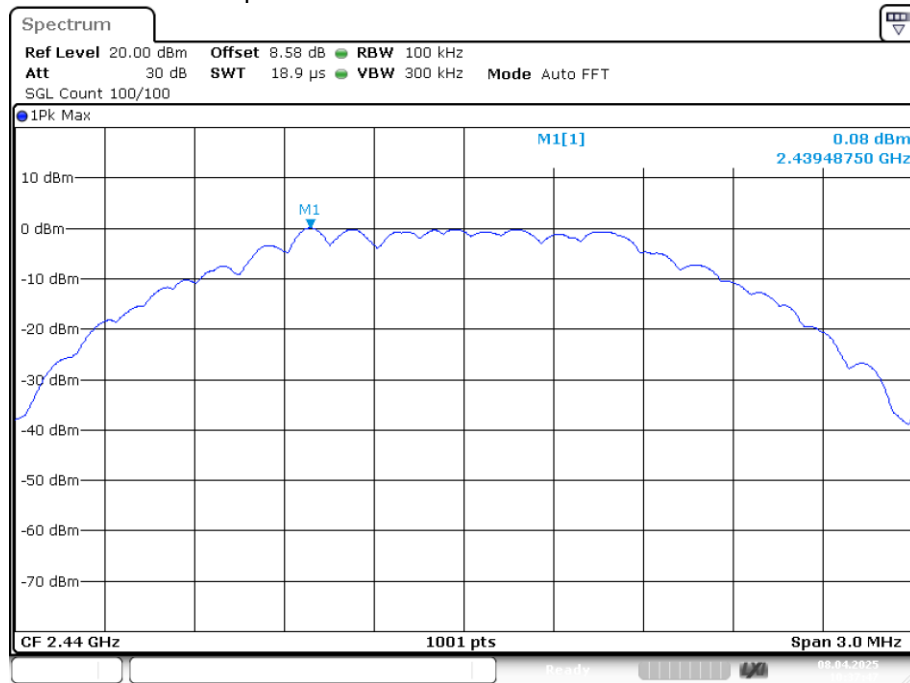


Date: 8.APR.2025 10:37:47

Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

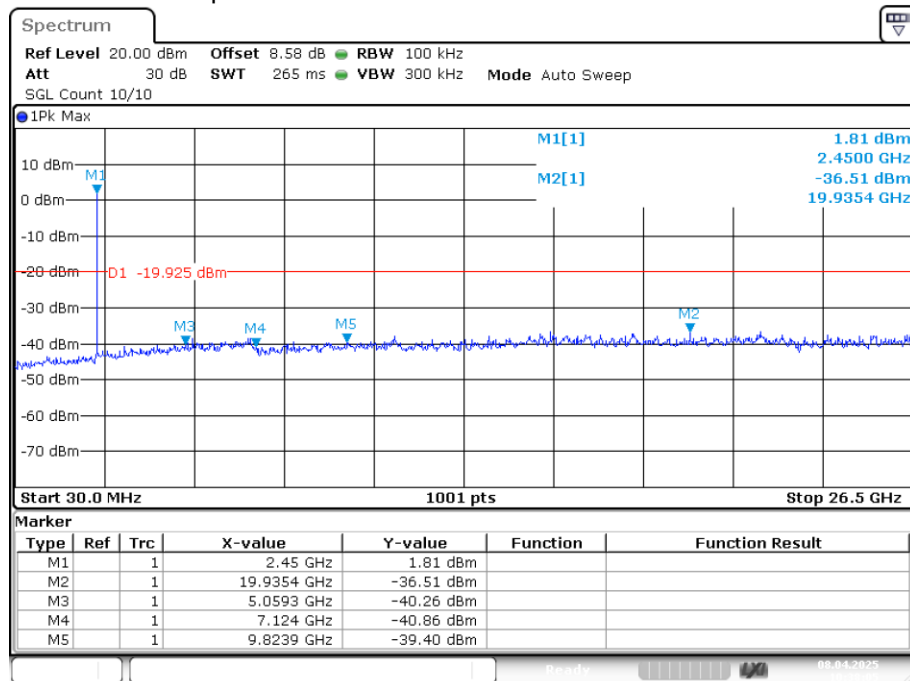


Date: 8.APR.2025 10:38:05

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref

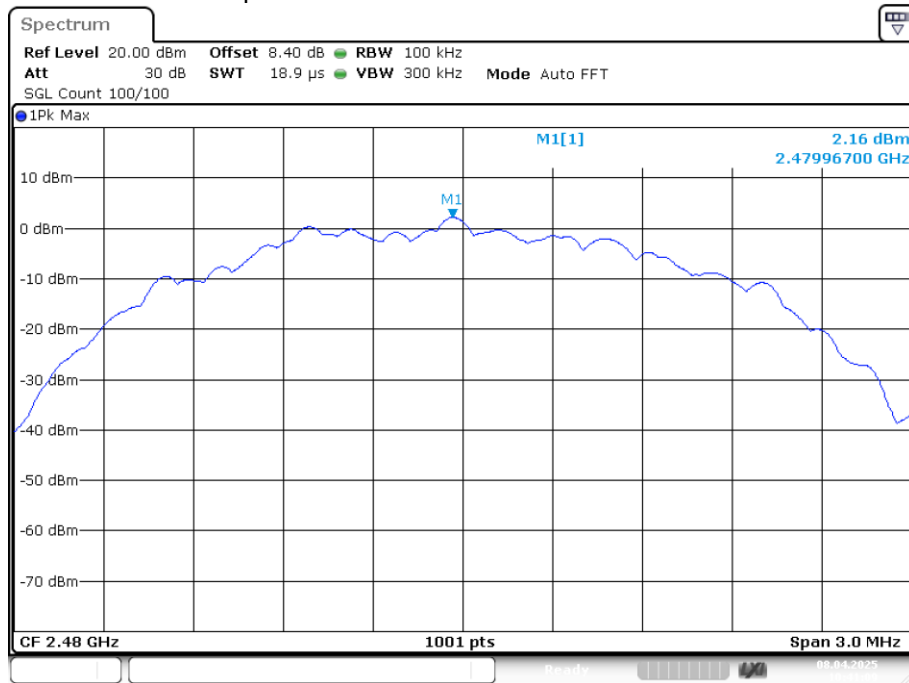

Date: 8.APR.2025 10:41:09

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

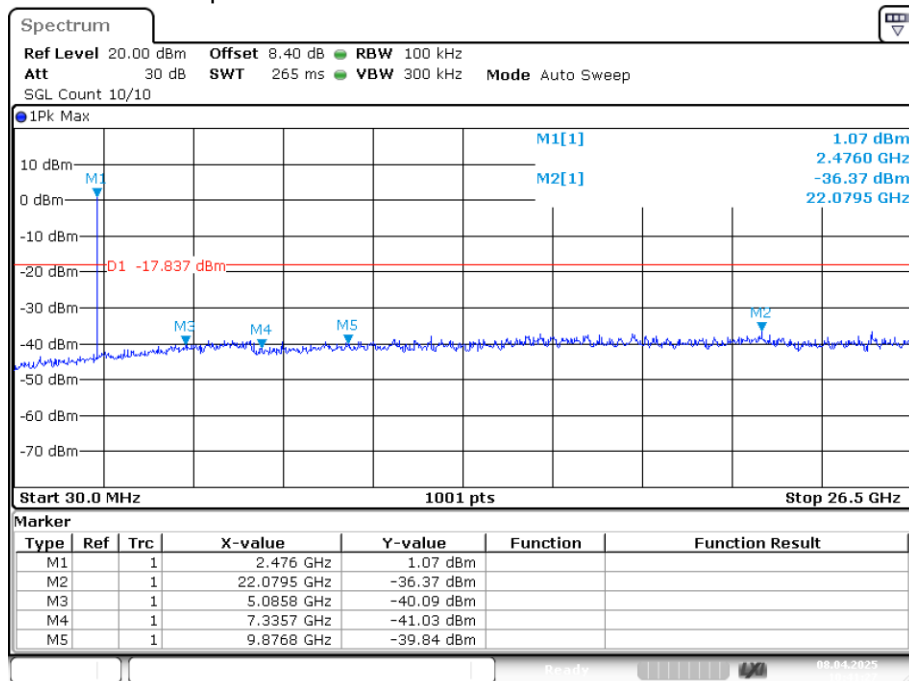

Date: 8.APR.2025 10:41:27

4. POWER LINE CONDUCTED EMISSION

4.1. Test Limits

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3. The limit decreases in line with the logarithm of the frequency in rang of 0.15 to 0.50 MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.


The bandwidth of test receiver is set at 9 kHz.

4.3. Test Setup

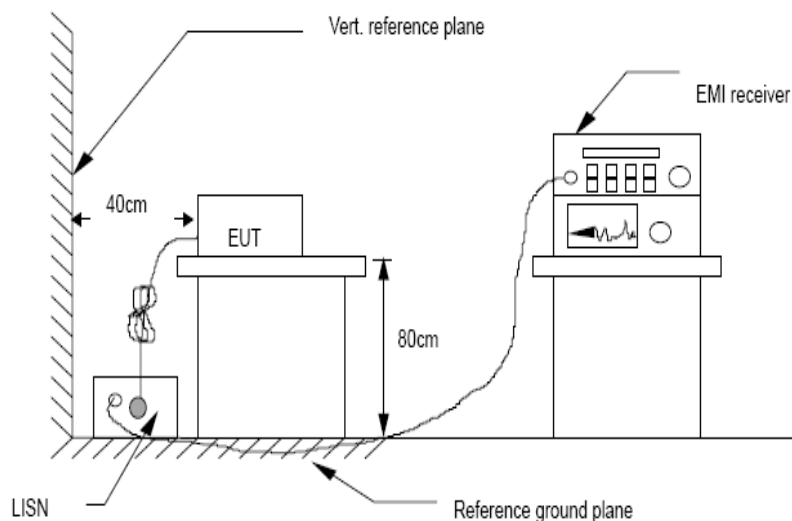

4.4. Test Results

Pass

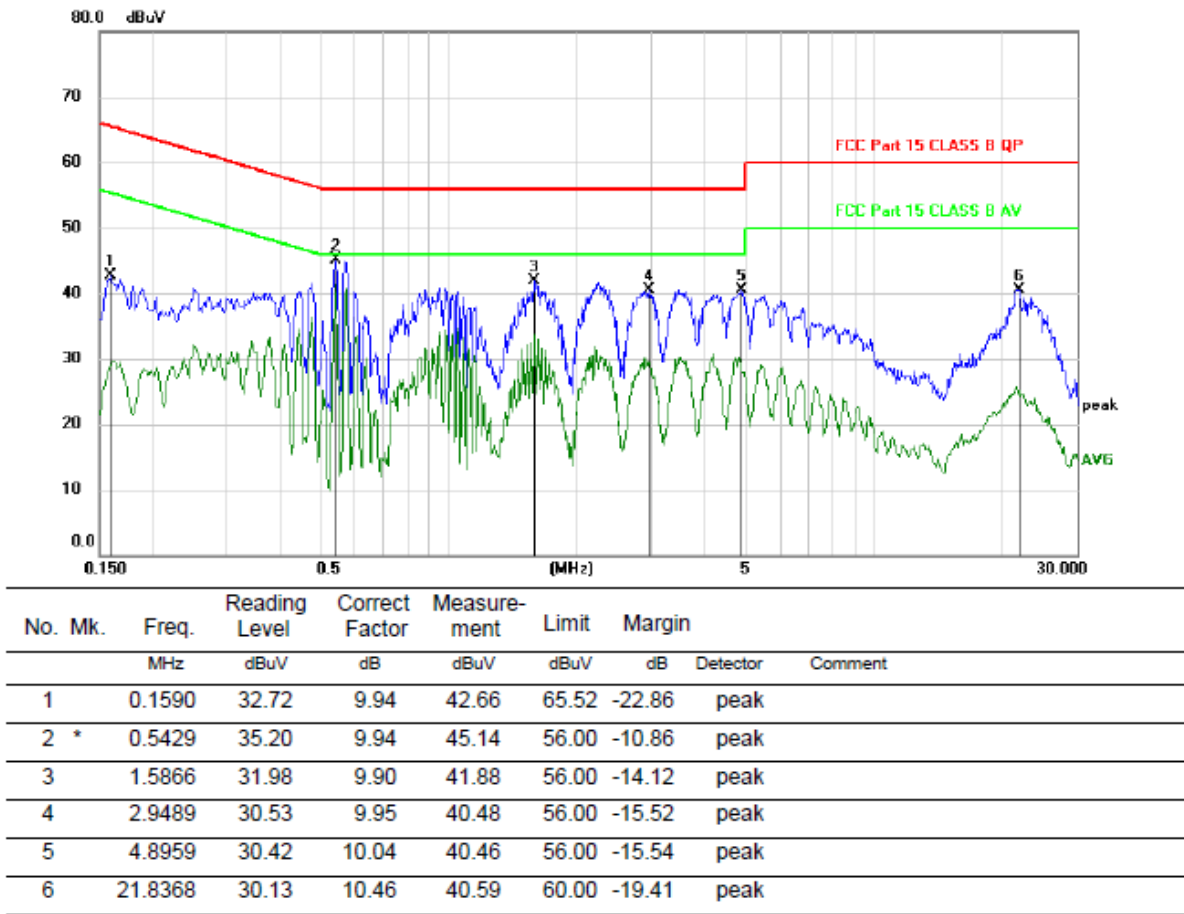
Polarity: L

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Polarity: N

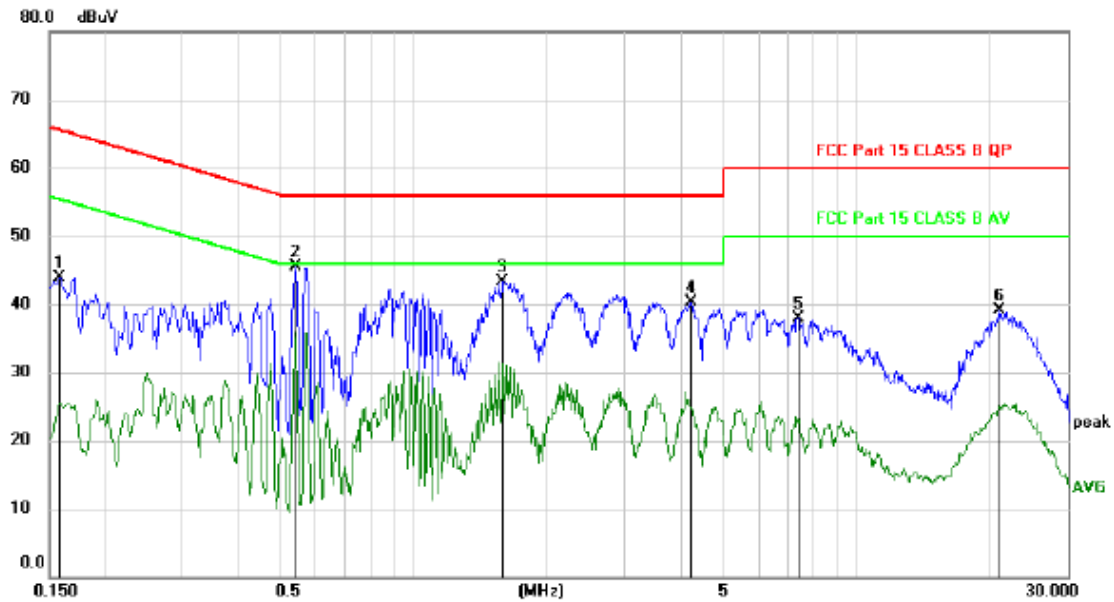

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1582	34.05	9.94	43.99	65.56	-21.57	peak	
2	*	0.5429	35.49	9.94	45.43	56.00	-10.57	peak	
3		1.5900	33.45	9.90	43.35	56.00	-12.65	peak	
4		4.2389	30.42	9.98	40.40	56.00	-15.60	peak	
5		7.3830	27.86	10.13	37.99	60.00	-22.01	peak	
6		21.1350	28.66	10.47	39.13	60.00	-20.87	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the GFSK 2402MHz(1Mbps) mode with the worst data is listed.

5. CONDUCTED MAXIMUM PEAK OUTPUT POWER

5.1. Test limits

Please refer section RSS-247 & 15.247.

5.2. Test Procedure


Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

5.2.1 Place the EUT on the table and set it in transmitting mode.

5.2.2 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.3. Test Setup



5.4. Test Results

GFSK (1M)

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	4.302	30	Pass
NVNT	BLE 1M	2440	Ant1	4.337	30	Pass
NVNT	BLE 1M	2480	Ant1	4.019	30	Pass

GFSK (2M)

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 2M	2402	Ant1	4.09	30	Pass
NVNT	BLE 2M	2440	Ant1	3.902	30	Pass
NVNT	BLE 2M	2480	Ant1	3.486	30	Pass

6. PEAK POWER SPECTRAL DENSITY

6.1. Test limits

6.1.1 Please refer section RSS-247 & 15.247.

6.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

6.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

6.2. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

6.2.1 Place the EUT on the table and set it in transmitting mode.


6.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3 Set the spectrum analyzer as $RBW = 3\text{kHz}$ (Set the RBW to: $3\text{ kHz} \leq RBW \leq 100\text{ kHz}$.), $VBW = 10\text{kHz}$ (Set the $VBW \geq 3 \times RBW$), $\text{span} = 1.5 \times \text{DTS bandwidth}$., detail see the test plot.

6.2.4 Record the max reading.

6.2.5 Repeat the above procedure until the measurements for all frequencies are completed.

6.3. Test Setup



6.4. Test Results


Pass

The test results are listed in next pages.

GFSK (1M)


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-11.718	8	Pass
NVNT	BLE 1M	2440	Ant1	-10.979	8	Pass
NVNT	BLE 1M	2480	Ant1	-11.835	8	Pass

PSD NVNT BLE 1M 2402MHz Ant1

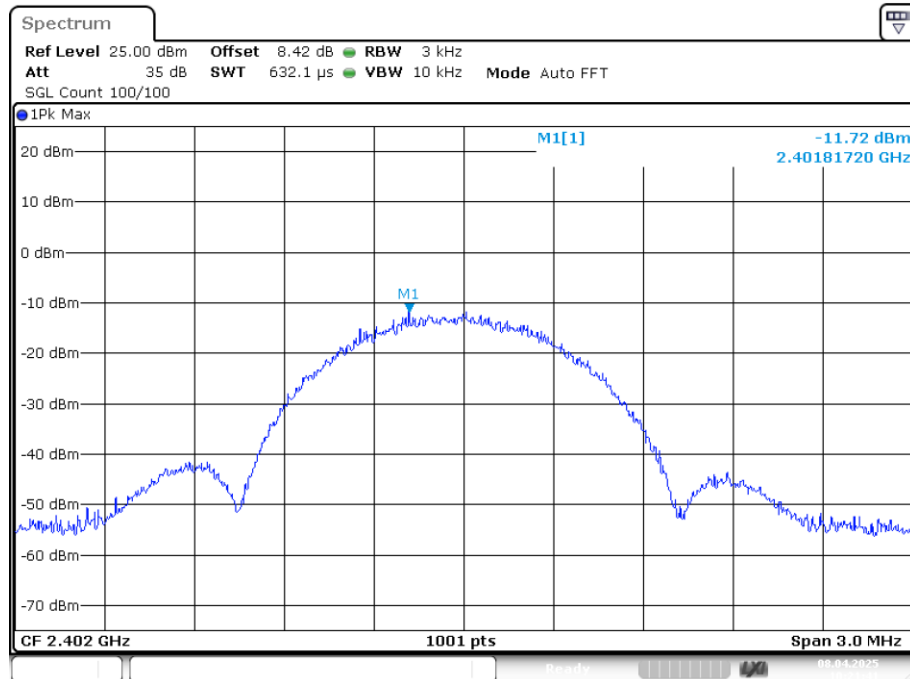


Date: 8.APR.2025 10:21:41

PSD NVNT BLE 1M 2440MHz Ant1

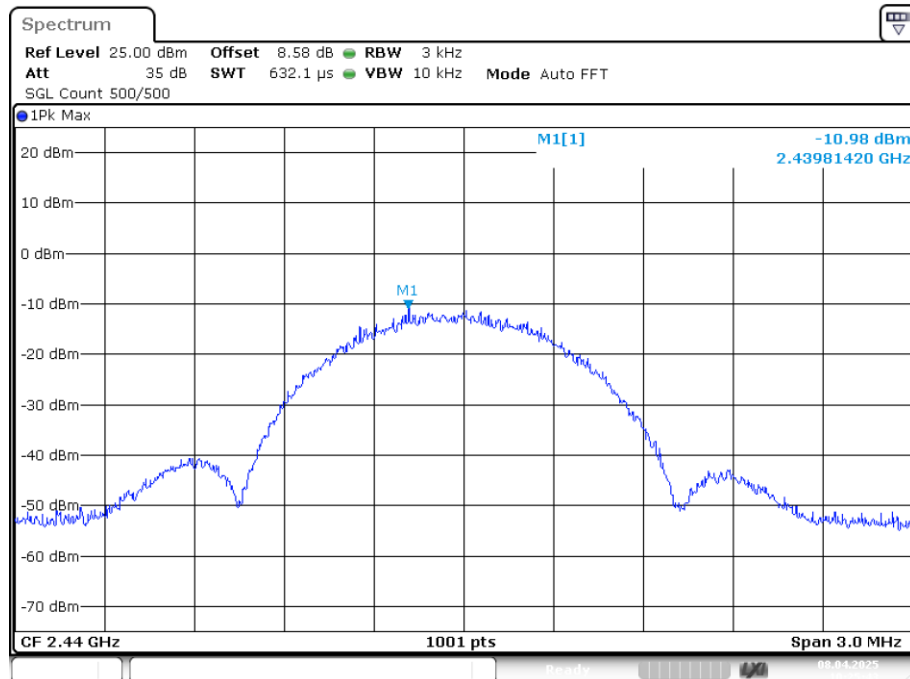

Date: 8.APR.2025 10:25:43

PSD NVNT BLE 1M 2480MHz Ant1

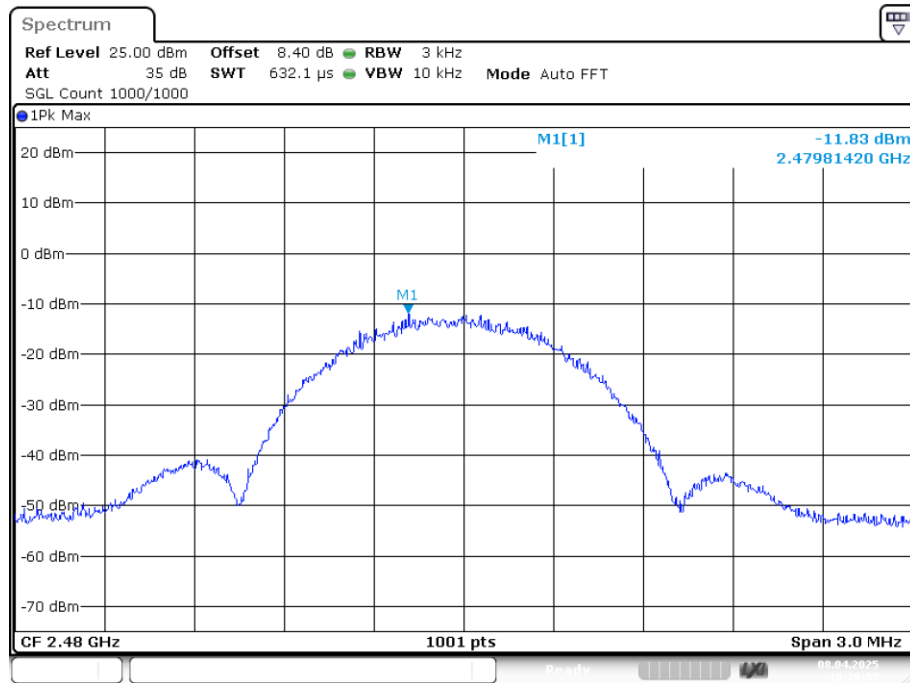


Date: 8.APR.2025 10:29:58

GFSK (2M)


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 2M	2402	Ant1	-14.516	8	Pass
NVNT	BLE 2M	2440	Ant1	-14.524	8	Pass
NVNT	BLE 2M	2480	Ant1	-15.165	8	Pass

PSD NVNT BLE 2M 2402MHz Ant1

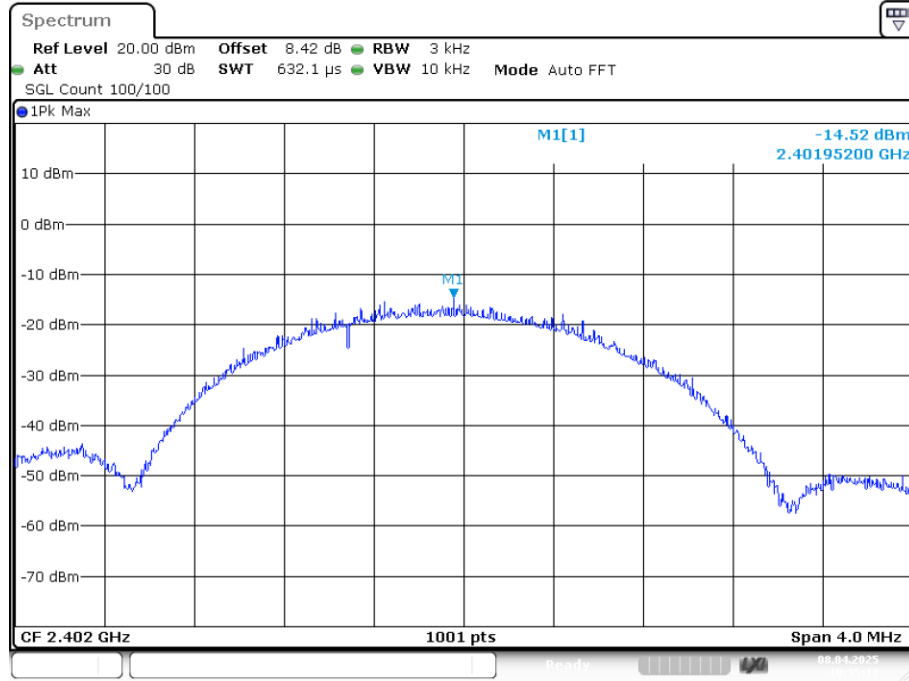


Date: 8.APR.2025 10:35:11

PSD NVNT BLE 2M 2440MHz Ant1

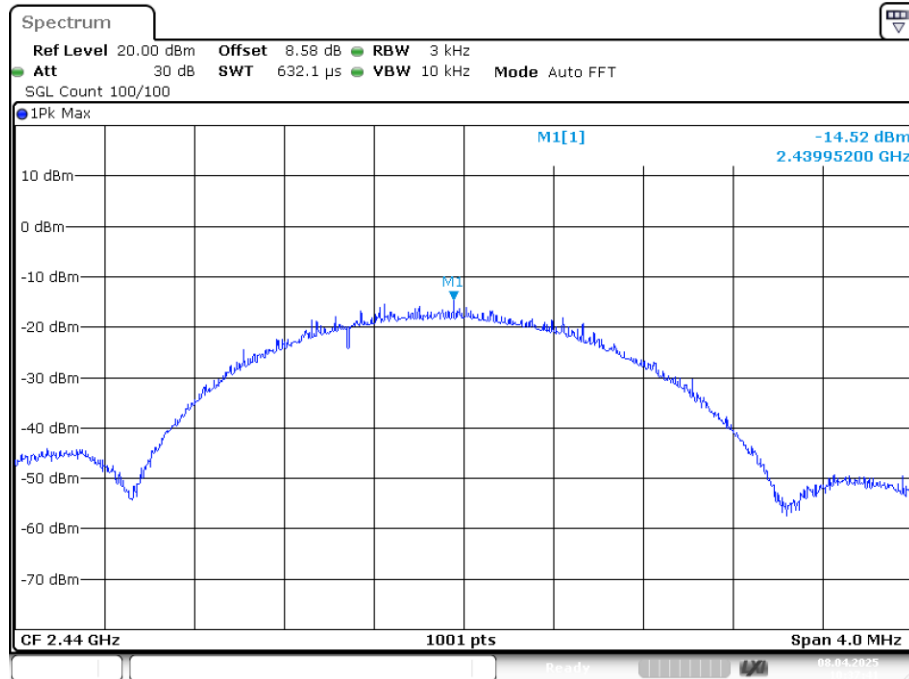

Date: 8.APR.2025 10:37:41

PSD NVNT BLE 2M 2480MHz Ant1

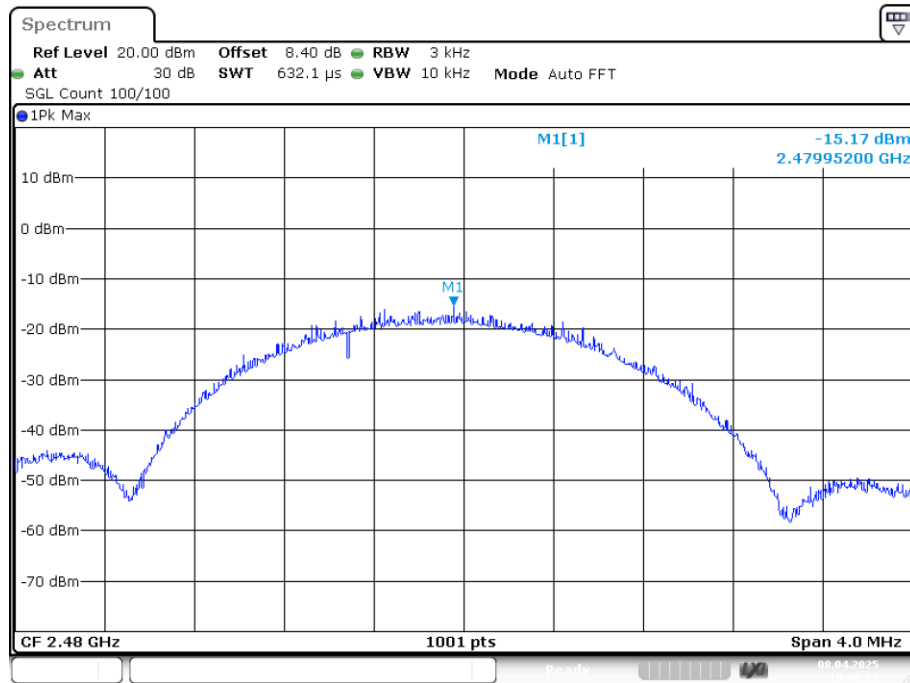

Date: 8.APR.2025 10:40:51

7. BANDWIDTH

7.1. Test limits

Please refer section RSS-247 & 15.247

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.


7.2. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

b) The test receiver set RBW = 100kHz, VBW $\geq$ 3*RBW =300kHz, sweep time set auto, detail see the test plot.

7.3. Test Setup




7.4. Test Results


GFSK(1M)

-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.727	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.662	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.678	0.5	Pass

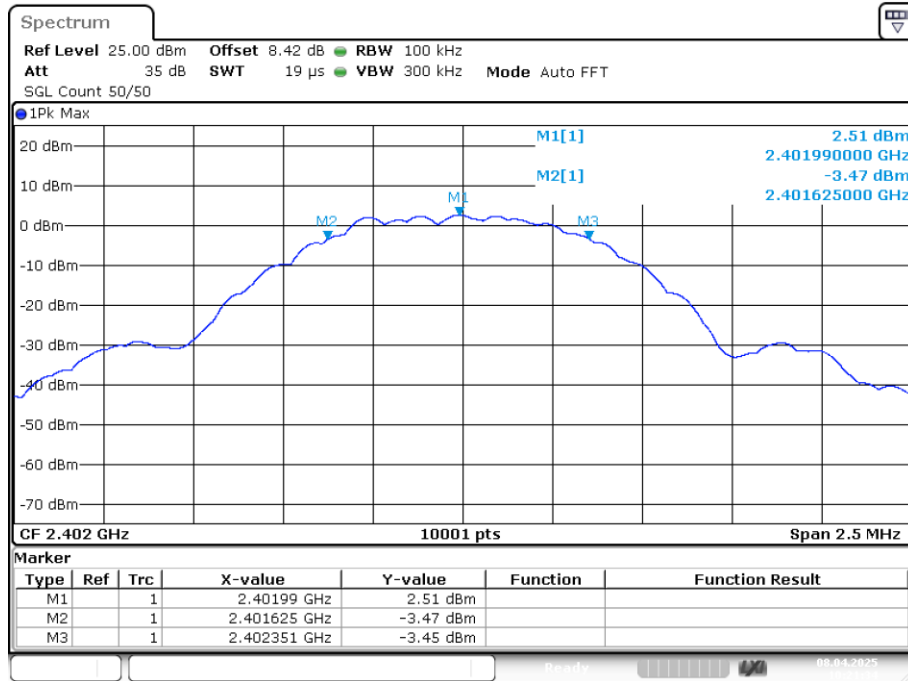
-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

Date: 8.APR.2025 10:21:34

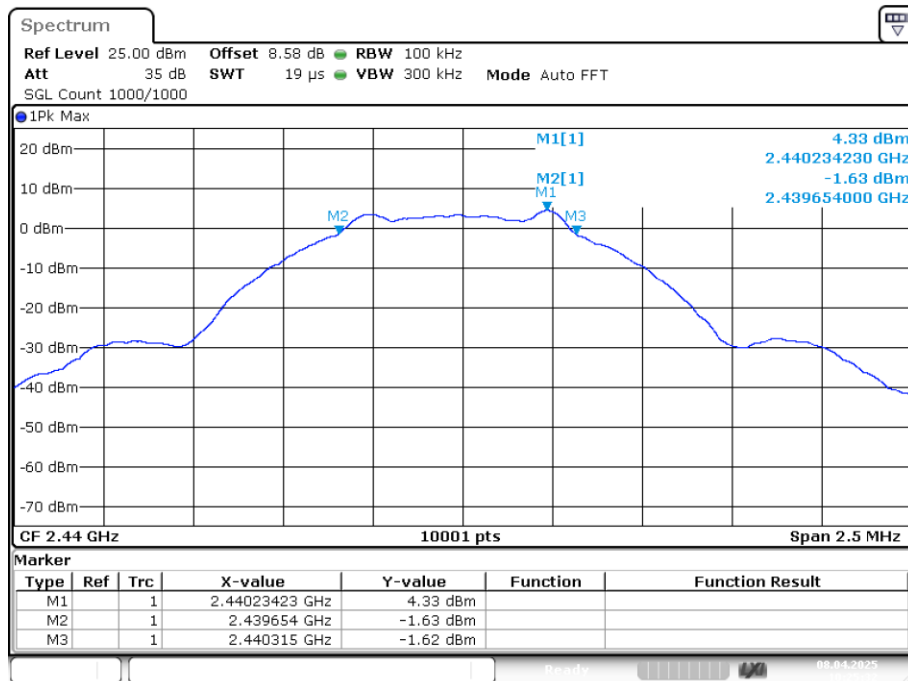-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

Date: 8.APR.2025 10:25:32

-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

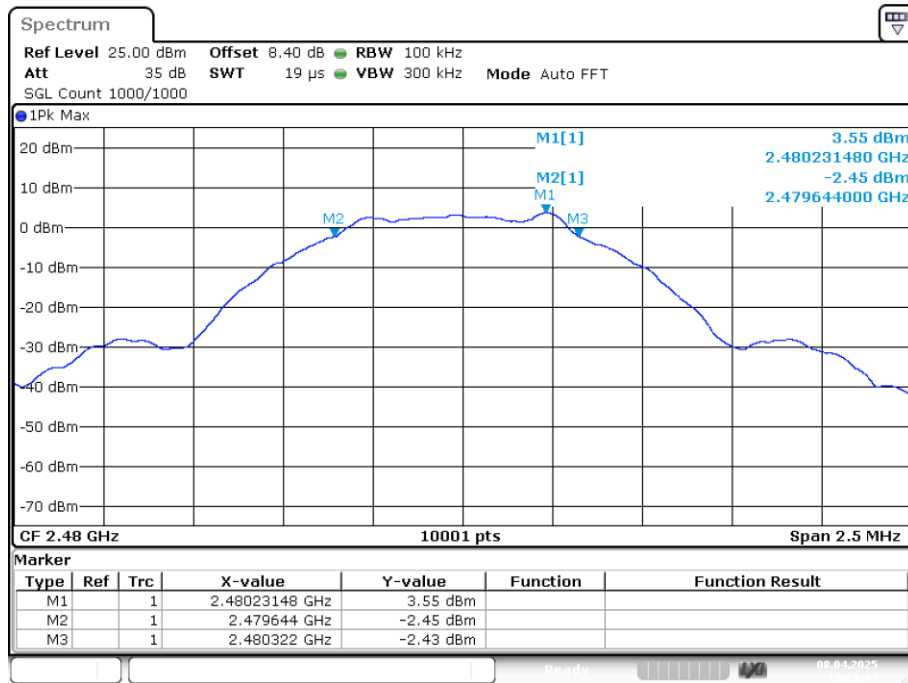


Date: 8.APR.2025 10:29:44

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.021
NVNT	BLE 1M	2440	Ant1	1.024
NVNT	BLE 1M	2480	Ant1	1.021

OBW NVNT BLE 1M 2402MHz Ant1

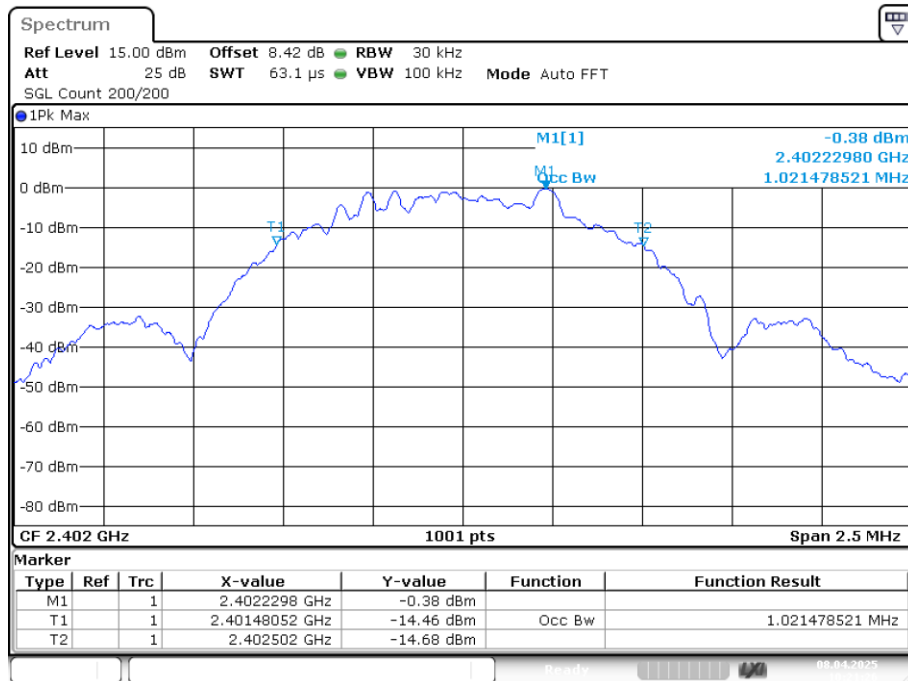


Date: 8.APR.2025 10:21:26

OBW NVNT BLE 1M 2440MHz Ant1

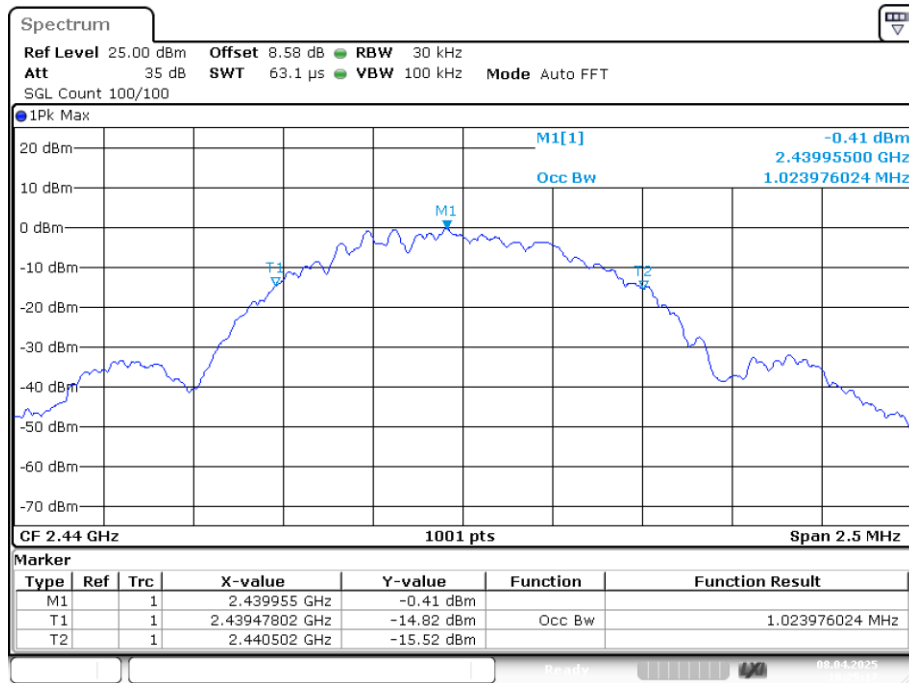

Date: 8.APR.2025 10:25:17

OBW NVNT BLE 1M 2480MHz Ant1

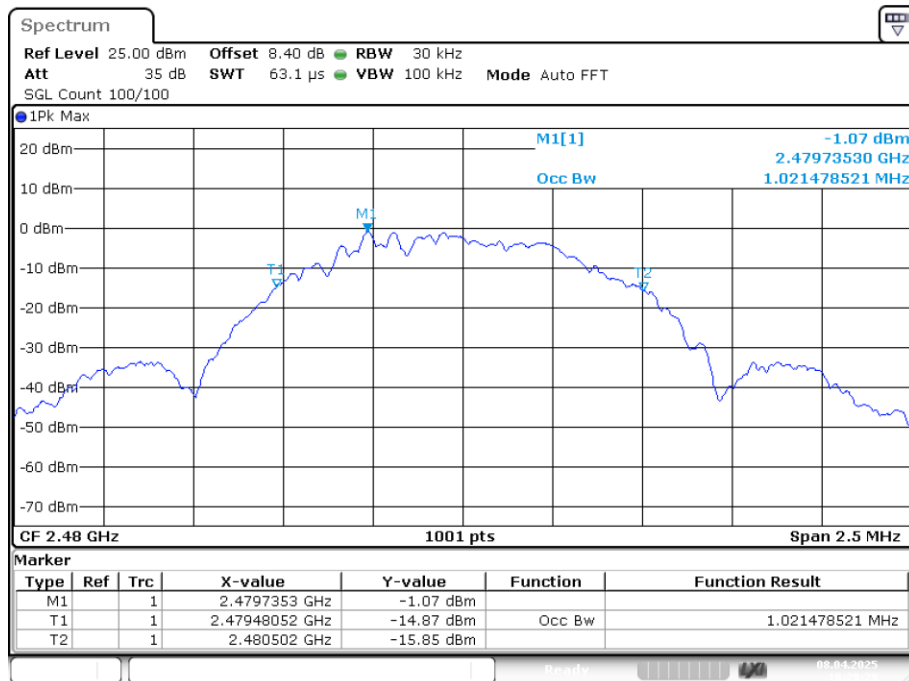


Date: 8.APR.2025 10:29:29

GFSK(2M)


-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 2M	2402	Ant1	1.382	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.374	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.231	0.5	Pass

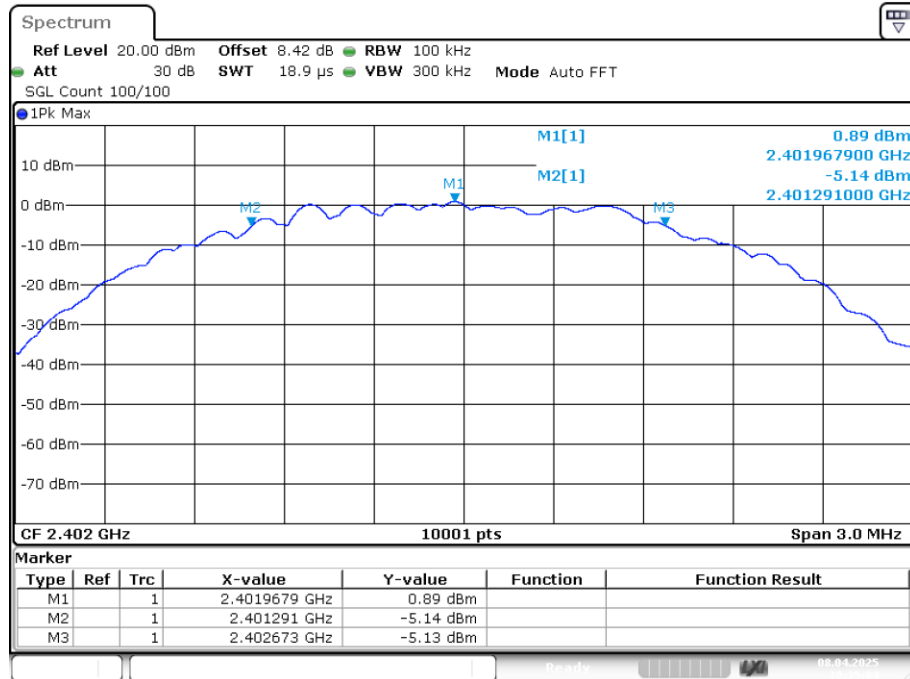-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1


Date: 8.APR.2025 10:35:04

-6dB Bandwidth NVNT BLE 2M 2440MHz Ant1

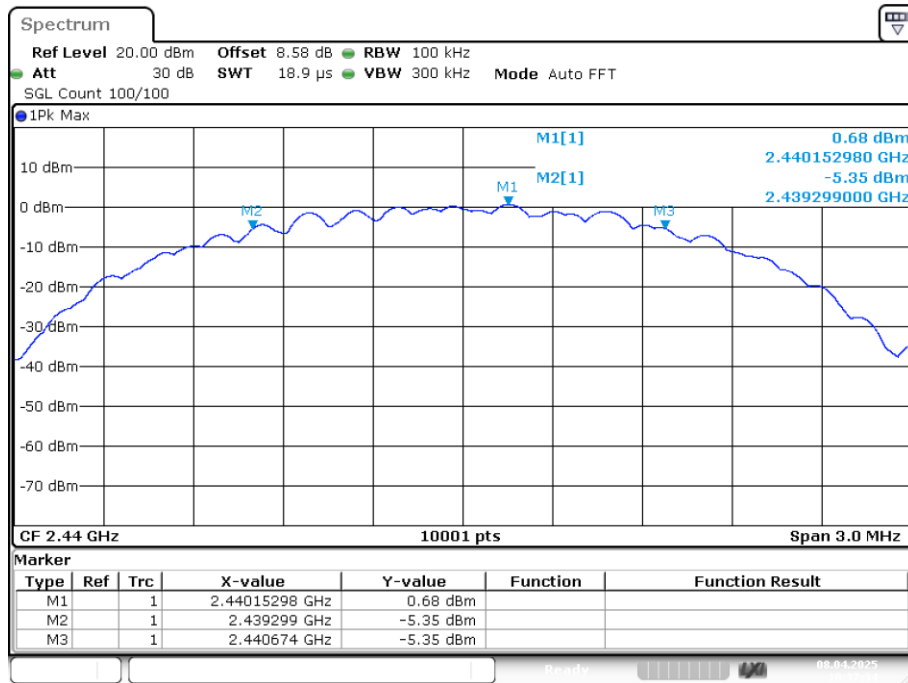

Date: 8.APR.2025 10:37:34

-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

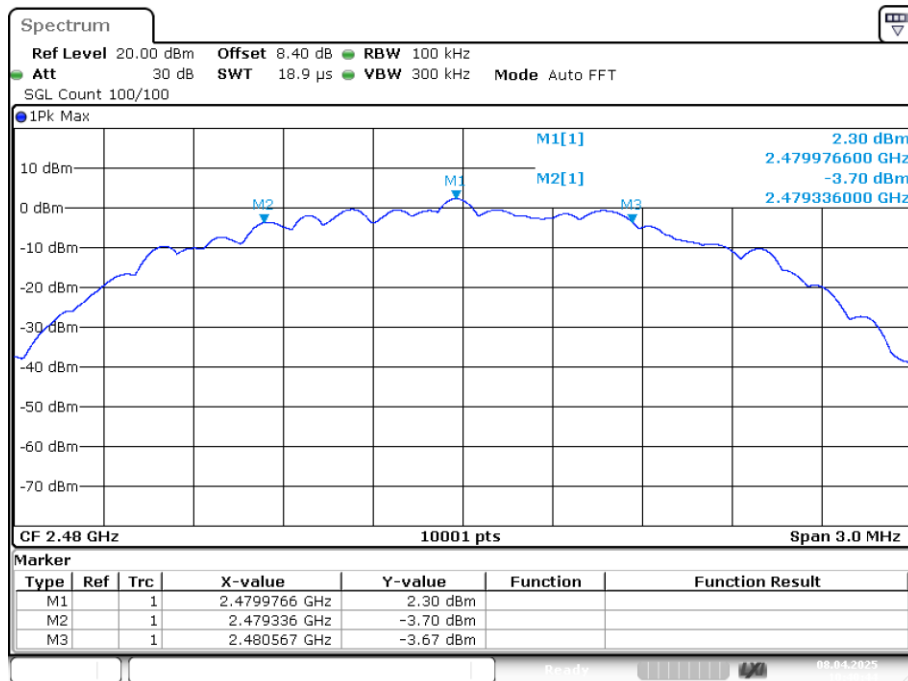


Date: 8.APR.2025 10:40:43

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 2M	2402	Ant1	1.996
NVNT	BLE 2M	2440	Ant1	2.002
NVNT	BLE 2M	2480	Ant1	2.008

OBW NVNT BLE 2M 2402MHz Ant1

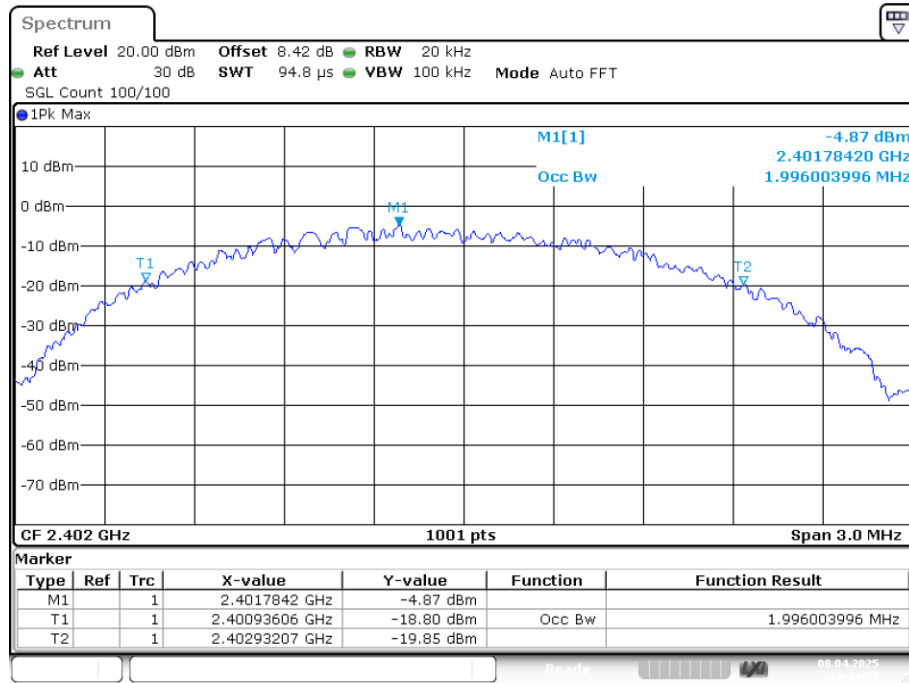


Date: 8.APR.2025 10:34:55

OBW NVNT BLE 2M 2440MHz Ant1

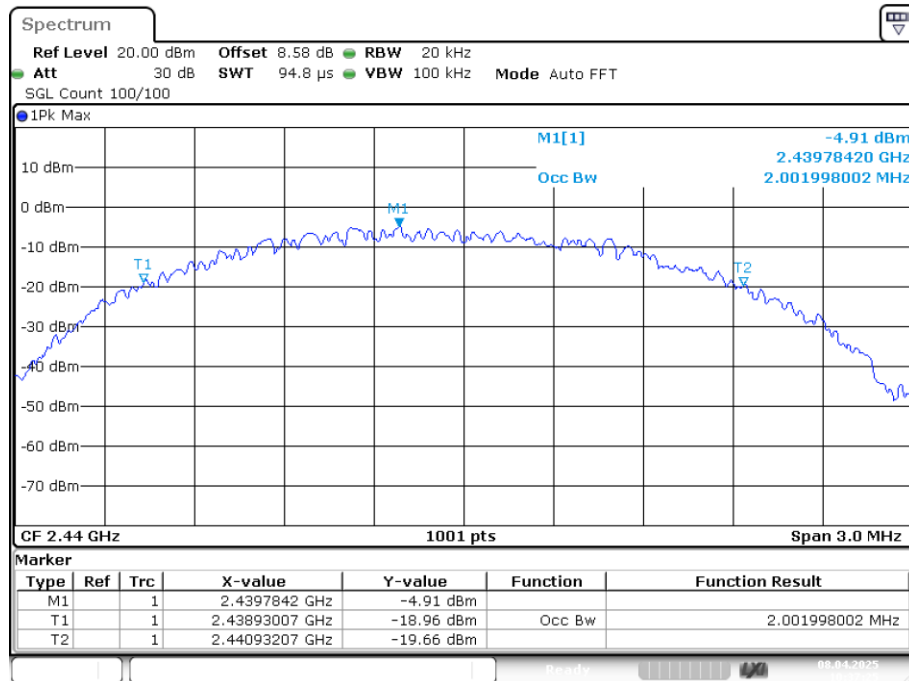

Date: 8.APR.2025 10:37:25

OBW NVNT BLE 2M 2480MHz Ant1

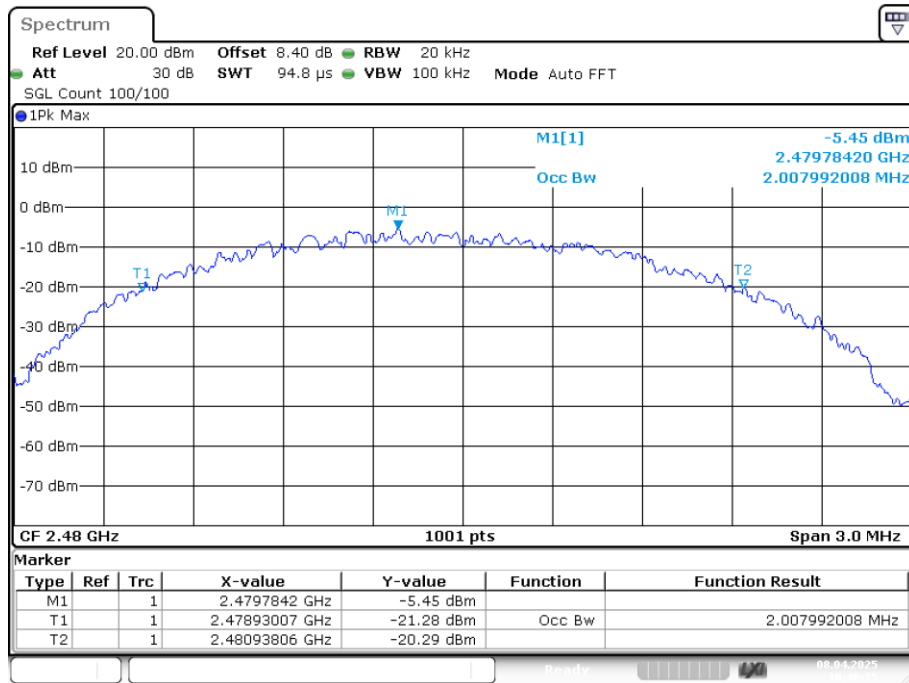

Date: 8.APR.2025 10:40:35

8. BAND EDGE CHECK

8.1. Test limits

Please refer section RSS-GEN&15.247.

8.2. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

8.2.1 Put the EUT on a 0.8m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

8.2.2 Check the spurious emissions out of band.

8.2.3 RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 3MHz, RMS detector for AV value.

8.3. Test Setup

Same as 5.2.2.


8.4. Test Results

Pass

The test results are listed in next pages.


GFSK (1M)

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

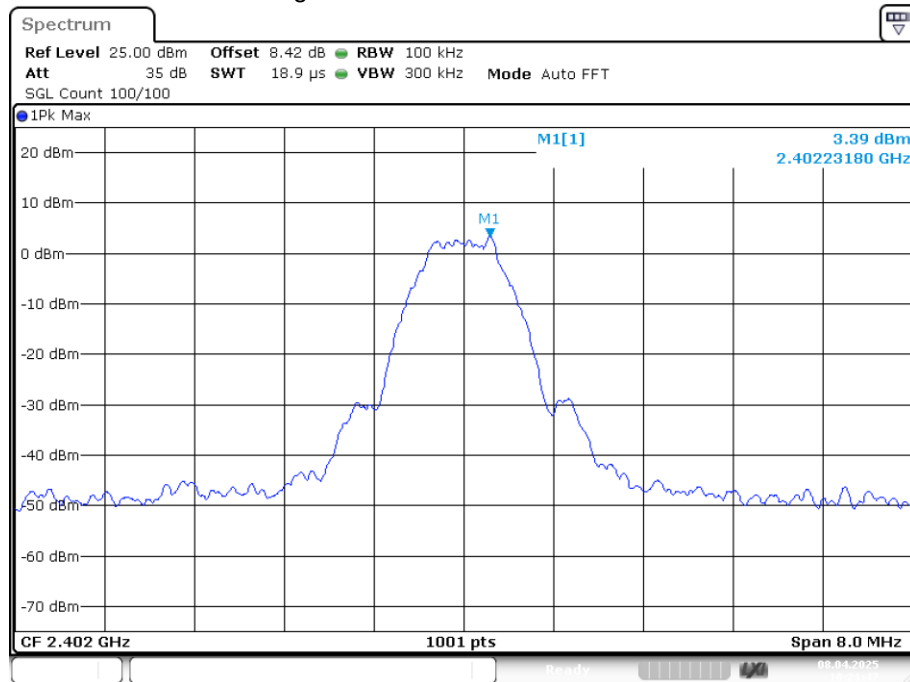


Date: 8.APR.2025 10:21:47

Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

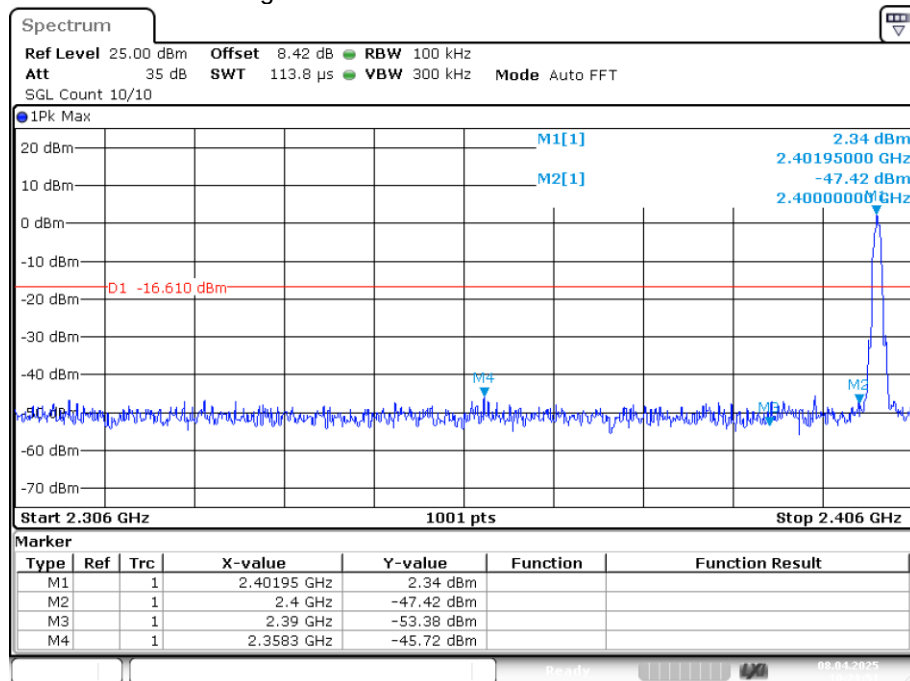


Date: 8.APR.2025 10:21:50

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

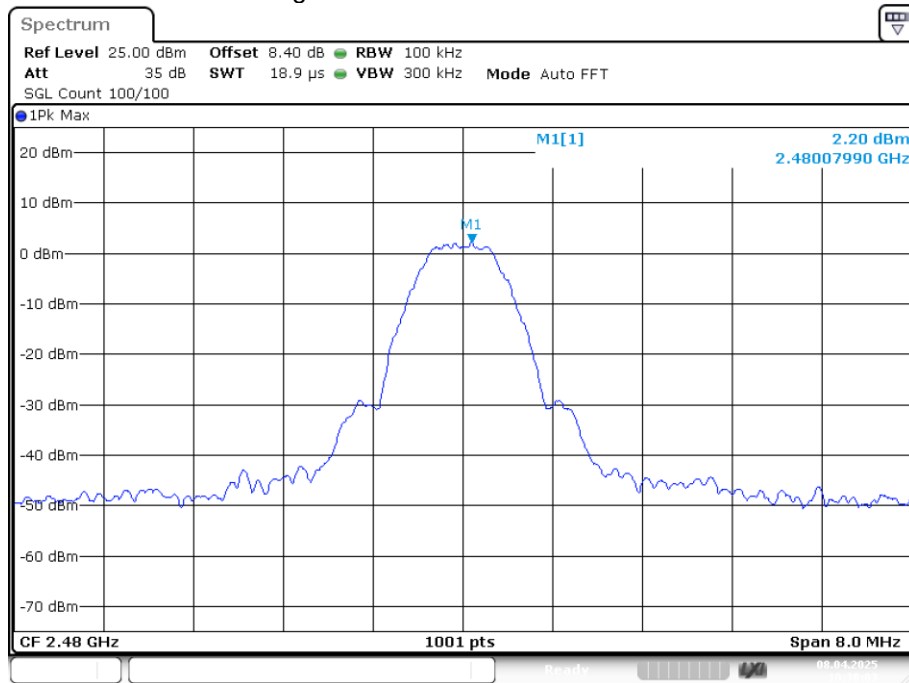

Date: 8.APR.2025 10:30:04


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

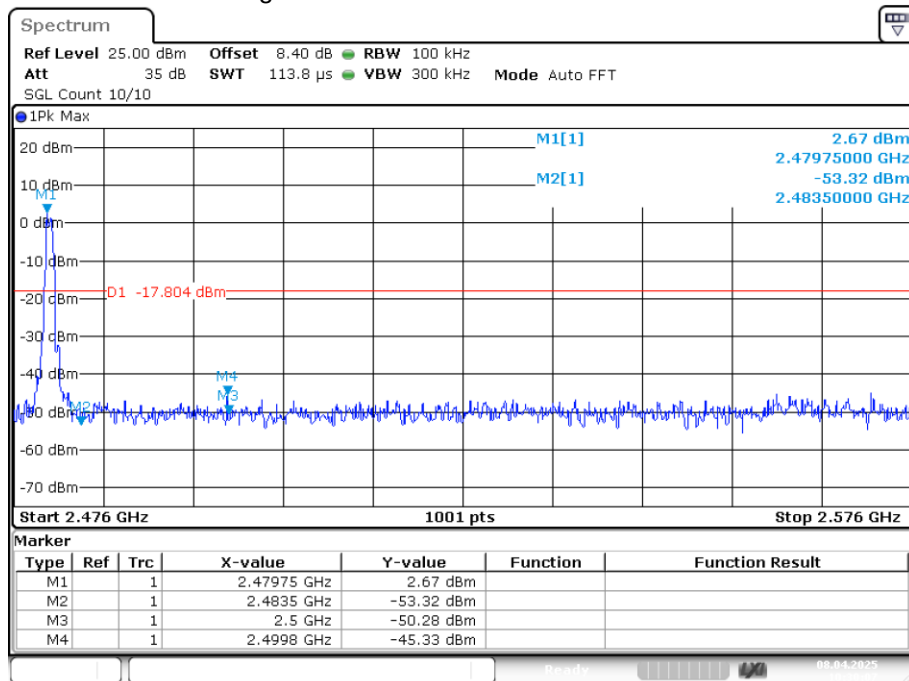

Date: 8.APR.2025 10:30:07


GFSK (2M)

Band Edge NVNT BLE 2M 2402MHz Ant1 Ref

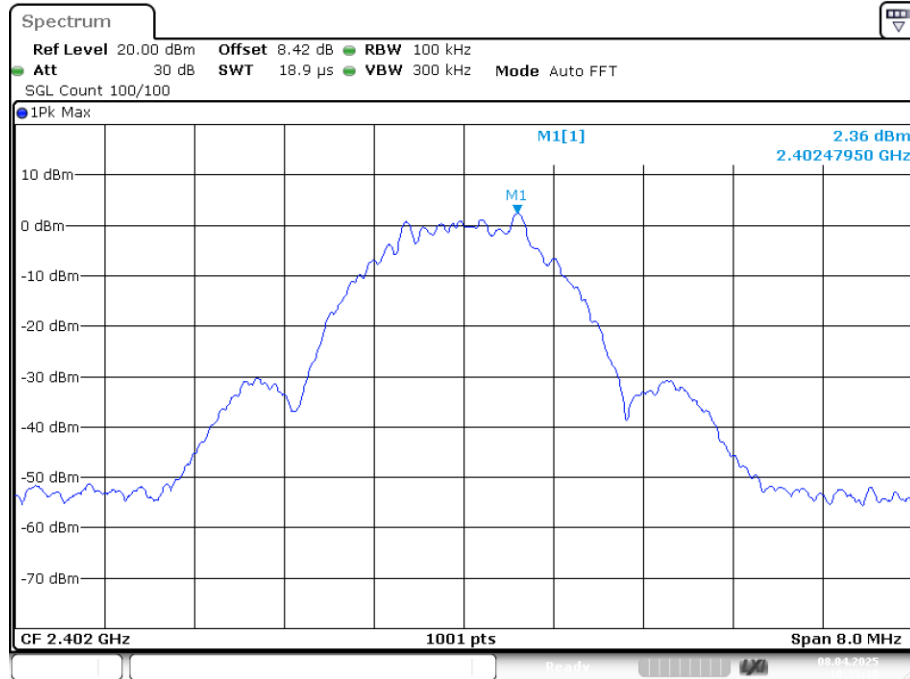


Date: 8.APR.2025 10:35:17

Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

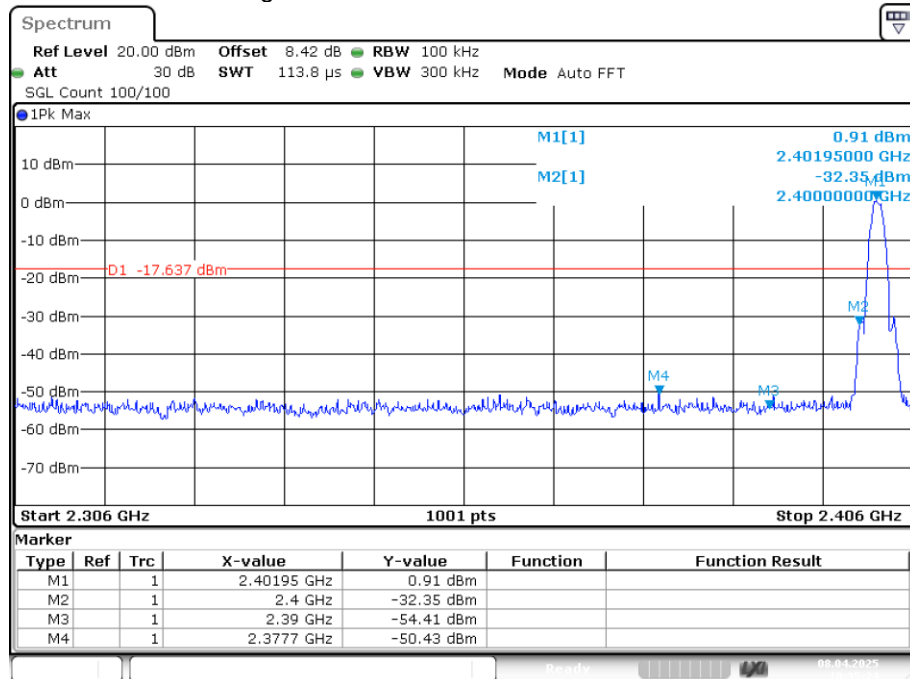


Date: 8.APR.2025 10:35:23

Band Edge NVNT BLE 2M 2480MHz Ant1 Ref

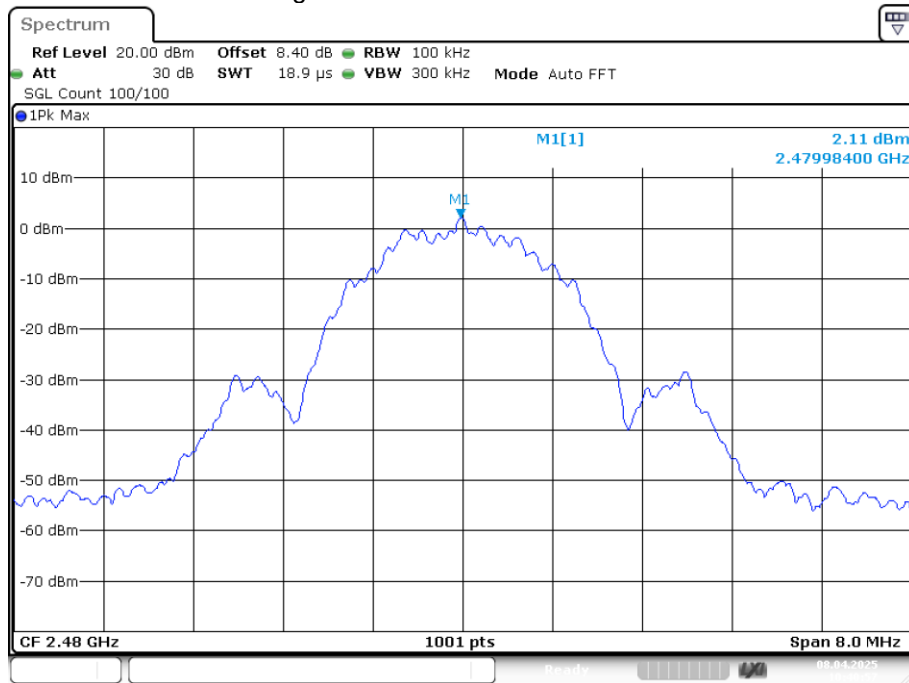

Date: 8.APR.2025 10:40:57


Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

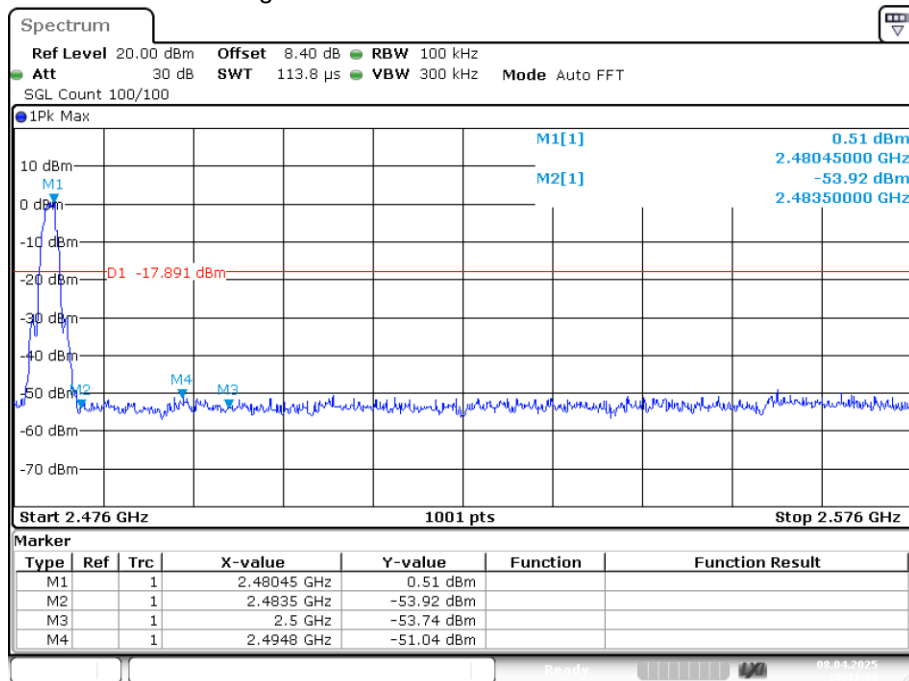


Date: 8.APR.2025 10:41:03

Radiated Method: GFSK(1M)

Test Mode: CH-L

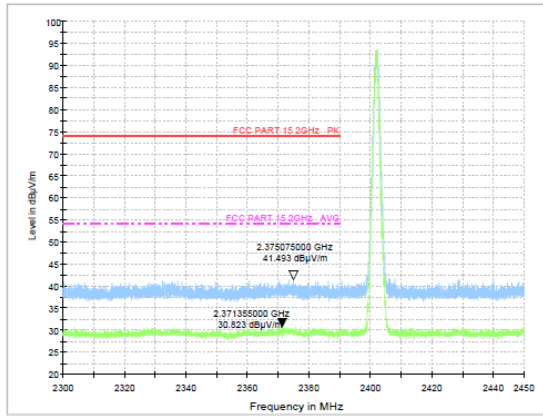


Test Mode: CH-H

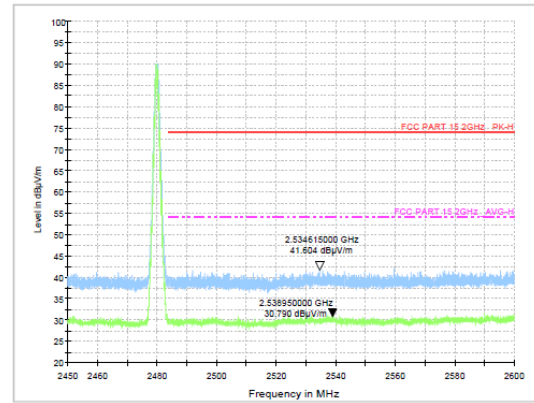


Radiated Method: GFSK(2M)

Test Mode: CH-L

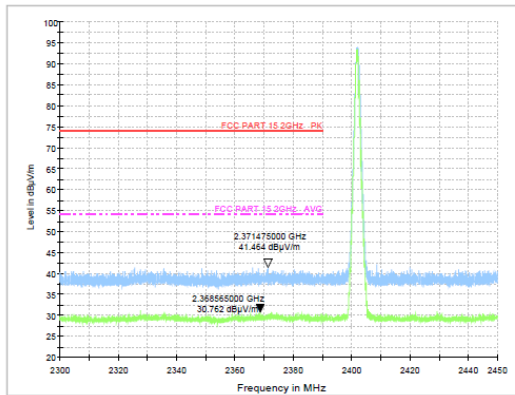

Test Mode: CH-H

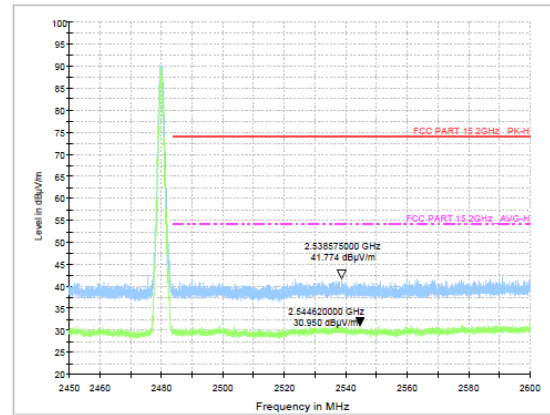

9. ANTENNA REQUIREMENT

9.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2. Antenna Connected Construction



The antenna is internal antenna and no consideration of replacement. Please see EUT photo for details.

9.3. Results


The EUT antenna is Internal Antenna. It complies with the standard requirement.

10. TEST SETUP PHOTO

10.1. Photo of Radiated Emission test

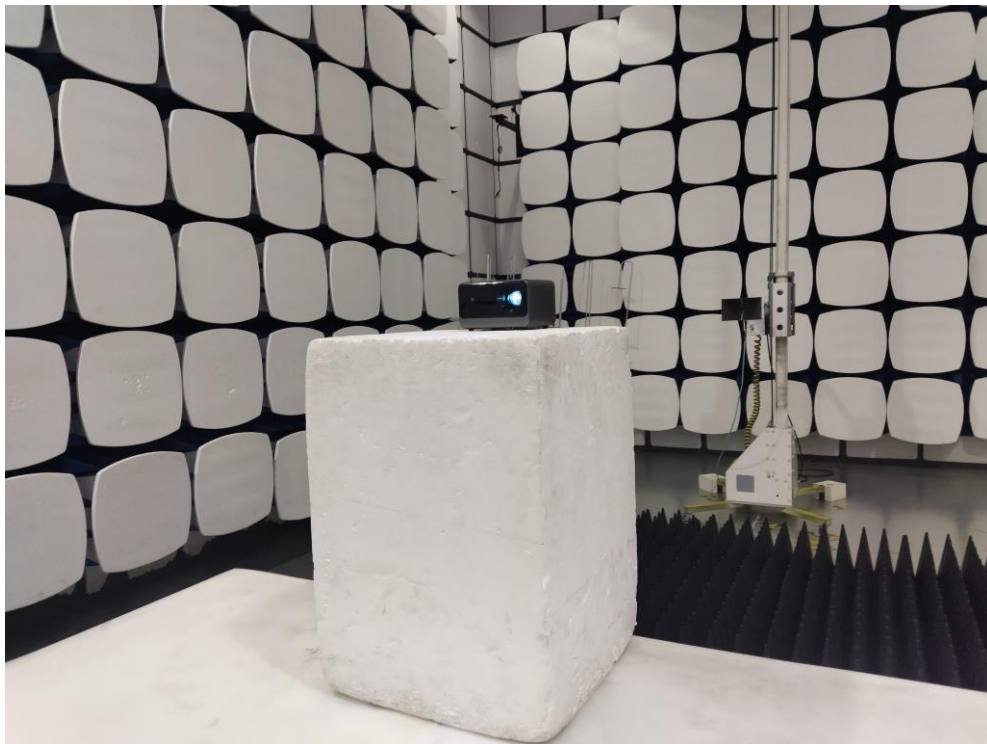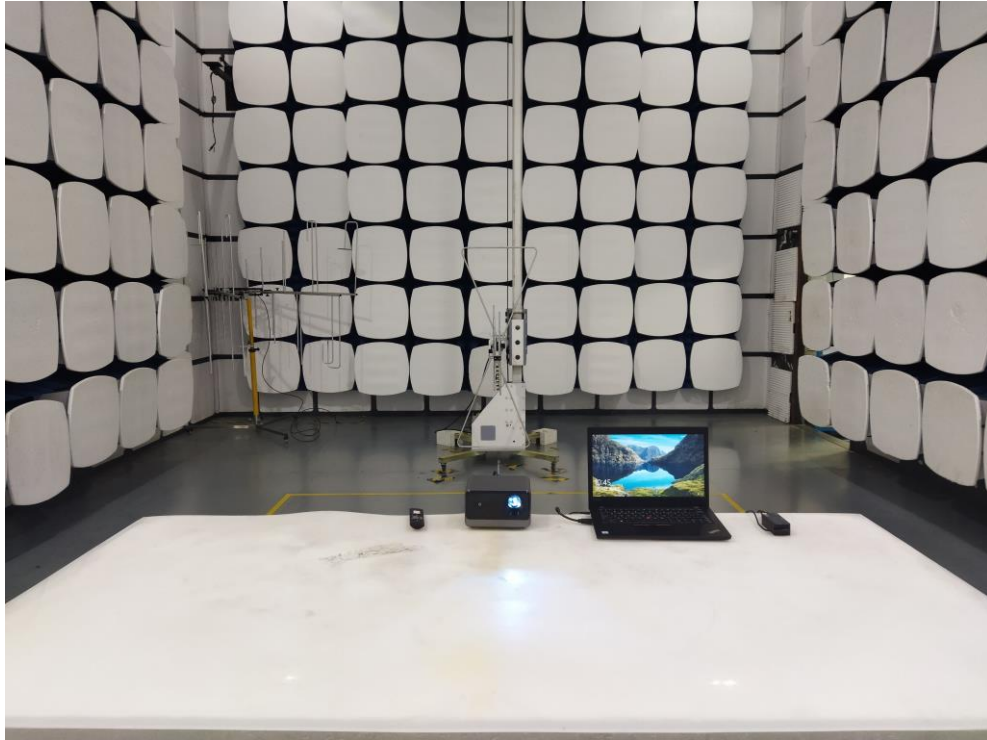

10.2.Photo of Conducted Emission test

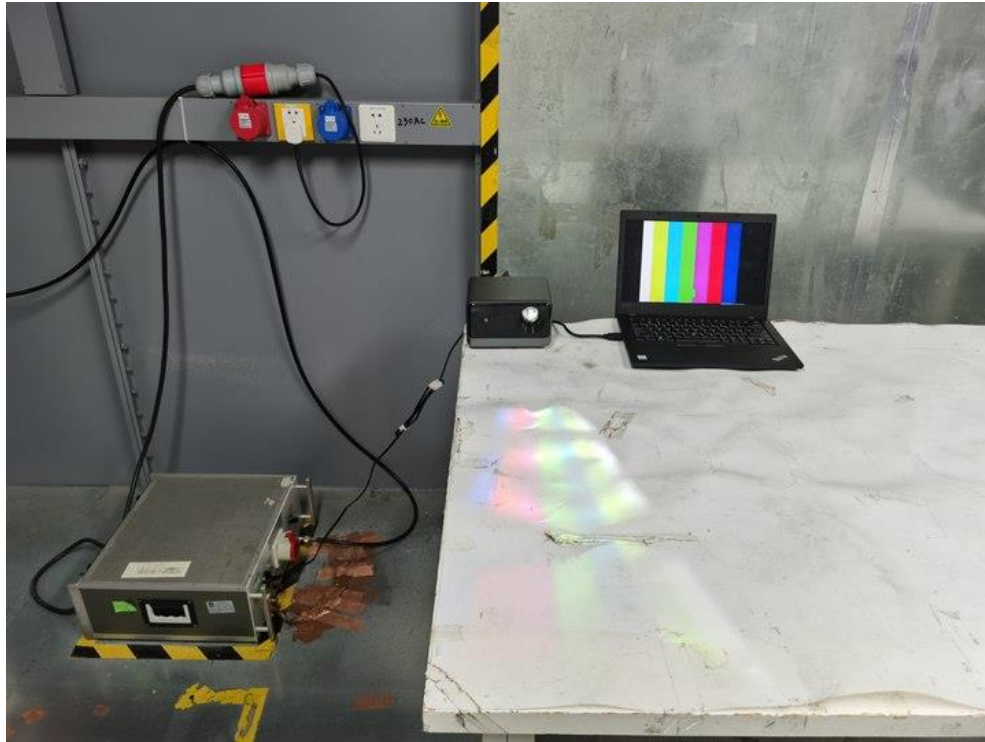

11. EUT PHOTOS

Please refer to the report A2502222-C05-R01.

12.MODEL LIST

AC201	AC203	AC211	AC213	AC221	AC223	AC231	AC233
AC241	AC243	AC251	AC253	AC261	AC263	AC271	AC273
AC281	AC283	AC291	AC293	AC301	AC303	AC311	AC313
AC321	AC323	AC331	AC333	AC341	AC343	AC351	AC353
AC361	AC363	AC371	AC373	AC381	AC383	AC391	AC393
AC401	AC403	AC411	AC413	AC421	AC423	AC431	AC433
AC441	AC443	AC451	AC453	AC461	AC463	AC471	AC473
AC481	AC483	AC491	AC493	AC501	AC503	AC511	AC513
AC521	AC523	AC531	AC533	AC541	AC543	AC551	AC553
AC561	AC563	AC571	AC573	AC581	AC583	AC591	AC593

-----END OF REPORT-----