



## FCC TEST REPORT

**FCC ID: 2BN84-AC571**

On Behalf of

**Shenzhen Aocai Technology Co., LTD**  
**LED projector**  
**Model No.: AC571, YG561**

Prepared for : Shenzhen Aocai Technology Co., LTD  
Address : 701, Building A9, Longwangmiao Industrial Building, East Baishisha  
Community, Fuyong Street, Baoan District, Shenzhen

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

Report Number : A2504097-C01-R03  
Date of Receipt : April 21, 2025  
Date of Test : April 21, 2025 - May 27, 2025  
Date of Report : May 27, 2025  
Version Number : V0  
**Test Result** : **Pass**

## TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
<b>TABLE OF CONTENTS -----</b>	<b>2</b>
<b>1. Summary of Standards And Results -----</b>	<b>6</b>
1.1. Description of Standards and Results -----	6
<b>2. General Information -----</b>	<b>7</b>
2.1. Description of Device (EUT) -----	7
2.2. Accessories of Device (EUT) -----	8
2.3. Tested Supporting System Details-----	8
2.4. Block Diagram of connection between EUT and simulators -----	8
2.5. Test Mode Description-----	8
2.6. Test Conditions-----	9
2.7. Test Facility-----	9
2.8. Measurement Uncertainty-----	9
2.9. Test Equipment List -----	10
<b>3. Spurious Emission-----</b>	<b>12</b>
3.1. Test Limits -----	12
3.2. Test Procedure -----	12
3.3. Test Setup -----	13
3.4. Test Results -----	14
<b>4. RF Conducted Spurious Emissions -----</b>	<b>19</b>
4.1. Block diagram of test setup -----	19
4.2. Limits -----	19
4.3. Test procedure -----	19
4.4. Test result-----	19
<b>5. Power Line Conducted Emission -----</b>	<b>26</b>
5.1. Test Limits -----	26
5.2. Test Procedure -----	26
5.3. Test Setup -----	26
5.4. Test Results -----	26
<b>6. Conducted Maximum peak Output Power-----</b>	<b>29</b>
6.1. Test limits -----	29
6.2. Test Procedure -----	29
6.3. Test Setup -----	29
6.4. Test Results -----	29
<b>7. Peak Power Spectral Density-----</b>	<b>30</b>
7.1. Test limits -----	30
7.2. Test Procedure -----	30
7.3. Test Setup -----	30
7.4. Test Results -----	30
<b>8. Bandwidth -----</b>	<b>35</b>
8.1. Test limits -----	35
8.2. Test Procedure -----	35
8.3. Test Setup -----	35
8.4. Test Results -----	35
<b>9. Band Edge (Conducted)-----</b>	<b>43</b>
9.1. Test limits -----	43
9.2. Block diagram of test setup -----	43
9.3. Test Procedure -----	43
9.4. Test Results -----	43
<b>10. Band Edge(Radiated) -----</b>	<b>48</b>
10.1. Block diagram of test setup -----	48
10.2. Limits -----	48
10.3. Test procedure -----	48
10.1. Test Results -----	48
<b>11. Duty Cycle -----</b>	<b>50</b>
11.1. Block diagram of test setup -----	50
11.2. Test Procedure -----	50

11.3. Test Results -----	50
<b>12. Antenna Requirement-----</b>	<b>54</b>
12.1. Standard Requirement -----	54
12.2. Antenna Connected Construction -----	54
12.3. Results -----	54
<b>13. Test setup photo-----</b>	<b>55</b>
13.1. Photo of Radiated Emission test-----	55
13.2. Photo of Conducted Emission test -----	56

## TEST REPORT DECLARATION

Applicant : Shenzhen Aocai Technology Co., LTD  
Address : 701, Building A9, Longwangmiao Industrial Building, East Baishisha Community, Fuyong Street, Baoan District, Shenzhen  
Manufacturer : Shenzhen Aocai Technology Co., LTD  
Address : 701, Building A9, Longwangmiao Industrial Building, East Baishisha Community, Fuyong Street, Baoan District, Shenzhen  
EUT Description : LED projector  
(A) Model No. AC571,YG561  
(B) Trademark N/A

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247**

**ANSI C63.10-2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen  
Project Engineer



Approved by (name + signature).....: Jack Xu  
Project Manager



Date of issue.....: May 27, 2025

**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	May 27, 2025	Initial released Issue	Yannis Wen

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Test Requirement	Standards Paragraph	Result
Conducted Emission	FCC PART 15	15.207	P
6dB Bandwidth	FCC PART 15	15.247 (a)(2)	P
Conducted Maximum Peak Output Power	FCC PART 15	15.247 (b)(3)	P
Radiated Spurious Emission	FCC PART 15	15.247 (c)	P
Conducted Spurious & Band Edge Emission	FCC PART 15	15.247 (d)	P
Power Spectral Density	FCC PART 15	15.247 (e)	P
Radiated Band Edge Emission	FCC PART 15	15.205	P
Antenna Requirement	FCC PART 15	15.203	P

Note: 1. P is an abbreviation for Pass.  
2. F is an abbreviation for Fail.  
3. N/A is an abbreviation for Not Applicable.  
4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Description : LED projector  
Model Number : AC571, YG561  
Diff : There is no difference except the name of the model. All tests are made with the AC571 model.  
Power supply : AC 120V from power line.

Radio Technology	: Bluetooth BLE
Operation frequency	: 2402-2480MHz
Channel No.	: 40 Channels
Channel spacing	: 2MHz
Rate	: 1Mbps, 2Mbps
Modulation type	: GFSK
Antenna Type	: Internal antenna, Maximum Gain is 4.73dBi (Antenna information is provided by applicant.)
Software version	: V1.0
Hardware version	: V1.0
Intend use environment	: Residential, commercial and light industrial environment


## 2.2. Accessories of Device (EUT)

Accessories : /  
 Manufacturer : /  
 Model : /  
 Ratings : /

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1	Notebook PC	Lenovo	ThinkPad L14	N/A	N/A

## 2.4. Block Diagram of connection between EUT and simulators

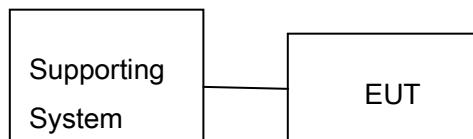

## 2.5. Test Mode Description

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK (1M/2Mbps)	Low :CH1	2402
	Middle: CH20	2440
	High: CH40	2480

Using QRCT testing software to control EUT work in Continuous TX mode, and select test channel, wireless mode, the power level of the test is set to default.

## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd  
 Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
 Shenzhen, Guangdong, China

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V) 3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V) 3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V) 4.30 dB(Polarize: H)
Uncertainty for radio frequency	$5.06 \times 10^{-8}$ GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

## 2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2025.03.09	4Year
4*4*3 Shielded room	CHENYU	4*4*3	/	N/A	2025.03.09	4Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2024.08.08	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2024.08.08	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2024.08.08	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2024.08.08	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2024.08.08	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2024.08.08	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2024.08.08	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2024.08.08	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2024.08.08	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2024.08.08	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2024.08.08	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	2Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2024.08.08	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2024.08.08	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2024.08.08	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2024.07.15	1 Year
Electronic Thermo-Hygrometer	S.H.Qixiang	HTC-1	/	N/A	2024.08.11	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2024.08.08	1 Year
Adjustable attenuator	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

<b>Software Information</b>			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1
RF-CE	MTS 8310	MWRFtest	V2.0.0.0

### 3. SPURIOUS EMISSION

#### 3.1. Test Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

**NOTE:**

- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(uV/m)

#### 3.2. Test Procedure

The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above1GHz testing, The table was rotated 360 degrees to determine the position of the highest radiation



The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set of make measurement.

The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Qusia Peak Detector mode premeasured


If Peak value comply with QP limit Below 1GHz.The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.

For the actual test configuration, please see the test setup photo.

### 3.3. Test Setup

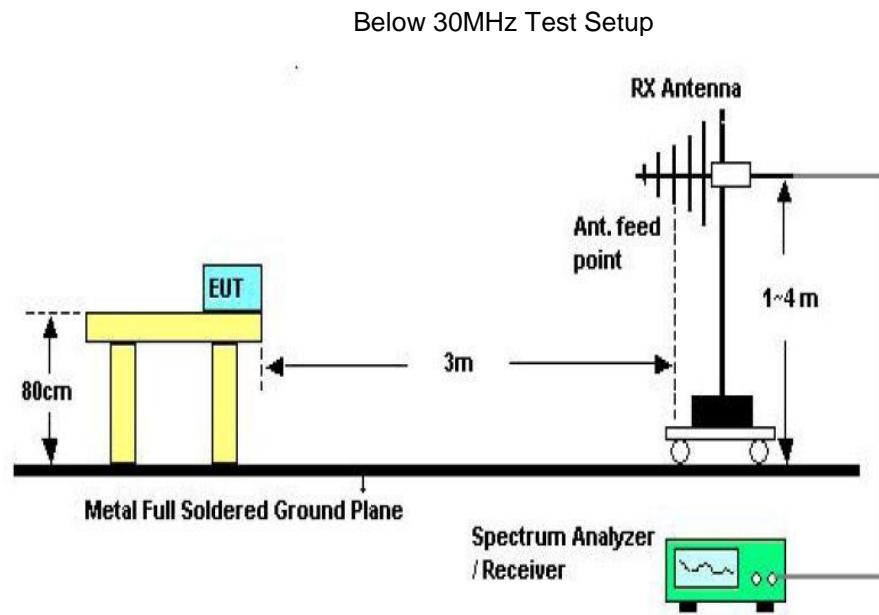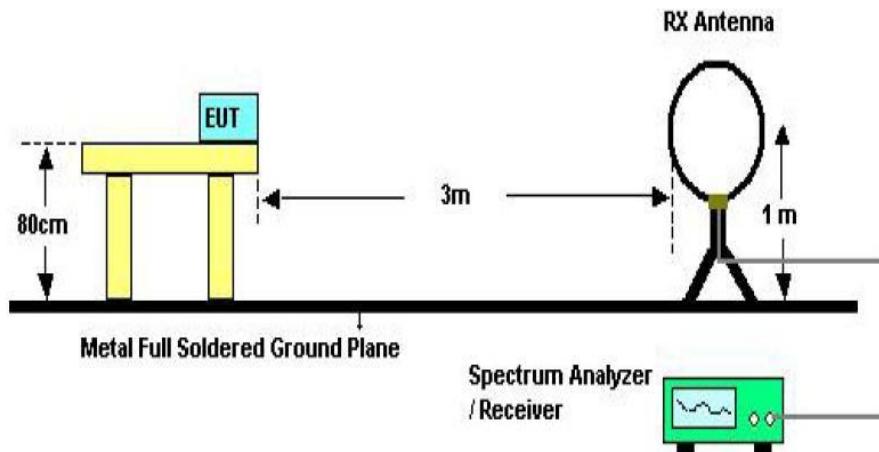

Above 30MHz Test Setup

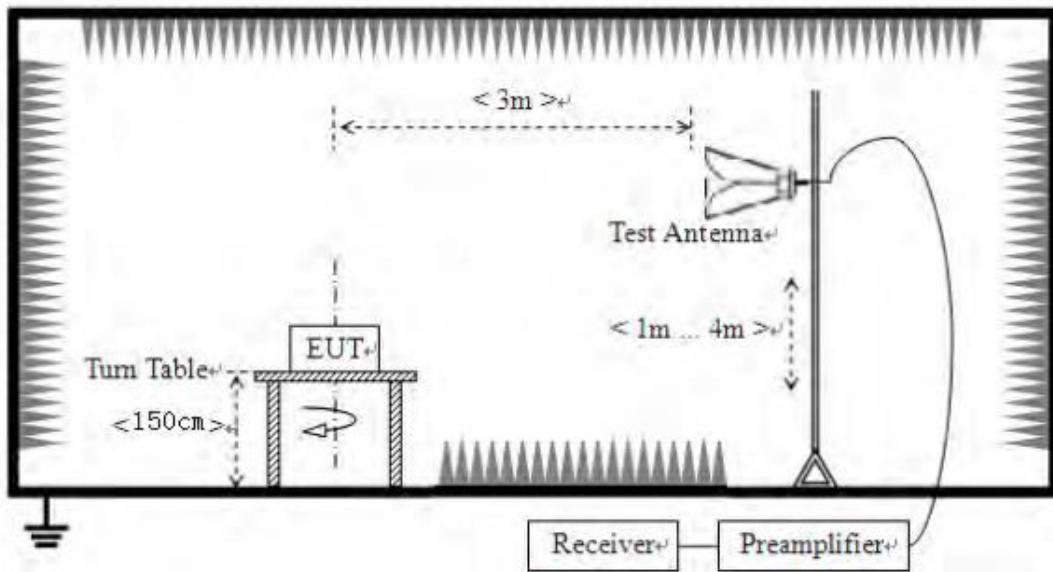

Above 1GHz Test Setup

### 3.4. Test Results

#### Test Condition

Continual Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHz~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

We have scanned the 10th harmonic from 9 kHz to the EUT.


Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2. Only show the test data of the worst Channel in this report.


## Antenna polarity: Horizontal

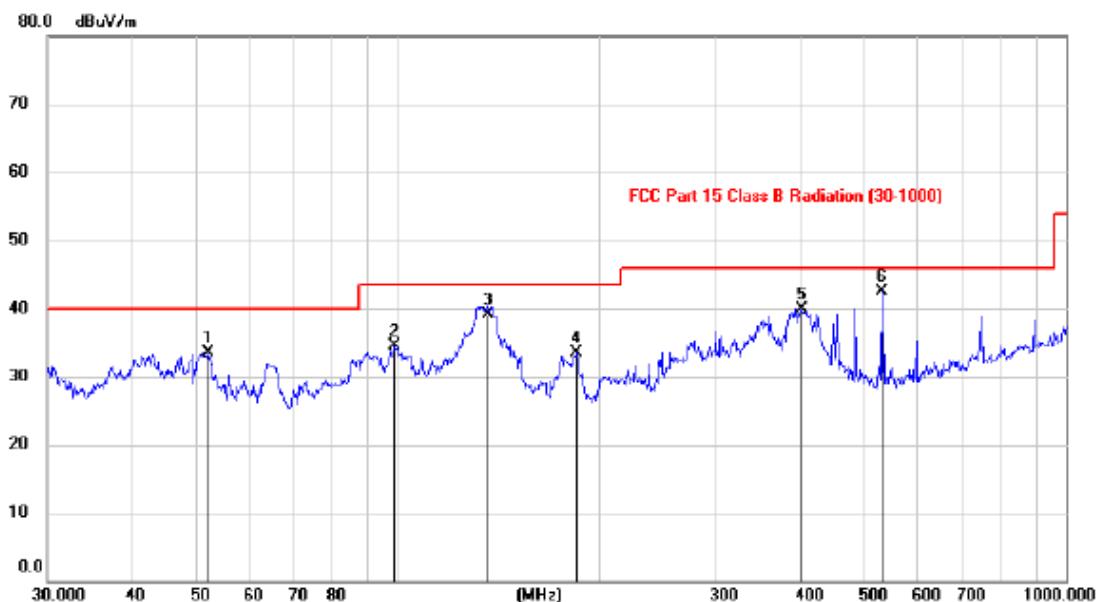

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Antenna Height	Table Degree									
									MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		52.1114	19.63	13.86	33.49	40.00	-6.51	peak										
2		99.1877	23.57	10.84	34.41	43.50	-9.09	peak										
3		136.6019	24.98	14.07	39.05	43.50	-4.45	QP										
4		185.5009	21.55	12.01	33.56	43.50	-9.94	peak										
5		403.5663	23.64	16.33	39.97	46.00	-6.03	peak										
6	*	530.9541	23.56	18.87	42.43	46.00	-3.57	QP										

Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2. Measurement=Reading Level+Correct Factor, Correct Factor=Antenna Factor+Cable Loss.

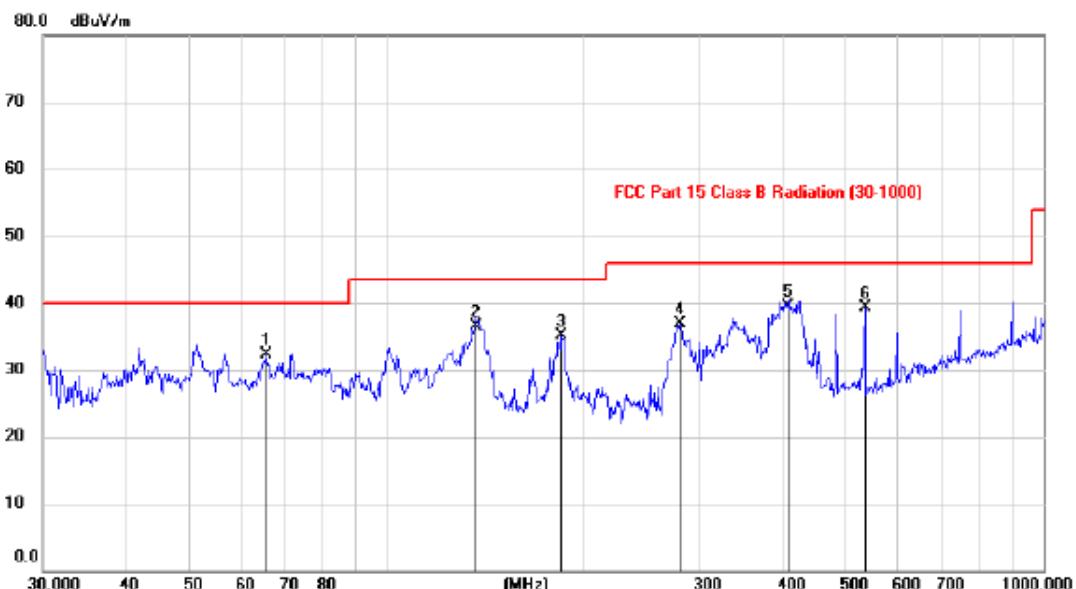**Antenna polarity: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
			Level							
		MHz	dBuV					cm	degree	Comment
1		65.4963	20.16	12.14	32.30	40.00	-7.70	peak		
2		136.6019	22.38	14.07	36.45	43.50	-7.05	QP		
3		184.8497	22.95	12.09	35.04	43.50	-8.46	peak		
4		279.9360	23.30	13.57	36.87	46.00	-9.13	peak		
5	*	409.2841	22.95	16.47	39.42	46.00	-6.58	QP		
6		534.7019	20.44	18.93	39.37	46.00	-6.63	peak		

Note:1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

**Notes:** Above is below 1GHz test data. This report only shall the worst case mode for GFSK 2402MHz (1Mbps).

1MHz  
From 1G-25GHz

Test Mode: TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	44.81	V	33.95	10.18	34.26	54.68	74	-19.32	PK
4804	38.20	V	33.95	10.18	34.26	48.07	54	-5.93	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	43.22	H	33.95	10.18	34.26	53.09	74	-20.91	PK
4804	37.24	H	33.95	10.18	34.26	47.11	54	-6.89	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: TX Mid									
4880	44.12	V	33.93	10.2	34.29	53.96	74	-20.04	PK
4880	33.09	V	33.93	10.2	34.29	42.93	54	-11.07	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
4880	46.34	H	33.93	10.2	34.29	56.18	74	-17.82	PK
4880	35.29	H	33.93	10.2	34.29	45.13	54	-8.87	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
Test Mode: TX High									
4960	45.87	V	33.98	10.22	34.25	55.82	74	-18.18	PK
4960	34.05	V	33.98	10.22	34.25	44.00	54	-10.00	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	43.36	H	33.98	10.22	34.25	53.31	74	-20.69	PK
4960	32.17	H	33.98	10.22	34.25	42.12	54	-11.88	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

2MHz  
From 1G-25GHz

Test Mode: TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	44.48	V	33.95	10.18	34.26	54.35	74	-19.65	PK
4804	37.27	V	33.95	10.18	34.26	47.14	54	-6.86	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	43.51	H	33.95	10.18	34.26	53.38	74	-20.62	PK
4804	34.20	H	33.95	10.18	34.26	44.07	54	-9.93	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: TX Mid									
4880	44.31	V	33.93	10.2	34.29	54.15	74	-19.85	PK
4880	33.37	V	33.93	10.2	34.29	43.21	54	-10.79	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
4880	46.51	H	33.93	10.2	34.29	56.35	74	-17.65	PK
4880	33.05	H	33.93	10.2	34.29	42.89	54	-11.11	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
Test Mode: TX High									
4960	43.63	V	33.98	10.22	34.25	53.58	74	-20.42	PK
4960	34.88	V	33.98	10.22	34.25	44.83	54	-9.17	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	44.97	H	33.98	10.22	34.25	54.92	74	-19.08	PK
4960	35.00	H	33.98	10.22	34.25	44.95	54	-9.05	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/


Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

## 4. RF CONDUCTED SPURIOUS EMISSIONS

### 4.1. Block diagram of test setup

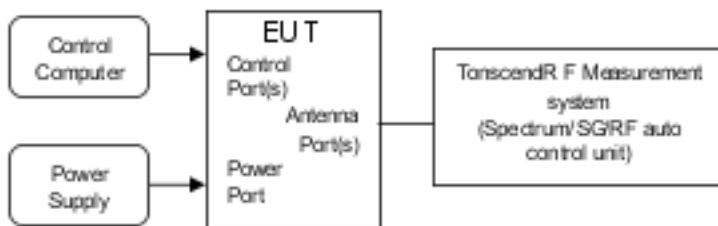

### 4.2. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).


### 4.3. Test procedure

The test receiver set RBW = 100kHz, VBW $\geq$ 3\*RBW =300kHz, sweep time set auto


### 4.4. Test result

PASS


## Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

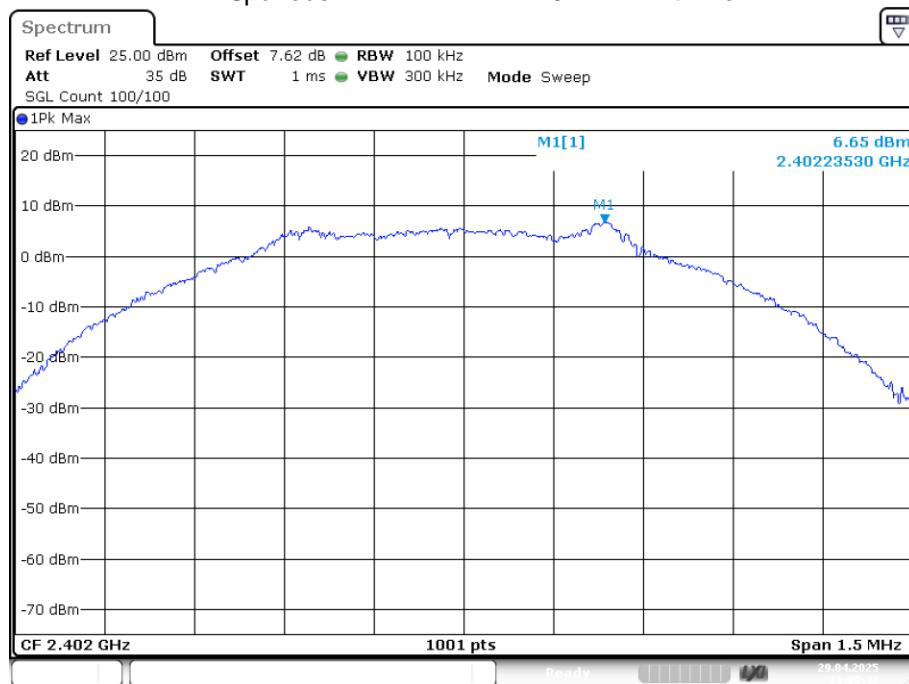


## Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

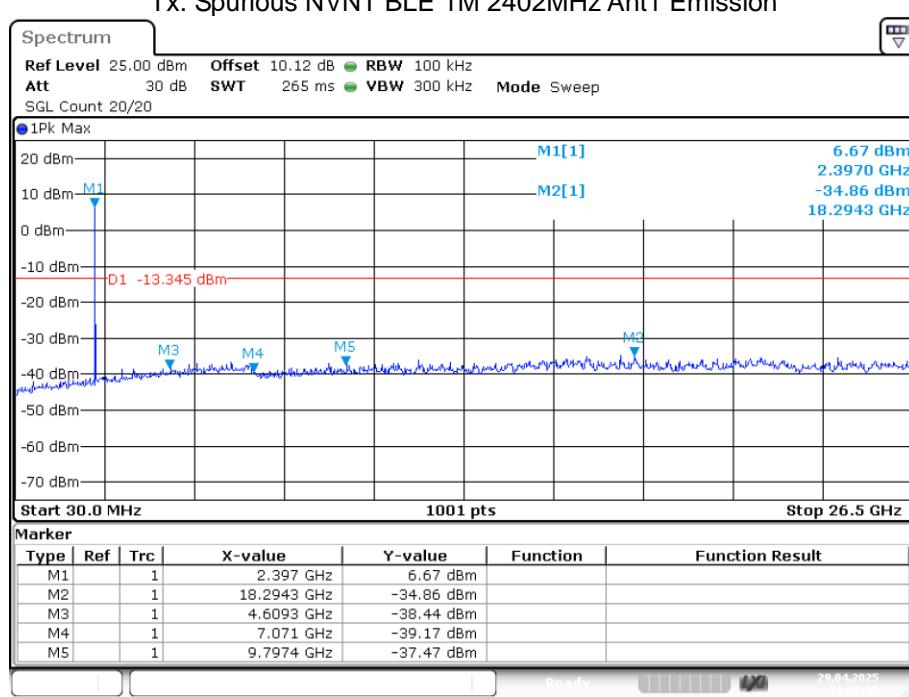


## Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

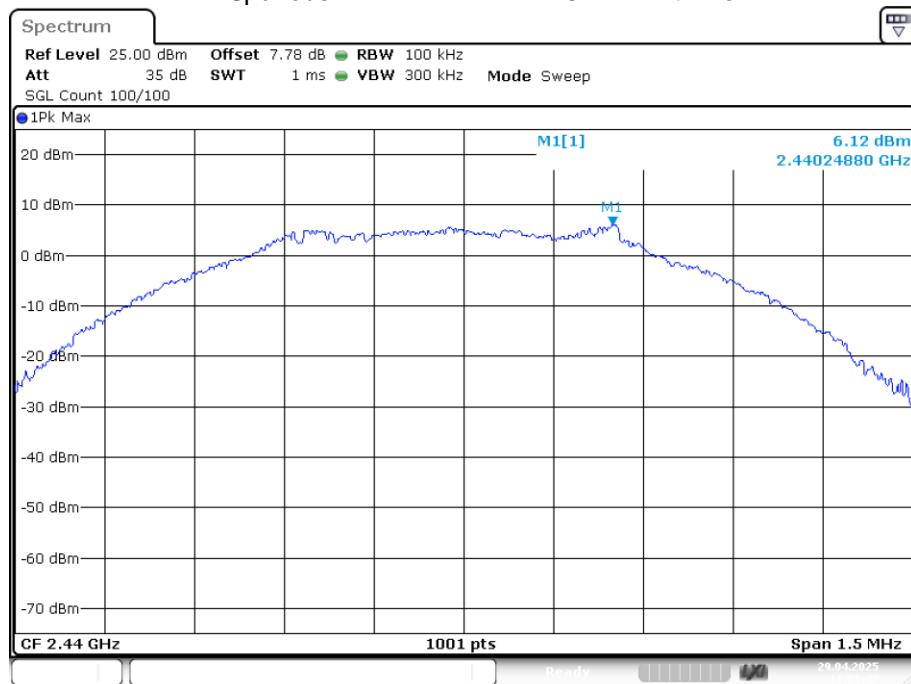


## Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

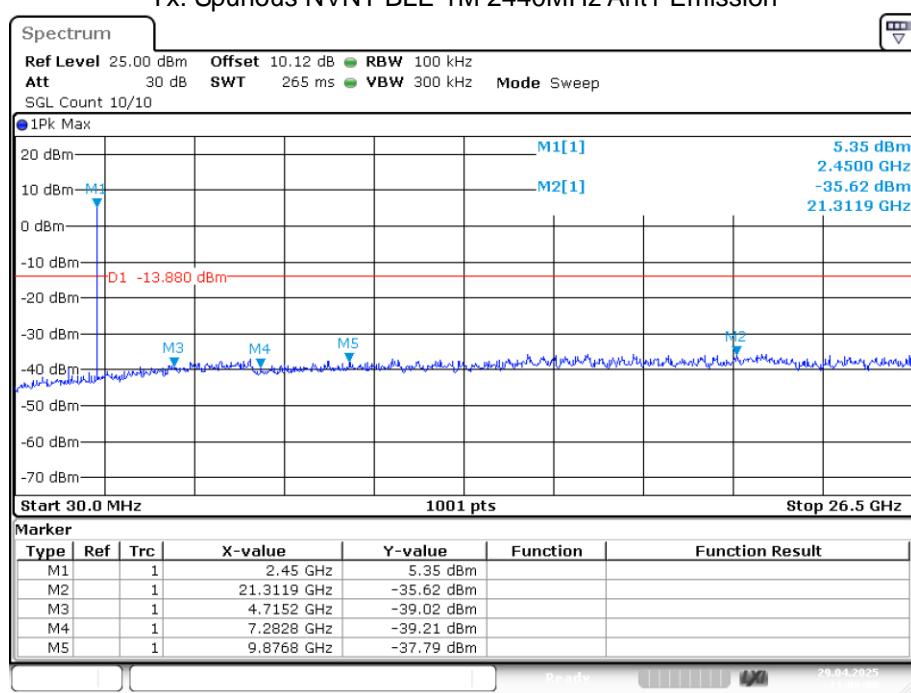


## Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

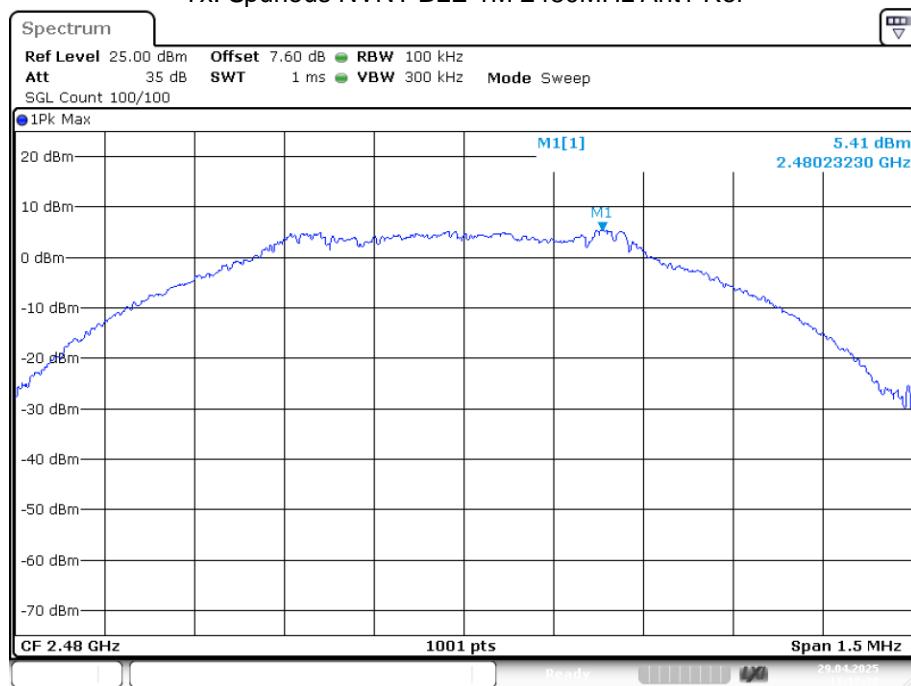


## Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

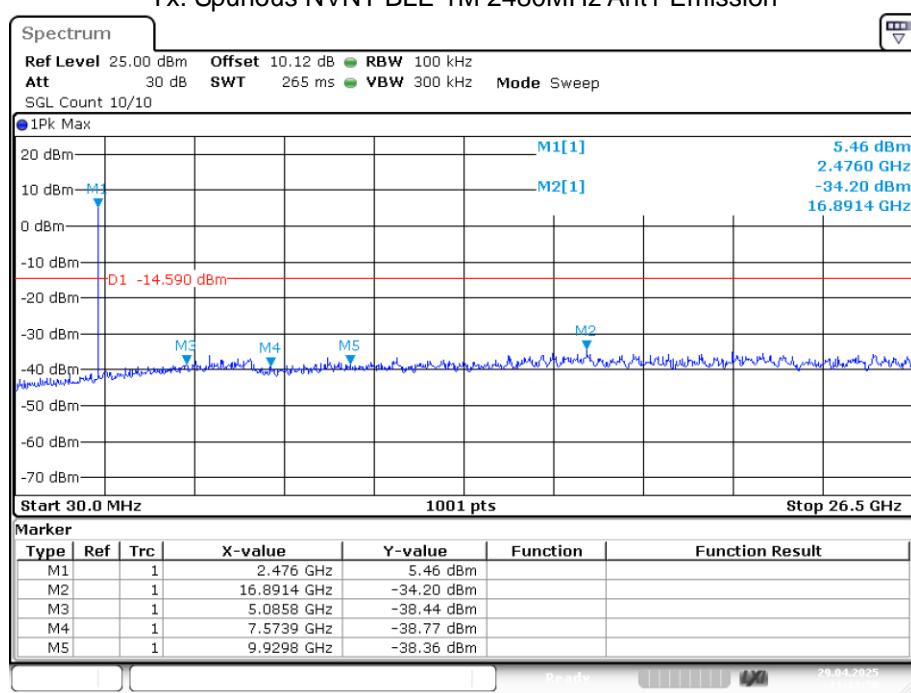


## Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref

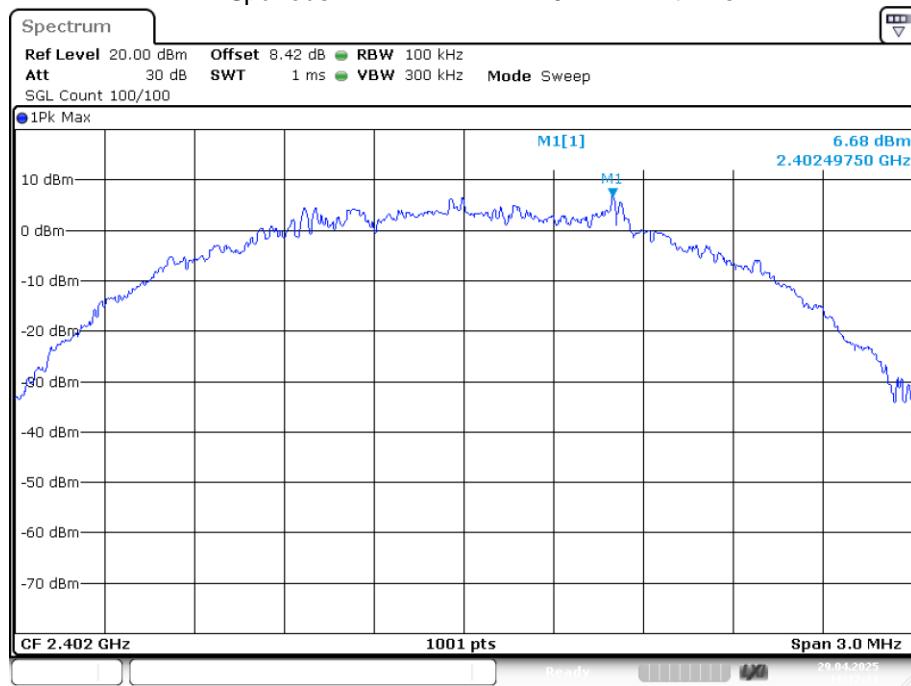


## Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

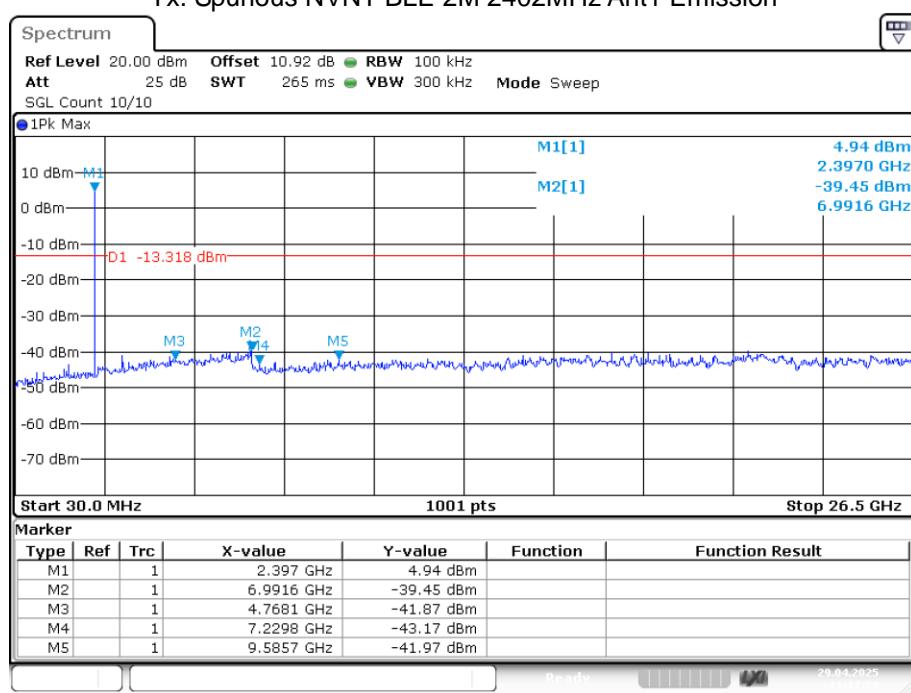


## Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref

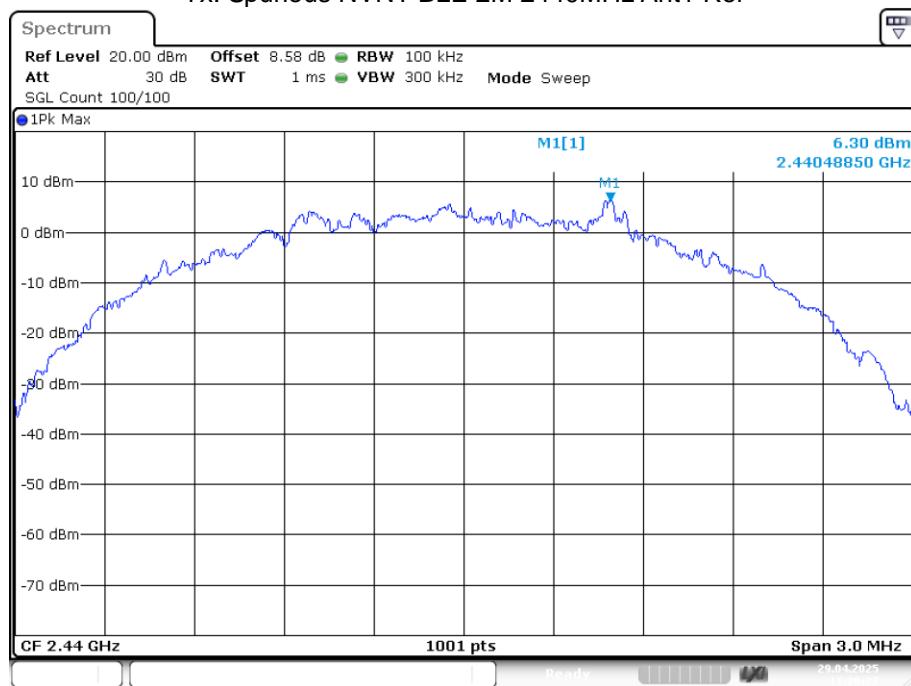


## Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

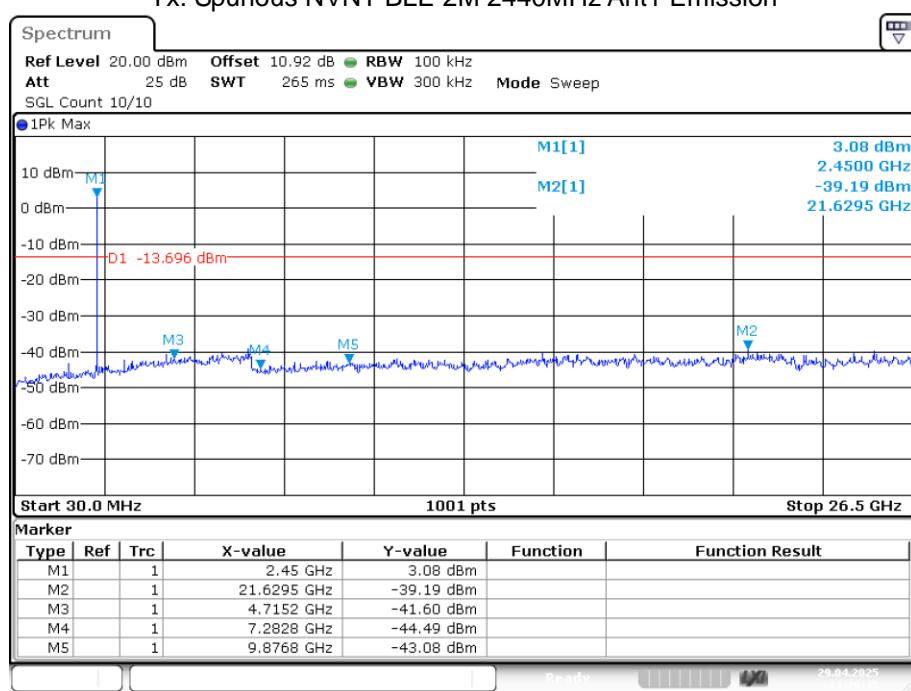

## Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref

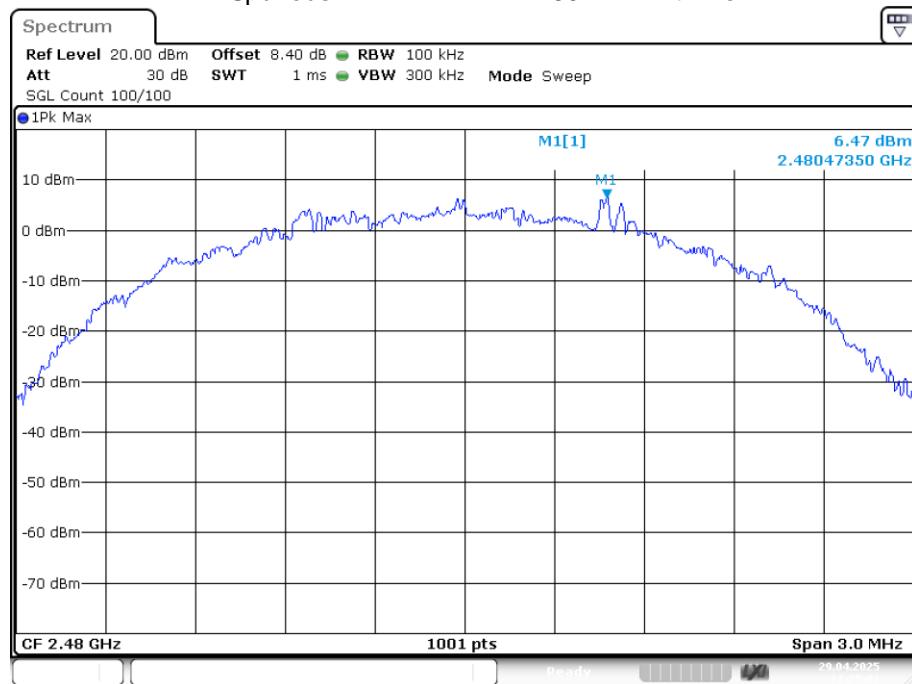

## Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

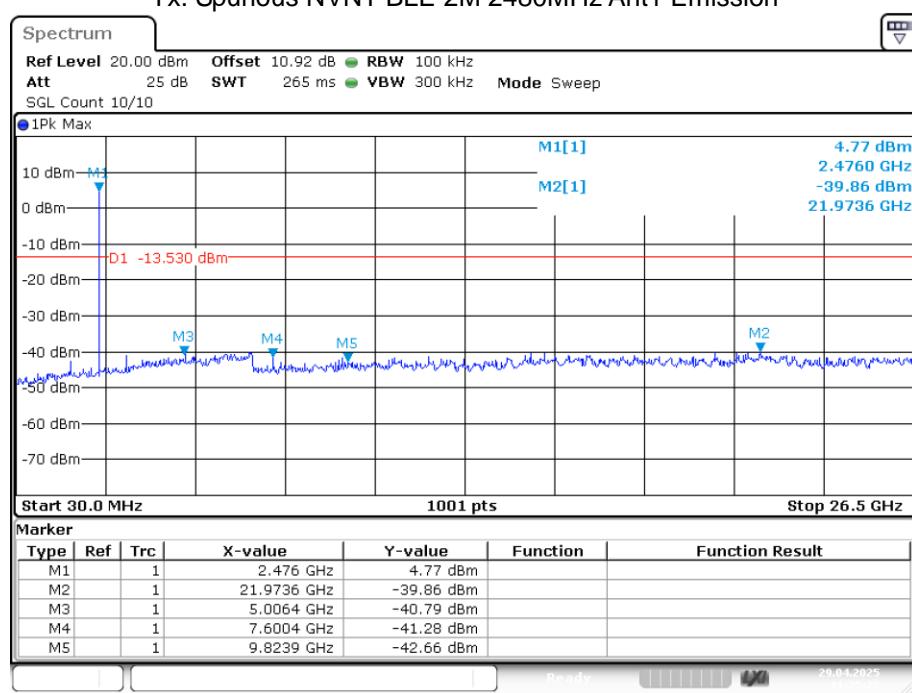

## 5. POWER LINE CONDUCTED EMISSION

### 5.1. Test Limits

Frequency	Limits dB( $\mu$ V)	
MHz	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50


Notes: 1. \*Decreasing linearly with logarithm of frequency.  
 2. The lower limit shall apply at the transition frequencies.  
 3. The limit decreases in line with the logarithm of the frequency in rang of 0.15 to 0.50 MHz.

### 5.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.


The bandwidth of test receiver is set at 9 kHz.

### 5.3. Test Setup

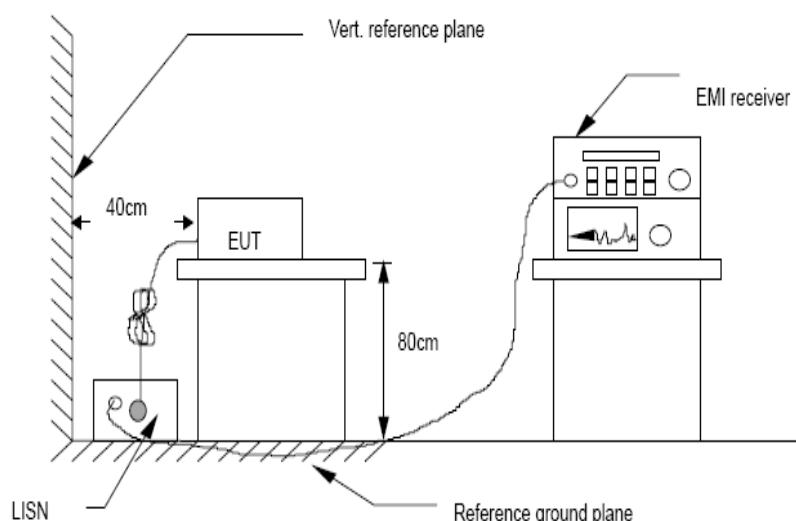

### 5.4. Test Results

Pass

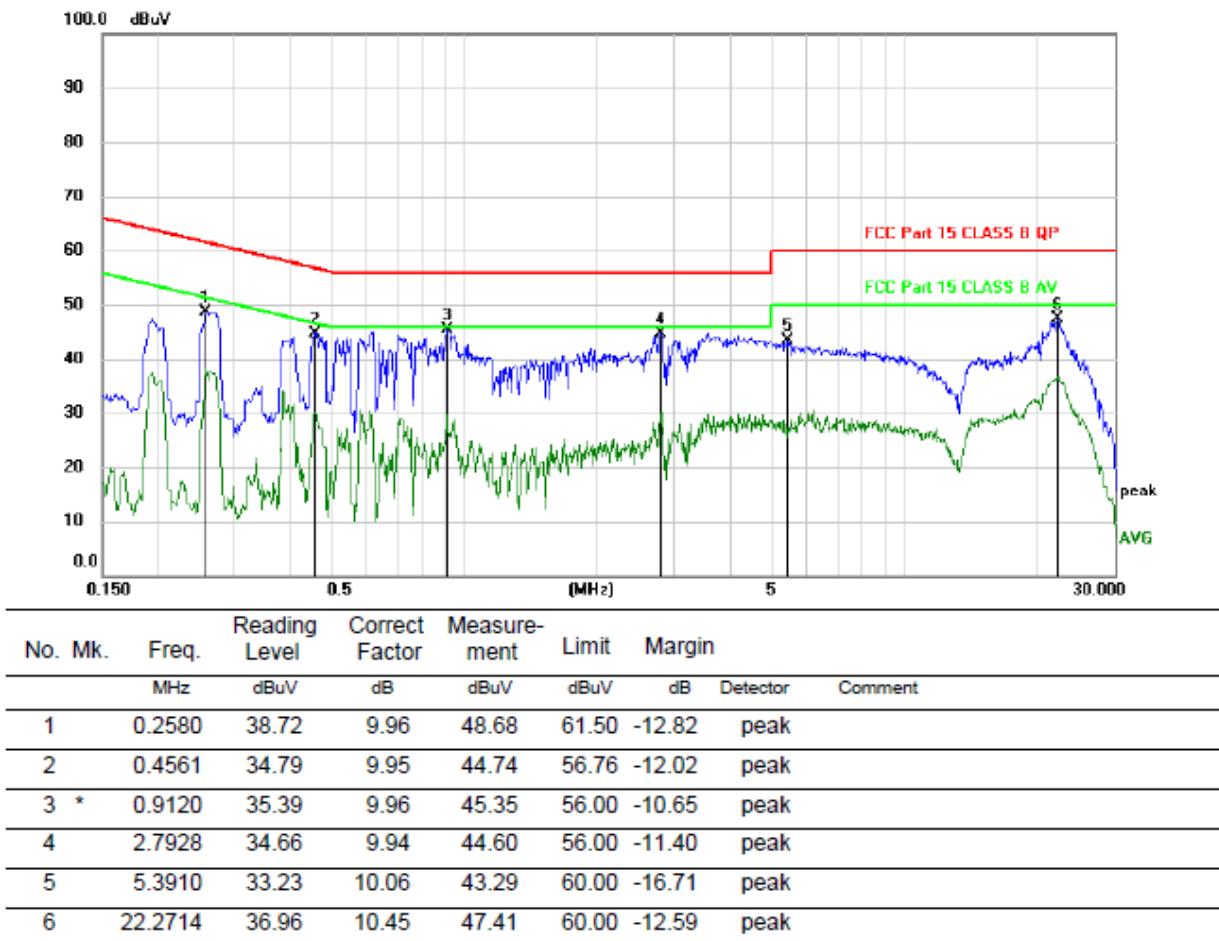
**Polarity: L**

\*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

## Polarity: N

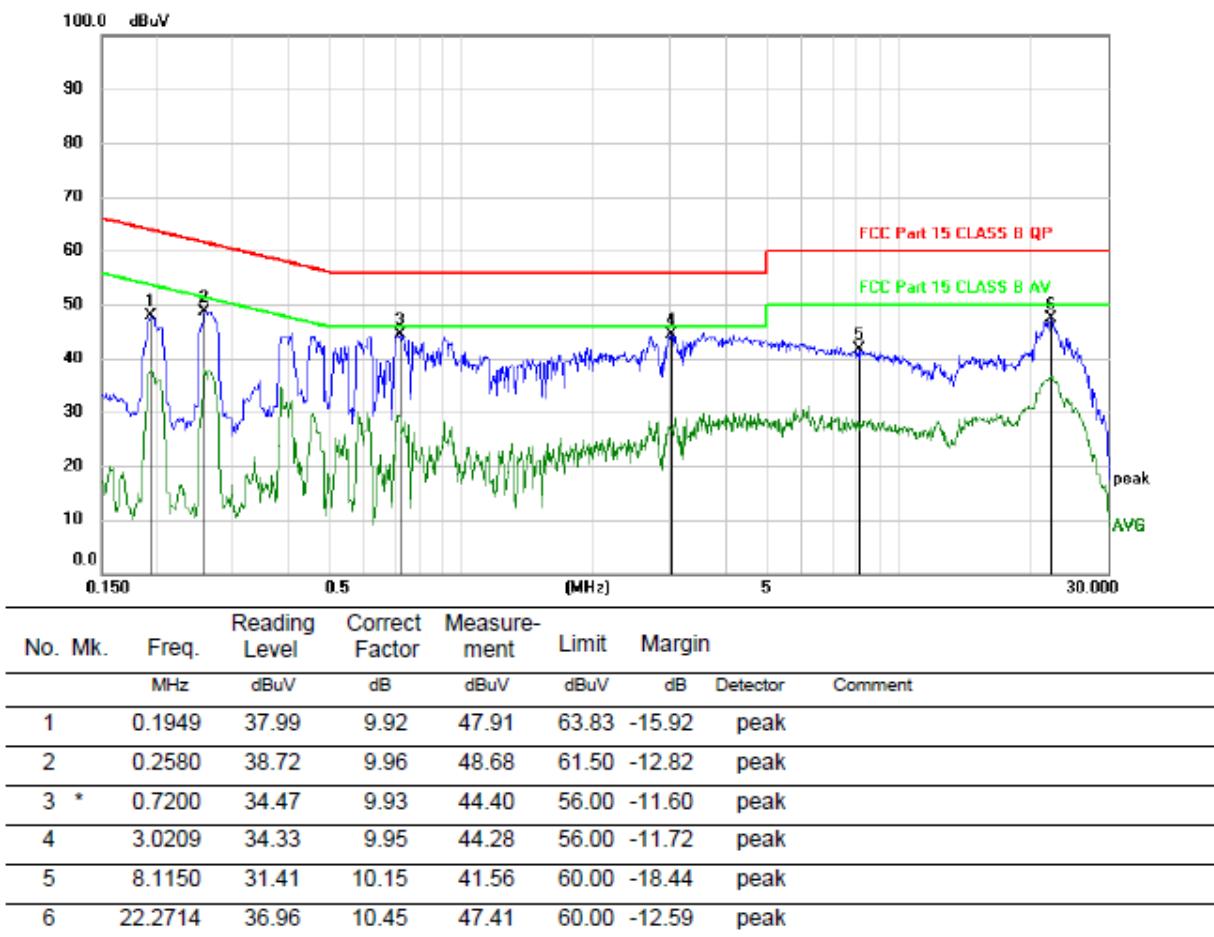

\*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the GFSK 2402MHz(1Mbps) mode with the worst data is listed.

## 6. CONDUCTED MAXIMUM PEAK OUTPUT POWER

### 6.1. Test limits

Please refer section RSS-247 & 15.247.

### 6.2. Test Procedure


Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

6.2.1 Place the EUT on the table and set it in transmitting mode.

6.2.2 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

### 6.3. Test Setup

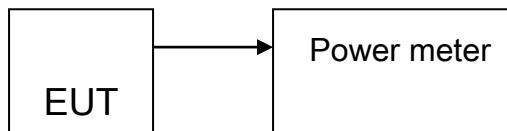

### 6.4. Test Results

Condition	Mode	Frequency (MHz)	Antenna	Correction Factor (dB)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	0.68	3.676	30	Pass
NVNT	BLE 1M	2440	Ant1	0.68	3.856	30	Pass
NVNT	BLE 1M	2480	Ant1	0.68	3.477	30	Pass
NVNT	BLE 2M	2402	Ant1	0.68	4.539	30	Pass
NVNT	BLE 2M	2440	Ant1	0.7	4.532	30	Pass
NVNT	BLE 2M	2480	Ant1	0.68	4.015	30	Pass

## 7. PEAK POWER SPECTRAL DENSITY

### 7.1. Test limits

7.1.1 Please refer section RSS-247 & 15.247.

7.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

7.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

### 7.2. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

7.2.1 Place the EUT on the table and set it in transmitting mode.


7.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3 Set the spectrum analyzer as RBW = 3kHz(Set the RBW to:  $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$ ), VBW = 10kHz(Set the VBW  $\geq 3 \times \text{RBW}$ ), span=1.5×DTS bandwidth., detail see the test plot.

7.2.4 Record the max reading.

7.2.5 Repeat the above procedure until the measurements for all frequencies are completed.

### 7.3. Test Setup

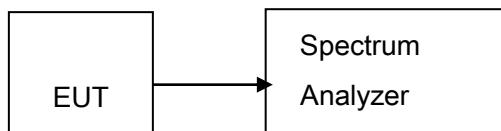


### 7.4. Test Results

Pass


The test results are listed in next pages.

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-12.045	8	Pass
NVNT	BLE 1M	2440	Ant1	-12.917	8	Pass
NVNT	BLE 1M	2480	Ant1	-12.291	8	Pass
NVNT	BLE 2M	2402	Ant1	-14.132	8	Pass
NVNT	BLE 2M	2440	Ant1	-14.634	8	Pass
NVNT	BLE 2M	2480	Ant1	-14.613	8	Pass


PSD NVNT BLE 1M 2402MHz Ant1

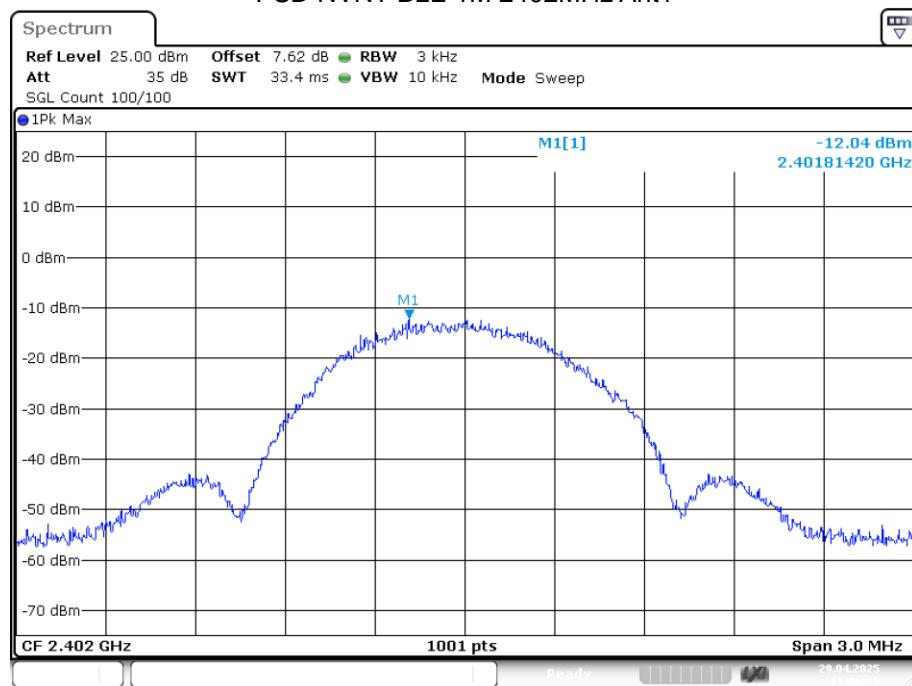


## PSD NVNT BLE 1M 2440MHz Ant1

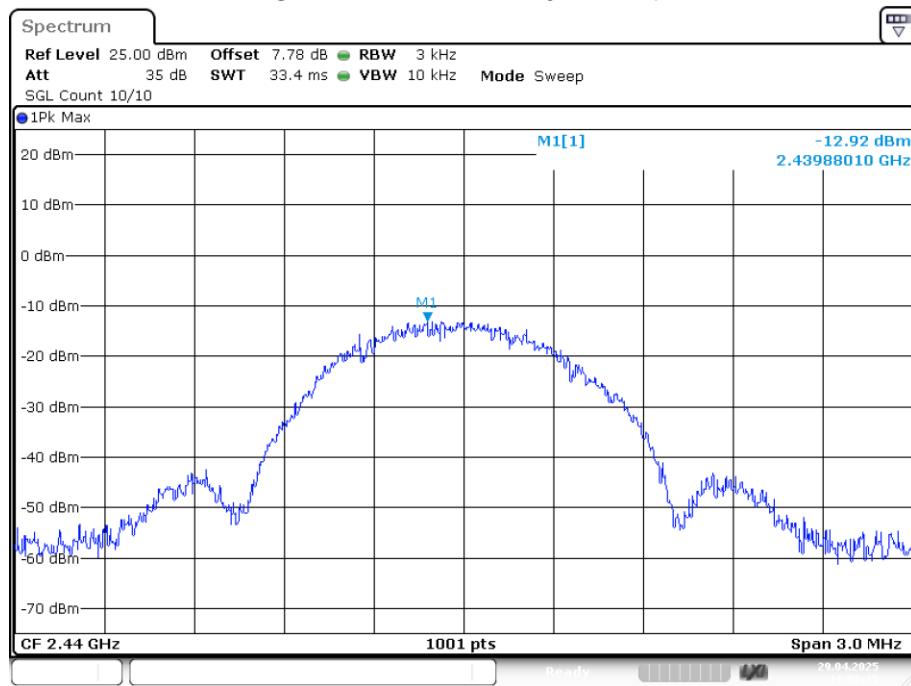


## PSD NVNT BLE 1M 2480MHz Ant1

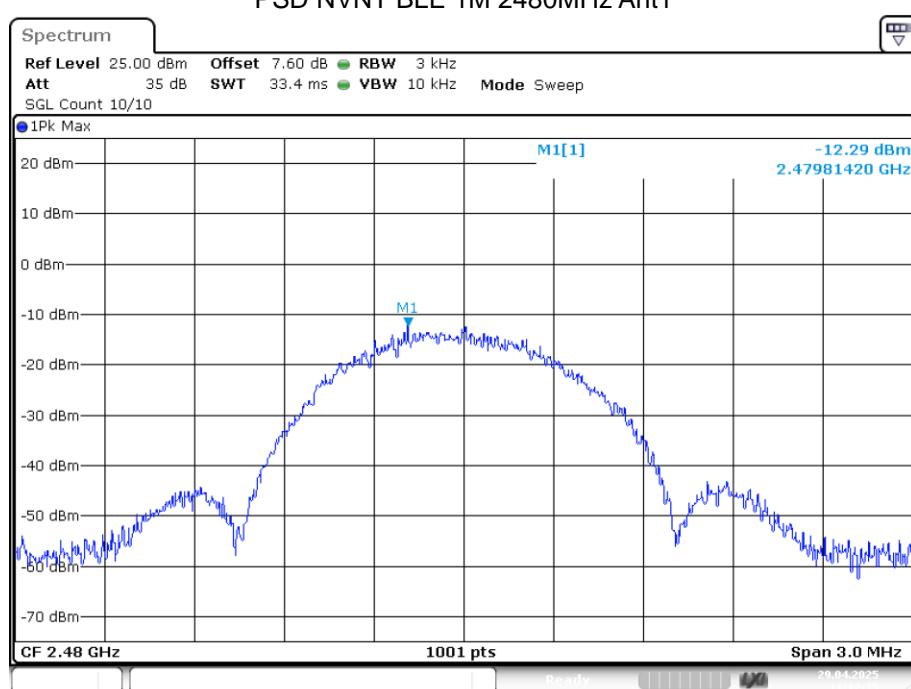


## PSD NVNT BLE 2M 2402MHz Ant1

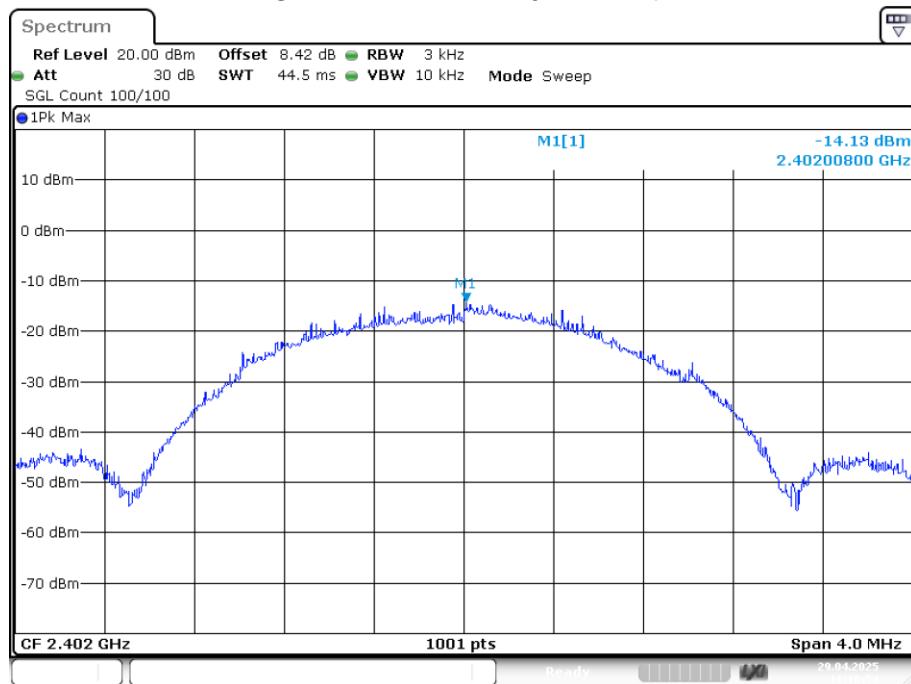

## PSD NVNT BLE 2M 2440MHz Ant1

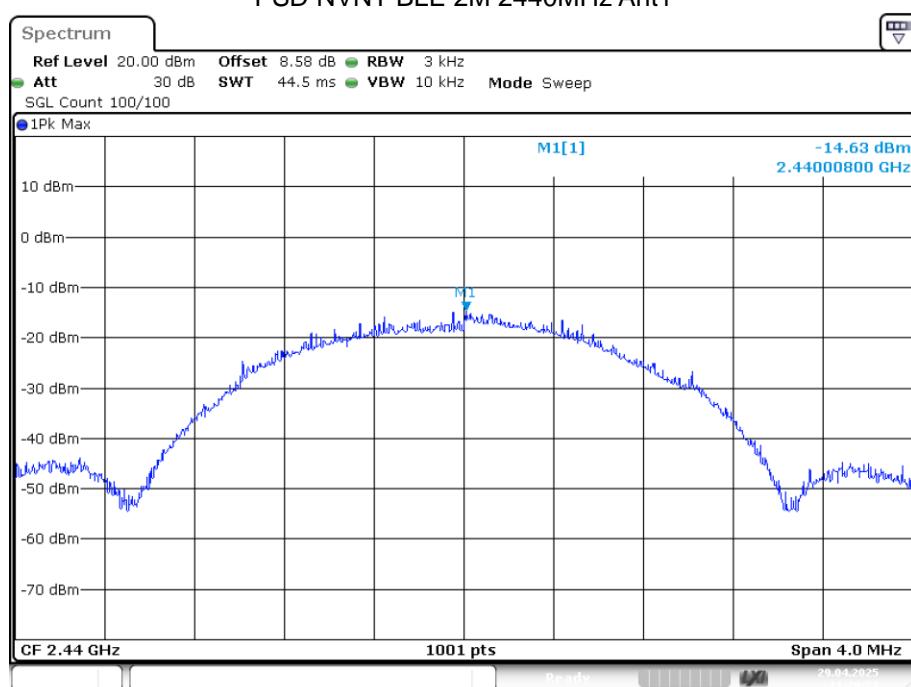

## PSD NVNT BLE 2M 2480MHz Ant1

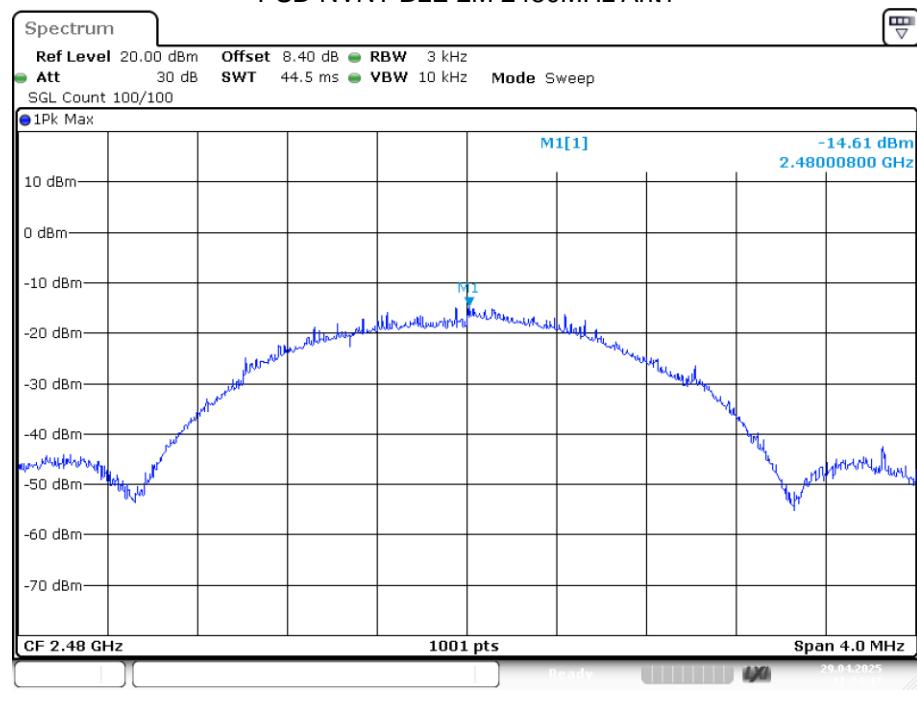

## 8. BANDWIDTH

### 8.1. Test limits

Please refer section RSS-247 & 15.247

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.


### 8.2. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

b) The test receiver set RBW = 100kHz, VBW $\geq$ 3\*RBW =300kHz, sweep time set auto, detail see the test plot.

### 8.3. Test Setup

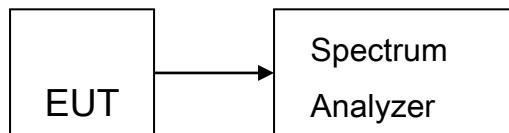


### 8.4. Test Results

#### -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.665	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.657	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.663	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.238	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.234	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.232	0.5	Pass

## -6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

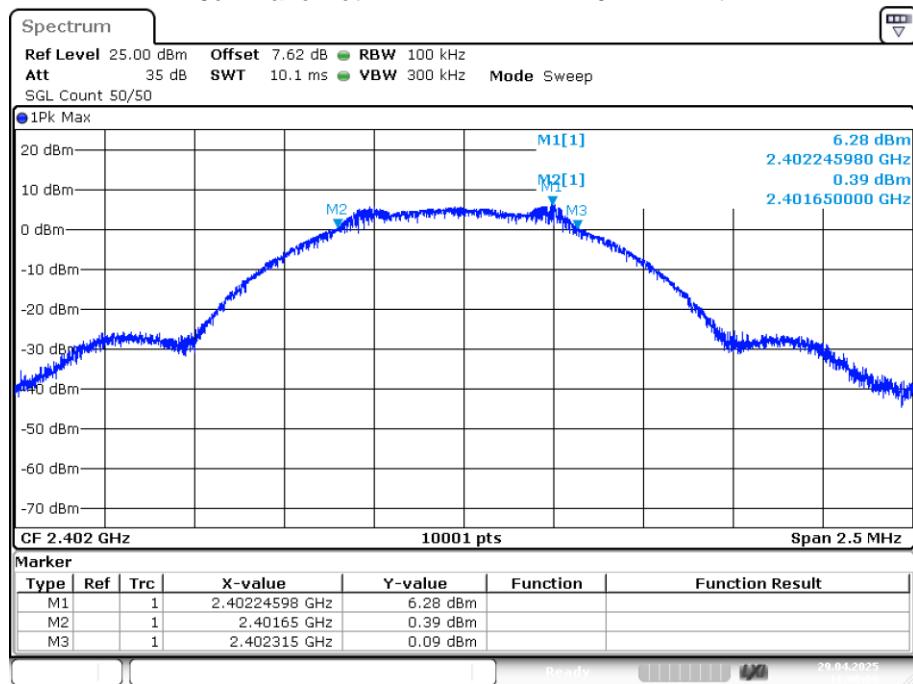


Date: 29.APR.2025 11:00:09

## -6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

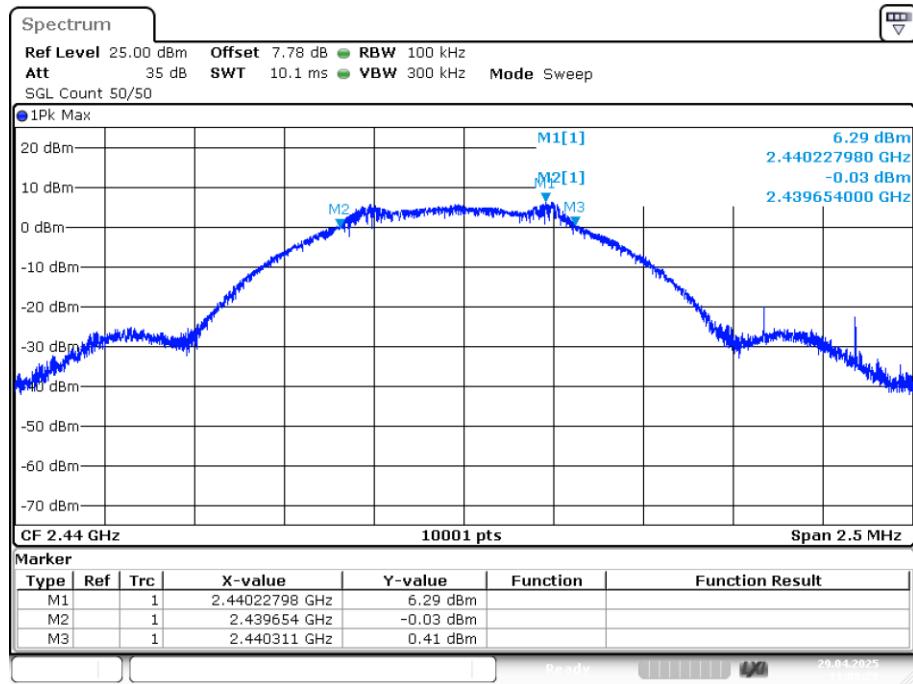


Date: 29.APR.2025 11:08:28

## -6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

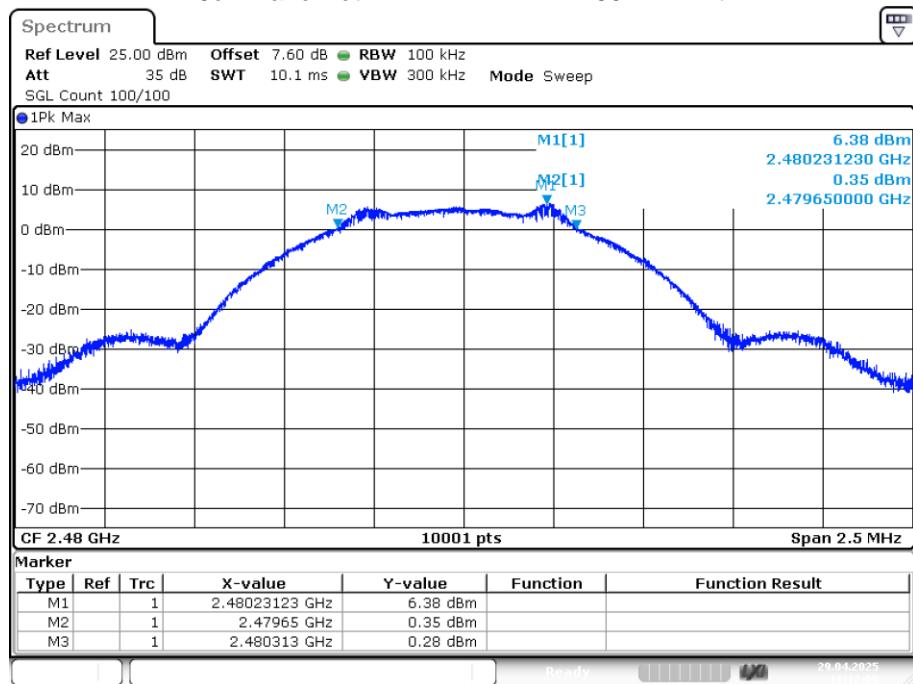


Date: 29.APR.2025 11:12:07

## -6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

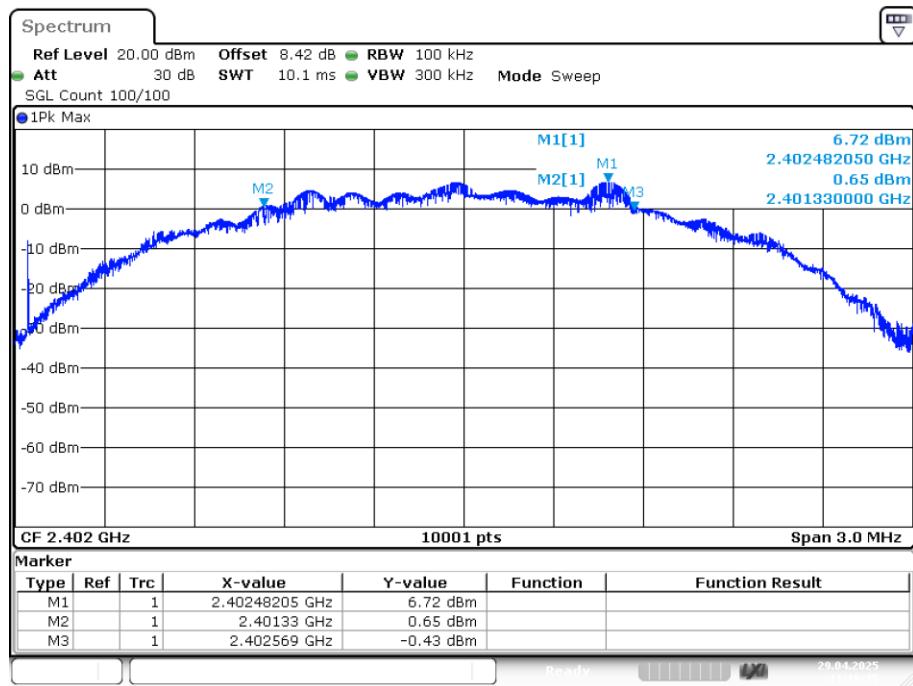


Date: 29.APR.2025 11:16:34

## -6dB Bandwidth NVNT BLE 2M 2440MHz Ant1

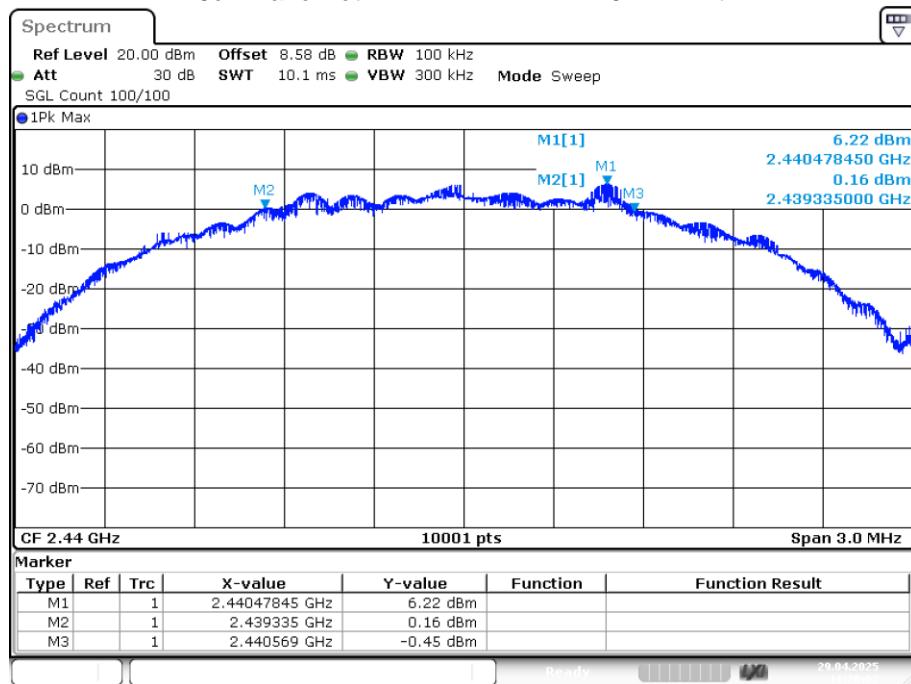

Date: 29.APR.2025 11:20:02

## -6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

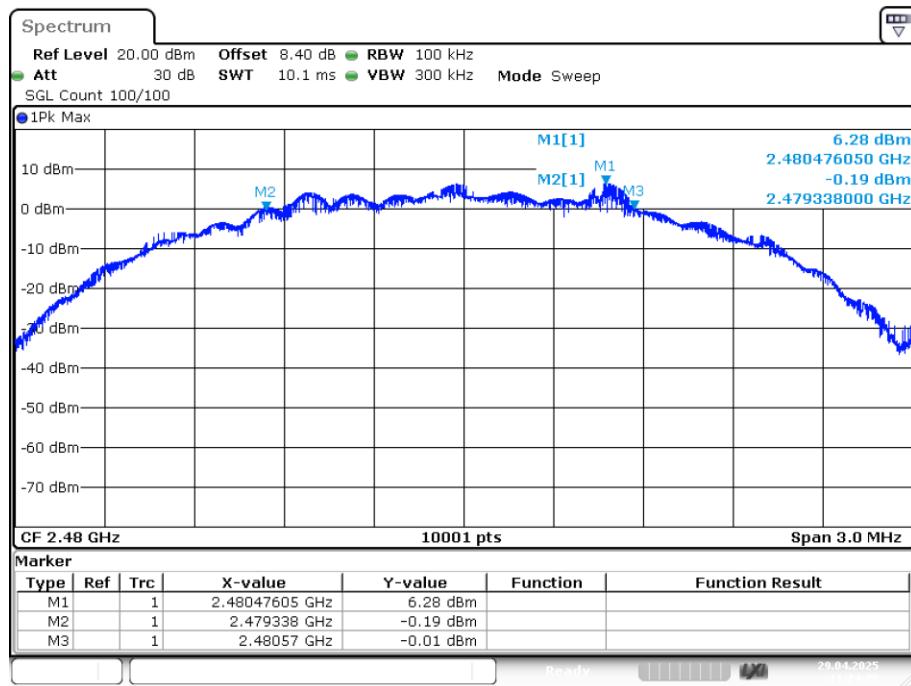


Date: 29.APR.2025 11:24:28


**Occupied Channel Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.016
NVNT	BLE 1M	2440	Ant1	1.044
NVNT	BLE 1M	2480	Ant1	1.019
NVNT	BLE 2M	2402	Ant1	2.05
NVNT	BLE 2M	2440	Ant1	2.047
NVNT	BLE 2M	2480	Ant1	2.008

OBW NVNT BLE 1M 2402MHz Ant1

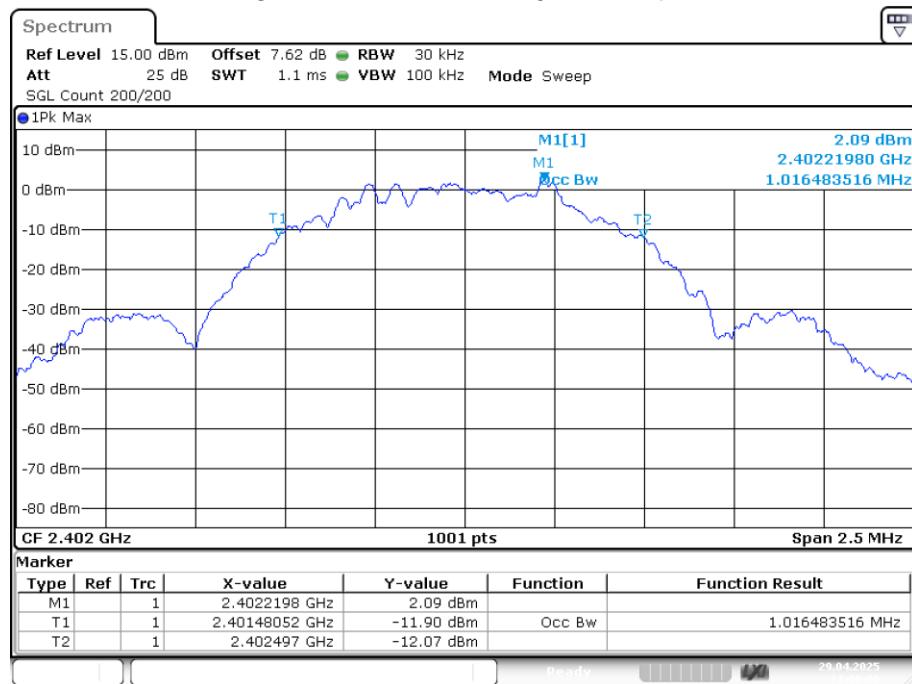


## OBW NVNT BLE 1M 2440MHz Ant1

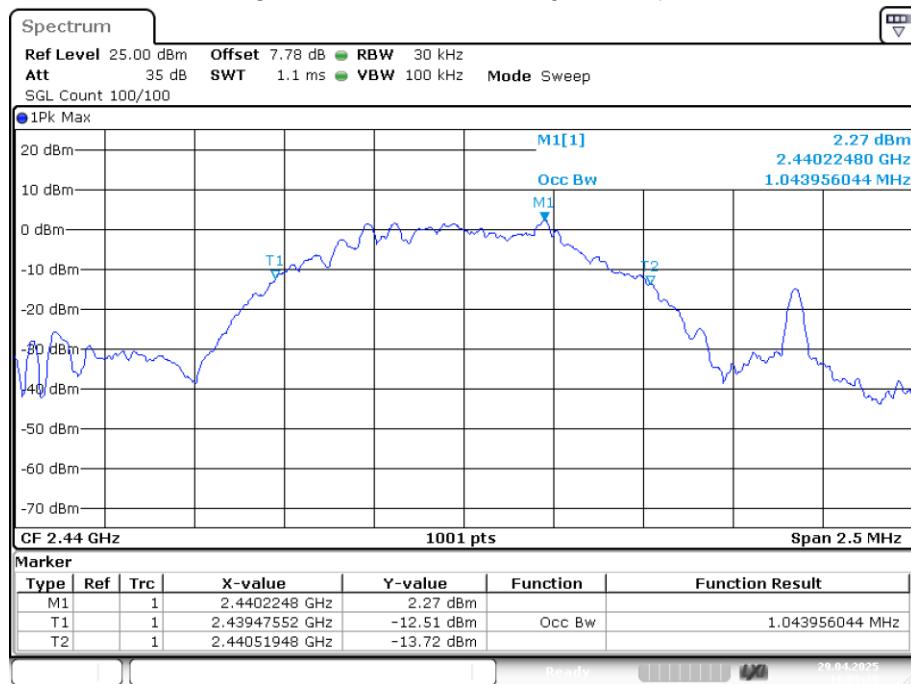


Date: 29.APR.2025 11:08:18

## OBW NVNT BLE 1M 2480MHz Ant1

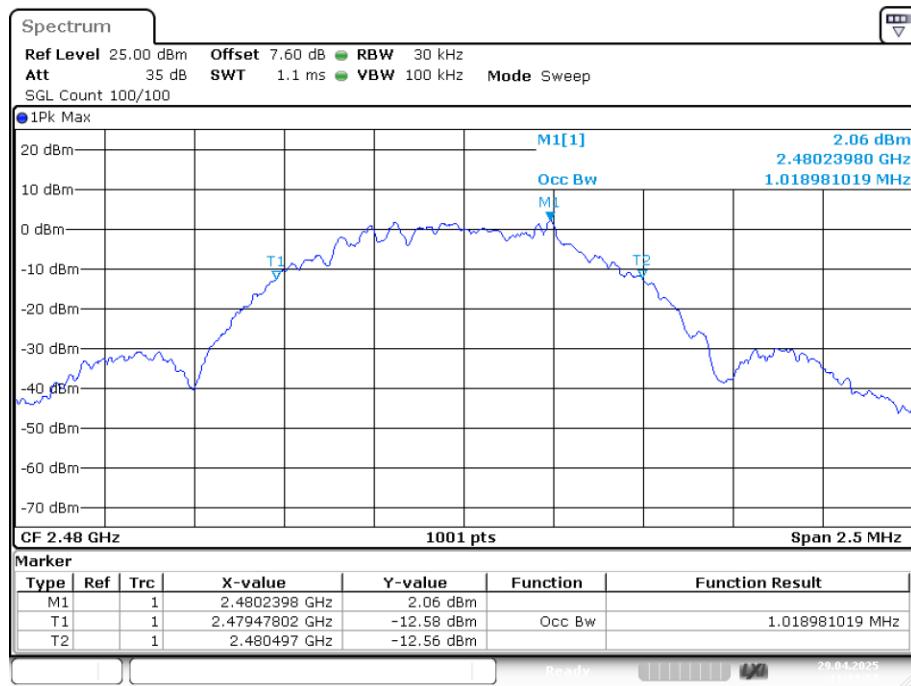


Date: 29.APR.2025 11:11:57

## OBW NVNT BLE 2M 2402MHz Ant1

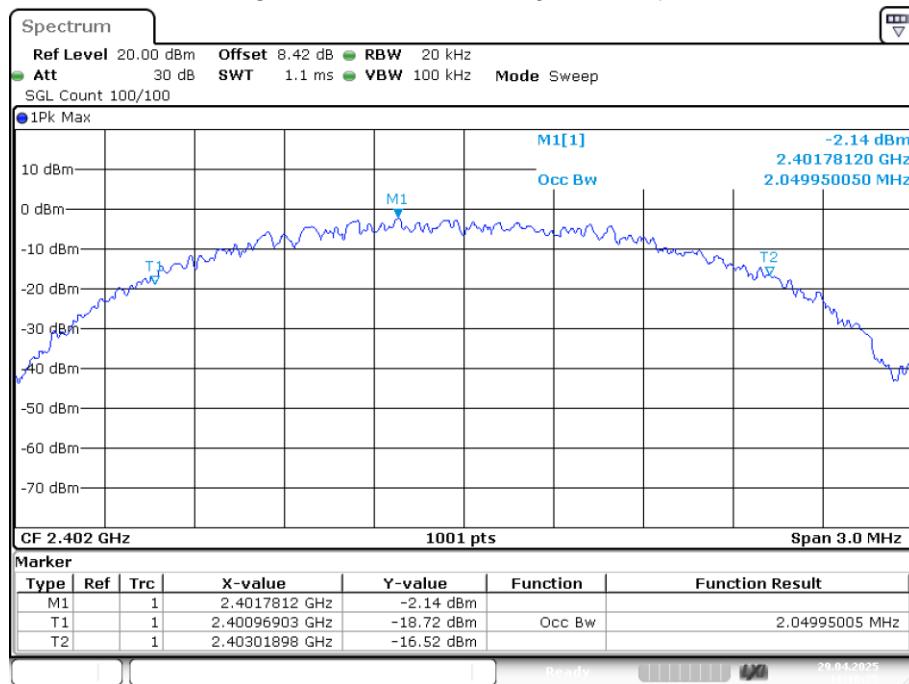


Date: 29.APR.2025 11:16:24

## OBW NVNT BLE 2M 2440MHz Ant1

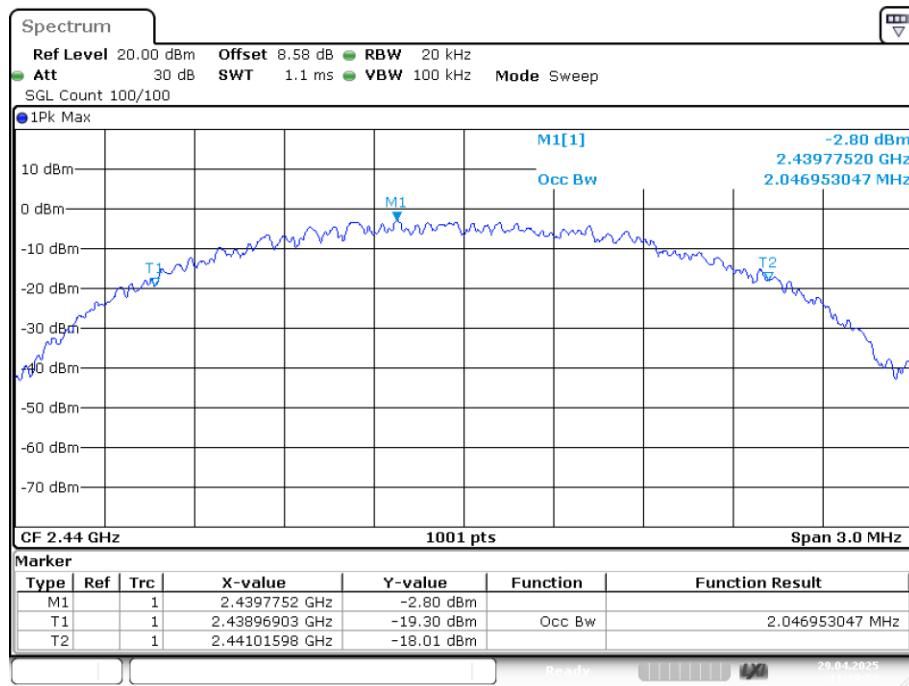

Date: 29.APR.2025 11:19:51

## OBW NVNT BLE 2M 2480MHz Ant1

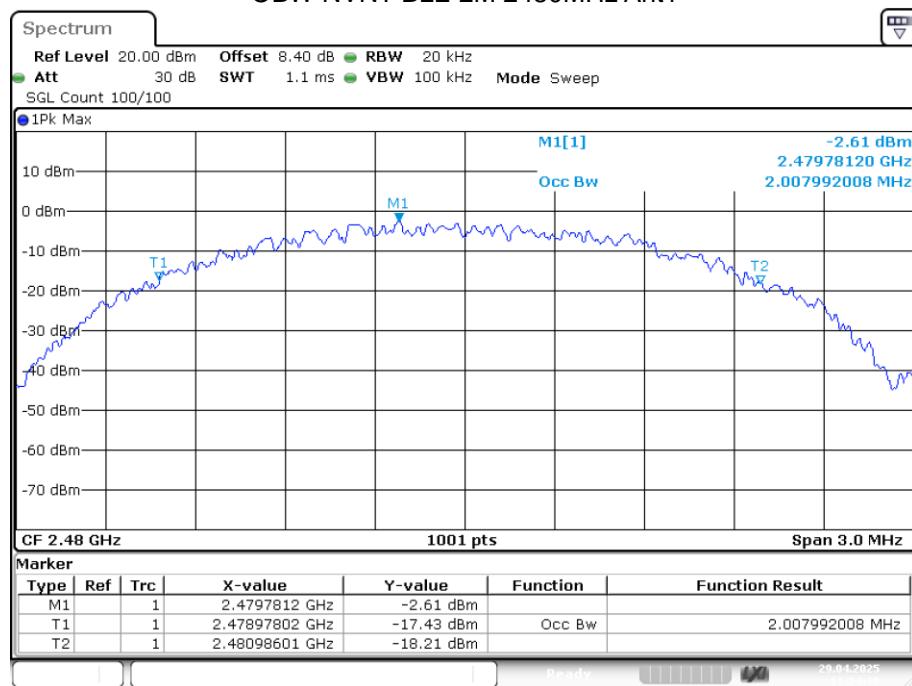


## 9. BAND EDGE (CONDUCTED)

### 9.1. Test limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### 9.2. Block diagram of test setup

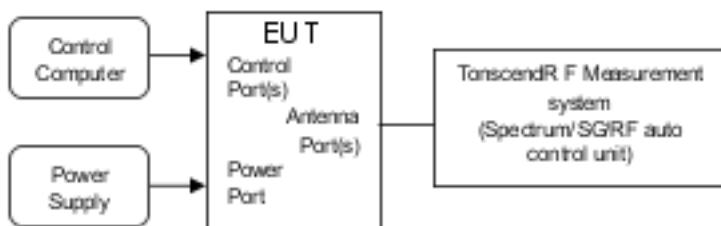

### 9.3. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

9.3.1 Put the EUT on a 0.8m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

9.3.2 Check the spurious emissions out of band.

9.3.3 RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 3MHz, RMS detector for AV value.


### 9.4. Test Results

Pass


The test results are listed in next pages.

## GFSK (1M)


## Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

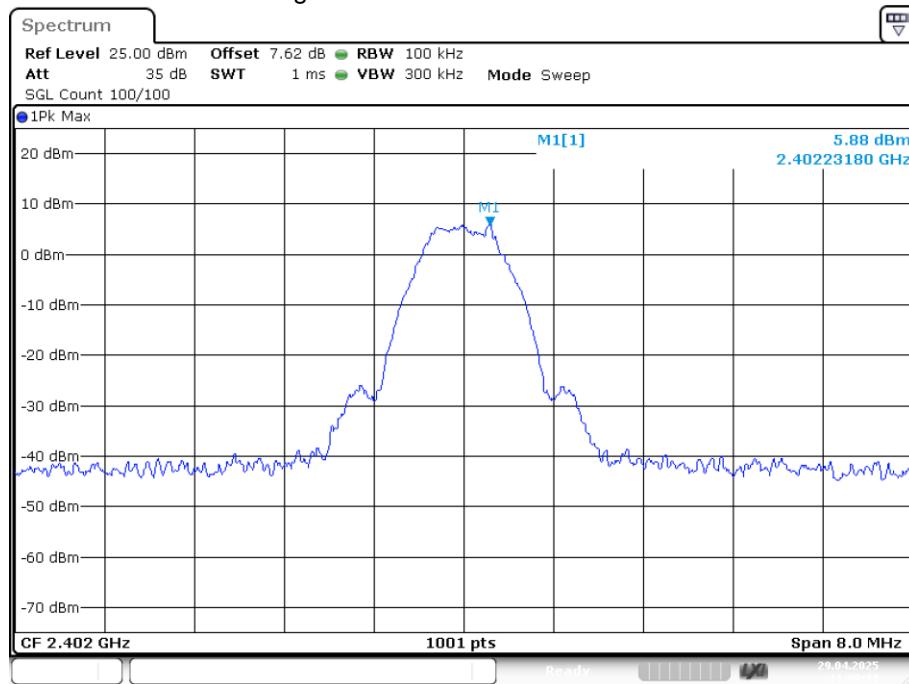


## Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

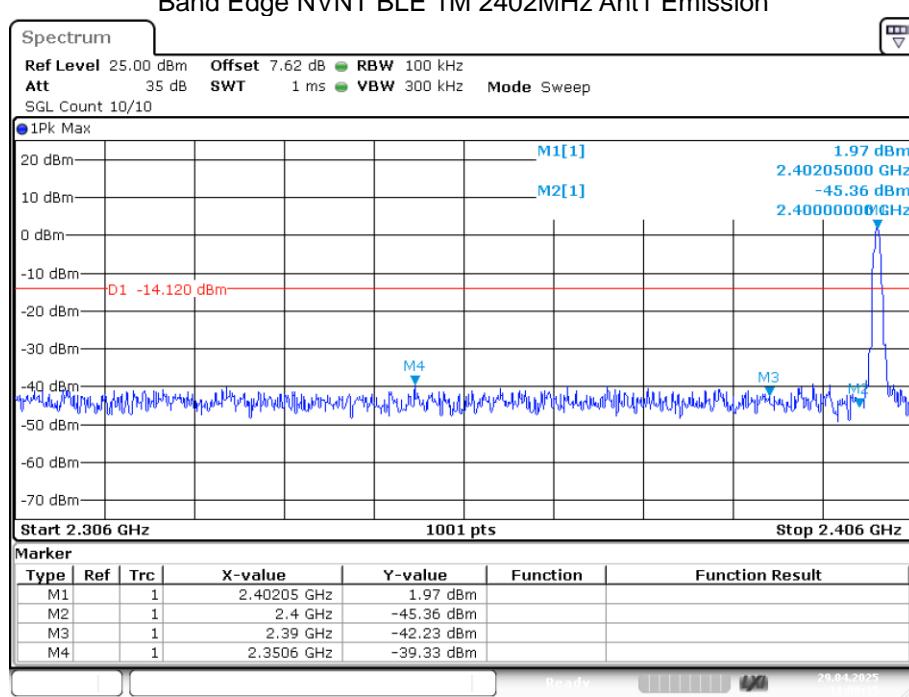

## Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

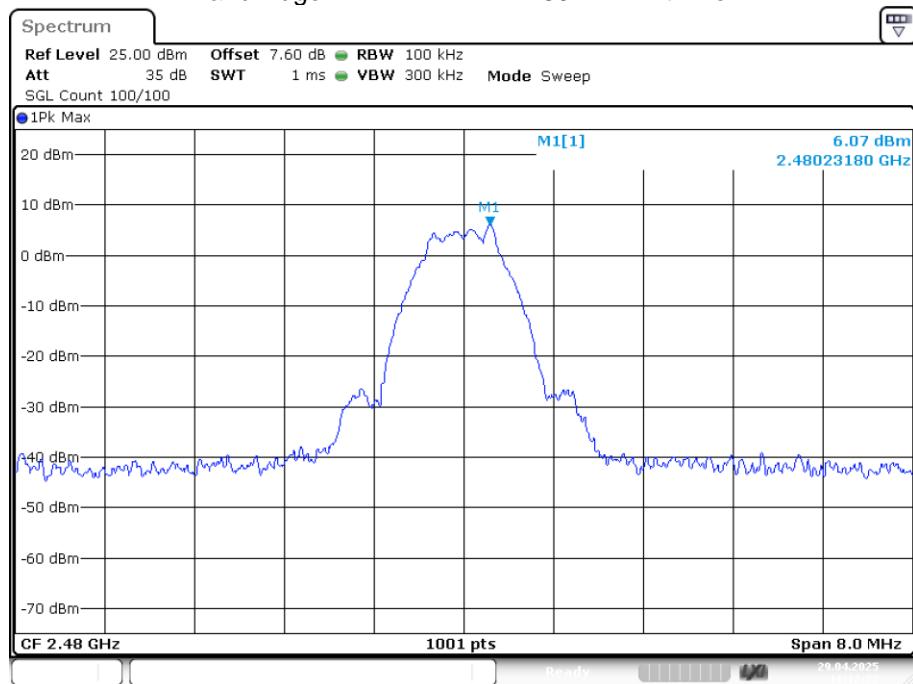

## Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

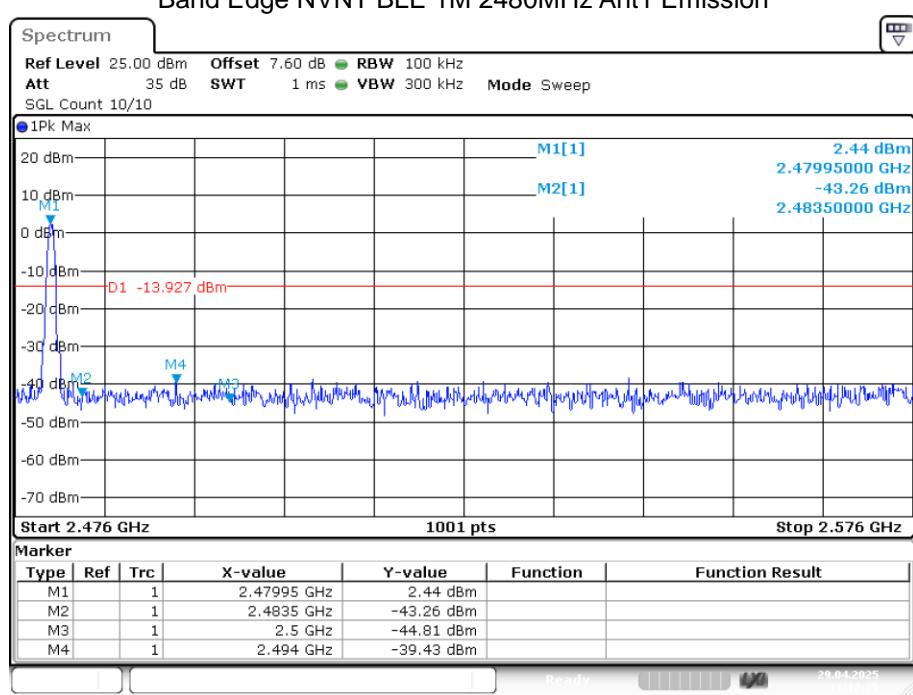


## GFSK (2M)


## Band Edge NVNT BLE 2M 2402MHz Ant1 Ref




## Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

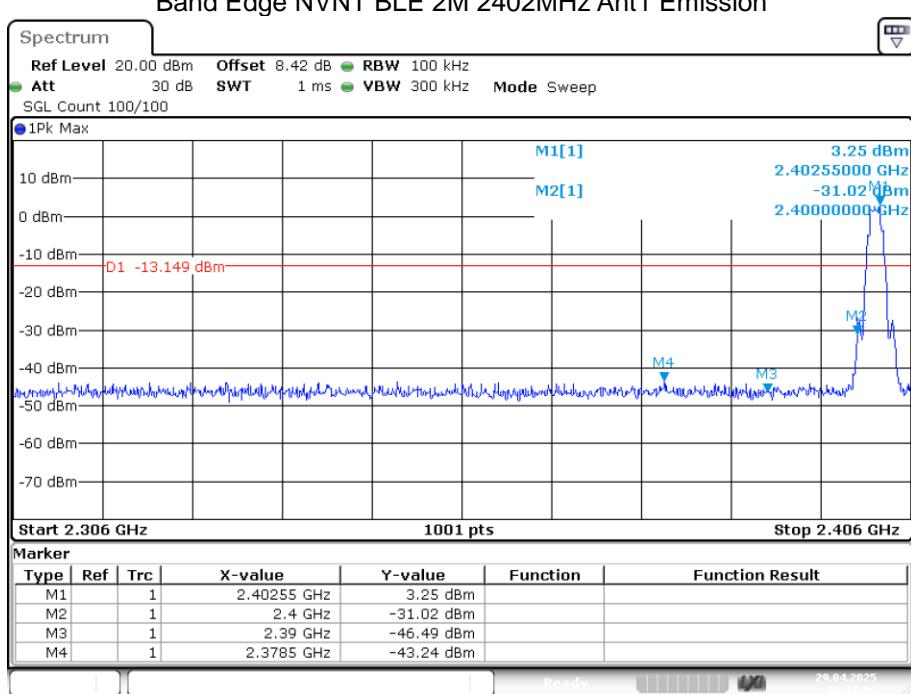

## Band Edge NVNT BLE 2M 2480MHz Ant1 Ref

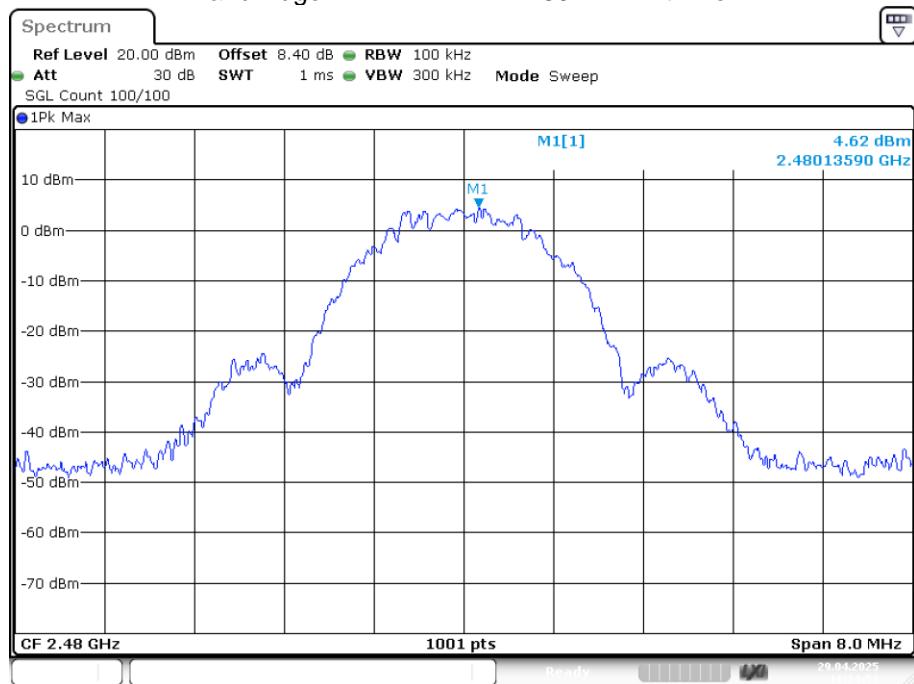


## Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

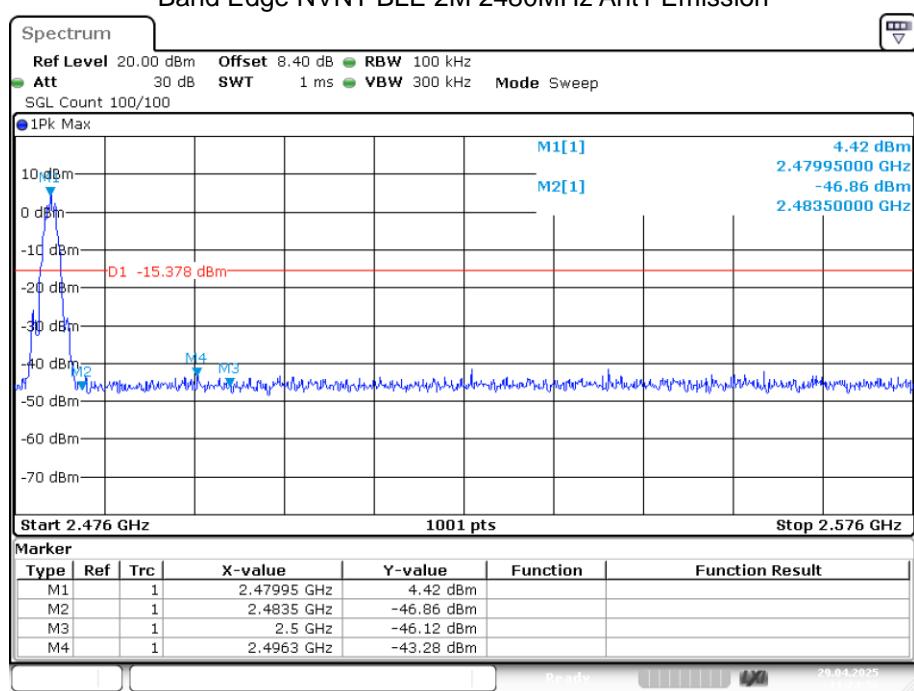

## 10. BAND EDGE(RADIATED)

### 10.1. Block diagram of test setup

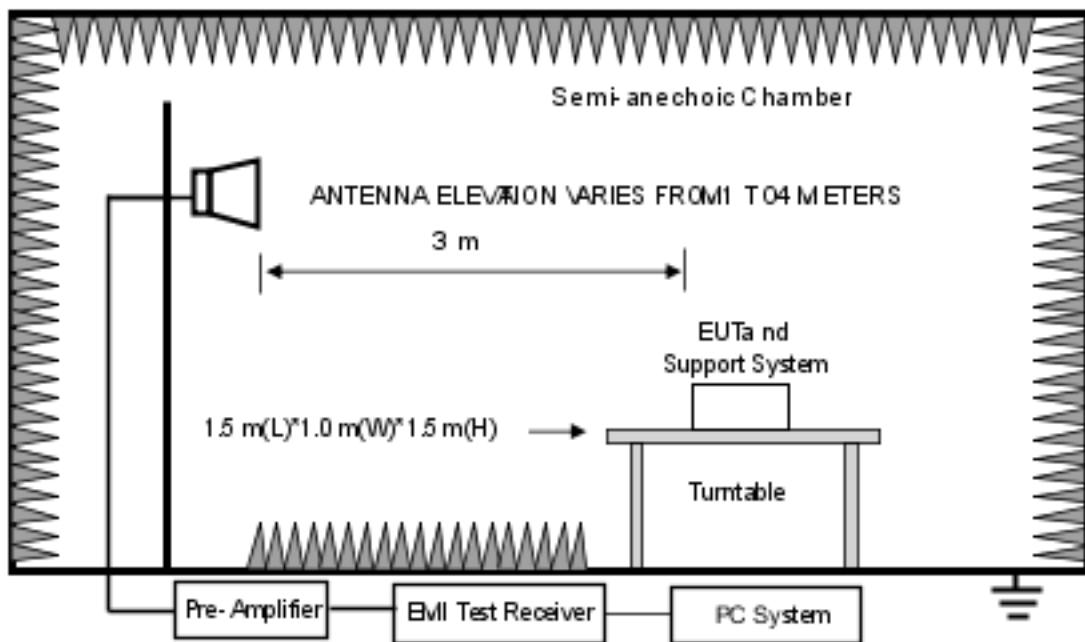

### 10.2. Limits

Please refer section 15.247.

### 10.3. Test procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

10.3.1 Put the EUT on a 0.8m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

10.3.2 Check the spurious emissions out of band.

10.3.3 RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 3MHz, RMS detector for AV value.

All restriction band and non- restriction band have been tested, only worse case is reported.


### 10.4. Test Results

Pass


The test results are listed in next pages.

Radiated Method: GFSK(1M)

Test Mode: CH-L

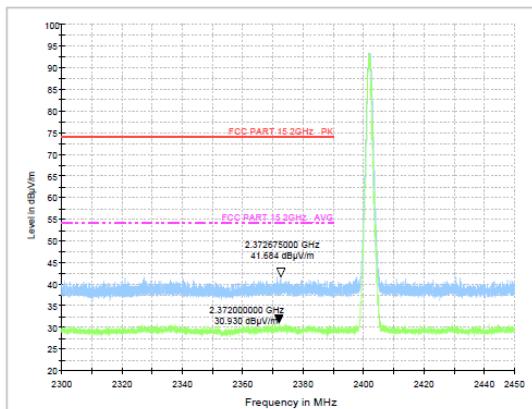


Test Mode: CH-H

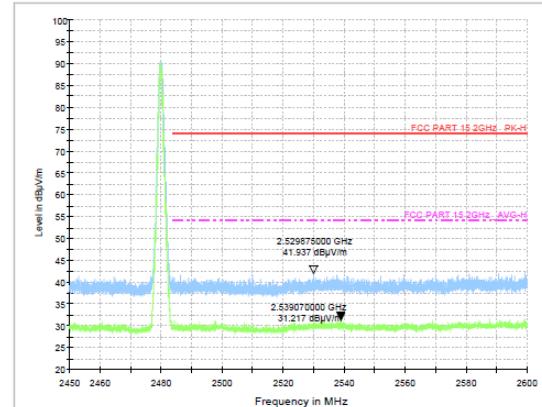


Radiated Method: GFSK(2M)

Test Mode: CH-L

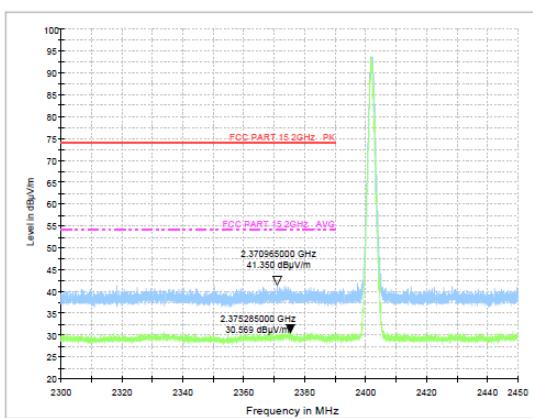


Test Mode: CH-H

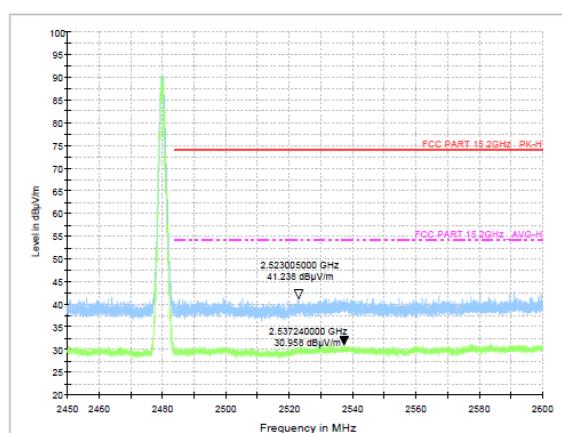

## 11. DUTY CYCLE

### 11.1. Block diagram of test setup

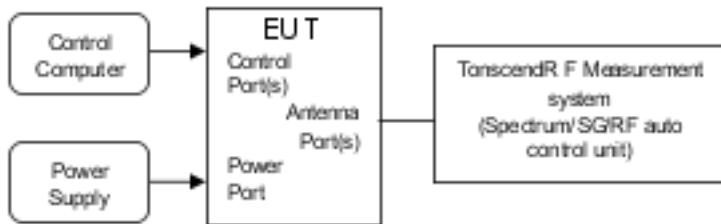

### 11.2. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

11.2.1 A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on and off times of the transmitted signal.


11.2.2 The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set  $RBW \geq EBW$  if possible; otherwise, set  $RBW$  to the largest available value. Set  $VBW \geq RBW$ . Set detector = peak or average. The zero-span measurement method shall not be used unless both  $RBW$  and  $VBW$  are  $> 50/T$ , where  $T$  is defined in II.B.1.a), and the number of sweep points across duration  $T$  exceeds 100. (For example, if  $VBW$  and/or  $RBW$  are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

### 11.3. Test Results


Pass

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	BLE 1M	2402	Ant1	85.6	0.68
NVNT	BLE 1M	2440	Ant1	85.6	0.68
NVNT	BLE 1M	2480	Ant1	85.6	0.68
NVNT	BLE 2M	2402	Ant1	85.6	0.68
NVNT	BLE 2M	2440	Ant1	85.2	0.7
NVNT	BLE 2M	2480	Ant1	85.6	0.68


## Duty Cycle NVNT BLE 1M 2402MHz Ant1

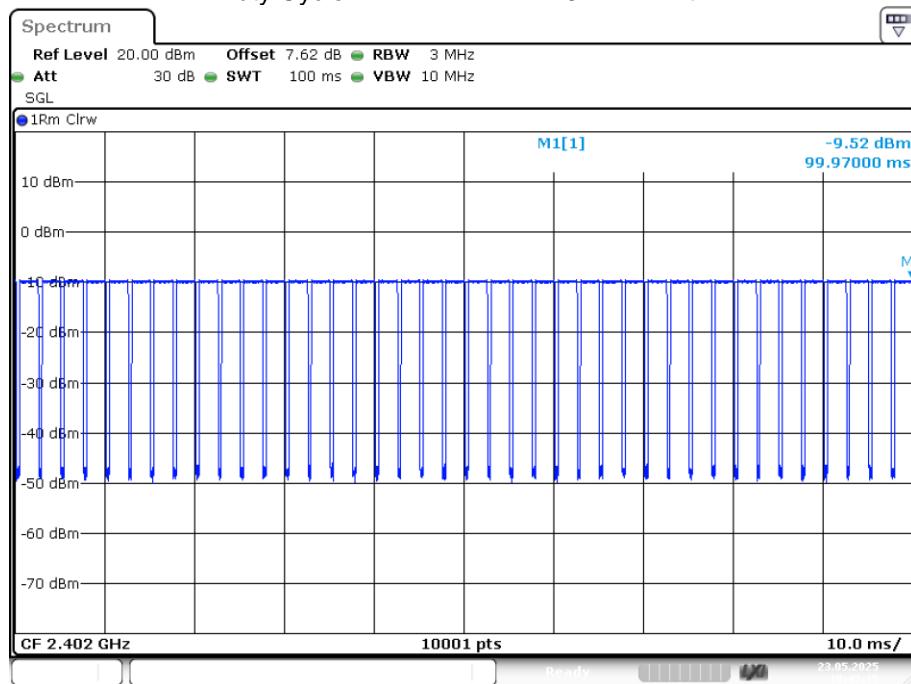


## Duty Cycle NVNT BLE 1M 2440MHz Ant1

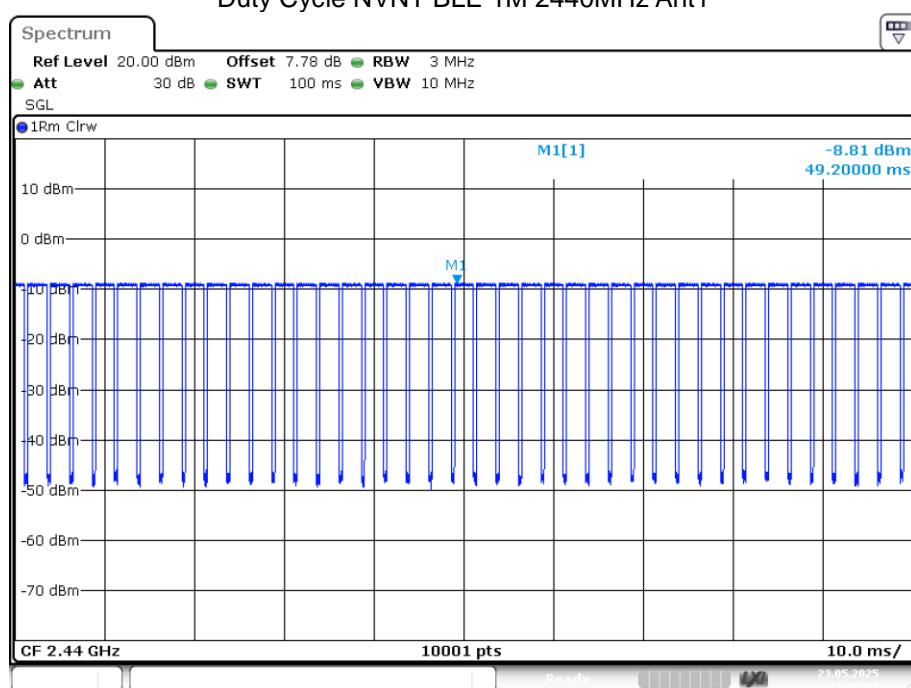


## Duty Cycle NVNT BLE 1M 2480MHz Ant1

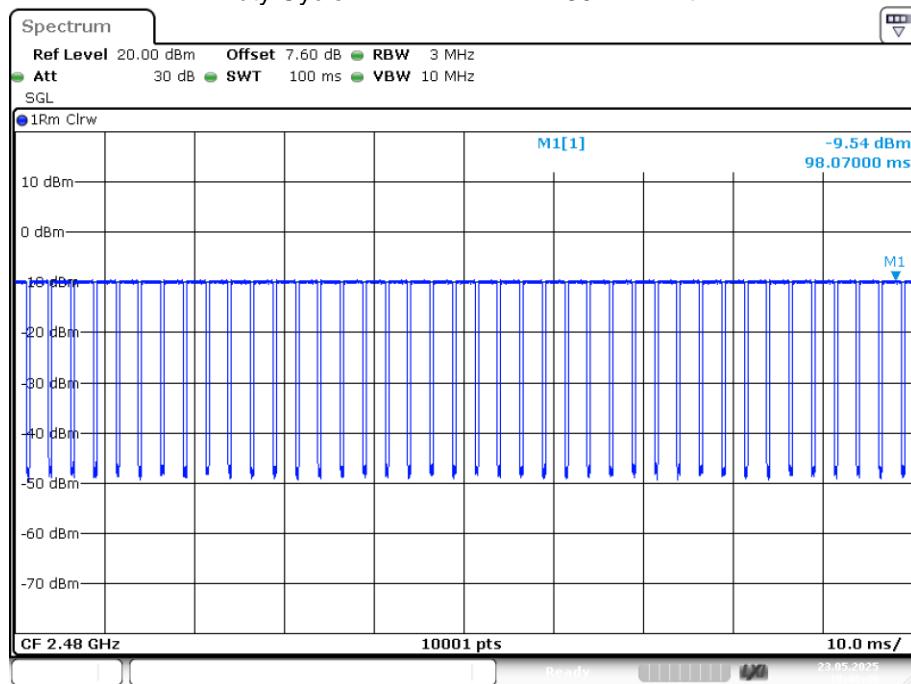

## Duty Cycle NVNT BLE 2M 2402MHz Ant1

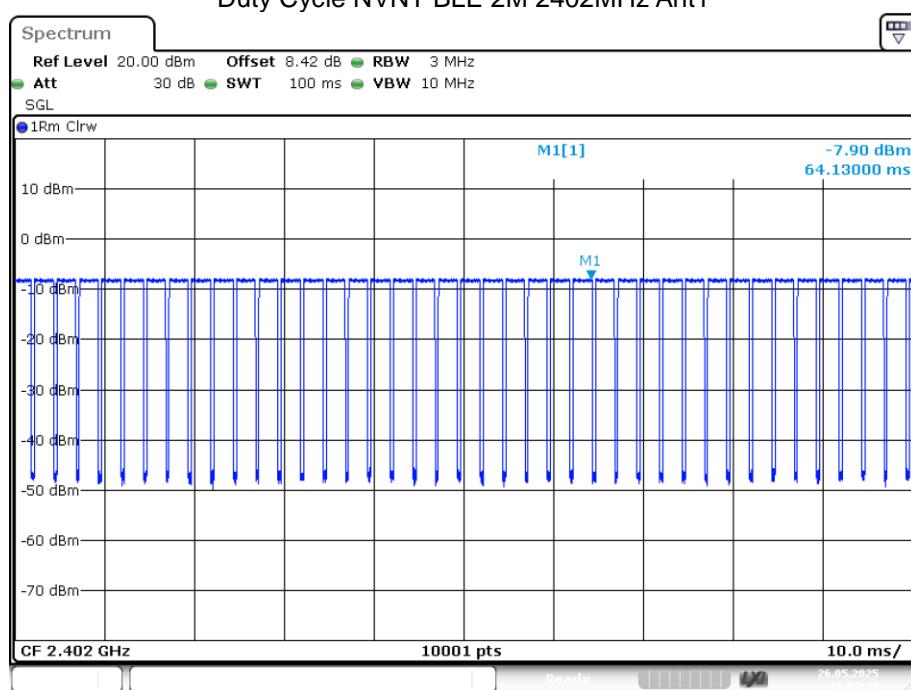


## Duty Cycle NVNT BLE 2M 2440MHz Ant1

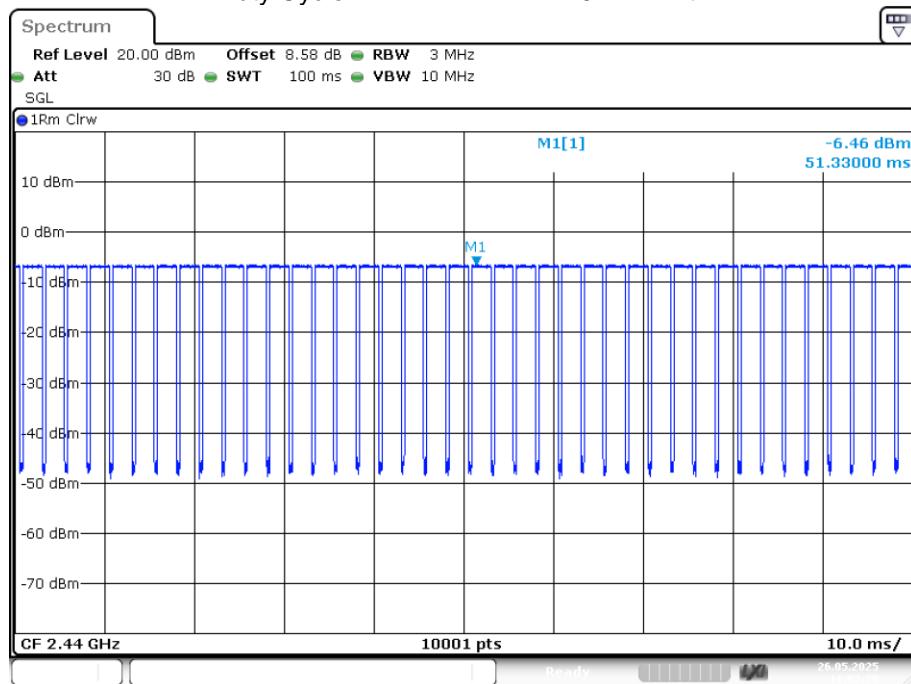

Date: 26.MAY.2025 11:07:27

## Duty Cycle NVNT BLE 2M 2480MHz Ant1

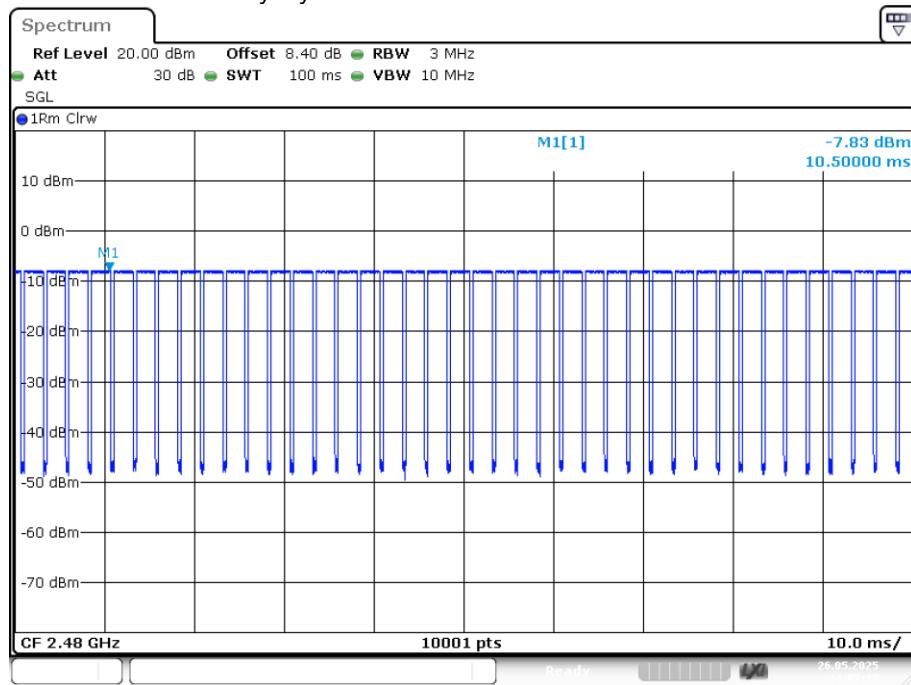

Date: 26.MAY.2025 11:07:11

## **12. ANTENNA REQUIREMENT**

### **12.1. Standard Requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **12.2. Antenna Connected Construction**


The antenna is internal antenna and no consideration of replacement. Please see EUT photo for details.

### **12.3. Results**


The EUT antenna is Internal Antenna. It complies with the standard requirement.

## 13. TEST SETUP PHOTO

### 13.1. Photo of Radiated Emission test

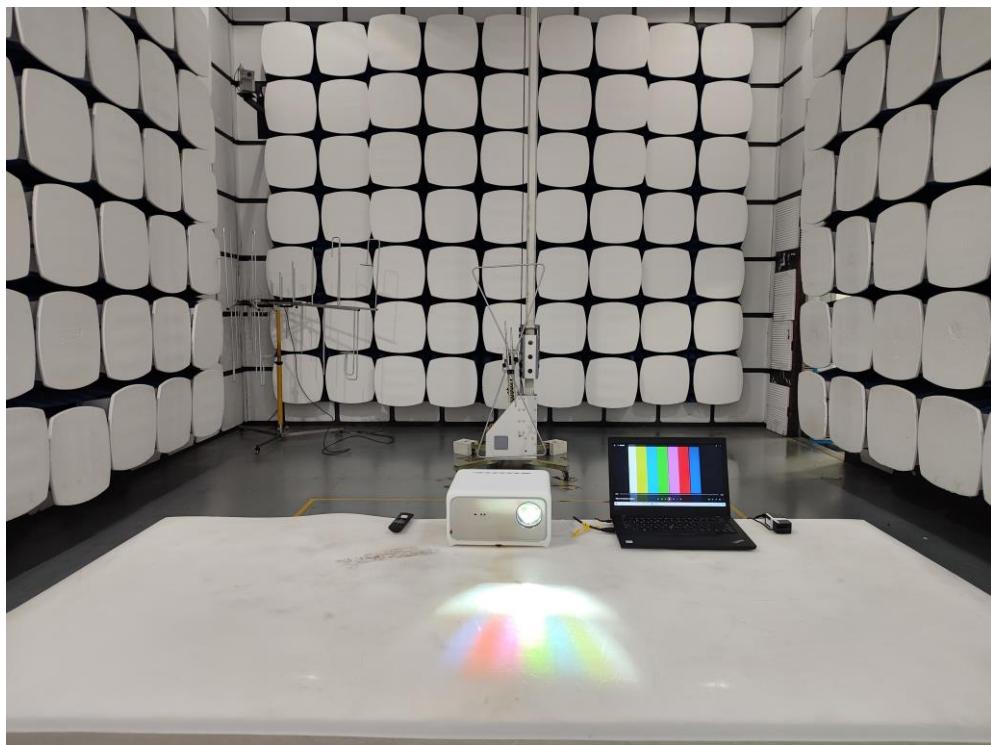

13.2.Photo of Conducted Emission test

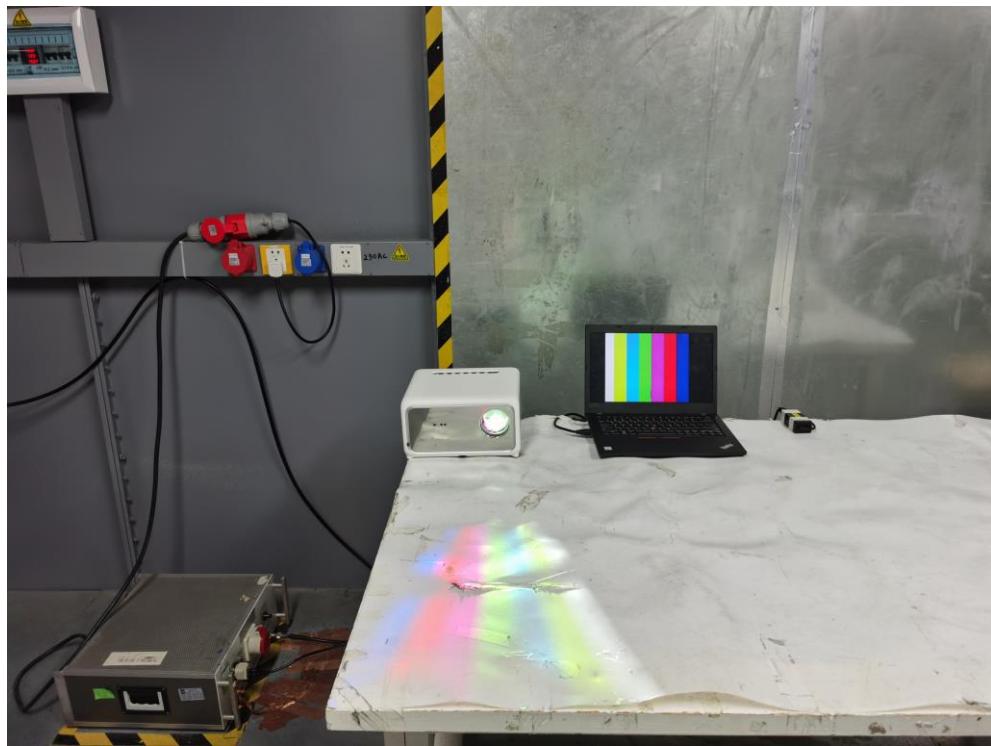

-----END OF REPORT-----