

802.11ac(VHT20) 5180MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.16	27.99	16.29	14.62	32.65	26.25	68.20	-41.95	Vertical
15540.11	29.87	21.83	17.66	34.46	34.90	74.00	-39.10	Vertical
10360.18	29.53	8.73	14.62	32.65	20.23	68.20	-47.97	Horizontal
15540.10	30.96	11.73	17.66	34.46	25.89	74.00	-48.11	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.16	14.80	16.29	14.62	32.65	13.06	54.00	-40.94	Vertical
15540.11	18.06	21.83	17.66	34.46	23.09	54.00	-30.91	Vertical
10360.18	19.94	8.73	14.62	32.65	10.64	54.00	-43.36	Horizontal
15540.10	23.33	11.73	17.66	34.46	18.26	54.00	-35.74	Horizontal

802.11ac(VHT20) 5200MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.13	27.78	16.29	14.62	32.65	26.04	68.20	-42.16	Vertical
15600.20	27.81	21.83	17.66	34.46	32.84	74.00	-41.16	Vertical
10400.31	30.63	8.73	14.62	32.65	21.33	68.20	-46.87	Horizontal
15600.30	31.62	11.73	17.66	34.46	26.55	74.00	-47.45	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.13	15.11	16.29	14.62	32.65	13.37	54.00	-40.63	Vertical
15600.20	18.14	21.83	17.66	34.46	23.17	54.00	-30.83	Vertical
10400.31	21.41	8.73	14.62	32.65	12.11	54.00	-41.89	Horizontal
15600.30	23.79	11.73	17.66	34.46	18.72	54.00	-35.28	Horizontal

802.11ac(VHT20) 5240MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.03	27.01	16.29	14.62	32.65	25.27	68.20	-42.93	Vertical
15720.13	29.13	21.83	17.66	34.46	34.16	74.00	-39.84	Vertical
10480.23	29.78	8.73	14.62	32.65	20.48	68.20	-47.72	Horizontal
15720.13	33.75	11.73	17.66	34.46	28.68	74.00	-45.32	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.03	15.29	16.29	14.62	32.65	13.55	54.00	-40.45	Vertical
15720.13	19.81	21.83	17.66	34.46	24.84	54.00	-29.16	Vertical
10480.23	21.31	8.73	14.62	32.65	12.01	54.00	-41.99	Horizontal
15720.13	22.04	11.73	17.66	34.46	16.97	54.00	-37.03	Horizontal

802.11ax(HE20) 5180MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.27	26.13	16.29	14.62	32.65	24.39	68.20	-43.81	Vertical
15540.14	29.23	21.83	17.66	34.46	34.26	74.00	-39.74	Vertical
10360.28	30.80	8.73	14.62	32.65	21.50	68.20	-46.70	Horizontal
15540.16	34.78	11.73	17.66	34.46	29.71	74.00	-44.29	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.27	17.47	16.29	14.62	32.65	15.73	54.00	-38.27	Vertical
15540.14	20.10	21.83	17.66	34.46	25.13	54.00	-28.87	Vertical
10360.28	19.66	8.73	14.62	32.65	10.36	54.00	-43.64	Horizontal
15540.16	23.02	11.73	17.66	34.46	17.95	54.00	-36.05	Horizontal

802.11ax(HE20) 5200MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.21	27.04	16.29	14.62	32.65	25.30	68.20	-42.90	Vertical
15600.12	29.12	21.83	17.66	34.46	34.15	74.00	-39.85	Vertical
10400.01	30.61	8.73	14.62	32.65	21.31	68.20	-46.89	Horizontal
15600.00	33.70	11.73	17.66	34.46	28.63	74.00	-45.37	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.21	16.14	16.29	14.62	32.65	14.40	54.00	-39.60	Vertical
15600.12	20.36	21.83	17.66	34.46	25.39	54.00	-28.61	Vertical
10400.01	20.09	8.73	14.62	32.65	10.79	54.00	-43.21	Horizontal
15600.00	23.16	11.73	17.66	34.46	18.09	54.00	-35.91	Horizontal

802.11ax(HE20) 5240MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.27	25.60	16.29	14.62	32.65	23.86	68.20	-44.34	Vertical
15720.03	29.87	21.83	17.66	34.46	34.90	74.00	-39.10	Vertical
10480.23	30.89	8.73	14.62	32.65	21.59	68.20	-46.61	Horizontal
15720.18	31.12	11.73	17.66	34.46	26.05	74.00	-47.95	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.27	17.86	16.29	14.62	32.65	16.12	54.00	-37.88	Vertical
15720.03	18.30	21.83	17.66	34.46	23.33	54.00	-30.67	Vertical
10480.23	21.63	8.73	14.62	32.65	12.33	54.00	-41.67	Horizontal
15720.18	20.78	11.73	17.66	34.46	15.71	54.00	-38.29	Horizontal

802.11n(HT40) 5190MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.00	27.61	16.29	14.62	32.65	25.87	68.20	-42.33	Vertical
15570.15	28.50	21.83	17.66	34.46	33.53	74.00	-40.47	Vertical
10380.19	31.08	8.73	14.62	32.65	21.78	68.20	-46.42	Horizontal
15570.12	31.29	11.73	17.66	34.46	26.22	74.00	-47.78	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.00	18.00	16.29	14.62	32.65	16.26	54.00	-37.74	Vertical
15570.15	20.37	21.83	17.66	34.46	25.40	54.00	-28.60	Vertical
10380.19	19.16	8.73	14.62	32.65	9.86	54.00	-44.14	Horizontal
15570.12	21.49	11.73	17.66	34.46	16.42	54.00	-37.58	Horizontal

802.11n(HT40) 5230MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.07	25.29	16.29	14.62	32.65	23.55	68.20	-44.65	Vertical
15690.26	30.44	21.83	17.66	34.46	35.47	74.00	-38.53	Vertical
10460.09	29.40	8.73	14.62	32.65	20.10	68.20	-48.10	Horizontal
15690.26	34.42	11.73	17.66	34.46	29.35	74.00	-44.65	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.07	17.30	16.29	14.62	32.65	15.56	54.00	-38.44	Vertical
15690.26	18.13	21.83	17.66	34.46	23.16	54.00	-30.84	Vertical
10460.09	18.26	8.73	14.62	32.65	8.96	54.00	-45.04	Horizontal
15690.26	21.90	11.73	17.66	34.46	16.83	54.00	-37.17	Horizontal

802.11ac(VHT40) 5190MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.29	27.99	16.29	14.62	32.65	26.25	68.20	-41.95	Vertical
15570.24	30.91	21.83	17.66	34.46	35.94	74.00	-38.06	Vertical
10380.23	29.04	8.73	14.62	32.65	19.74	68.20	-48.46	Horizontal
15570.18	33.48	11.73	17.66	34.46	28.41	74.00	-45.59	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.29	15.07	16.29	14.62	32.65	13.33	54.00	-40.67	Vertical
15570.24	16.97	21.83	17.66	34.46	22.00	54.00	-32.00	Vertical
10380.23	19.64	8.73	14.62	32.65	10.34	54.00	-43.66	Horizontal
15570.18	23.34	11.73	17.66	34.46	18.27	54.00	-35.73	Horizontal

802.11ac(VHT40) 5230MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.18	25.46	16.29	14.62	32.65	23.72	68.20	-44.48	Vertical
15690.30	28.95	21.83	17.66	34.46	33.98	74.00	-40.02	Vertical
10460.12	32.46	8.73	14.62	32.65	23.16	68.20	-45.04	Horizontal
15690.05	30.91	11.73	17.66	34.46	25.84	74.00	-48.16	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.18	15.87	16.29	14.62	32.65	14.13	54.00	-39.87	Vertical
15690.30	19.17	21.83	17.66	34.46	24.20	54.00	-29.80	Vertical
10460.12	18.38	8.73	14.62	32.65	9.08	54.00	-44.92	Horizontal
15690.05	20.52	11.73	17.66	34.46	15.45	54.00	-38.55	Horizontal

802.11ax(HE40) 5190MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.20	25.88	16.29	14.62	32.65	24.14	68.20	-44.06	Vertical
15570.24	28.86	21.83	17.66	34.46	33.89	74.00	-40.11	Vertical
10380.07	30.67	8.73	14.62	32.65	21.37	68.20	-46.83	Horizontal
15570.26	34.74	11.73	17.66	34.46	29.67	74.00	-44.33	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.20	15.27	16.29	14.62	32.65	13.53	54.00	-40.47	Vertical
15570.24	20.23	21.83	17.66	34.46	25.26	54.00	-28.74	Vertical
10380.07	21.40	8.73	14.62	32.65	12.10	54.00	-41.90	Horizontal
15570.26	23.79	11.73	17.66	34.46	18.72	54.00	-35.28	Horizontal

802.11ax(HE40) 5230MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.05	26.22	16.29	14.62	32.65	24.48	68.20	-43.72	Vertical
15690.15	28.44	21.83	17.66	34.46	33.47	74.00	-40.53	Vertical
10460.30	28.79	8.73	14.62	32.65	19.49	68.20	-48.71	Horizontal
15690.07	30.94	11.73	17.66	34.46	25.87	74.00	-48.13	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.05	16.24	16.29	14.62	32.65	14.50	54.00	-39.50	Vertical
15690.15	19.46	21.83	17.66	34.46	24.49	54.00	-29.51	Vertical
10460.30	20.92	8.73	14.62	32.65	11.62	54.00	-42.38	Horizontal
15690.07	23.72	11.73	17.66	34.46	18.65	54.00	-35.35	Horizontal

U-NII 3:

802.11a(HT20) 5745MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.30	26.45	16.29	14.62	32.65	24.71	74.00	-49.29	Vertical
17235.00	29.47	21.83	17.66	34.46	34.50	68.20	-33.70	Vertical
11490.29	29.21	8.73	14.62	32.65	19.91	74.00	-54.09	Horizontal
17235.08	30.92	11.73	17.66	34.46	25.85	68.20	-42.35	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.16	17.32	16.29	14.62	32.65	15.58	54.00	-38.42	Vertical
17235.29	18.16	21.83	17.66	34.46	23.19	54.00	-30.81	Vertical
11490.00	18.20	8.73	14.62	32.65	8.90	54.00	-45.10	Horizontal
17235.12	21.31	11.73	17.66	34.46	16.24	54.00	-37.76	Horizontal

802.11a(HT20) 5785MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.22	26.71	16.29	14.62	32.65	24.97	74.00	-49.03	Vertical
17355.16	28.99	21.83	17.66	34.46	34.02	68.20	-34.18	Vertical
11570.20	31.18	8.73	14.62	32.65	21.88	74.00	-52.12	Horizontal
17355.32	31.68	11.73	17.66	34.46	26.61	68.20	-41.59	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.06	17.76	16.29	14.62	32.65	16.02	54.00	-37.98	Vertical
17355.23	19.00	21.83	17.66	34.46	24.03	54.00	-29.97	Vertical
11570.14	18.56	8.73	14.62	32.65	9.26	54.00	-44.74	Horizontal
17355.10	23.52	11.73	17.66	34.46	18.45	54.00	-35.55	Horizontal

802.11a(HT20) 5825MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.30	27.00	16.29	14.62	32.65	25.26	74.00	-48.74	Vertical
17475.26	27.63	21.83	17.66	34.46	32.66	68.20	-35.54	Vertical
11650.14	28.90	8.73	14.62	32.65	19.60	74.00	-54.40	Horizontal
17475.27	34.86	11.73	17.66	34.46	29.79	68.20	-38.41	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.20	14.86	16.29	14.62	32.65	13.12	54.00	-40.88	Vertical
17475.13	19.37	21.83	17.66	34.46	24.40	54.00	-29.60	Vertical
11650.02	17.97	8.73	14.62	32.65	8.67	54.00	-45.33	Horizontal
17475.27	24.09	11.73	17.66	34.46	19.02	54.00	-34.98	Horizontal

802.11n(HT20) 5745MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.08	24.92	16.29	14.62	32.65	23.18	74.00	-50.82	Vertical
17235.13	27.90	21.83	17.66	34.46	32.93	68.20	-35.27	Vertical
11490.29	28.78	8.73	14.62	32.65	19.48	74.00	-54.52	Horizontal
17235.13	34.12	11.73	17.66	34.46	29.05	68.20	-39.15	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.30	17.63	16.29	14.62	32.65	15.89	54.00	-38.11	Vertical
17235.30	16.84	21.83	17.66	34.46	21.87	54.00	-32.13	Vertical
11490.12	19.17	8.73	14.62	32.65	9.87	54.00	-44.13	Horizontal
17235.21	20.59	11.73	17.66	34.46	15.52	54.00	-38.48	Horizontal

802.11n(HT20) 5785MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.25	26.78	16.29	14.62	32.65	25.04	74.00	-48.96	Vertical
17355.08	27.81	21.83	17.66	34.46	32.84	68.20	-35.36	Vertical
11570.14	32.19	8.73	14.62	32.65	22.89	74.00	-51.11	Horizontal
17355.21	34.20	11.73	17.66	34.46	29.13	68.20	-39.07	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.06	18.55	16.29	14.62	32.65	16.81	54.00	-37.19	Vertical
17355.10	17.10	21.83	17.66	34.46	22.13	54.00	-31.87	Vertical
11570.01	21.34	8.73	14.62	32.65	12.04	54.00	-41.96	Horizontal
17355.04	21.46	11.73	17.66	34.46	16.39	54.00	-37.61	Horizontal

802.11n(HT20) 5825MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.09	25.91	16.29	14.62	32.65	24.17	74.00	-49.83	Vertical
17475.30	28.27	21.83	17.66	34.46	33.30	68.20	-34.90	Vertical
11650.06	29.57	8.73	14.62	32.65	20.27	74.00	-53.73	Horizontal
17475.16	31.07	11.73	17.66	34.46	26.00	68.20	-42.20	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.04	14.71	16.29	14.62	32.65	12.97	54.00	-41.03	Vertical
17475.26	19.84	21.83	17.66	34.46	24.87	54.00	-29.13	Vertical
11650.15	18.45	8.73	14.62	32.65	9.15	54.00	-44.85	Horizontal
17475.31	21.76	11.73	17.66	34.46	16.69	54.00	-37.31	Horizontal

802.11ac(VHT20) 5745MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.14	24.89	16.29	14.62	32.65	23.15	74.00	-50.85	Vertical
17235.11	29.01	21.83	17.66	34.46	34.04	68.20	-34.16	Vertical
11490.26	32.39	8.73	14.62	32.65	23.09	74.00	-50.91	Horizontal
17235.26	31.11	11.73	17.66	34.46	26.04	68.20	-42.16	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.05	15.60	16.29	14.62	32.65	13.86	54.00	-40.14	Vertical
17235.28	18.67	21.83	17.66	34.46	23.70	54.00	-30.30	Vertical
11490.02	19.01	8.73	14.62	32.65	9.71	54.00	-44.29	Horizontal
17235.28	21.18	11.73	17.66	34.46	16.11	54.00	-37.89	Horizontal

802.11ac(VHT20) 5785MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.19	24.77	16.29	14.62	32.65	23.03	74.00	-50.97	Vertical
17355.07	28.43	21.83	17.66	34.46	33.46	68.20	-34.74	Vertical
11570.27	29.68	8.73	14.62	32.65	20.38	74.00	-53.62	Horizontal
17355.27	31.91	11.73	17.66	34.46	26.84	68.20	-41.36	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.14	16.95	16.29	14.62	32.65	15.21	54.00	-38.79	Vertical
17355.27	18.00	21.83	17.66	34.46	23.03	54.00	-30.97	Vertical
11570.29	21.15	8.73	14.62	32.65	11.85	54.00	-42.15	Horizontal
17355.13	21.12	11.73	17.66	34.46	16.05	54.00	-37.95	Horizontal

802.11ac(VHT20) 5825MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.27	25.34	16.29	14.62	32.65	23.60	74.00	-50.40	Vertical
17475.23	27.93	21.83	17.66	34.46	32.96	68.20	-35.24	Vertical
11650.09	32.12	8.73	14.62	32.65	22.82	74.00	-51.18	Horizontal
17475.02	32.00	11.73	17.66	34.46	26.93	68.20	-41.27	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.28	15.77	16.29	14.62	32.65	14.03	54.00	-39.97	Vertical
17475.23	18.35	21.83	17.66	34.46	23.38	54.00	-30.62	Vertical
11650.16	19.11	8.73	14.62	32.65	9.81	54.00	-44.19	Horizontal
17475.03	23.63	11.73	17.66	34.46	18.56	54.00	-35.44	Horizontal

802.11ax(HE20) 5745MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.07	25.95	16.29	14.62	32.65	24.21	74.00	-49.79	Vertical
17235.08	29.61	21.83	17.66	34.46	34.64	68.20	-33.56	Vertical
11490.05	31.00	8.73	14.62	32.65	21.70	74.00	-52.30	Horizontal
17235.14	31.15	11.73	17.66	34.46	26.08	68.20	-42.12	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.22	17.10	16.29	14.62	32.65	15.36	54.00	-38.64	Vertical
17235.24	18.22	21.83	17.66	34.46	23.25	54.00	-30.75	Vertical
11490.14	18.85	8.73	14.62	32.65	9.55	54.00	-44.45	Horizontal
17235.04	23.31	11.73	17.66	34.46	18.24	54.00	-35.76	Horizontal

802.11ax(HE20) 5785MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.09	25.65	16.29	14.62	32.65	23.91	74.00	-50.09	Vertical
17355.10	27.86	21.83	17.66	34.46	32.89	68.20	-35.31	Vertical
11570.24	30.67	8.73	14.62	32.65	21.37	74.00	-52.63	Horizontal
17355.21	30.98	11.73	17.66	34.46	25.91	68.20	-42.29	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.10	17.06	16.29	14.62	32.65	15.32	54.00	-38.68	Vertical
17355.08	18.61	21.83	17.66	34.46	23.64	54.00	-30.36	Vertical
11570.29	18.86	8.73	14.62	32.65	9.56	54.00	-44.44	Horizontal
17355.16	24.15	11.73	17.66	34.46	19.08	54.00	-34.92	Horizontal

802.11ax(HE20) 5825MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.15	27.60	16.29	14.62	32.65	25.86	74.00	-48.14	Vertical
17475.10	30.84	21.83	17.66	34.46	35.87	68.20	-32.33	Vertical
11650.16	29.19	8.73	14.62	32.65	19.89	74.00	-54.11	Horizontal
17475.29	33.41	11.73	17.66	34.46	28.34	68.20	-39.86	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.03	15.74	16.29	14.62	32.65	14.00	54.00	-40.00	Vertical
17475.21	17.98	21.83	17.66	34.46	23.01	54.00	-30.99	Vertical
11650.06	18.28	8.73	14.62	32.65	8.98	54.00	-45.02	Horizontal
17475.32	20.65	11.73	17.66	34.46	15.58	54.00	-38.42	Horizontal

802.11n(HT40) 5755MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.24	24.97	16.29	14.62	32.65	23.23	74.00	-50.77	Vertical
17265.07	29.63	21.83	17.66	34.46	34.66	68.20	-33.54	Vertical
11510.06	29.34	8.73	14.62	32.65	20.04	74.00	-53.96	Horizontal
17265.20	34.07	11.73	17.66	34.46	29.00	68.20	-39.20	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.30	15.35	16.29	14.62	32.65	13.61	54.00	-40.39	Vertical
17265.20	18.28	21.83	17.66	34.46	23.31	54.00	-30.69	Vertical
11510.27	19.90	8.73	14.62	32.65	10.60	54.00	-43.40	Horizontal
17265.09	21.20	11.73	17.66	34.46	16.13	54.00	-37.87	Horizontal

802.11n(HT40) 5795MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.30	25.07	16.29	14.62	32.65	23.33	74.00	-50.67	Vertical
17385.25	30.67	21.83	17.66	34.46	35.70	68.20	-32.50	Vertical
11590.17	28.81	8.73	14.62	32.65	19.51	74.00	-54.49	Horizontal
17385.14	34.65	11.73	17.66	34.46	29.58	68.20	-38.62	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.17	16.03	16.29	14.62	32.65	14.29	54.00	-39.71	Vertical
17385.29	17.14	21.83	17.66	34.46	22.17	54.00	-31.83	Vertical
11590.05	18.77	8.73	14.62	32.65	9.47	54.00	-44.53	Horizontal
17385.04	23.49	11.73	17.66	34.46	18.42	54.00	-35.58	Horizontal

802.11ac(VHT40) 5755MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.27	28.13	16.29	14.62	32.65	26.39	74.00	-47.61	Vertical
17265.30	28.55	21.83	17.66	34.46	33.58	68.20	-34.62	Vertical
11510.28	32.09	8.73	14.62	32.65	22.79	74.00	-51.21	Horizontal
17265.17	33.76	11.73	17.66	34.46	28.69	68.20	-39.51	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.25	17.86	16.29	14.62	32.65	16.12	54.00	-37.88	Vertical
17265.10	20.70	21.83	17.66	34.46	25.73	54.00	-28.27	Vertical
11510.02	20.62	8.73	14.62	32.65	11.32	54.00	-42.68	Horizontal
17265.04	20.64	11.73	17.66	34.46	15.57	54.00	-38.43	Horizontal

802.11ac(VHT40) 5795MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.12	27.30	16.29	14.62	32.65	25.56	74.00	-48.44	Vertical
17385.12	30.88	21.83	17.66	34.46	35.91	68.20	-32.29	Vertical
11590.16	31.66	8.73	14.62	32.65	22.36	74.00	-51.64	Horizontal
17385.15	33.41	11.73	17.66	34.46	28.34	68.20	-39.86	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.31	14.65	16.29	14.62	32.65	12.91	54.00	-41.09	Vertical
17385.10	19.85	21.83	17.66	34.46	24.88	54.00	-29.12	Vertical
11590.07	18.35	8.73	14.62	32.65	9.05	54.00	-44.95	Horizontal
17385.20	20.90	11.73	17.66	34.46	15.83	54.00	-38.17	Horizontal

802.11ax(HE40) 5755MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.24	25.82	16.29	14.62	32.65	24.08	74.00	-49.92	Vertical
17265.15	30.04	21.83	17.66	34.46	35.07	68.20	-33.13	Vertical
11510.29	30.09	8.73	14.62	32.65	20.79	74.00	-53.21	Horizontal
17265.03	33.91	11.73	17.66	34.46	28.84	68.20	-39.36	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.25	16.25	16.29	14.62	32.65	14.51	54.00	-39.49	Vertical
17265.12	18.70	21.83	17.66	34.46	23.73	54.00	-30.27	Vertical
11510.10	18.88	8.73	14.62	32.65	9.58	54.00	-44.42	Horizontal
17265.21	24.26	11.73	17.66	34.46	19.19	54.00	-34.81	Horizontal

802.11ax(HE40) 5795MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.03	25.19	16.29	14.62	32.65	23.45	74.00	-50.55	Vertical
17385.16	28.38	21.83	17.66	34.46	33.41	68.20	-34.79	Vertical
11590.09	29.06	8.73	14.62	32.65	19.76	74.00	-54.24	Horizontal
17385.26	33.34	11.73	17.66	34.46	28.27	68.20	-39.93	Horizontal


Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.16	14.76	16.29	14.62	32.65	13.02	54.00	-40.98	Vertical
17385.03	19.39	21.83	17.66	34.46	24.42	54.00	-29.58	Vertical
11590.29	21.72	8.73	14.62	32.65	12.42	54.00	-41.58	Horizontal
17385.09	24.20	11.73	17.66	34.46	19.13	54.00	-34.87	Horizontal

Note:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

4.10 Conducted Spurious Emission

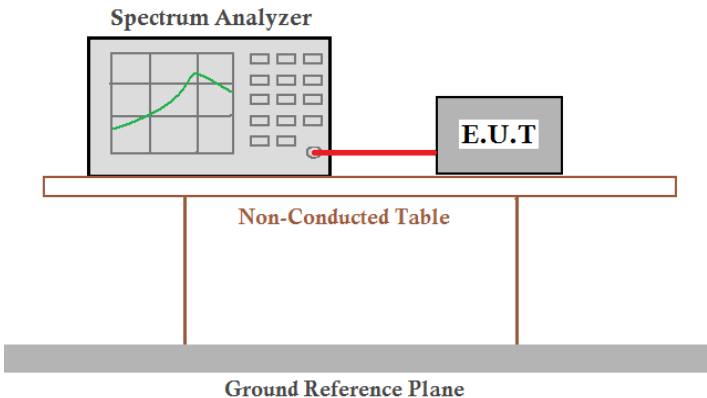
Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	- For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. - For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test procedure:	The procedure for peak unwanted emissions measurements above 1000 MHz is as follows: - Peak emission levels are measured by setting the instrument as follows: 1) RBW = 1 MHz. 2) VBW $\geq [3 \times \text{RBW}]$. 3) Detector = peak. 4) Sweep time = auto. 5) Trace mode = max hold. 6) Allow sweeps to continue until the trace stabilizes.
Test results:	Pass

U-NII 1

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-29.62	-27	Pass
NVNT	a	5200	Ant1	-29.47	-27	Pass
NVNT	a	5240	Ant1	-30.46	-27	Pass
NVNT	ac20	5180	Ant1	-30.09	-27	Pass
NVNT	ac20	5200	Ant1	-29.73	-27	Pass
NVNT	ac20	5240	Ant1	-28.83	-27	Pass
NVNT	ac40	5190	Ant1	-29.36	-27	Pass
NVNT	ac40	5230	Ant1	-29.57	-27	Pass
NVNT	ax20	5180	Ant1	-29.95	-27	Pass
NVNT	ax20	5200	Ant1	-28.94	-27	Pass
NVNT	ax20	5240	Ant1	-30.26	-27	Pass
NVNT	ax40	5190	Ant1	-29.2	-27	Pass
NVNT	ax40	5230	Ant1	-29.87	-27	Pass
NVNT	n20	5180	Ant1	-29.3	-27	Pass
NVNT	n20	5200	Ant1	-29.2	-27	Pass
NVNT	n20	5240	Ant1	-30.76	-27	Pass
NVNT	n40	5190	Ant1	-28.48	-27	Pass
NVNT	n40	5230	Ant1	-28.95	-27	Pass


Note: Adding antenna gain results can also meet the requirements, so the test results meet the requirements

Tx. Spurious NVNT a 5180MHz Ant1 Emission

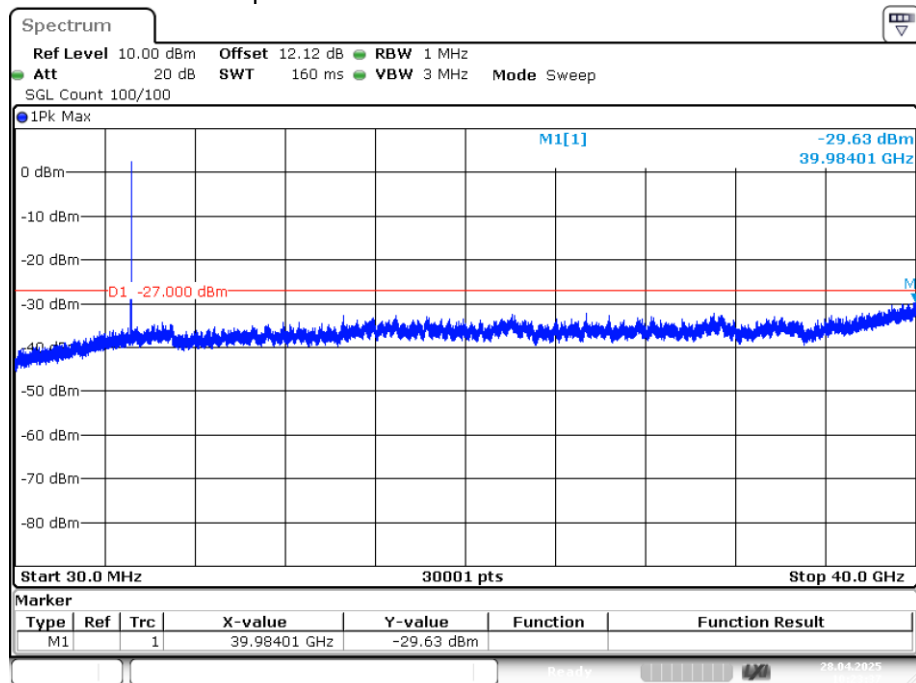


Date: 28.APR.2025 10:23:37

Tx. Spurious NVNT a 5200MHz Ant1 Emission

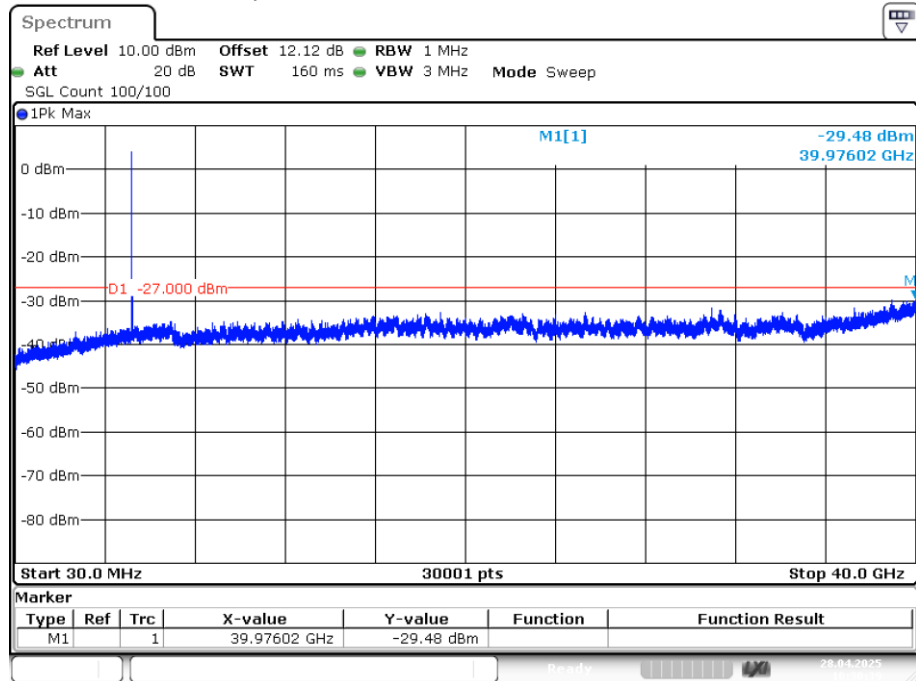


Date: 28.APR.2025 10:30:39

Tx. Spurious NVNT a 5240MHz Ant1 Emission

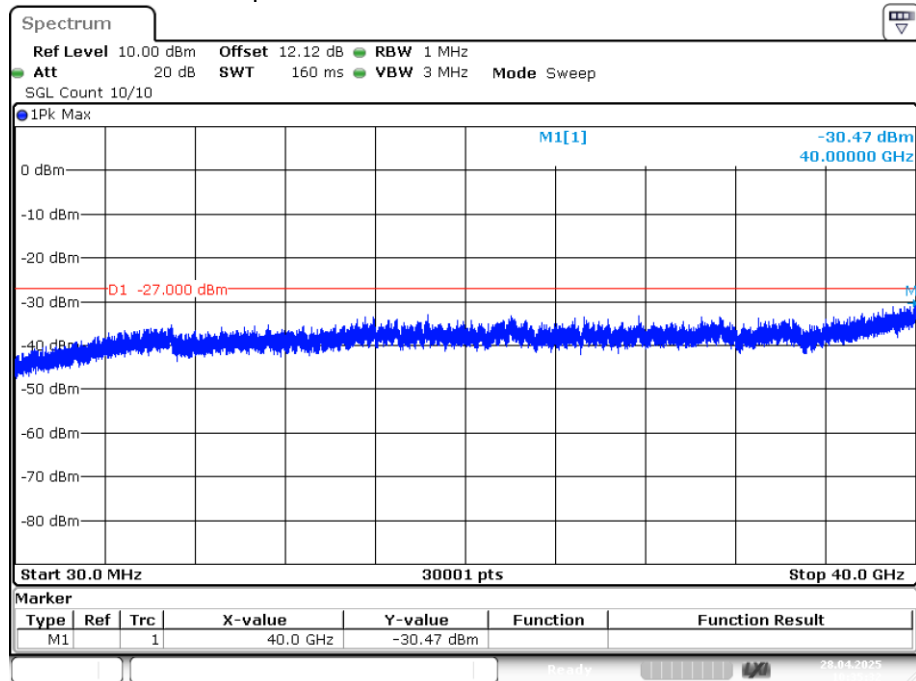


Date: 28.APR.2025 10:35:32

Tx. Spurious NVNT ac20 5180MHz Ant1 Emission

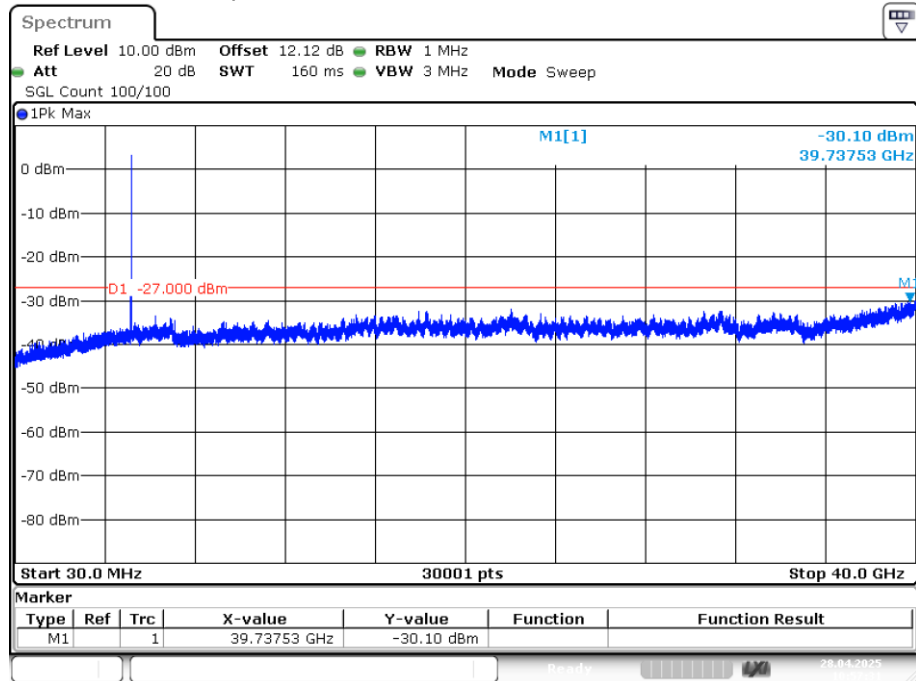


Date: 28.APR.2025 10:57:31

Tx. Spurious NVNT ac20 5200MHz Ant1 Emission

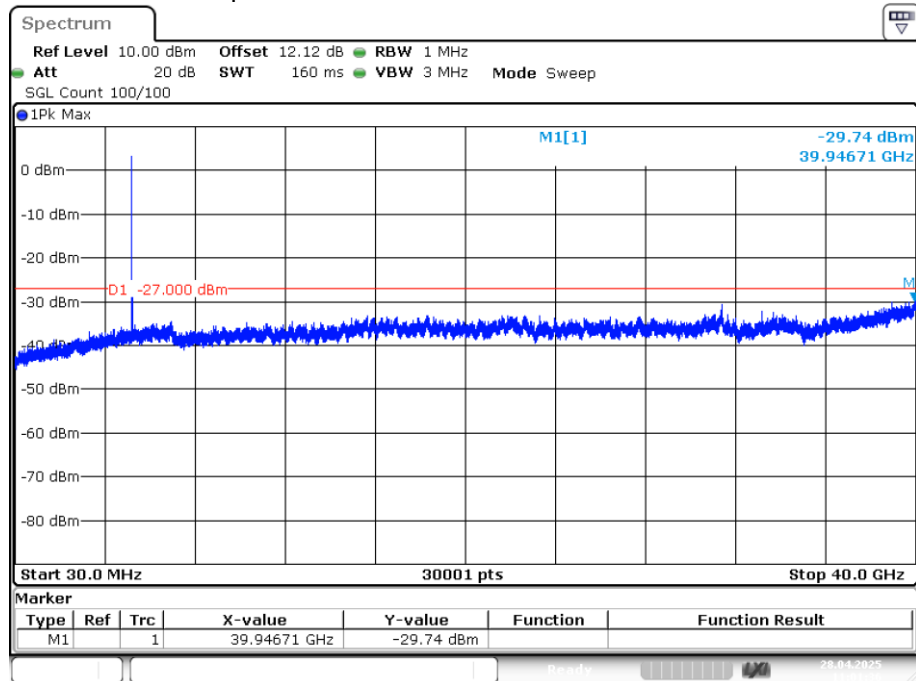


Date: 28.APR.2025 11:01:36

Tx. Spurious NVNT ac20 5240MHz Ant1 Emission

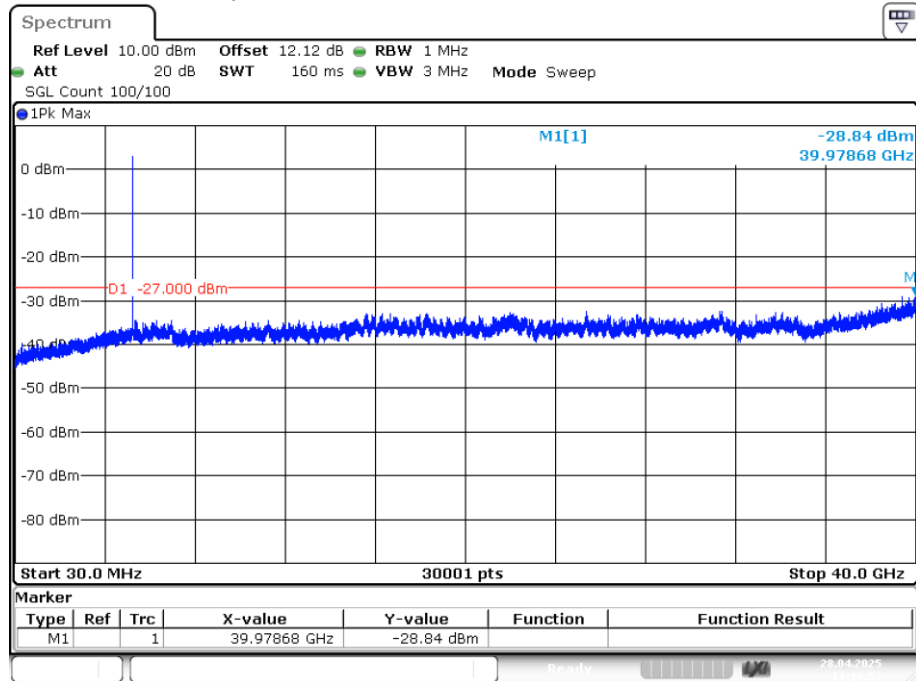


Date: 28.APR.2025 11:16:52

Tx. Spurious NVNT ac40 5190MHz Ant1 Emission

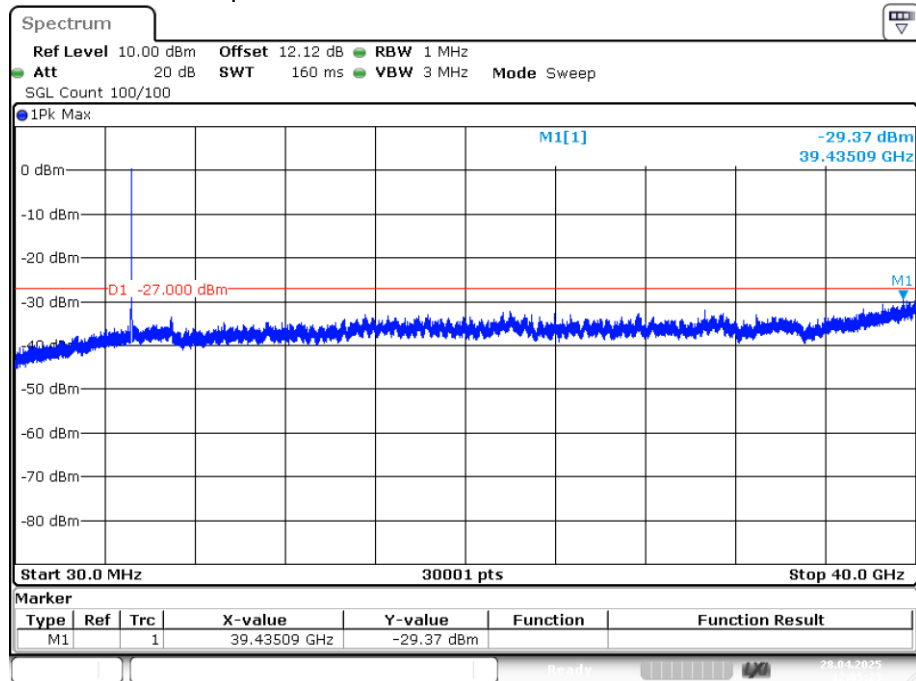


Date: 28.APR.2025 12:05:23

Tx. Spurious NVNT ac40 5230MHz Ant1 Emission

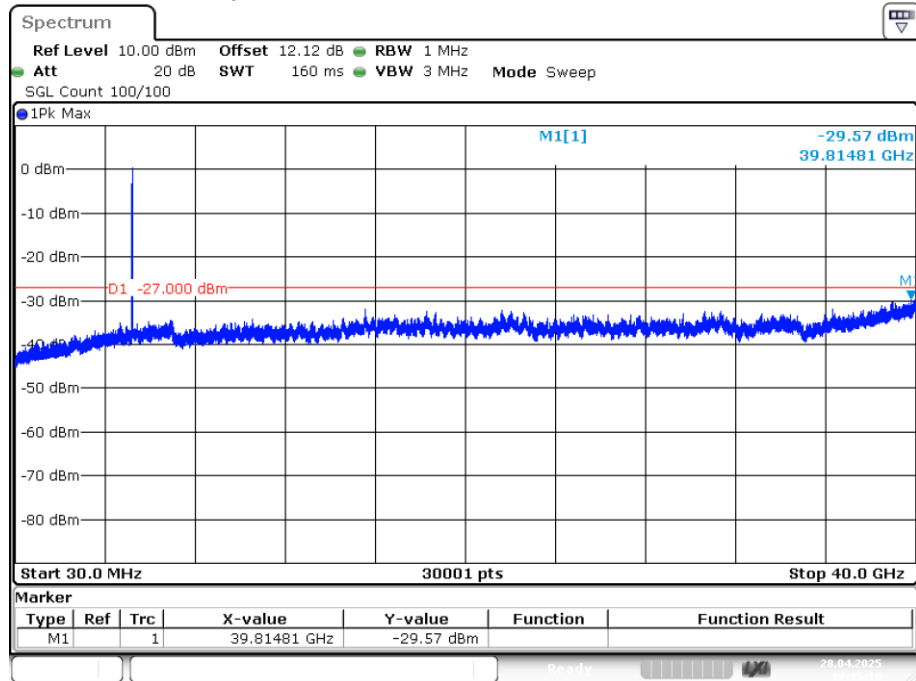


Date: 28.APR.2025 12:15:16

Tx. Spurious NVNT ax20 5180MHz Ant1 Emission

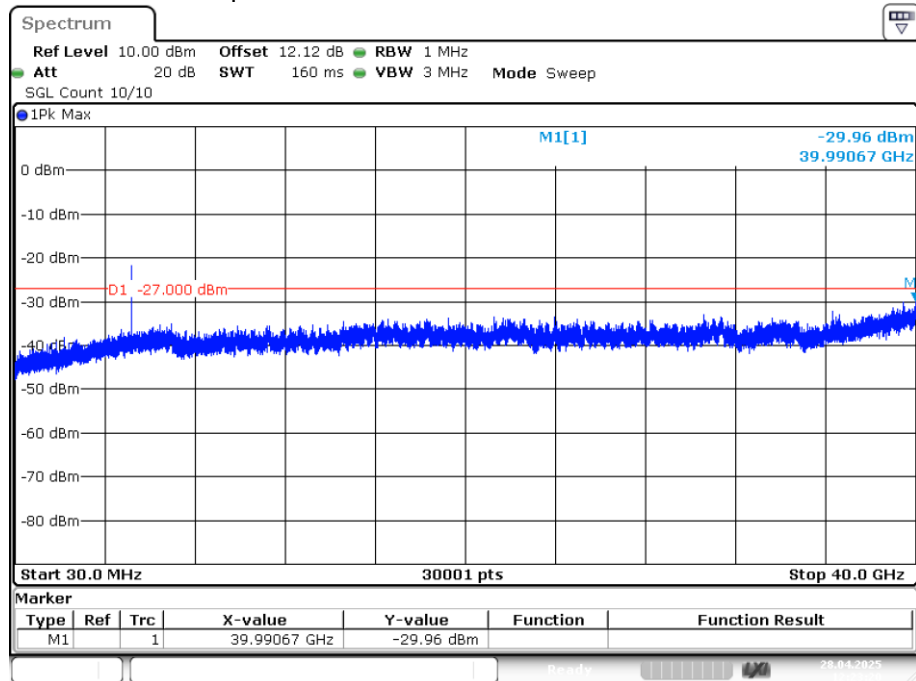


Date: 28.APR.2025 12:23:20

Tx. Spurious NVNT ax20 5200MHz Ant1 Emission

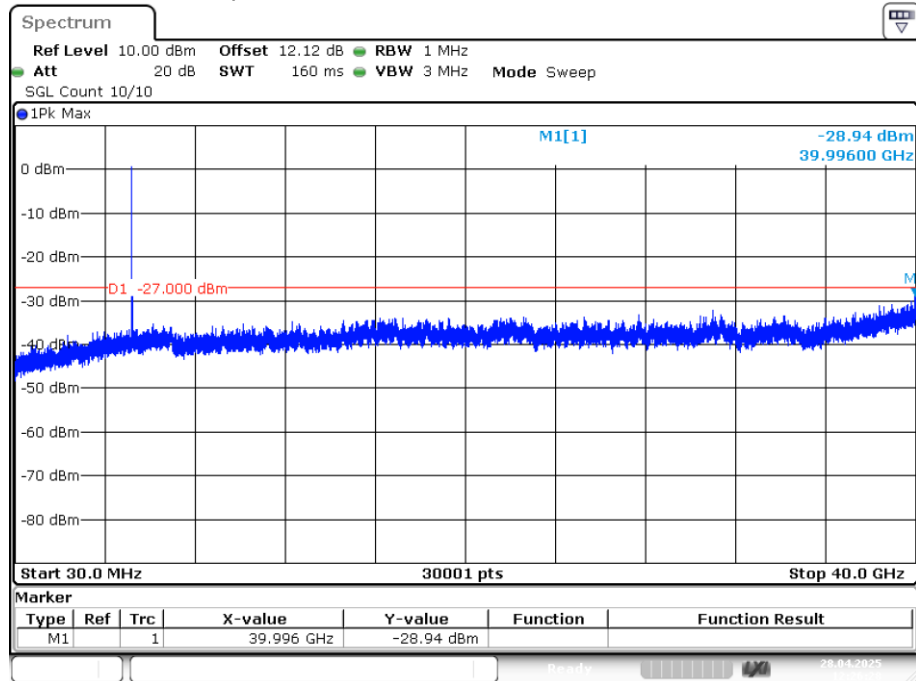


Date: 28.APR.2025 12:26:28

Tx. Spurious NVNT ax20 5240MHz Ant1 Emission

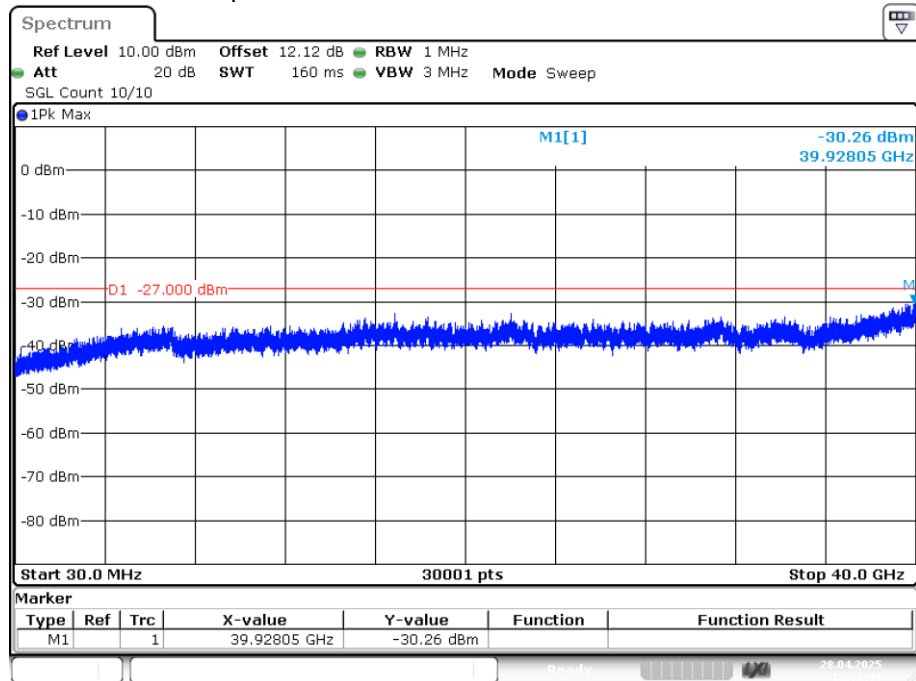


Date: 28.APR.2025 12:37:45

Tx. Spurious NVNT ax40 5190MHz Ant1 Emission

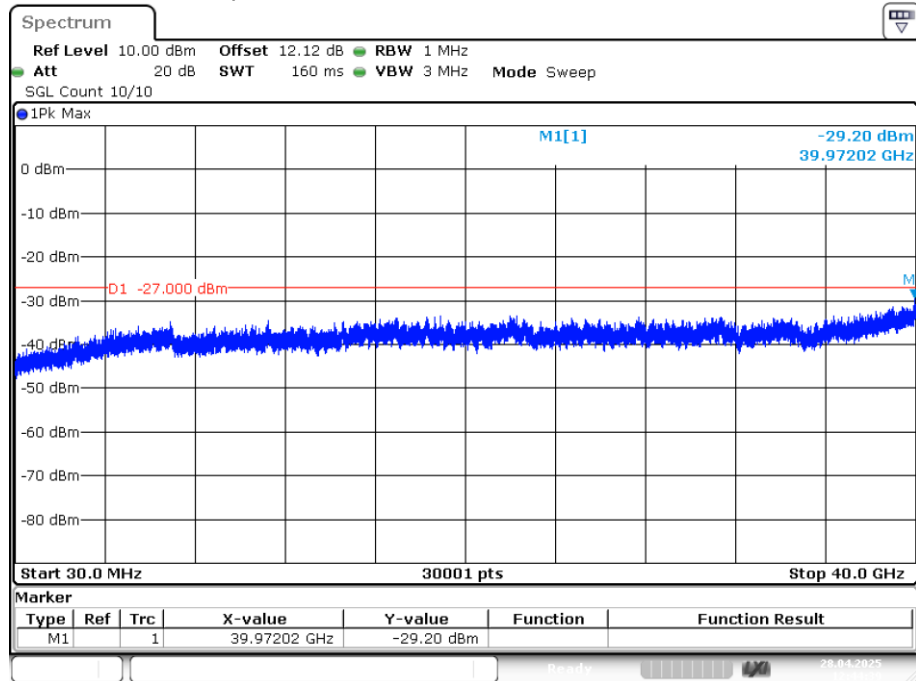


Date: 28.APR.2025 12:44:38

Tx. Spurious NVNT ax40 5230MHz Ant1 Emission

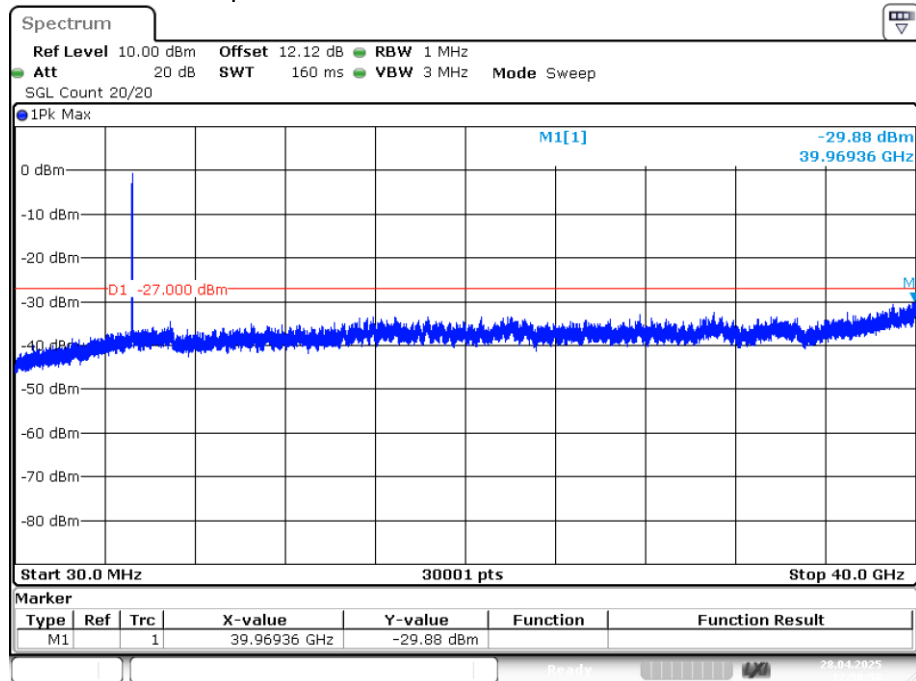


Date: 28.APR.2025 12:50:57

Tx. Spurious NVNT n20 5180MHz Ant1 Emission

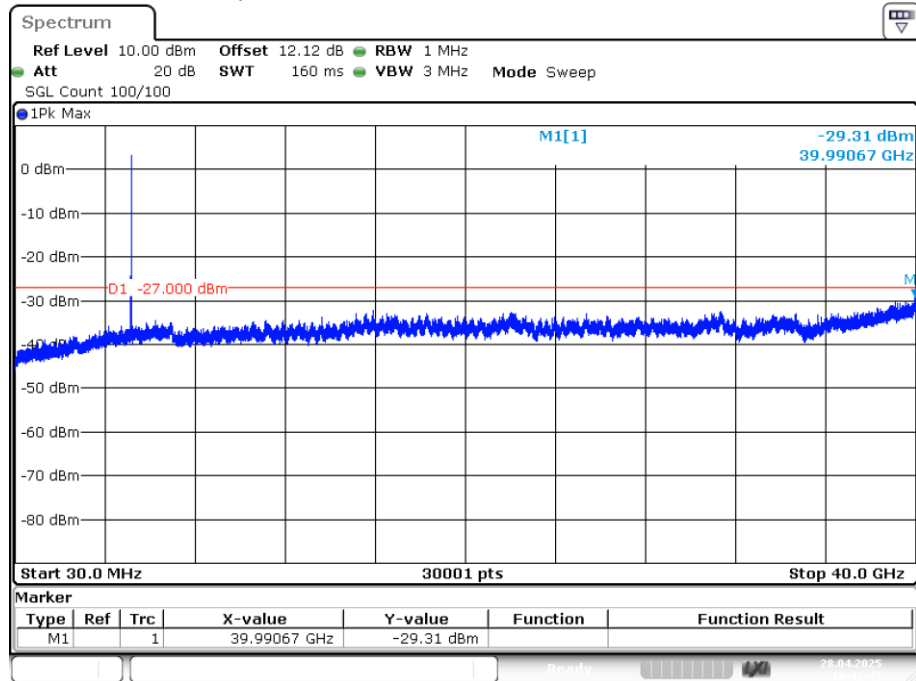


Date: 28.APR.2025 10:42:47

Tx. Spurious NVNT n20 5200MHz Ant1 Emission

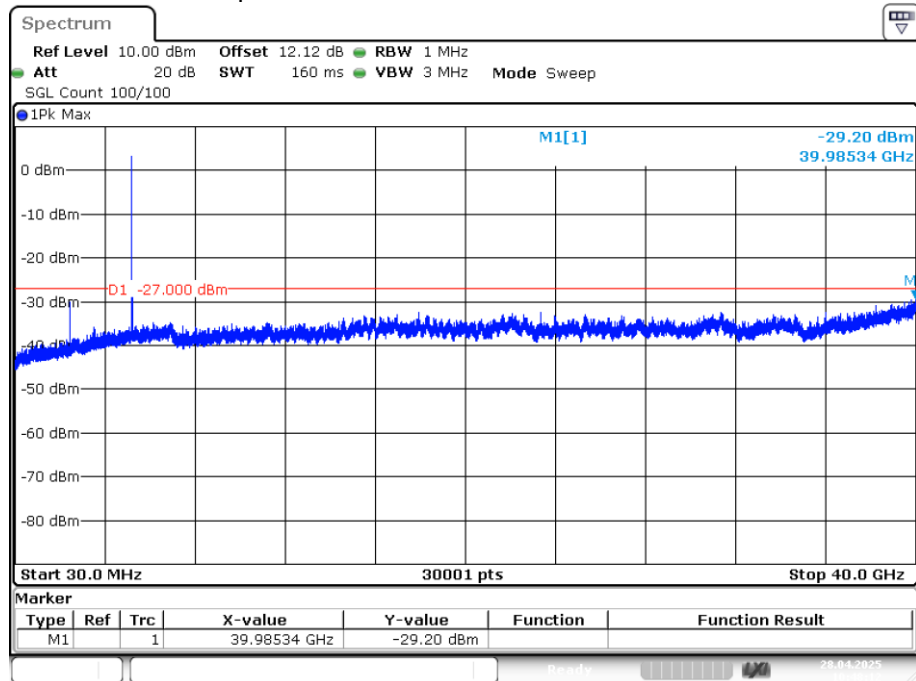


Date: 28.APR.2025 10:48:12

Tx. Spurious NVNT n20 5240MHz Ant1 Emission

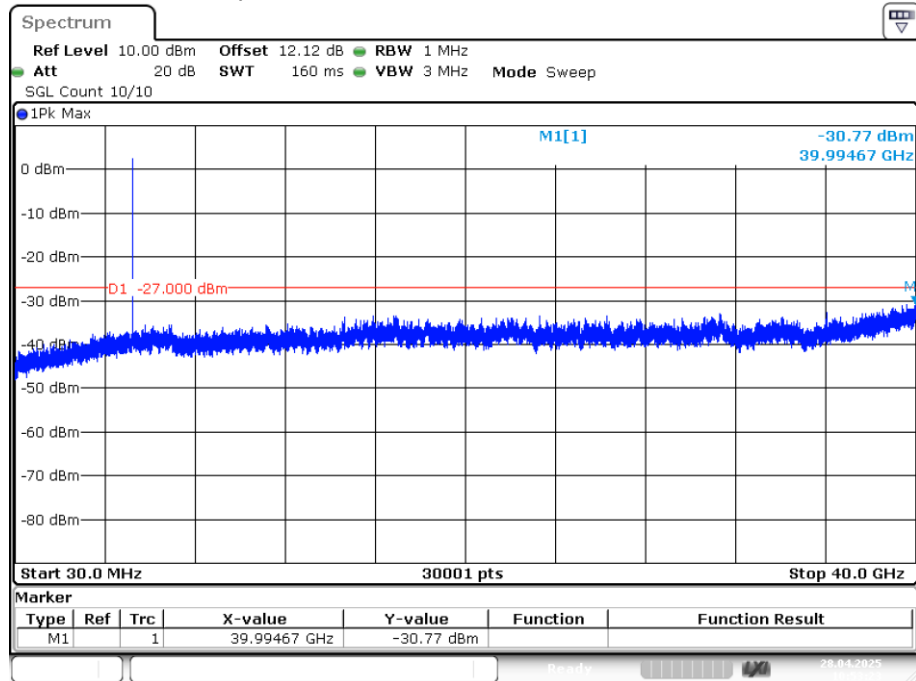


Date: 28.APR.2025 10:53:23

Tx. Spurious NVNT n40 5190MHz Ant1 Emission

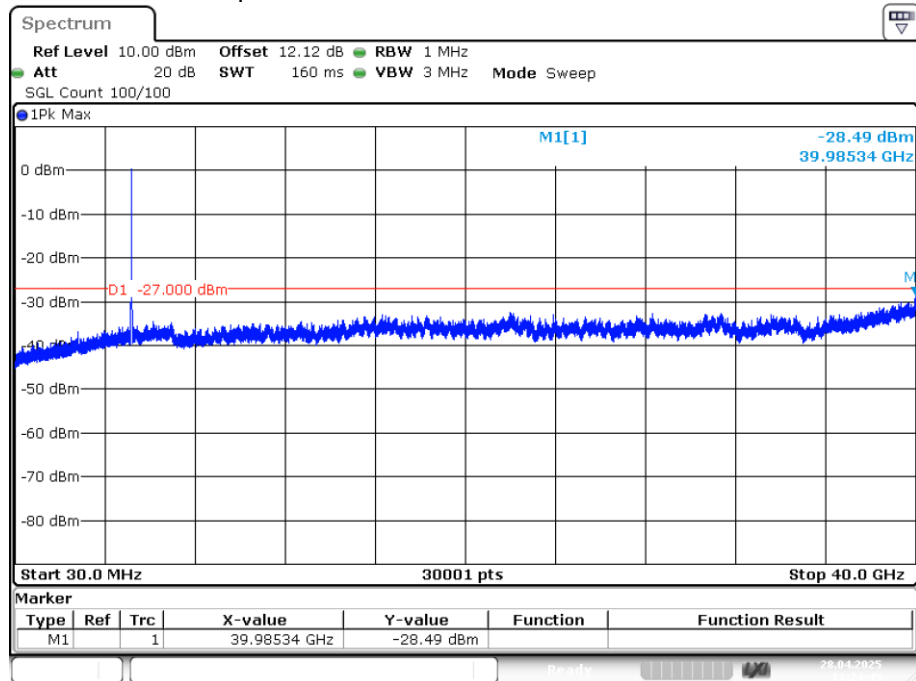

Date: 28.APR.2025 11:24:45

Tx. Spurious NVNT n40 5230MHz Ant1 Emission

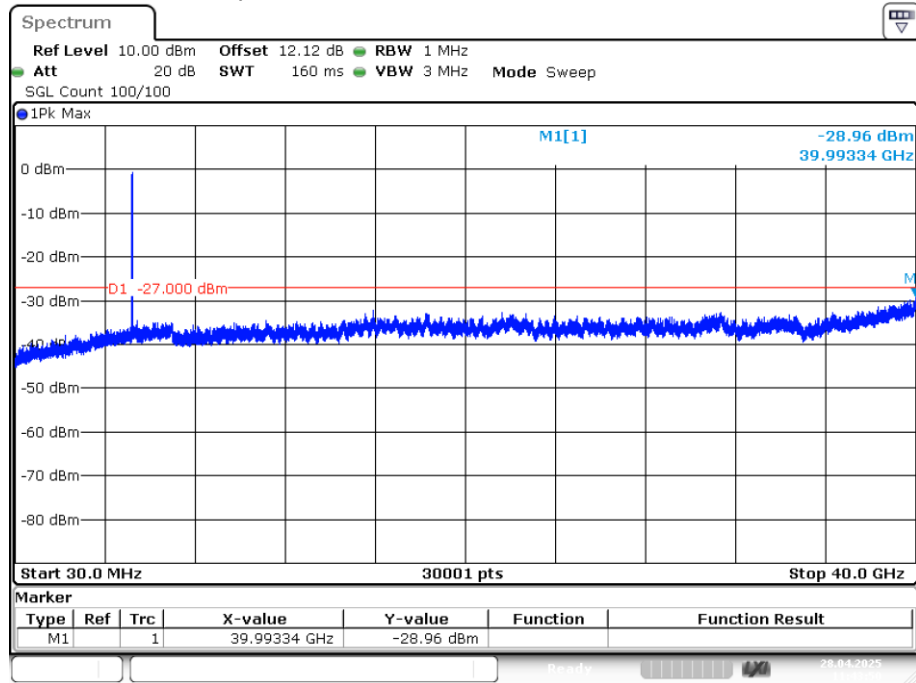


Date: 28.APR.2025 11:43:50

U-NII 3

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5745	Ant1	-31.18	-27	Pass
NVNT	a	5785	Ant1	-29.82	-27	Pass
NVNT	a	5825	Ant1	-30.06	-27	Pass
NVNT	ac20	5745	Ant1	-30.4	-27	Pass
NVNT	ac20	5785	Ant1	-30.82	-27	Pass
NVNT	ac20	5825	Ant1	-29.91	-27	Pass
NVNT	ac40	5755	Ant1	-30.33	-27	Pass
NVNT	ac40	5795	Ant1	-30.1	-27	Pass
NVNT	ax20	5745	Ant1	-29	-27	Pass
NVNT	ax20	5785	Ant1	-29.7	-27	Pass
NVNT	ax20	5825	Ant1	-29.5	-27	Pass
NVNT	ax40	5755	Ant1	-30.46	-27	Pass
NVNT	ax40	5795	Ant1	-30.32	-27	Pass
NVNT	n20	5745	Ant1	-30.66	-27	Pass
NVNT	n20	5785	Ant1	-30.09	-27	Pass
NVNT	n20	5825	Ant1	-30.55	-27	Pass
NVNT	n40	5755	Ant1	-29.65	-27	Pass
NVNT	n40	5795	Ant1	-30.05	-27	Pass


Note: Adding antenna gain results can also meet the requirements, so the test results meet the requirements

Tx. Spurious NVNT a 5745MHz Ant1 Emission

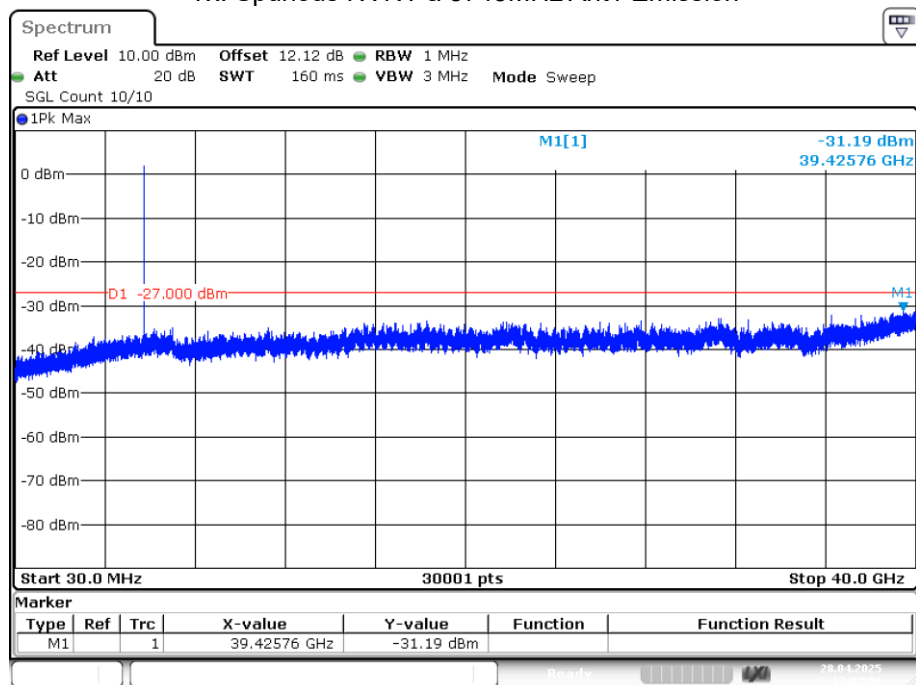


Date: 28.APR.2025 13:02:00

Tx. Spurious NVNT a 5785MHz Ant1 Emission

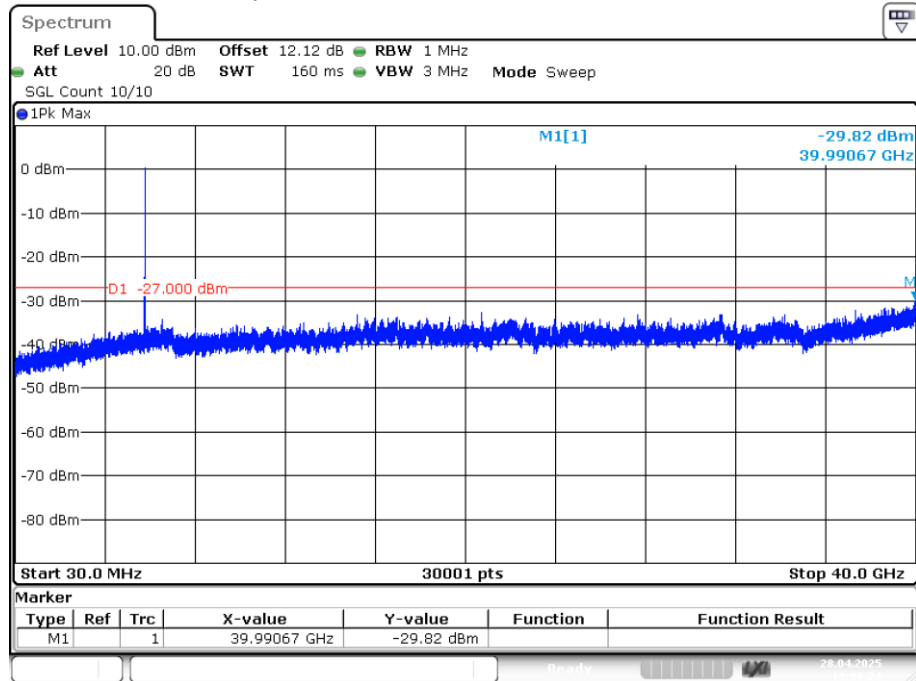


Date: 28.APR.2025 13:08:24

Tx. Spurious NVNT a 5825MHz Ant1 Emission

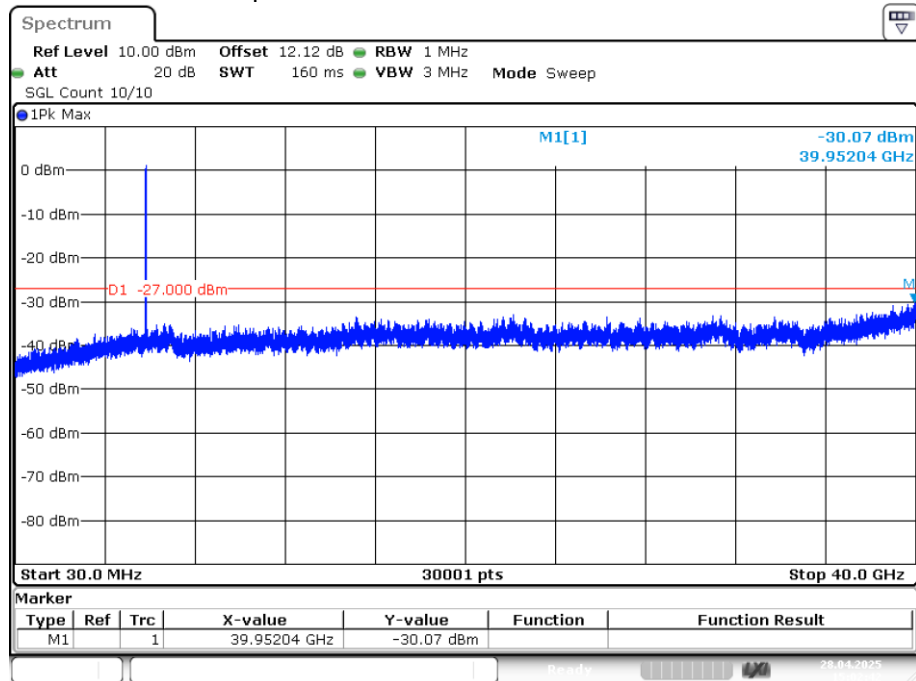


Date: 28.APR.2025 15:02:41

Tx. Spurious NVNT ac20 5745MHz Ant1 Emission

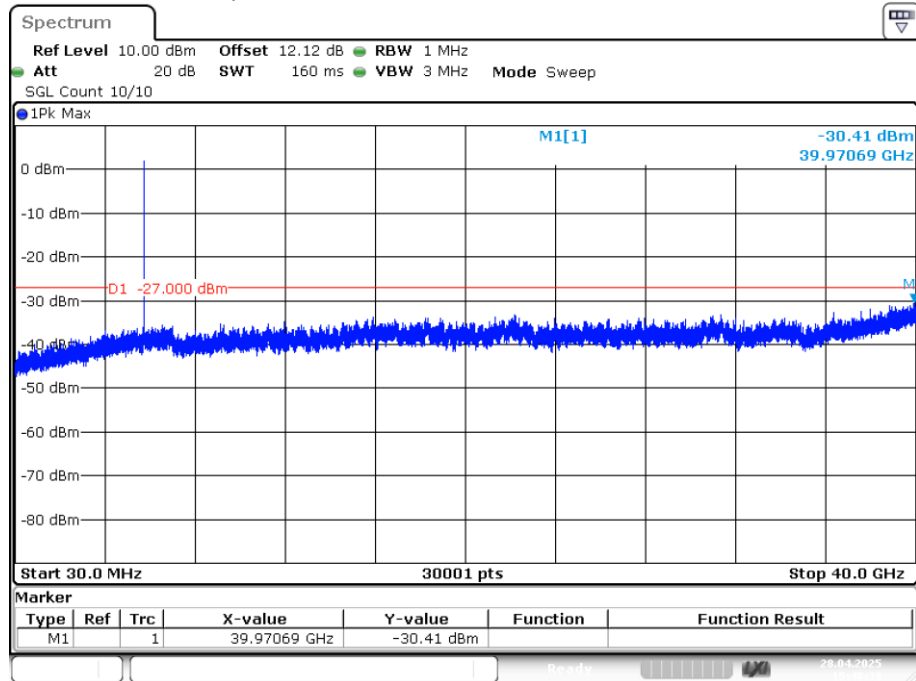


Date: 28.APR.2025 15:48:39

Tx. Spurious NVNT ac20 5785MHz Ant1 Emission

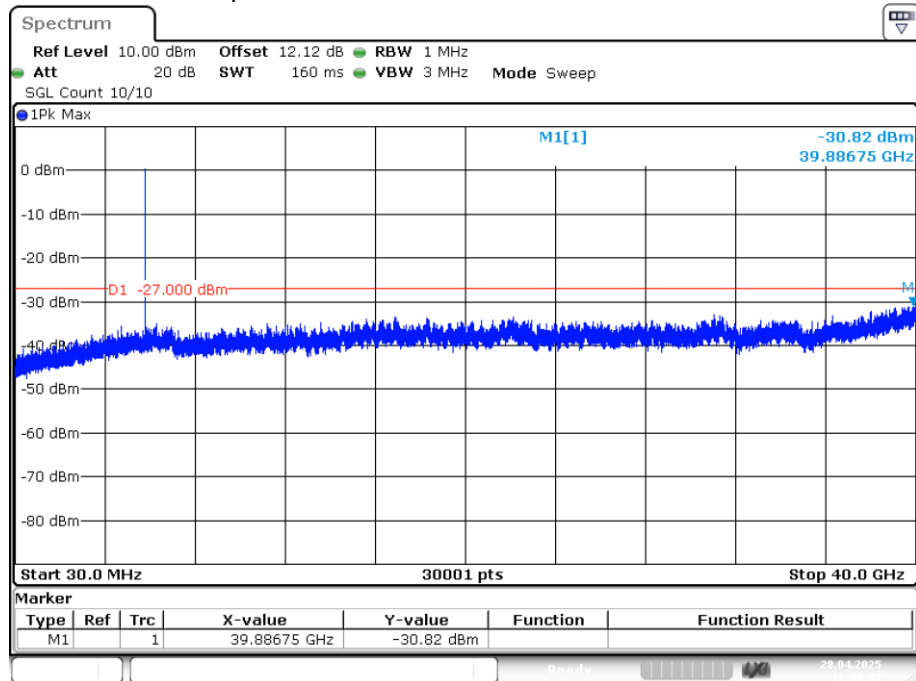


Date: 28.APR.2025 16:06:07

Tx. Spurious NVNT ac20 5825MHz Ant1 Emission

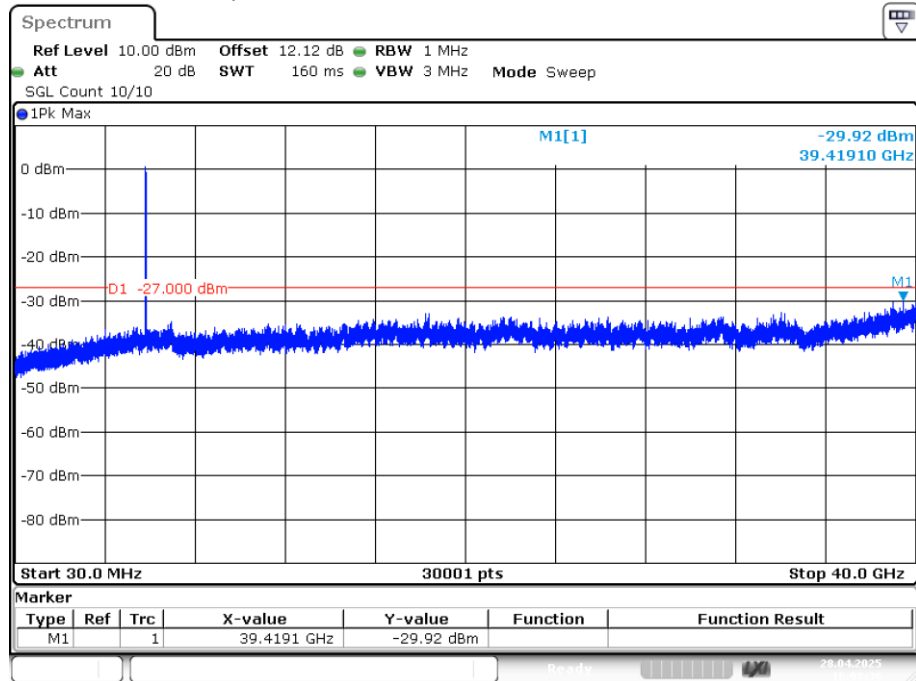


Date: 28.APR.2025 16:08:36

Tx. Spurious NVNT ac40 5755MHz Ant1 Emission

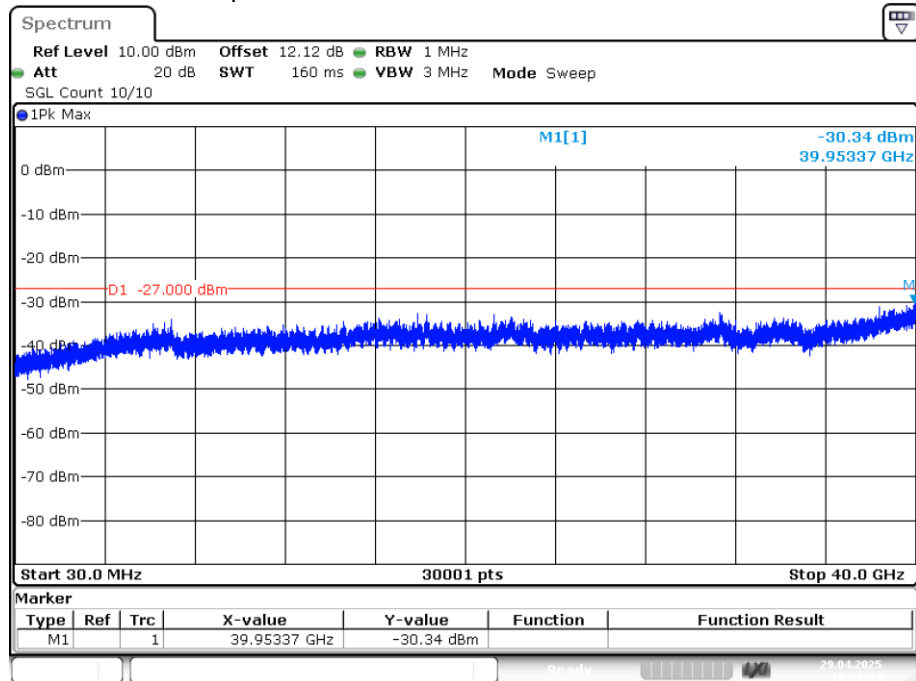


Date: 29.APR.2025 10:20:34

Tx. Spurious NVNT ac40 5795MHz Ant1 Emission

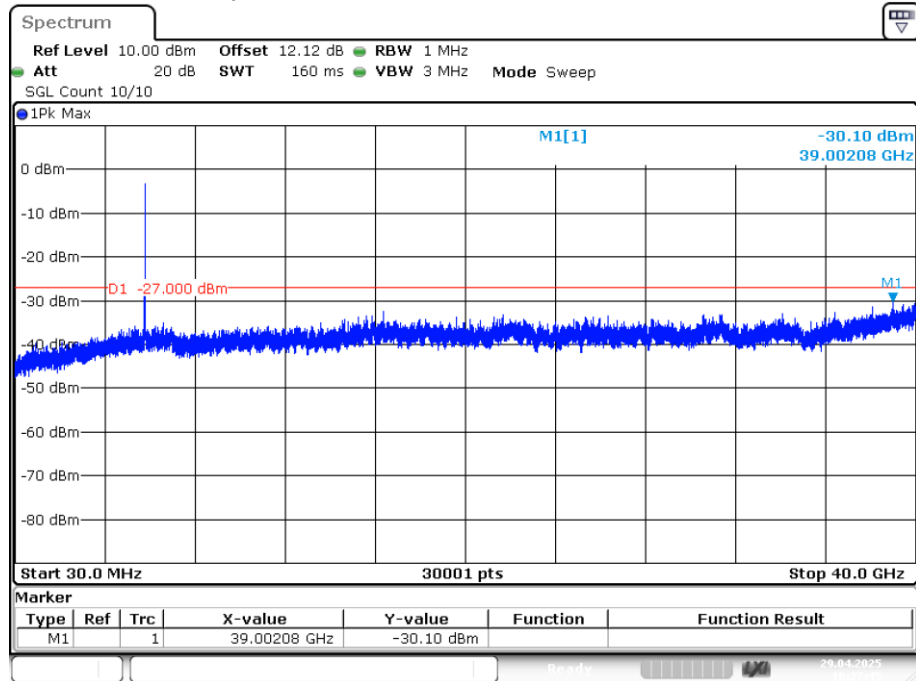


Date: 29.APR.2025 10:27:44

Tx. Spurious NVNT ax20 5745MHz Ant1 Emission

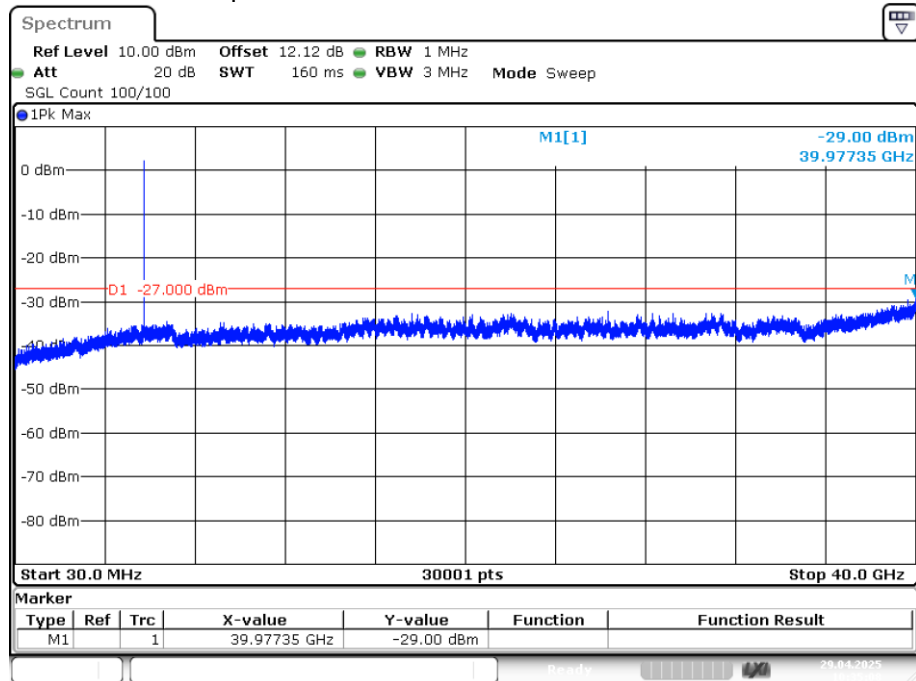


Date: 29.APR.2025 10:35:09

Tx. Spurious NVNT ax20 5785MHz Ant1 Emission

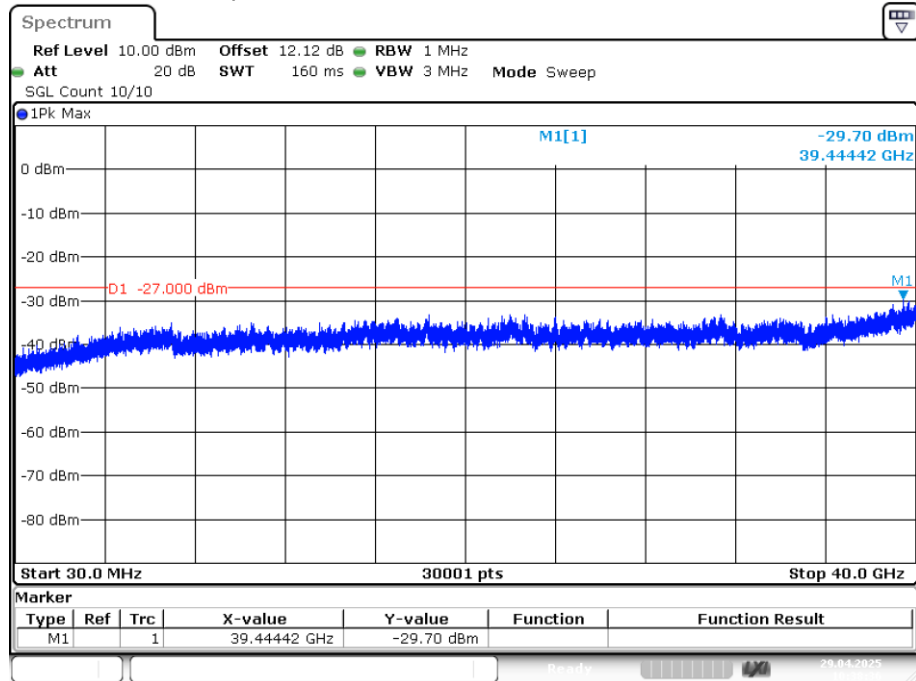


Date: 29.APR.2025 10:38:36

Tx. Spurious NVNT ax20 5825MHz Ant1 Emission

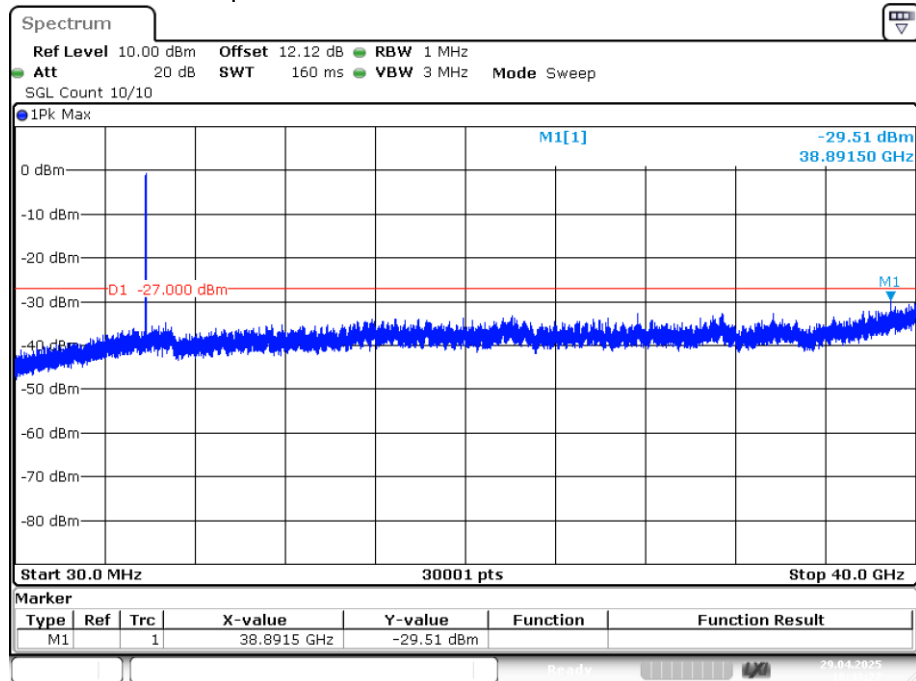


Date: 29.APR.2025 10:43:27

Tx. Spurious NVNT ax40 5755MHz Ant1 Emission

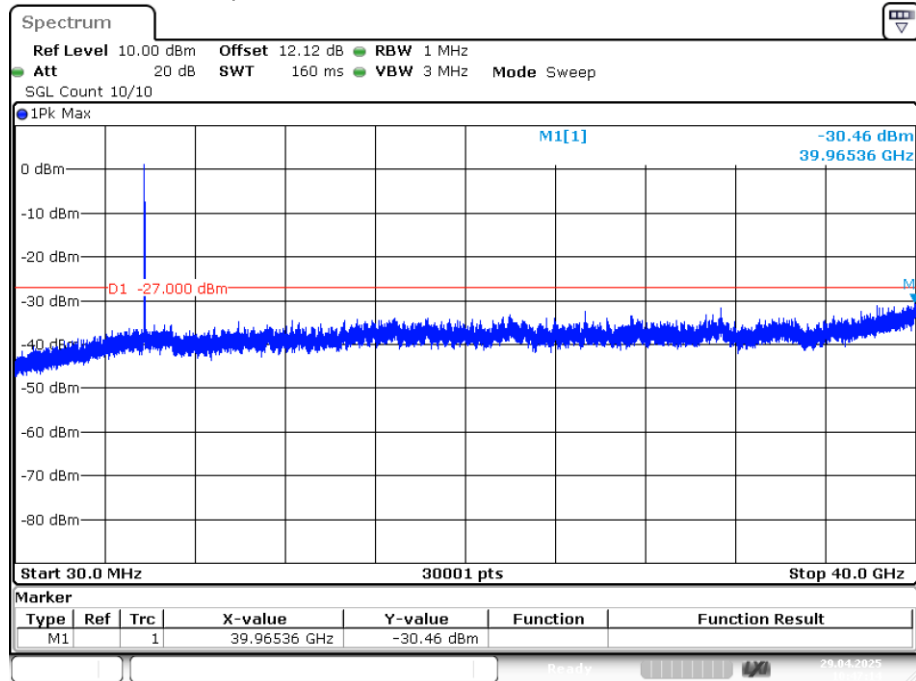


Date: 29.APR.2025 10:47:13

Tx. Spurious NVNT ax40 5795MHz Ant1 Emission

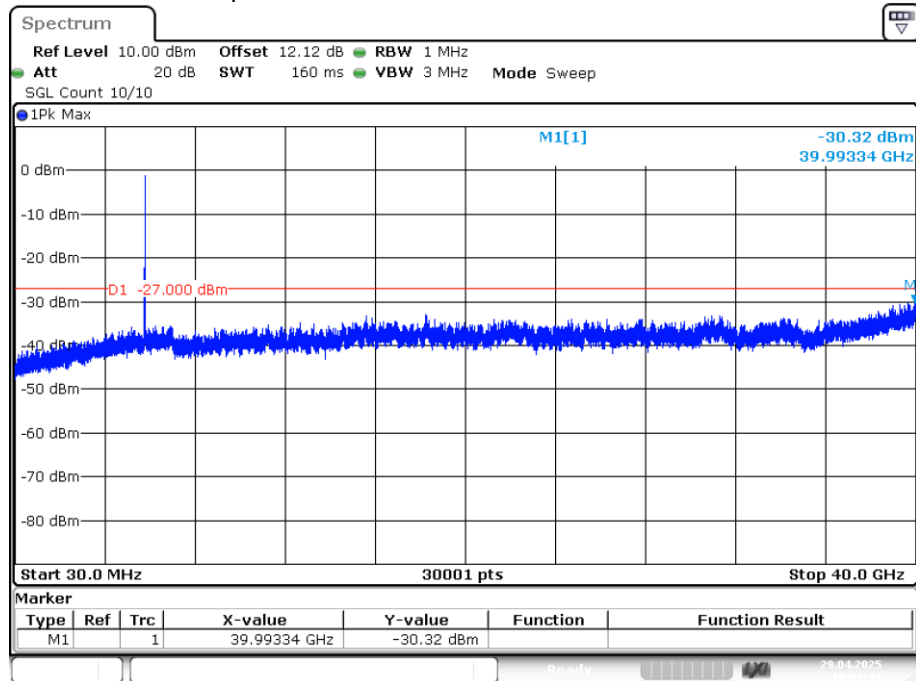


Date: 29.APR.2025 10:53:13

Tx. Spurious NVNT n20 5745MHz Ant1 Emission

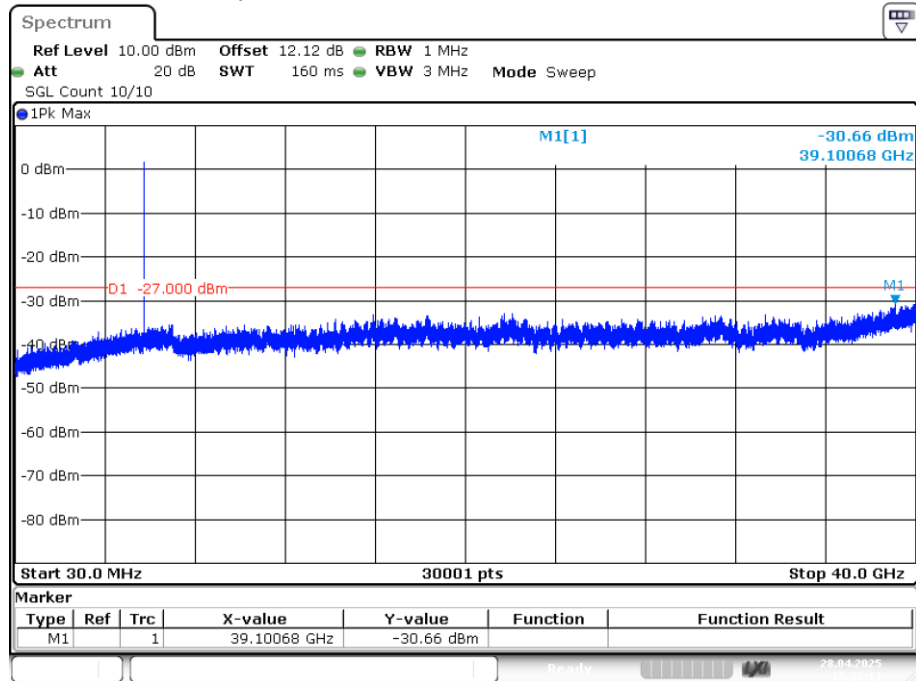


Date: 28.APR.2025 15:32:11

Tx. Spurious NVNT n20 5785MHz Ant1 Emission

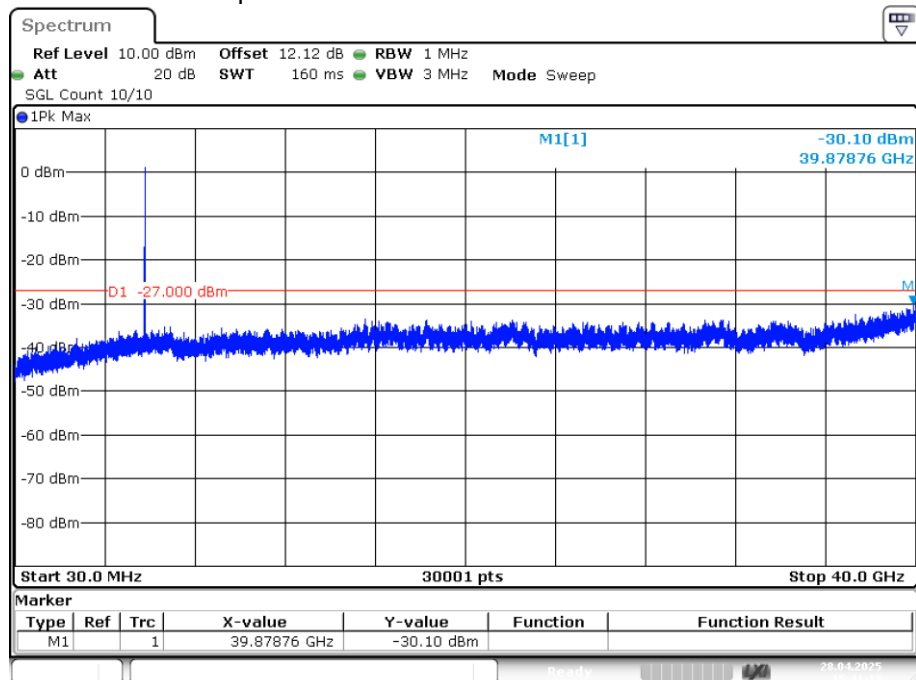


Date: 28.APR.2025 15:41:13

Tx. Spurious NVNT n20 5825MHz Ant1 Emission

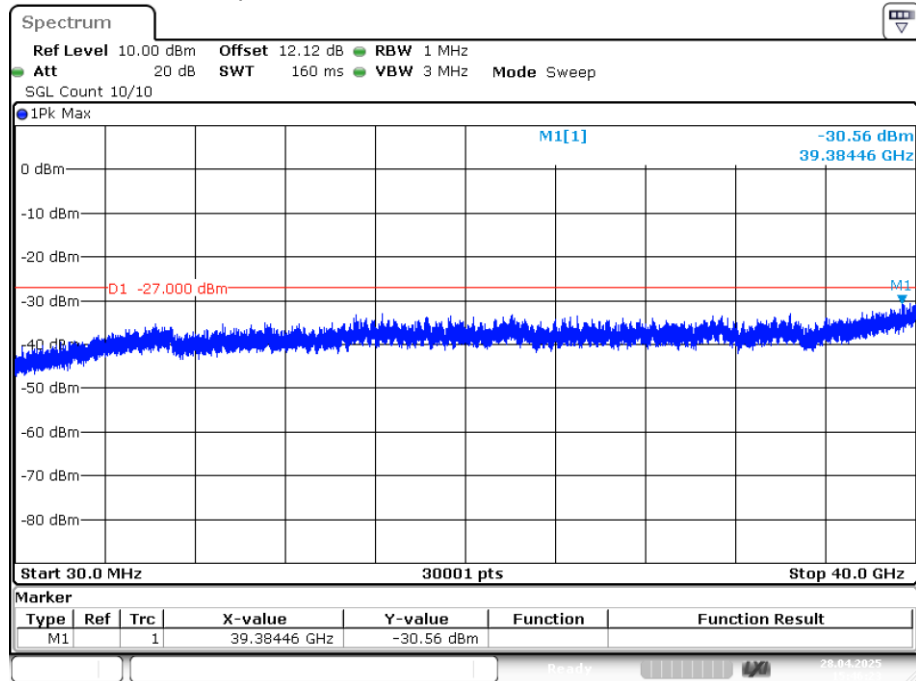


Date: 28.APR.2025 15:46:23

Tx. Spurious NVNT n40 5755MHz Ant1 Emission

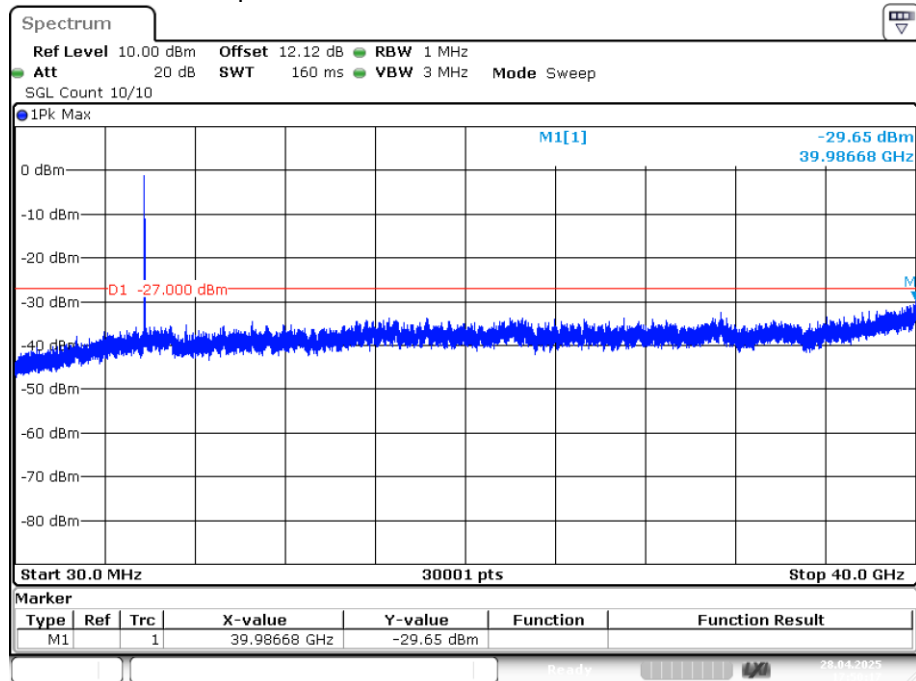

Date: 28.APR.2025 17:50:16

Tx. Spurious NVNT n40 5795MHz Ant1 Emission

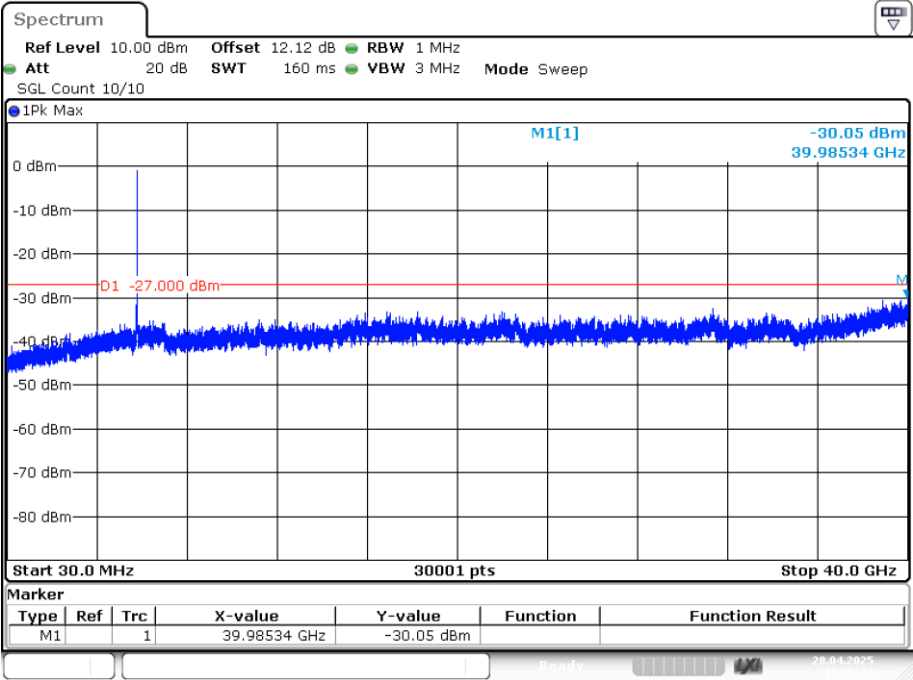

Date: 28.APR.2025 17:55:13

-----END OF REPORT-----